



**Agilent**  
**N9912A FieldFox**  
**RF Analyzer**  
2 MHz to 4/6 GHz

Data Sheet

## **Documentation Warranty**

THE MATERIAL CONTAINED IN THIS DOCUMENT IS PROVIDED "AS IS," AND IS SUBJECT TO BEING CHANGED, WITHOUT NOTICE, IN FUTURE EDITIONS. FURTHER, TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AGILENT DISCLAIMS ALL WARRANTIES, EITHER EXPRESS OR IMPLIED WITH REGARD TO THIS MANUAL AND ANY INFORMATION CONTAINED HEREIN, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. AGILENT SHALL NOT BE LIABLE FOR ERRORS OR FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, USE, OR PERFORMANCE OF THIS DOCUMENT OR ANY INFORMATION CONTAINED HEREIN. SHOULD AGILENT AND THE USER HAVE A SEPARATE WRITTEN AGREEMENT WITH WARRANTY TERMS COVERING THE MATERIAL IN THIS DOCUMENT THAT CONFLICT WITH THESE TERMS, THE WARRANTY TERMS IN THE SEPARATE AGREEMENT WILL CONTROL.

## **DFARS/Restricted Rights Notice**

If software is for use in the performance of a U.S. Government prime contract or subcontract, Software is delivered and licensed as "Commercial computer software" as defined in DFAR 252.227-7014 (June 1995), or as a "commercial item" as defined in FAR 2.101(a) or as "Restricted computer software" as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Agilent Technologies' standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

## Table of Contents

|  |    |
|--|----|
| Cable and Antenna Analyzer.....              | 4  |
| Network Analyzer (Option 303) .....          | 8  |
| Time domain (Option 010).....                | 9  |
| Spectrum Analyzer (Option 230 and 231) ..... | 13 |
| Preamplifier (Option 235).....               | 21 |
| Interference Analyzer (Option 236).....      | 21 |
| Channel Power Meter (Option 311) .....       | 22 |
| Power Meter (Option 302).....                | 22 |
| General Information.....                     | 23 |
| Supported Cal Kits .....                     | 26 |

## Definitions

### **Specification (spec.)**

Warranted performance. Specifications include guardbands to account for the expected statistical performance distribution, measurement uncertainties, and changes in performance due to environmental conditions. The following conditions must be met:

- FieldFox has been turned on at least 90 minutes
- FieldFox is within its calibration cycle
- Storage or operation at 25°C ±5 °C range (unless otherwise stated)

### **Typical (typ.)**

Expected performance of an average unit over a 20 °C to 30 °C temperature range after being at ambient temperature for two hours, unless otherwise indicated; does not include guardbands. It is not covered by the product warranty. The FieldFox must be within its calibration cycle.

### **Nominal (nom.)**

A general, descriptive term or design parameter. It is not tested, and not covered by the product warranty.

### **Calibration**

The process of measuring known standards to characterize an instrument's systematic (repeatable) errors.

### **Corrected (residual)**

Indicates performance after error correction (calibration). It is determined by the quality of calibration standards and how well "known" they are, plus system repeatability, stability, and noise.

### **Uncorrected (raw)**

Indicates instrument performance without error correction. The uncorrected performance affects the stability of a calibration.

## Cable and Antenna Analyzer

| Description                                 | Specification                 | Typical           |                   | Supplemental Information     |
|---|-------------------------------|-------------------|-------------------|------------------------------|
|   |                               | 10 minute warm up | 90 minute warm up |                              |
| <b>Frequency Range</b>                      |                               |                   |                   |                              |
| Option 104                                  | 2 MHz to 4 GHz                |                   |                   |                              |
| Option 106                                  | 2 MHz to 6 GHz                |                   |                   |                              |
| <b>Frequency Reference</b>                  |                               |                   |                   |                              |
| Accuracy                                    | ±2 ppm                        | ±2 ppm            |                   |                              |
| Aging Rate                                  | ±1 ppm/yr                     | ±1 ppm/yr         |                   |                              |
| Temperature Stability                       | ±1 ppm over 0 to 55 °C        | ±1 ppm            |                   |                              |
| <b>Frequency Resolution</b>                 |                               |                   |                   |                              |
| 2 MHz to 1.6 GHz                            | 2.5 kHz                       |                   |                   |                              |
| > 1.6 GHz to 3.2 GHz                        | 5 kHz                         |                   |                   |                              |
| > 3.2 GHz to 6 GHz                          | 10 kHz                        |                   |                   |                              |
| <b>Resolution (Number of data points)</b>   |                               |                   |                   |                              |
|   | 101, 201, 401, 601, 801, 1001 |                   |                   |                              |
| <b>Measurement Speed</b>                    |                               |                   |                   |                              |
| Return Loss                                 |                               |                   |                   |                              |
| 1.75 GHz – 3.85 GHz,<br>1001 points, Cal ON |                               |                   |                   | 1.5 ms/point (nominal)       |
| DTF   |                               |                   |                   |                              |
| 0 to 500 ft, 601<br>points, Cal ON          |                               |                   |                   | 2.4 ms/point (nominal)       |
| <b>Output Power (RF Out Port)</b>           |                               |                   |                   |                              |
| High  |                               |                   |                   |                              |
| 2 MHz to 4 GHz                              |                               |                   |                   | < +8 dBm, +6 dBm (nominal)   |
| > 4 GHz to 6 GHz                            |                               |                   |                   | < +7 dBm, +2 dBm (nominal)   |
| Low (Typically 31 dB below high power)      |                               |                   |                   |                              |
| 2 MHz to 4 GHz                              |                               |                   |                   | < -23 dBm, -25 dBm (nominal) |
| > 4 GHz to 6 GHz                            |                               |                   |                   | < -24 dBm, -25 dBm (nominal) |
| <b>Immunity to Interfering Signals</b>      |                               |                   |                   |                              |
|   |                               |                   |                   | +16 dBm (nominal)            |

## Cable and Antenna Analyzer (continued)

| Description  | Specification | Typical           |                   |
|--|---------------|-------------------|-------------------|
|  |               | 10 minute warm up | 90 minute warm up |
| <b>Directivity</b>   |               |                   |                   |
| Corrected with OSL calibration <sup>1</sup>  | >42 dB        | >42 dB            |                   |
| Corrected with QuickCal (Option 111) <sup>3</sup>                                    |               |                   | ≥42 dB            |
| Raw  |               |                   |                   |
| 2 MHz to 3.5 GHz   |               |                   | > 20 dB           |
| > 3.5 GHz to 6 GHz   |               |                   | > 14 dB           |
| <b>Source Match</b>  |               |                   |                   |
| Corrected with OSL calibration <sup>1</sup>  | > 36 dB       | > 36 dB           |                   |
| Corrected with QuickCal (Option 111) <sup>3</sup>                                    |               |                   | ≥35 dB            |
| Raw  |               |                   |                   |
| 2 MHz to 3 GHz   |               |                   | > 25 dB           |
| > 3 GHz to 6 GHz   |               |                   | > 16 dB           |
| <b>Reflection Tracking</b>   |               |                   |                   |
| Corrected with OSL calibration <sup>1</sup>  | ±0.06 dB      | ±0.06 dB          |                   |
| Corrected with QuickCal (Option 111) <sup>3</sup>                                    |               |                   | ±0.15 dB          |
| <b>Reflection Dynamic Range</b>  |               |                   |                   |
| Reflection (RF Out port) (High power out)  |               |                   |                   |
| 2 MHz to 4 GHz   |               | 60 dB             |                   |
| > 4 GHz to 6 GHz   |               | 55 dB             |                   |
| <b>Maximum Measurable Cable Loss Using 1–Port CAT Measurement Model <sup>2</sup></b> |               |                   |                   |
|  |               | Refl Dyn Range /2 |                   |
| <b>Transmission Dynamic Range(Option 110)</b>  |               |                   |                   |
| 300 Hz IF Bandwidth  |               |                   |                   |
| 2 MHz to 2 GHz   |               | 72 dB             |                   |
| > 2 GHz to 3 GHz   |               | 67 dB             |                   |
| > 3 GHz to 5 GHz   |               | 58 dB             |                   |
| > 5 GHz to 6 GHz   |               | 49 dB             |                   |
| <b>Return Loss</b>   |               |                   |                   |
| Display Range  | 0 to 100 dB   |                   |                   |
| Resolution   | 0.01 dB       |                   |                   |
| <b>VSWR</b>  |               |                   |                   |
| Display Range  | 1 to 500      |                   |                   |
| Resolution   | 0.01          |                   |                   |
| <b>Cable Loss</b>  |               |                   |                   |
| Display Range  | 0 to 100 dB   |                   |                   |
| Resolution   | 0.01 dB       |                   |                   |

## Cable and Antenna Analyzer (continued)


| Description                | Specification  | Supplemental Information   |
|----------------------------|--|--|
| <b>Distance-to-Fault</b>   |  |  |
| Horizontal Range           | Range = [(number of points – 1) / frequency span * 2] * velocity factor * speed of light | Number of points auto coupled according to start and stop distance entered |
| Horizontal Resolution      | Resolution = Range / (number of points – 1)  | Number of points settable by user  |
| Bandpass Mode Window Types |  | Maximum, medium, and minimum windows                                       |

<sup>1</sup> Using recommended calibration kits.

<sup>2</sup> Higher cable losses can be measured using transmission or S21 measurements. Cable losses measured in transmission mode limited by transmission dynamic range.

<sup>3</sup> QuickCal is performed with the connect LOAD step.

**Figure 1: CAT Mode, Type-N Calibration Kit – Magnitude (Specification)**

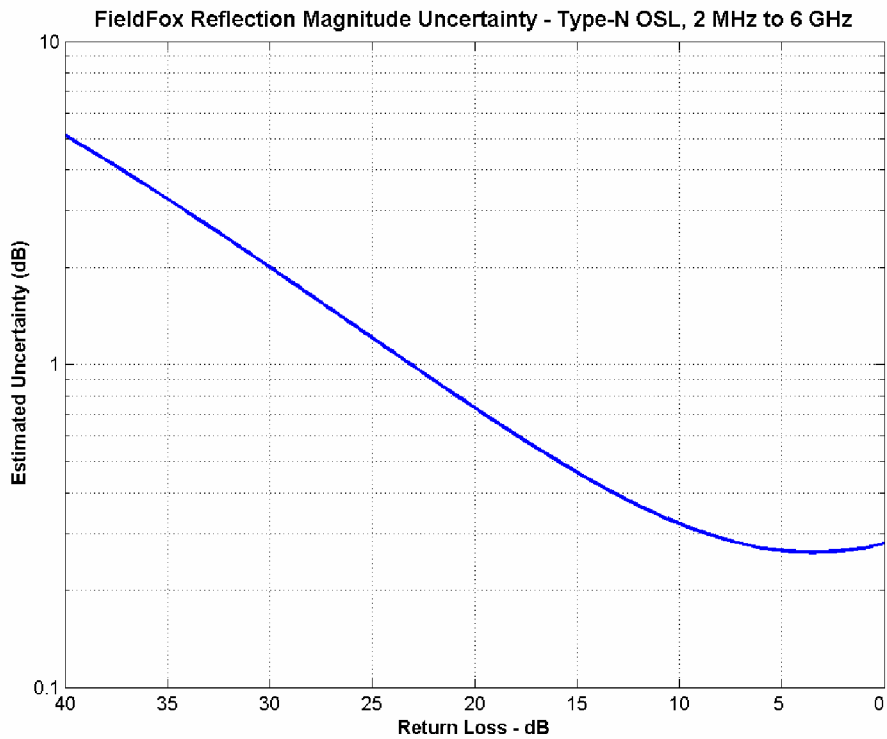

## Cable and Antenna Analyzer (continued)

Figure 2: CAT Mode, QuickCal – Magnitude (Typical)


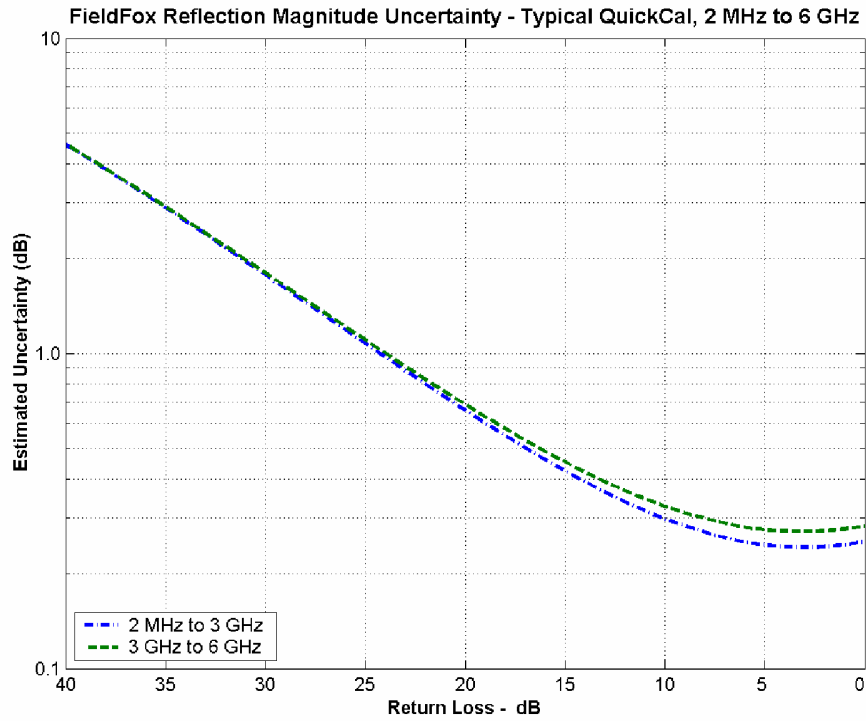


Figure 3: CAT Mode, Preset Cal – Magnitude (Typical)

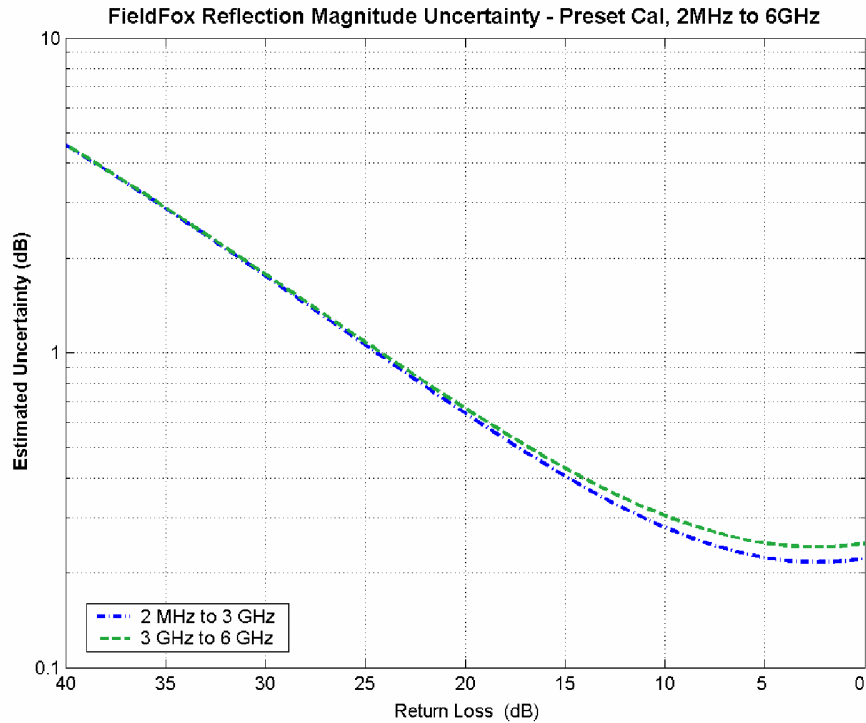

## Network Analyzer (Option 303)

The following CAT mode performance parameters apply to NA mode: frequency accuracy, frequency resolution, output power, directivity, source match, reflection tracking, and reflection and transmission dynamic range. NA mode performance that is in addition to CAT mode is listed in the table below.

| Description                                      | Specification                                       | Supplemental Information                 |
|--|---|--|
| <b>Frequency Range</b>                           |   |  |
|  | 2 MHz to 4 GHz                                      | Option 104                               |
|  | 2 MHz to 6 GHz                                      | Option 106                               |
| <b>Measurement Speed</b>                         |   |  |
| S11: 1.75 GHz – 3.85 GHz,<br>1001 Points, Cal ON |   | 1.5 ms/point (nominal)                   |
| S21: 1.78 GHz – 2.06 GHz,<br>201 Points, Cal ON  |   | 1.9 ms/point (nominal)                   |
| <b>S11 Phase Uncertainty<sup>1</sup></b>         |   |  |
| Display Range                                    | See Figure 5 on<br>following page<br>–180° to +180° |  |
| <b>System Impedance</b>                          |   |  |
|  | 50Ω (nominal)                                       | 75Ω with appropriate adapter and Cal Kit |

<sup>1</sup> Using recommended calibration kits.

| Description                                   | Information  |
|---|--|
| <b>Measurements</b>                           | S11 magnitude and phase<br>S21 magnitude (option 110)<br>A receiver magnitude<br>R receiver magnitude  |
| <b>Formats</b>                                | Log magnitude, Linear magnitude<br>Available ONLY for S11:<br>VSWR, Phase, Smith Chart, Polar, Group delay, Unwrapped phase  |
| <b>Resolution<br/>(Number of data points)</b> | 101, 201, 401, 601, 801, 1601, 4001, 10001<br>Custom number of points can be set using SCPI  |
| <b>Averaging</b>                              | Sweep and point averaging; 2 to 999 points.  |
| <b>Number of traces</b>                       | Four traces available. Tr1, Tr2, Tr3, Tr4  |
| <b>Data markers</b>                           | Each trace has six independent markers that can be displayed simultaneously. Delta markers are available for each marker.  |
| <b>Marker formats</b>                         | Default marker format is the trace format. In Smith chart or polar format, [Real +Imag] or [Mag and Phase] formats are also available.   |
| <b>Marker functions</b>                       | Peak, Next Peak, Peak Left, Peak Right, Mkr→ Center, Min Search, Peak Excursion, Peak Threshold, Target, Bandwidth, Tracking   |
| <b>Display formats</b>                        | Single-trace<br>Dual-trace overlay (both traces on one graticule)<br>Dual-trace split (each trace on separate graticules)<br>Three-trace split (each trace on separate graticules) |



|                     |  |
|---------------------|--|
|                     | Quad-trace split (each trace on separate graticules)   |
| <b>Display data</b> | Display data, memory, data and memory, or data math  |
| <b>Trace math</b>   | Vector division or subtraction of current linear measurement values and memory data.   |
| <b>Scale</b>        | Autoscale, scale, reference level, reference position<br>Autoscale: Automatically selects scale resolution and reference value to center the trace. Autoscale all scales all visible traces.   |
| <b>Title</b>        | Add custom titles to the display.  |
| <b>Limit lines</b>  | Define test limit lines that appear on the display for go/no go testing. Lines may be any combination of horizontal, sloping lines, or discrete data points. Each trace can have its own limit line.<br>Limit Lines can be Fixed, Relative to center frequency and reference level, and can be built from existing traces. |

## Time domain (Option 010)

Using time domain, data from transmission or reflection measurements in the frequency domain are converted to the time domain. The time-domain response shows the measured parameter value versus time.

| Description                | Information  |
|----------------------------|--|
| <b>Time stimulus modes</b> |  |
| <b>Low-pass step</b>       | Similar to a traditional time domain reflectometer (TDR) stimulus waveform, Low-pass step is used to measure low-pass devices. The frequency-domain data should extend from DC (extrapolated value) to a higher value. |
| <b>Low-pass impulse</b>    | Also used to measure low-pass devices  |
| <b>Bandpass impulse</b>    | Stimulates a pulsed RF signal and is used to measure the time-domain response of band-limited devices  |
| <b>Windowing</b>           | Windowing is used to filter the frequency-domain data and thereby reduce overshoot and ringing in the time-domain response.  |
| <b>Gating</b>              | Gating is used to selectively remove reflection or transmission time-domain responses. When converted back to the frequency domain, the effects of the responses outside the gate are removed.                         |

## Network Analyzer (continued)

Figure 4: NA Mode, Type-N Calibration Kit – Magnitude (Specification)



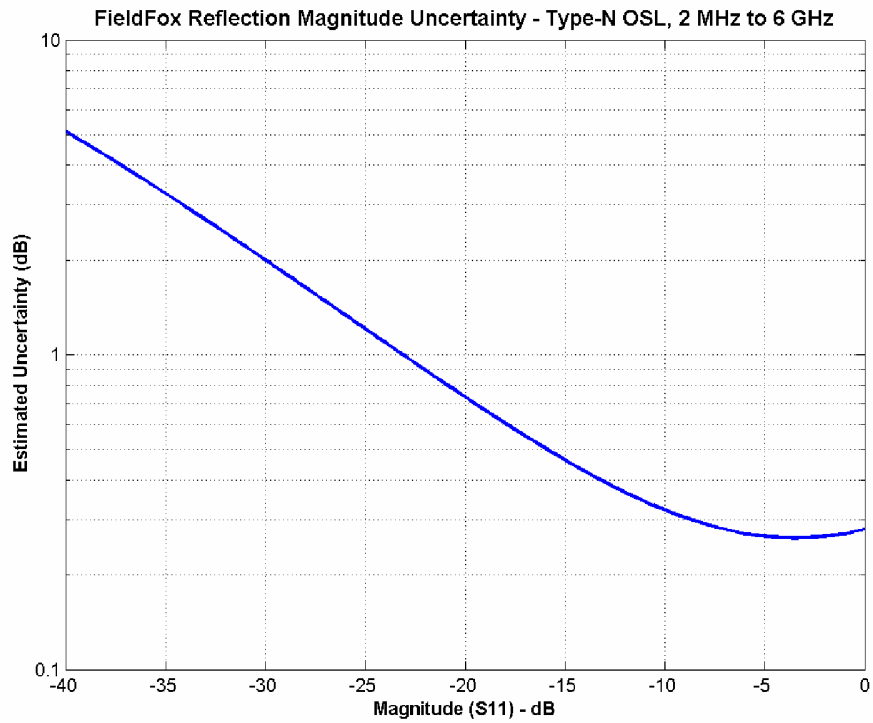


Figure 5: NA Mode, Type-N Calibration Kit – Phase (Specification)

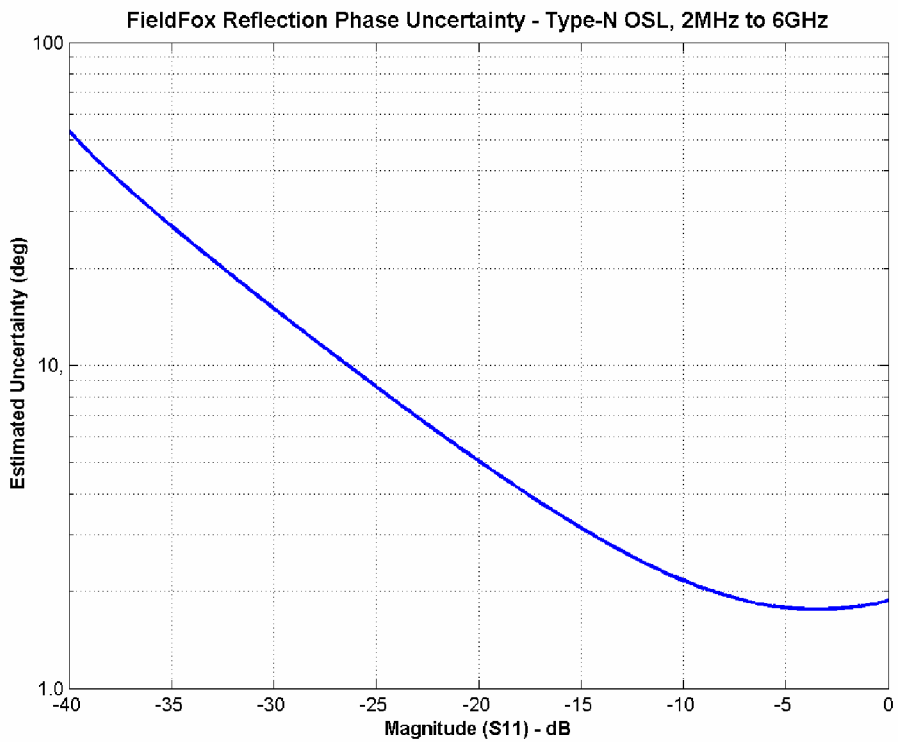

## Network Analyzer (continued)

Figure 6: NA Mode, QuickCal – Magnitude (Typical)

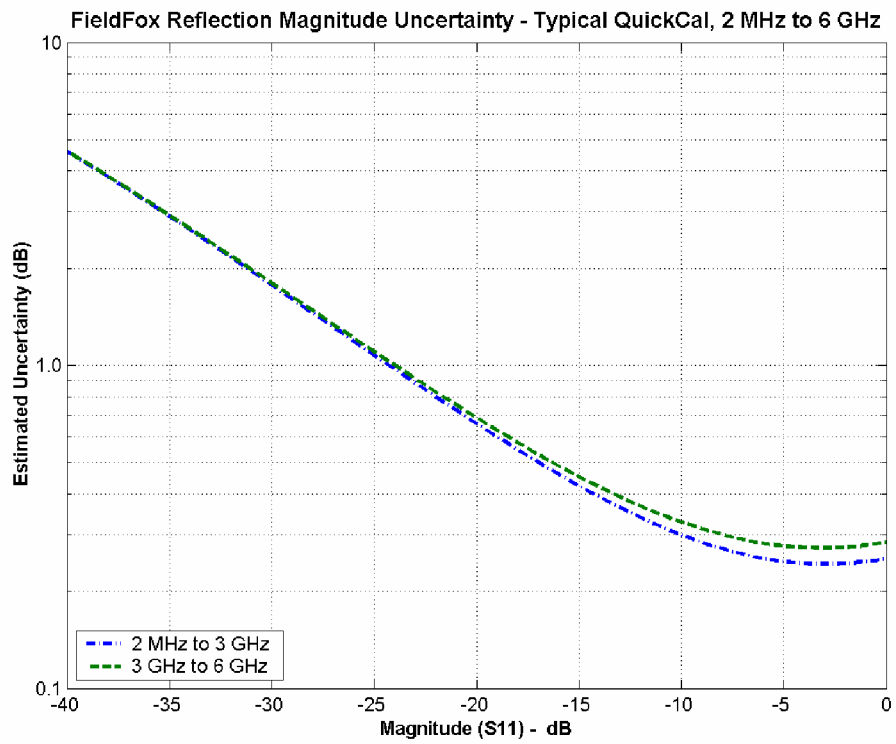

## Network Analyzer (continued)

Figure 7: NA Mode, Preset Cal – Magnitude (Typical)


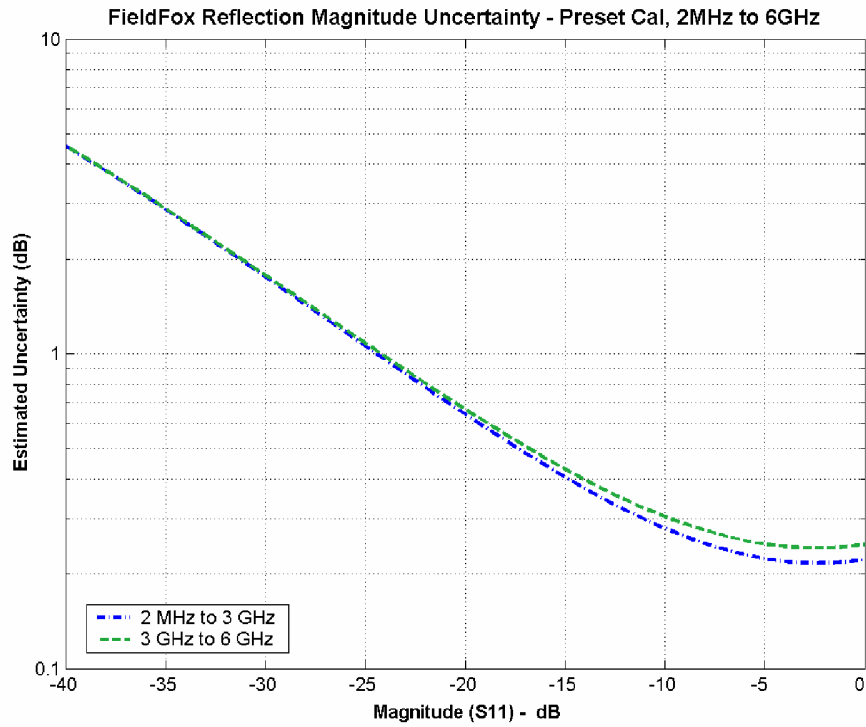


Figure 8: NA Mode, Preset Cal – Phase (Typical)

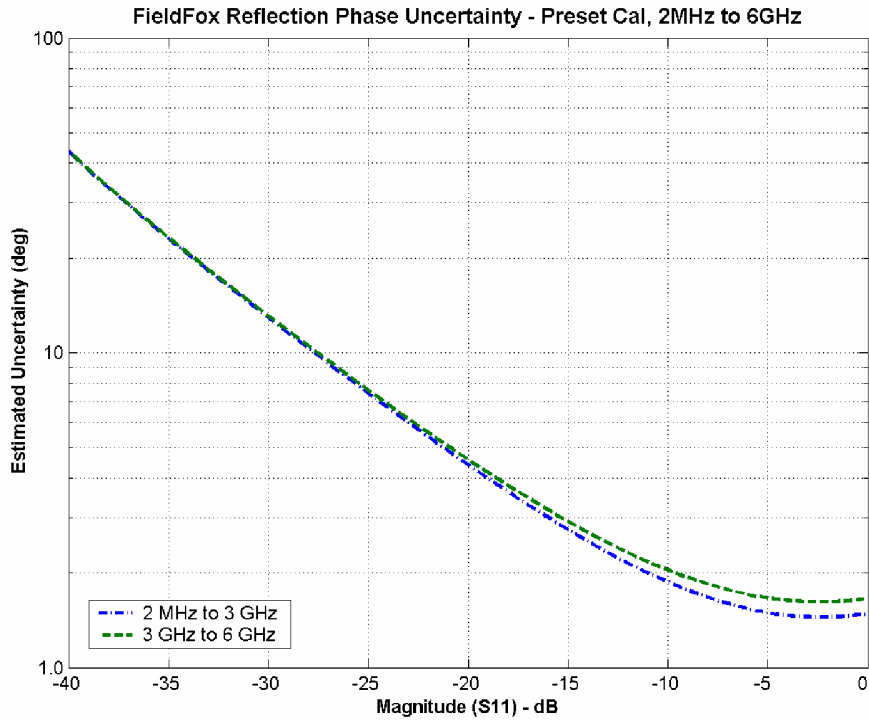

## Spectrum Analyzer (Option 230 and 231)

| Description   | Specification  | Supplemental Information   |
|---|--|--|
| <b>FREQUENCY</b>  |  |  |
| <b>Frequency Range</b>  |  |  |
| Option 230  | 100 kHz to 4 GHz   | Usable to 5 kHz <sup>1</sup>   |
| Option 231  | 100 kHz to 6 GHz   | Usable to 5 kHz <sup>1</sup><br>Tunable to 6.1 GHz   |
| <b>Frequency Reference</b>                                      |  |  |
| Accuracy  | ±2 ppm   |  |
| Aging Rate  | ± 1 ppm/yr   |  |
| Temperature Stability   | ± 1 ppm over –10 to 55 °C  |  |
| <b>Frequency Readout Accuracy (start, stop, center, marker)</b> |  |  |
|   | ± (readout frequency x frequency reference accuracy + RBW centering + 0.5 x horizontal resolution) | Horizontal resolution = span/(trace points – 1)<br>RBW centering :<br>5% x RBW, FFT mode (nominal)<br>16% x RBW, Step mode (nominal) |
| <b>Frequency Span</b>   |  |  |
| Range   | 0 Hz (zero span), 10 Hz to max freq  |  |
| Accuracy  | ±(2 x RBW centering + horizontal resolution)   | ±(2 x RBW centering + 2 x horizontal resolution) for detector = Normal   |
| Resolution  | 1 Hz   |  |
| <b>Sweep Time, Span = 0 Hz</b>                                  |  |  |
| Range   |  |  |
| Minimum   | 1.0 us   |  |
| Maximum   |  |  |
| RBW = 2 MHz   | 2.18 ms  |  |
| RBW = 1 MHz   | 3.28 ms  |  |
| RBW = 300 kHz   | 5.46 ms  |  |
| RBW = 100 kHz   | 16.38 ms   |  |
| RBW = 30 kHz  | 54.60 ms   |  |
| RBW = 10 kHz  | 163.84 ms  |  |
| RBW = 3 kHz   | 546.00 ms  |  |
| RBW = 1 kHz   | 1.64 s   |  |
| RBW = 300 Hz  | 2.54 s   |  |
| Resolution  | 100.0 ns   |  |
| Readout   | Entered value representing trace horizontal scale range.   |  |

<sup>1</sup>With signal at center frequency.

## Spectrum Analyzer (continued)

| Description                              | Specification  | Supplemental Information  |
|--|--|---|
| <b>Sweep Acquisition, Span &gt; 0 Hz</b> |  |   |
| Range                                    | 1 to 5000. Number of data acquisitions per trace point. Value is normalized to the minimum required to achieve amplitude accuracy with CW signals. | Auto coupled. For pulsed RF signals, manually increase the sweep acquisition value to maximize the pulse spectrum envelope. |
| Resolution                               | 1  |   |
| Readout                                  | Measured value representing time required to tune receiver, acquire data, and process trace.   |   |
| <b>Trigger</b>                           |  |   |
| Trigger Type                             | Free Run, Video, External  |   |
| Trigger Slope                            | Positive, Negative edge  |   |
| Trigger Delay                            |  |   |
| Range                                    | 0 to 10 sec  |   |
| Resolution                               | 100 nsec   |   |
| Auto Trigger                             | Forces a periodic acquisition in the absence of a trigger event  |   |
| Auto Trigger Range                       | 0 sec (OFF) to 10 sec  |   |
| <b>Time Gating</b>                       |  |   |
| Gate Method                              | Triggered FFT  |   |
| Gate Delay Range                         | Same as Trigger Delay  |   |
| <b>Trace Update</b>                      |  |   |
| Span = 20 MHz, RBW = 3 kHz               |  | 1.5 updates/s (nominal)   |
| Span = 100 MHz, RBW auto coupled         |  | 7 updates/s (nominal)   |
| Span = 6 GHz, RBW auto coupled           |  | 1 update/s (nominal)  |
| <b>Trace Points</b>                      |  |   |
|  | 101, 201, 401, 601, 801, 1001<br>(Defaults to 401)   |   |

## Spectrum Analyzer (continued)

| Description                       | Specification   | Supplemental Information                |
|-----------------------------------|---|---|
| <b>Resolution Bandwidth (RBW)</b> |   |   |
| Range (–3 dB bandwidth)           |   |   |
| Zero Span                         | 300 Hz to 1 MHz in 1–3–10 sequence; 2 MHz                     |   |
| Non–Zero Span                     | 10 Hz to 300 kHz in 1/1.5/2/3/5/7.5/10 sequence; 1 MHz, 2 MHz | Step keys change RBW in 1–3–10 sequence |
| Accuracy                          |   |   |
| 1 kHz to 1 MHz                    |   | ± 5% (nominal)                          |
| 10 Hz to 100 kHz non–zero span    |   | ± 1% (nominal)                          |
| 2 MHz                             |   | ± 10% (nominal)                         |
| 300 Hz zero span                  |   | ± 10% (nominal)                         |
| Selectivity (–60 dB/ –3 dB)       |   | 4:1 (nominal)                           |
| <b>Video Bandwidth (VBW)</b>      |   |   |
| Range                             | 1 Hz to 2 MHz in 1/1.5/2/3/5/7/10 sequence                    | VBW ≥ RBW in zero span                  |

| Description                     | Specification                                   | Typical           |                   |
|---------------------------------|---|-------------------|-------------------|
|                                 |   | 10 minute warm up | 90 minute warm up |
| <b>Stability</b>                |   |                   |                   |
| Noise Sidebands, CF = 1 GHz     |   |                   |                   |
| 10 kHz offset                   | < –85 dBc/Hz                                    | –88 dBc/Hz        | –88 dBc/Hz        |
| 30 kHz offset                   |   | –89 dBc/Hz        | –89 dBc/Hz        |
| 100 kHz offset                  |   | –95 dBc/Hz        | –95 dBc/Hz        |
| 1 MHz offset                    |   | –115 dBc/Hz       | –115 dBc/Hz       |
| <b>Measurement Range</b>        |   |                   |                   |
|                                 | Displayed average noise level (DANL) to +20 dBm |                   |                   |
| Input Attenuator Range          | 0 to 31 dB                                      |                   |                   |
| Resolution                      | 1 dB steps                                      |                   |                   |
| <b>Maximum Safe Input Level</b> |   |                   |                   |
| Average Continuous Power        | +27 dBm (0.5 W)                                 |                   |                   |
| DC                              | ±50 VDC   |                   |                   |

## Spectrum Analyzer (continued)

| Description   | Specification  | Typical           |                   |
|---|--|-------------------|-------------------|
|   |  | 10 minute warm up | 90 minute warm up |
| <b>Displayed Average Noise Level (DANL)</b>   |  |                   |                   |
| 10 Hz RBW, 10 Hz VBW, 50 ohm termination on input, 0 dB attenuation, average detector |  |                   |                   |
| Preamplifier OFF  |  |                   |                   |
| 20 to 30 °C:  |  |                   |                   |
| 10 MHz to 2.4 GHz   |  |                   | -130 dBm          |
| > 2.4 GHz to 5.0 GHz  |  |                   | -125 dBm          |
| > 5.0 GHz to 6.0 GHz  |  |                   | -119 dBm          |
| Preamplifier ON (Option 235)  |  |                   |                   |
| 20 to 30 °C:  |  |                   |                   |
| 10 MHz to 2.4 GHz   | < -143 dBm   |                   | -148 dBm          |
| > 2.4 GHz to 5.0 GHz  | < -140 dBm   |                   | -145 dBm          |
| > 5.0 GHz to 6.0 GHz  | < -132 dBm   |                   | -138 dBm          |
| -10 to 55 °C:   |  |                   |                   |
| 10 MHz to 2.4 GHz   | < -141 dBm   |                   |                   |
| > 2.4 GHz to 5.0 GHz  | < -138 dBm   |                   |                   |
| > 5.0 GHz to 6.0 GHz  | < -130 dBm   |                   |                   |
| <b>Display Range</b>  |  |                   |                   |
| Log Scale   | Ten divisions displayed; 0.1 to 1.0 dB/division in 0.1 dB steps, and 1 to 20 dB/division in 1 dB steps |                   |                   |
| <b>Trace Detectors</b>  |  |                   |                   |
|   | Normal, Positive Peak, Negative Peak, Sample, Average  |                   |                   |
| <b>Trace States</b>   |  |                   |                   |
|   | Clear/Write, Max Hold, Min Hold, Average, View, Blank  |                   |                   |
| <b>Number of Traces</b>   |  |                   |                   |
|   | 4  |                   |                   |
| <b>Number of Averages</b>   |  |                   |                   |
|   | 1 to 10,000  |                   |                   |
| <b>Reference Level</b>  |  |                   |                   |
| Range   | -170 dBm to +30 dBm  |                   |                   |
| Resolution  | 0.1 dB   |                   |                   |
| Accuracy  | 0 dB   |                   |                   |



## Spectrum Analyzer (continued)

| Description  | Specification | Typical           |                   |
|--|---------------|-------------------|-------------------|
|  |               | 10 minute warm up | 90 minute warm up |
| <b>Absolute Amplitude Accuracy at 50 MHz</b>   |               |                   |                   |
| Peak detector, 10 dB attenuation, preamplifier off, RBW < 2 MHz, input signal -5 dBm to -50 dBm, all settings auto-coupled                     |               |                   |                   |
| 20 to 30 °C  | ±0.8 dB       | ±0.8 dB           | ±0.4 dB           |
| -10 to 55 °C   | ±1.1 dB       |                   | ±0.8 dB           |
| <b>Frequency Response</b>  |               |                   |                   |
| Relative to 50 MHz, Peak detector, 10 dB attenuation, preamplifier off, RBW = 30 kHz, input signal 0 dBm to -50 dBm, all settings auto-coupled |               |                   |                   |
| 20 to 30 °C:   |               |                   |                   |
| 2 MHz to 10 MHz  | ±1.1 dB       | ±1.0 dB           | ±0.5 dB           |
| > 10 MHz to 3.0 GHz  | ±0.9 dB       | ±0.6 dB           | ±0.3 dB           |
| > 3.0 GHz to 5.0 GHz   | ±1.3 dB       | ±1.1 dB           | ±0.5 dB           |
| > 5.0 GHz to 6.0 GHz   | ±1.5 dB       | ±1.5 dB           | ±0.5 dB           |
| -10 to 55 °C:  |               |                   |                   |
| 2 MHz to 10 MHz  | ±2.0 dB       |                   | ±1.0 dB           |
| > 10 MHz to 3.0 GHz  | ±1.5 dB       |                   | ±0.6 dB           |
| > 3.0 GHz to 5.0 GHz   | ±2.0 dB       |                   | ±1.1 dB           |
| > 5.0 GHz to 6.0 GHz   | ±2.6 dB       |                   | ±1.5 dB           |
| Preamplifier ON (Option 235)   |               |                   |                   |
| 20 to 30 °C:   |               |                   |                   |
| 2 MHz to 10 MHz  |               |                   | ±0.7 dB           |
| > 10 MHz to 3.0 GHz  |               |                   | ±0.5 dB           |
| > 3.0 GHz to 5.0 GHz   |               |                   | ±0.7 dB           |
| > 5.0 GHz to 6.0 GHz   |               |                   | ±0.7 dB           |
| -10 to 55 °C:  |               |                   |                   |
| 2 MHz to 10 MHz  |               |                   | ±1.2 dB           |
| > 10 MHz to 3.0 GHz  |               |                   | ±0.8 dB           |
| > 3.0 GHz to 5.0 GHz   |               |                   | ±1.3 dB           |
| > 5.0 GHz to 6.0 GHz   |               |                   | ±1.7 dB           |

## Spectrum Analyzer (continued)

| Description   | Specification   | Typical  |                   | Supplemental Information                   |
|---|---|--|-------------------|--|
|   |   | 10 minute warm up  | 90 minute warm up |  |
| <b>Resolution Bandwidth Switching Uncertainty</b>     |   |  |                   |  |
|   | RBW < 2 MHz   |  |                   | 0.0 dB<br>0.7 dB peak-to-peak <sup>3</sup> |
| <b>Total Absolute Amplitude Accuracy <sup>1</sup></b> |   |  |                   |  |
|   | Peak detector, 10 dB attenuation, preamplifier off, RBW < 2 MHz, input signal 0 dBm to -50 dBm, all settings auto coupled | Absolute Amplitude at 50 MHz + Frequency Response <sup>4</sup> |                   |  |
|   | 20 to 30 °C:  |  |                   |  |
|   | 2 MHz to 10 MHz   | ±1.8 dB  | ±1.28 dB          | ±0.60 dB                                   |
|   | > 10 MHz to 3.0 GHz   | ±1.5 dB  | ±1.0 dB           | ±0.50 dB                                   |
|   | > 3.0 GHz to 5.0 GHz  | ±1.9 dB  | ±1.36 dB          | ±0.60 dB                                   |
|   | > 5.0 GHz to 6.0 GHz  | ±2.1 dB  | ±1.7 dB           | ±0.60 dB                                   |
| <b>RF Input VSWR</b>                                  |   |  |                   |  |
|   | At all attenuation settings   |  |                   | 1.5:1 (nominal)                            |
| <b>Second harmonic distortion (SHI)</b>               |   |  |                   |  |
|   | -30 dBm signal at input mixer <sup>2</sup>  |  |                   |  |
|   | 2 MHz to 1.35 GHz   |  |                   | < -70 dBc<br>+40 dBm SHI (nominal)         |
|   | 1.35 GHz to 3.0 GHz   |  |                   | < -80 dBc<br>+50 dBm SHI (nominal)         |
| <b>Third Order Intermodulation Distortion (TOI)</b>   |   |  |                   |  |
|   | Two -30 dBm tones at input mixer  |  |                   | < -96 dBc<br>+18 dBm TOI (nominal)         |

<sup>1</sup> With signal at center frequency.

<sup>2</sup> Mixer level = RF input level – input attenuation

<sup>3</sup> For signals not at center frequency.

<sup>4</sup> The specification for Total Absolute Amplitude Accuracy is less than the sum of the Absolute Amplitude Accuracy and Frequency Response specifications because redundant uncertainty is removed.

## Spectrum Analyzer (continued)

| Description  | Supplemental Information                                   |
|--|--|
| <b>Residual Responses</b>  |  |
| Input terminated, 0 dB attenuation, preamplifier off, RBW $\leq$ 1 kHz, VBW auto coupled |  |
| 20 MHz to 3 GHz  | -90 dBm (nominal)  |
| > 3 GHz to 6 GHz   | -85 dBm (nominal)  |
| <b>Spurious Responses</b>  |  |
| Input Mixer level -30 dBm  |  |
| RFsig = Rftune + 417 MHz   | -70 dBc (nominal)  |
| RFsig = Rftune + 1.716 GHz   | -80 dBc (nominal)  |
| Input Mixer level -10 dBm; First IF Image Response                                       |  |
| Rfsig = Rftune - 2 x 0.8346 GHz<br>for Rftune 5.7 to 6.0 GHz                             | -50 dBc (nominal)  |
| Sidebands  | -80 dBc (nominal)  |
|  | -60 dBc (nominal) when battery<br>charging, 260 kHz offset |

**Figure 10**


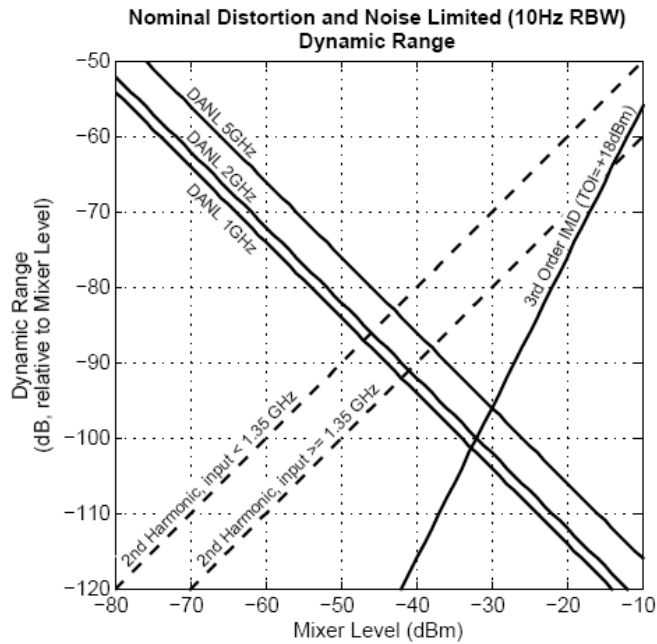


Figure 11

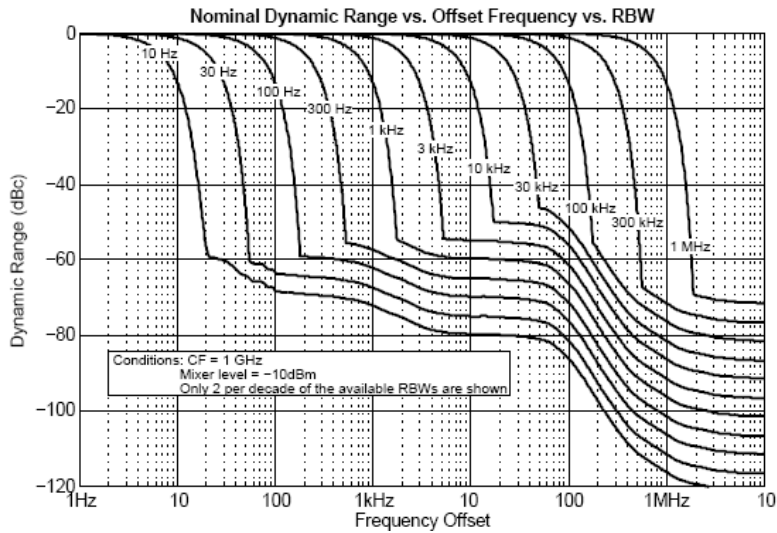

| Description  | Specification  |
|--|--|
| <b>Independent Signal Source or Tracking Generator</b>   |  |
| <p>The independent source or tracking generator is included with either spectrum analyzer option. The source can be used in continuous wave (CW) or stimulus/response (S/R) mode. In CW mode, the source frequency is independent of the receiver frequency. The source can be tuned to a frequency that is different from the receiver. In stimulus/response mode, the source operates the same as a traditional tracking generator - the receiver tracks the source.</p> |  |
| <b>Frequency range</b>   | 2 MHz to 4 GHz (Option 230) or 2 MHz to 6 GHz (Option 231)   |
| <b>Amplitude</b>   | <p>High power                    2 MHz to 4 GHz &lt; +8 dBm, +6 dBm (nominal)<br/>              &gt;4 GHz to 6 GHz &lt; +7 dBm, +2 dBm (nominal)</p> <p>Low power                      2 MHz to 4 GHz &lt; -23 dBm, -25 dBm (nominal)<br/>              &gt;4 GHz to 6 GHz &lt; -24 dBm, -29 dBm (nominal)</p> |
| <b>Attenuation</b>   | 0 to 31 dB   |
| <b>Functions</b>   | Continuous wave, stimulus / response   |

Spectrum Analyzer (continued)

| Description                  | Specification          | Supplemental Information |
|------------------------------|------------------------|--------------------------|
| <b>AM/FM Tune and Listen</b> |                        |                          |
| Audio demodulation types     | AM, FM Narrow, FM Wide |                          |
| Audio Bandwidth              | 16 kHz                 |                          |
| Receiver IF Bandwidth        |                        |                          |

|                   |               |
|-------------------|---------------|
| AM                | 35 kHz        |
| FM Narrow         | 12 kHz        |
| FM Wide           | 150 kHz       |
| Listen Time Range | 0 to 100 sec. |

#### Audio Signal Strength Indicator

Audio Signal Strength Indicator helps locate signals. The tone and frequency of the beep varies with signal strength.

#### Radio Standards

With a Radio Standard applied, pre-defined frequency bands, channel numbers or Uplink / Downlink selections can be used instead of manual frequency entry. The pre-defined FieldFox Radio Standards include bands such as W-CDMA, LTE, and GSM. Custom Radio Standards can also be defined, imported, and applied to the FieldFox.

#### FieldFox Power Suite Measurement types

Channel Power  
Occupied Bandwidth  
Adjacent Channel Power Ratio

### Preamplifier (Option 235)

| Description            | Specification    | Typical<br>10 minute warm up |
|------------------------|------------------|------------------------------|
| <b>Frequency Range</b> |                  |                              |
| Option 230             | 100 kHz to 4 GHz |                              |
| Option 231             | 100 kHz to 6 GHz |                              |
| Gain                   |                  | 22 dB                        |

### Interference Analyzer (Option 236)

| Description          | Specification  | Supplemental Information |
|----------------------|--|--------------------------|
| <b>Display Types</b> |  |                          |
| Spectrogram          | Overlay, full screen, top, or bottom with active trace |                          |
| Waterfall            |  |                          |
| <b>Markers</b>       |  |                          |
|                      | Time, delta time                                       |                          |

## Channel Power Meter (Option 311)

Channel power meter is a built-in power measurement that application does not require an external power sensor. Set the center frequency and channel bandwidth. The results are shown on a large analog display.

| Description             | Specification      | Typical  |
|-------------------------|--------------------|----------|
| <b>Frequency range:</b> |                    |          |
|                         | 100 kHz to 4/6 GHz |          |
| <b>Power accuracy</b>   |                    |          |
| 2 MHz to 10 MHz         | ±1.8 dB            | ±0.60 dB |
| > 10 MHz to 3.0 GHz     | ±1.5 dB            | ±0.50 dB |
| > 3.0 GHz to 5.0 GHz    | ±1.9 dB            | ±0.60 dB |
| > 5.0 GHz to 6.0 GHz    | ±2.1 dB            | ±0.60 dB |

## Power Meter (Option 302)

Power Meter (Option 302) supports the Agilent Technologies U2000 Series USB Average Power Sensors. For specifications, refer to the U2000 Series USB Sensor's Data Sheet at <http://www.agilent.com/find/usbsensor>.

## General Information

| Description   | Specification   | Typical      | Supplemental Information  |
|---|---|--------------|---|
| <b>Calibration Cycle</b>                                |   |              |   |
|   | 1 Year  |              |   |
| <b>Environmental</b>                                    |   |              |   |
|   | <ul style="list-style-type: none"> <li>▪ Agilent Technologies Environmental Test manual (ETM) for Outdoor Equipment<sup>1</sup></li> <li>▪ MIL-PRF-28800F class 2</li> </ul>            |              |   |
| Altitude – Operating                                    | 9,144 m (30,000 ft)   |              | Under battery operation<br>AC to DC adapter rated at 3000m  |
| Altitude – Non-Operating                                | 15,240 m (50,000 ft)  |              |   |
| IP Class  | 30  |              |   |
| <b>Temperature Range</b>                                |   |              |   |
| Operating   |   |              |   |
| AC Power  | -10 to 55 °C  |              |   |
| Battery   | -10 to 50 °C  | -10 to 55 °C |   |
| Storage   | -51 to 71 °C  |              | With the battery pack removed. The battery packs should be stored in an environment with low humidity. Extended exposure to temperature above 45 °C could degrade battery performance and life. |
| <b>EMC</b>  |   |              |   |
| Complies with European EMC Directive 2004/108/EC        | <ul style="list-style-type: none"> <li>▪ IEC/EN 61326-2-1</li> <li>▪ CISPR Pub 11 Group 1, class A</li> <li>▪ AS/NZS CISPR 11</li> <li>▪ ICES/NMB-001</li> </ul>                        |              | When subjected to continuously present radiated electromagnetic phenomena, some degradation of performance may occur  |
| <b>ESD</b>  |   |              |   |
|   | ▪ IEC/EN 61000-4-2  |              | Functional up to 20 kV test <sup>1</sup>  |
| <b>Safety</b>   |   |              |   |
| Complies with European Low Voltage Directive 2006/95/EC | <ul style="list-style-type: none"> <li>▪ IEC/EN 61010-1 2<sup>nd</sup> Edition</li> <li>▪ Canada: CSA C22.2 No. 61010-1-04</li> <li>▪ USA: UL 61010-1 2<sup>nd</sup> Edition</li> </ul> |              |   |

## General Information (continued)

| Description                   | Specification  | Typical | Supplemental Information  |
|-------------------------------|--|---------|---|
| <b>Power</b>                  |  |         |   |
| Power Supply                  |  |         |   |
| External DC Input             | 15 to 19 VDC   |         | 40 W maximum when battery charging  |
| External AC Power Adapter     |  |         | Efficiency Level IV, 115 VAC  |
| Input                         | 100 to 250 VAC, 50 to 60 Hz<br>1.25 – 0.56 A   |         |   |
| Output                        | 15 VDC, 4 A  |         |   |
| Power Consumption             |  |         |   |
| On                            |  | 12 W    |   |
| <b>Battery</b>                |  |         |   |
|                               | 10.8 V, 4.6 A-h  |         | Lithium ion   |
| Operating Time                |  | 4 hours |   |
| Charge Time                   | A fully discharged battery takes about 1.5 hours to recharge to 80%, 4 hours to 100% |         |   |
| Discharge Temperature Limits  | -10 to 60 °C <sup>2</sup> , ≤ 85% RH   |         |   |
| Charge Temperature Limits     | 0 to 45 °C <sup>2</sup> , ≤ 85% RH   |         |   |
| Storage Temperature Limits    | -20 to 50 °C <sup>2</sup> , ≤ 85% RH   |         |   |
|                               |  |         | The battery packs should be stored in an environment with low humidity. Extended exposure to temperature above 45 °C could degrade battery performance and life |
| <b>Data Storage</b>           |  |         |   |
| Internal                      | Minimum 16 MB  |         | Up to 1000 instrument states and trace  |
| External                      |  |         | Supports USB 2.0 compatible memory devices; Supports miniSD and miniSDHC memory cards   |
| <b>Display</b>                |  |         |   |
|                               | 6.5" transfective color VGA LED-backlit<br>640 x 480 with anti-glare coating         |         |   |
| <b>Weight</b>                 |  |         |   |
|                               | 2.8 kg (6.2 lbs) including battery   |         |   |
| <b>Dimensions (H x W x D)</b> |  |         |   |
|                               | 292 x 188 x 72 mm (11.5" x 7.4" x 2.8")  |         |   |



## General Information (continued)

| Description                           | Specification                             | Typical | Supplemental Information                                  |
|---------------------------------------|---|---------|---|
| <b>Inputs &amp; Outputs</b>           |   |         |   |
| RF Out Port                           |   |         |   |
| Connector                             | Type-N, female                            |         |   |
| Impedance                             | 50 $\Omega$ (nominal)                     |         |   |
| Damage Level                          | > +23 dBm, > $\pm$ 50 VDC                 |         |   |
| RF In Port                            |   |         |   |
| Connector                             | Type-N, female                            |         |   |
| Impedance                             | 50 $\Omega$ (nominal)                     |         |   |
| Damage Level                          | > +27 dBm, > $\pm$ 50 VDC                 |         |   |
| LO Emissions                          |   |         |   |
| 0 dB attenuation,<br>preamplifier off |   |         | -65 dBm (nominal)   |
| Headphone Jack<br>Connector           | 3.5 mm (1/8 inch) miniature audio<br>jack |         |   |
| USB                                   |   |         |   |
| USB-A (2 ports)                       | Hi-speed USB 2.0                          |         |   |
| Mini USB (1 port)                     | Hi-speed USB 2.0                          |         | Provided for future use.                                  |
| LAN                                   | 100Base-T ONLY<br>RJ-45 connector         |         | 10Base-T is NOT supported                                 |
| External Reference /Trigger Input     |   |         |   |
| Connector                             | BNC female                                |         |   |
| External Reference                    |   |         |   |
| Input Frequency                       | 10 MHz                                    |         |   |
| Input Amplitude<br>Range              |   |         | -5 dBm to +10 dBm (nominal)                               |
| Impedance                             |   |         | 50 $\Omega$ (nominal)                                     |
| Lock Range                            |   |         | $\pm$ 10 ppm of external reference<br>frequency (nominal) |
| Trigger Input                         |   |         |   |
| Impedance                             |   |         | 10 K $\Omega$ (nominal)                                   |
| Level Range                           |   |         |   |
| Rising Edge                           |   |         | 1.7 V (nominal)   |
| Falling Edge                          |   |         | 1 V (nominal)   |

1 Samples of this product have been type tested in accordance with the Agilent Environmental Test Manual (ETM) for outdoor equipment (OE) and verified to be robust against the environmental stresses of storage, transportation and end use ; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions.

2 Charge and discharge temperatures are internal temperatures of the battery as measured by a sensor embedded in the battery. The Battery screen displays temperature information. To access the screen, select **System**, **Service Diagnostics**, and **Battery**

## Supported Cal Kits

The following list of calibration kits are loaded in the FieldFox. You can add additional calibration kits to the FieldFox using FieldFox Data Link Software.


The basic 50-ohm QuickCal does not require cal standards. However, for higher accuracy, perform QuickCal with a load. 75-ohm QuickCal does require a 75-ohm load.

| Model number | Description  |
|--------------|--|
| N9910X-800   | 3-in-1 OSL calibration kit, DC to 6 GHz, Type-N (m) 50 ohm                             |
| N9910X-801   | 3-in-1 OSL calibration kit, DC to 6 GHz, Type-N (f) 50 ohm                             |
| N9910X-802   | 3-in-1 OSL calibration kit, DC to 6 GHz, 7/16 DIN (m)                                  |
| N9910X-803   | 3-in-1 OSL calibration kit, DC to 6 GHz, 7/16 DIN (f)                                  |
| 85031B       | Economy calibration kit, DC to 6 GHz, 7 mm   |
| 85032E       | Economy calibration kit, DC to 6 GHz, Type-N, 50-ohm                                   |
| 85032F       | Standard calibration kit, DC to 9 GHz, Type-N, 50-ohm                                  |
| 85033E       | Standard calibration kit, DC to 9 GHz, 3.5 mm  |
| 85036B       | Standard calibration kit, DC to 3 GHz, Type-N 75-ohm                                   |
| 85036E       | Economy calibration kit, DC to 3 GHz, Type-N 75-ohm                                    |
| 85038A       | Standard calibration kit, DC to 7.5 GHz, 7-16  |
| 85039B       | Economy calibration kit, DC to 3 GHz, Type-F, 75-ohm                                   |
| 85052D       | Economy calibration kit, DC to 26.5 GHz, 3.5 mm  |
| 85054B       | Standard calibration kit, DC to 18 GHz, Type-N, 50-ohm                                 |
| 85054D       | Economy calibration kit, DC to 18 GHz, Type-N, 50-ohm                                  |
| 85514A       | Calibration kit, 4-in-1, open, short, load and through, DC to 9 GHz, Type-N(m), 50     |
| 85515A       | Calibration kit, 4-in-1, open, short, load and through, DC to 9 GHz, Type-N(f), 50     |
| 85516A       | Calibration kit, 4-in-1, open, short, load and through, DC to 3 GHz, Type-N(m), 75 ohm |
| 85517A       | Calibration kit, 4-in-1, open, short, load and through, DC to 3 GHz, Type-N(f), 75 ohm |

## FieldFox Data Link Software

FieldFox Data Link software, installed on a PC, provides the following capabilities:

- Capture of current trace and settings
- Opening of data files (s1p, s2p, csv, sta, and png) residing on the instrument
- Editing cal kit and cable files on the instrument, or creating new cal kits and cables
- Transferring files to/from the instrument
- Annotating plots for documentation purposes
- Marker, limit line, and format changes on the PC
- Report generation
- Printing function

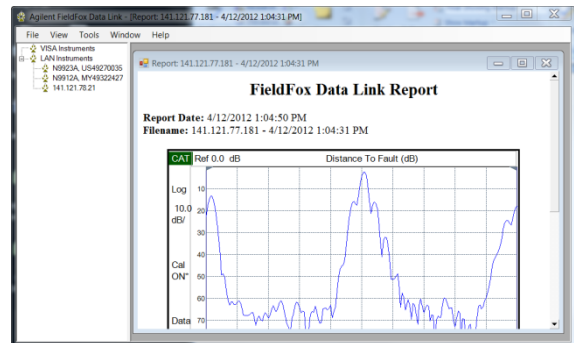

FieldFox Data Link software is available from the following website:

<http://www.agilent.com/find/fieldfoxsupport>

### Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to:

[www.agilent.com/find/removealldoubt](http://www.agilent.com/find/removealldoubt)



### Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.



[www.agilent.com/find/open](http://www.agilent.com/find/open)

Agilent Open simplifies the process of connecting and programming test systems to help engineers design, validate and manufacture electronic products. Agilent offers open connectivity for a broad range of system-ready instruments, open industry software, PC-standard I/O and global support, which are combined to more easily integrate test system development.

[www.agilent.com/find/FieldFox](http://www.agilent.com/find/FieldFox)

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

#### Americas

|               |                |
|---------------|----------------|
| Canada        | (877) 894-4414 |
| Latin America | 305 269 7500   |
| United States | (800) 829-4444 |

#### Asia Pacific

|           |                |
|-----------|----------------|
| Australia | 1 800 629 485  |
| China     | 800 810 0189   |
| Hong Kong | 800 938 693    |
| India     | 1 800 112 929  |
| Japan     | 81 426 56 7832 |
| Korea     | 080 769 0800   |
| Malaysia  | 1 800 888 848  |
| Singapore | 1 800 375 8100 |
| Taiwan    | 0800 047 866   |
| Thailand  | 1 800 226 008  |

#### Europe

|                |                     |
|----------------|---------------------|
| Austria        | 01 36027 71571      |
| Belgium        | 32 (0) 2 404 93 40  |
| Denmark        | 45 70 13 15 15      |
| Finland        | 358 (0) 10 855 2100 |
| France         | 0825 010 700*       |
|                | *0.125 €/minute     |
| Germany        | 07031 464 6333**    |
|                | **0.14 €/minute     |
| Ireland        | 1890 924 204        |
| Italy          | 39 02 92 60 8 484   |
| Netherlands    | 31 (0) 20 547 2111  |
| Spain          | 34 (91) 631 3300    |
| Sweden         | 0200-88 22 55       |
| Switzerland    | 0800 80 53 53       |
| United Kingdom | 44 (0) 118 9276201  |

#### Other European Countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

Product specifications and descriptions in this document subject to change without notice.

Manufacturing Part Number: N9912-90006

Printed in USA, May 1, 2012

Supersedes: January 5, 2012

© Agilent Technologies, Inc. 2012



**Agilent Technologies**