


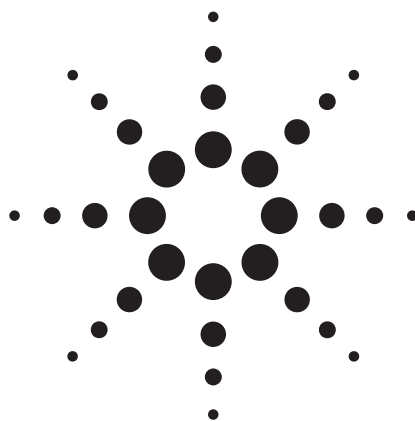

Agilent 8471D Coaxial RF Microwave Detectors

100 kHz to 2 GHz

Data Sheet

Features and Description

- Zero bias
- Environmentally rugged
- BNC connector

The Agilent 8471D detector is a planar doped barrier detector offering the characteristics of the Agilent 8474 line of PDB detectors in an economical package. It is available with an BNC RF connector and BNC video connector.

The detector is designed for use in RF and microwave instrumentation and systems applications as the detecting element in leveling loops, for power monitoring and for wideband video detection.

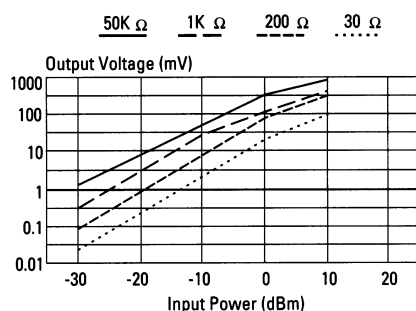


Figure 1. Typical transfer characteristics.

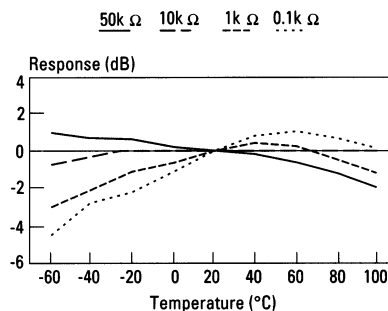


Figure 3. Typical output response with temperature ($P_{in} \leq 20$ dBm).

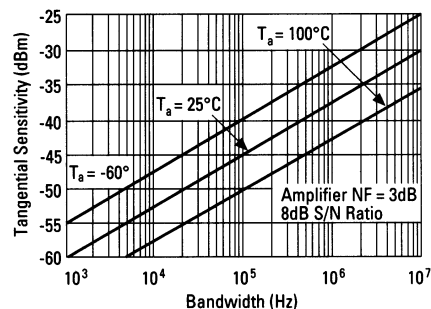


Figure 2. Typical tangential sensitivity.

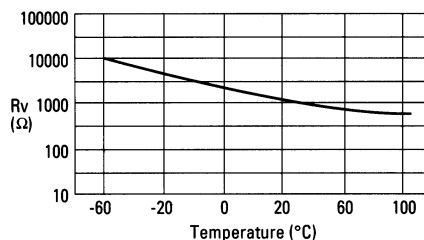


Figure 4. Typical video impedance variation with temperature.

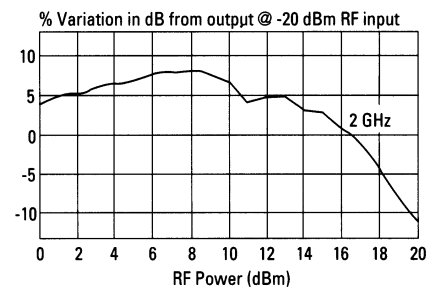


Figure 5. Typical square law deviation.



Agilent Technologies

Specifications

Frequency range	100 kHz to 2 GHz
Frequency response	± 0.2 dB 100 kHz to 1 GHz; ± 0.4 dB 1 to 2 GHz
SWR	< 1.23 0.0001 to 1 GHz; < 1.46 1 to 2 GHz
Low level sensitivity	0.5 mV/ μ W
Max operating input	100 mW
Typical short-term max input	0.7 Watt
Noise	< 50 μ V (μ V peak-to-peak with CW power applied to produce 100 mV output, 400 kHz BW)
Output polarity	(STD) Negative (103) Positive
Option (102)	Optimal square law load option

Note: Above specifications are at 25° C and ≤ 20 dBm unless otherwise specified.

Environmental

Operating temperature	-20° to +85° C
Non-operating temperature	MIL-STD 883, Method 1010: (-55° to +85°)
Vibration	MIL-STD 883, Method 2007: (0.6" D.A 20 to 80 Hz and 20g, 80 to 2000 Hz)
Shock	MIL-STD 883, Method 2002.1: (500g, 0.5 ms)
Altitude	MIL-STD 883, Method (50,000 ft, 15,240 m)
Moisture resistance	MIL-STD 883, Method 1004.1 (25° to 40° C, 95% RH)
RFI	MIL-STD 461C (meets Part 7, degraded by 10 dB)

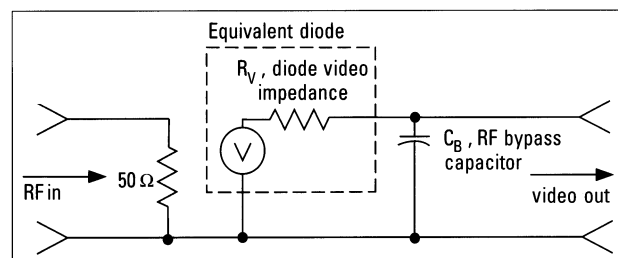


Figure 6. Equivalent circuit for 8471D with typical parameter values.

Typical values:

$$R_v \text{ (diode video impedance)} \approx 1.5 \text{ k}\Omega^1$$

$$C_B \text{ (RF bypass capacitor)} \approx 6800 \text{ pF nominal}$$

$$T_R \text{ (10 to 90\% risetime)} \approx 2.2 \frac{(R_{LOAD})(R_v)}{R_{LOAD} + R_v} (C_B + C_{LOAD}) = \frac{0.35}{BW}$$

Agilent 8471D

A	13.72 (0.54)
B	63.4 (2.50)
C	15.64 (0.62)

Connector BNC (m) input:
BNC (f) output

Net weight: 38.8 grams (1.37 oz.)

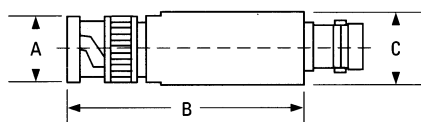


Figure 7. 8471D

1. At 25° C and PIN ≤ 20 dBm (see Figure 3)



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit www.agilent.com/find/connectivity for more information.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

United States:
(tel) 800 829 4444
(fax) 800 829 4433
Canada:
(tel) 877 894 4414
(fax) 800 746 4866
China:
(tel) 800 810 0189
(fax) 800 820 2816
Europe:
(tel) 31 20 547 2111
Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (080) 769 0800
(fax) (080) 769 0900
Latin America:
(tel) (305) 269 7500
Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331
Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6755 0042
Email: tm_ap@agilent.com
Contacts revised: 9/17/04

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 1990, 2004
Printed in USA, December 22, 2004
5952-0644



Agilent Technologies