

# R&S®ESW

## EMI Test Receiver

# Specifications



## CONTENTS

<b>Definitions .....</b>	<b>4</b>
<b>Specifications.....</b>	<b>5</b>
Frequency .....	5
Sweep time.....	7
Preselection and preamplifier .....	7
R&S®ESW-B24 low noise amplifier (LNA).....	7
IF and resolution bandwidths.....	8
Level.....	9
Sensitivity .....	13
Spurious responses.....	21
Level measurement uncertainty.....	22
Measurement speed .....	24
Trigger functions.....	24
Audio demodulator .....	25
Inputs and outputs.....	25
General data.....	28
<b>Options .....</b>	<b>30</b>
R&S®ESW-B10 external generator control.....	30
R&S®ESW-B21 LO/IF connections for external mixers (not available for R&S®ESW8).....	30
<b>Ordering information .....</b>	<b>31</b>
Options.....	31
<i>Firmware</i> .....	31
Recommended extras.....	32
Service options.....	33

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

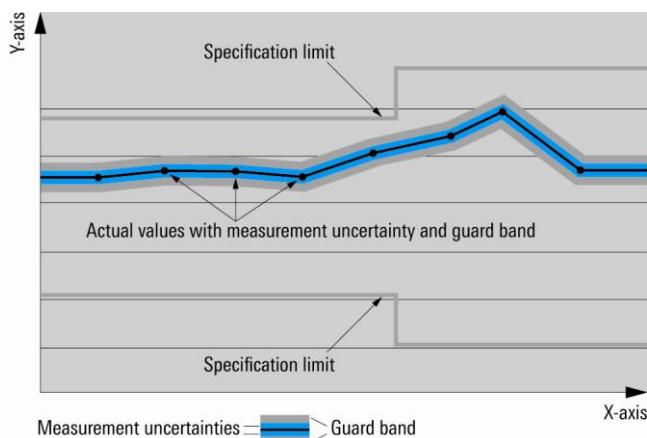

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP/3GPP2 standard, chip rates are specified in Mcps (million chips per second), whereas bit rates and symbol rates are specified in Mbps (million bits per second), kbps (thousand bits per second) or ksps (thousand symbols per second), and sample rates are specified in Msample/s (million samples per second). Mcps, kbps, ksps and Msample/s are not SI units.

# Specifications

## Frequency

<b>Frequency range</b>	R&S®ESW8	
	input 1, DC coupled	1 Hz to 8 GHz
	input 1, AC coupled	10 MHz to 8 GHz
	R&S®ESW26	
	input 1, DC coupled	1 Hz to 26.5 GHz
	input 1, AC coupled	10 MHz to 26.5 GHz
	R&S®ESW44	
	input 1, DC coupled	1 Hz to 44 GHz
	input 1, AC coupled	10 MHz to 44 GHz
	all models	
	input 2, DC coupled	1 Hz to 1 GHz
	input 2, AC coupled <sup>1</sup>	10 MHz to 1 GHz
<b>Frequency resolution</b>		0.01 Hz


<b>Reference frequency, internal</b>		
Accuracy		$\pm(\text{time since last adjustment} \times \text{aging rate} + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-7}$
	with R&S®ESW-B4 OCXO precision frequency reference option	$\pm 3 \times 10^{-8}$
Temperature drift (0 °C to +50 °C)	standard	$\pm 1 \times 10^{-7}$
	with R&S®ESW-B4 OCXO precision frequency reference option	$\pm 1 \times 10^{-9}$
Achievable initial calibration accuracy	standard	$\pm 1 \times 10^{-8}$
	with R&S®ESW-B4 OCXO precision frequency reference option	$\pm 5 \times 10^{-9}$

<b>Frequency readout (analyzer mode)</b>		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	1001
	range	
	spectrum analyzer	101 to 100001
	EMI measurement	101 to 200001
Marker tuning frequency step size	marker step size = sweep points	span/(sweep points - 1)
	marker step size = standard	span/(default sweep points - 1)
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2}(\text{last digit}))$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		$\pm 0.1\%$

<b>Receiver scan</b>		
Scan		max. 10 subranges with different settings
Scan modes		normal, time domain
Measurement time	normal scan, per frequency	50 µs to 100 s
	time domain scan, per subrange	50 µs to 100 s
Number of trace points		up to 10 000 000
Frequency step size	normal scan	min. 1 Hz
	time domain scan	$0.25 \times \text{resolution bandwidth}$

<sup>1</sup> Pulse limiter = off.

<b>Time domain scan</b>			
Frequency segment processed in parallel	RBW = 200 Hz	0.66 MHz	
	RBW = 9 kHz	30 MHz	
	RBW = 120 kHz	24.6 MHz	
	RBW = 1 MHz	25.6 MHz	
FFT overlap factor		≥ 93 %	
<b>Spectral purity</b>			
SSB phase noise	frequency = 1000 MHz, carrier offset		
	10 Hz, without R&S®ESW-B4 option	-80 dBc (1 Hz) (nom.)	
	10 Hz, with R&S®ESW-B4 option	-90 dBc (1 Hz) (nom.)	
	100 Hz	-106 dBc (1 Hz), typ. -112 dBc (1 Hz)	
	1 kHz	< -125 dBc (1 Hz), typ. -130 dBc (1 Hz)	
	10 kHz	< -134 dBc (1 Hz), typ. -138 dBc (1 Hz)	
	100 kHz	< -136 dBc (1 Hz), typ. -140 dBc (1 Hz)	
	1 MHz	< -145 dBc (1 Hz), typ. -149 dBc (1 Hz)	
	10 MHz	-156 dBc (1 Hz) (nom.)	
Residual FM	frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms	< 0.1 Hz (nom.)	

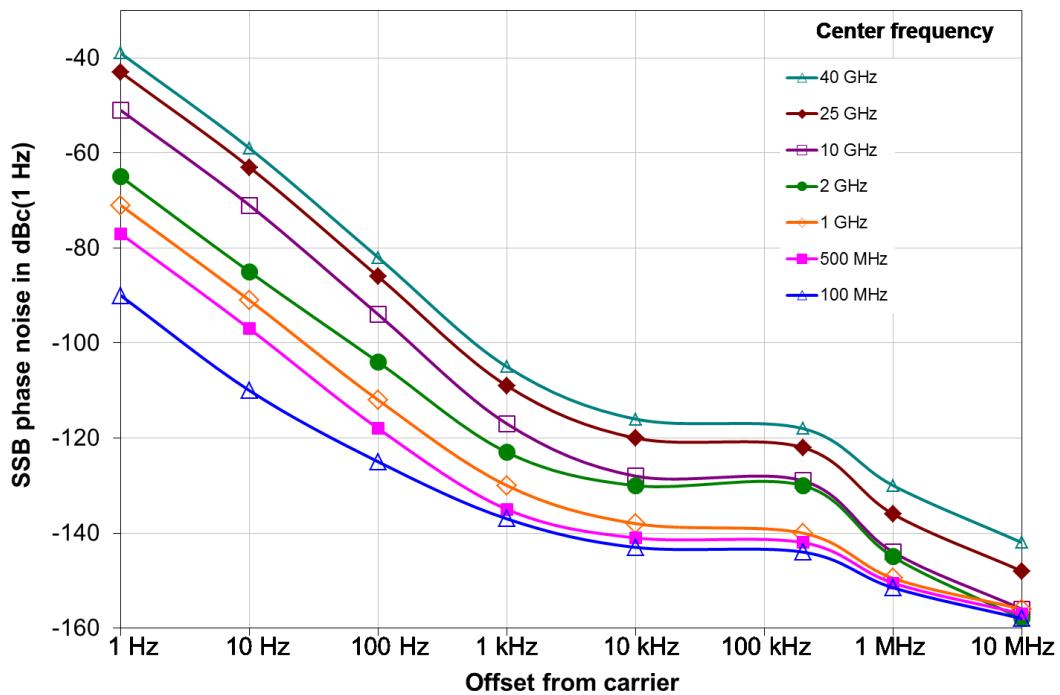

Typical phase noise at different center frequencies (with the R&S®ESW-B4 option for offsets ≤ 10 Hz).

## Sweep time

Sweep time range	span = 0 Hz	1 µs to 16000 s
	span ≥ 10 Hz	3 µs to 16000 s <sup>2</sup>
Sweep time accuracy	span = 0 Hz	±0.1 % (nom.)
	span ≥ 10 Hz	±3 % (nom.)

## Preselection and preamplifier

<b>Preselection</b>		
State	receiver mode	always on
	analyzer mode	on/off (selectable)
Number of preselection filters	21	
<b>Preselection filters</b>		
Bandwidths (–6 dB), nominal	1 Hz to 150 kHz	200 kHz, fixed lowpass filter
	150 kHz to 30 MHz	38 MHz, fixed bandpass filter
	2 MHz to 30 MHz, selectable	36 MHz, fixed bandpass filter
	30 MHz to 125 MHz	134 MHz, fixed bandpass filter
	125 MHz to 205 MHz	141 MHz, fixed bandpass filter
	205 MHz to 285 MHz	146 MHz, fixed bandpass filter
	285 MHz to 365 MHz	142 MHz, fixed bandpass filter
	365 MHz to 445 MHz	156 MHz, fixed bandpass filter
	445 MHz to 525 MHz	136 MHz, fixed bandpass filter
	525 MHz to 605 MHz	126 MHz, fixed bandpass filter
	605 MHz to 685 MHz	141 MHz, fixed bandpass filter
	685 MHz to 765 MHz	131 MHz, fixed bandpass filter
	765 MHz to 845 MHz	128 MHz, fixed bandpass filter
	845 MHz to 925 MHz	132 MHz, fixed bandpass filter
	925 MHz to 1001 MHz	133 MHz, fixed bandpass filter
	1001 MHz to 1795 MHz	1044 MHz, fixed bandpass filter
	1795 MHz to 2895 MHz	1541 MHz, fixed bandpass filter
	2895 MHz to 4895 MHz	2452 MHz, fixed bandpass filter
	4895 MHz to 6800 MHz	fixed highpass filter
	6800 MHz to 8000 MHz	fixed highpass filter
	8 GHz to 44 GHz	YIG filter
<b>Notch filters</b>		
Reject band	selectable	2400 MHz to 2500 MHz 5725 MHz to 5875 MHz
Reject attenuation		20 dB (nom.)
<b>Preamplifier</b>		
Range		1 kHz to 8 GHz
Gain		20 dB (nom.)
Location		in the signal path between preselection and 1st mixer, only available with preselection = on
Interaction		preamplifier and LNA (R&S®ESW-B24 option) operate alternatively; preamplifier = on means LNA = off and vice versa

## R&S®ESW-B24 low noise amplifier (LNA)

Frequency range	R&S®ESW8 R&S®ESW26 R&S®ESW44	150 kHz to 8 GHz 150 kHz to 26.5 GHz 150 kHz to 44 GHz
Gain		30 dB (nom.)
Location		in the signal path between RF attenuator and preselection
Interaction		preamplifier and LNA operate alternatively; LNA = on means preamplifier = off and vice versa

<sup>2</sup> The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

## IF and resolution bandwidths

<b>IF filters, sweep filters and FFT filters</b>		
Resolution bandwidths ( $-3\text{ dB}$ )	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®ESW-B8 option	20 MHz, 50 MHz, 80 MHz additionally
Bandwidth uncertainty	RBW $\leq 10\text{ MHz}$	< 3 %
	RBW $> 10\text{ MHz}$	< 3 % (nom.)
Shape factor 60 dB:3 dB	RBW $\leq 10\text{ MHz}$	< 5
	RBW $> 10\text{ MHz}$	< 5 (nom.)

<b>EMI filters</b>		
Bandwidths ( $-6\text{ dB}$ )	standard	1 Hz, 10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz, 10 MHz
	with R&S®ESW-B8 option	20 MHz, 50 MHz, 80 MHz additionally
Bandwidth uncertainty	RBW $\leq 10\text{ MHz}$	< 3 %
	RBW $> 10\text{ MHz}$	< 3 % (nom.)
Shape factor 60 dB:6 dB	RBW $\leq 10\text{ MHz}$	< 4
	RBW $> 10\text{ MHz}$	< 4 (nom.)

<b>Channel filters (analyzer mode)</b>		
Bandwidths ( $-3\text{ dB}$ )	standard (RRC = root raised cosine)	100 Hz, 200 Hz, 300 Hz, 500 Hz 1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/ 24.3 (RRC)/25/30/50/100/150/192/200/ 300/500 kHz 1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/8/10 MHz
	with R&S®ESW-B8 option	20 MHz, 28 MHz, 40 MHz, 80 MHz additionally
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

<b>Video bandwidths (analyzer mode)</b>	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®ESW-B8 option	20 MHz, 50 MHz, 80 MHz additionally

## Level

<b>Level display (analyzer mode)</b>		
Display range		displayed noise floor up to +30 dBm
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average, quasi-peak, CISPR-average, RMS-average
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation – preamplifier/LNA gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

<b>Level display (receiver mode)</b>		
Level display	analog	bargraph display, separately for each detector
	digital	numeric; 0.01 dB resolution
Detectors	max. 4 selectable	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
Units of level axis		dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW, dB $\mu$ T
RF spectrum		
Logarithmic level axis		10 dB to 200 dB, in steps of 10
Frequency axis		linear or logarithmic
Number of traces		6
Detectors	normal scan	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
	time domain scan	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average

<b>Amplitude probability display – CISPR APD measuring function</b>		
Minimum amplitude probability		$10^{-7}$
Maximum acquisition time		120 s
Analysis bandwidth (-6 dB)		200 Hz, 9 kHz, 120 kHz, 1 MHz

<b>Max. input level</b>		
DC voltage	AC coupled	50 V
	DC coupled	0 V
CW RF power	RF attenuation = 0 dB preselection off <sup>3</sup> , preamplifier off, LNA off <sup>4</sup>	20 dBm (= 0.1 W)
	preselection/preamplifier on or LNA on <sup>4</sup>	13 dBm (=0.02 W)
	RF attenuation ≥ 10 dB preselection off <sup>3</sup> , preamplifier off, LNA off <sup>4</sup>	30 dBm (= 1 W)
	preselection on <sup>5</sup> , preamplifier on or LNA on <sup>4</sup>	23 dBm (= 0.2 W)
Pulse spectral density	RF attenuation = 0 dB, preamplifier off, LNA off <sup>4</sup>	97 dB μV/MHz
Max. pulse voltage	RF attenuation ≥ 10 dB input 1, input 2 with pulse limiter off	150 V
	input 2 with pulse limiter on	450 V
Response threshold of built-in pulse limiter	input 2, RF attenuation ≥ 10 dB, pulse limiter on	30 V (nom.)
Max. pulse energy, pulse duration $\tau = 10 \mu\text{s}$	RF attenuation ≥ 10 dB input 1, input 2 with pulse limiter off	1 mWs
	input 2 with pulse limiter on	20 mWs

<b>Intermodulation</b>		
1 dB compression of input mixer (two-tone)	RF attenuation = 0 dB, preselection off <sup>3</sup> , preamplifier off, LNA off <sup>4</sup> $f_{in} \leq 3 \text{ GHz}$	+15 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	+10 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	+7 dBm (nom.)
	RF attenuation = 0 dB, preselection on <sup>5</sup> and preamplifier off, LNA off <sup>4</sup> $f_{in} \leq 3 \text{ GHz}$	+10 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	+5 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	+7 dBm (nom.)
	RF attenuation = 0 dB, preselection on <sup>5</sup> , preamplifier on, LNA off <sup>4</sup> $f_{in} \leq 3 \text{ GHz}$	-5 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	-10 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	+7 dBm (nom.)
	RF attenuation = 0 dB, preselection on <sup>5</sup> , preamplifier off, LNA on <sup>4</sup> $f_{in} \leq 3 \text{ GHz}$	-18 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	-25 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	-23 dBm (nom.)
	RF attenuation = 0 dB, preselection off <sup>3</sup> , preamplifier off, LNA on <sup>4</sup> $f_{in} \leq 3 \text{ GHz}$	-13 dBm (nom.)
	$3 \text{ GHz} < f_{in} \leq 8 \text{ GHz}$	-20 dBm (nom.)
	$f_{in} > 8 \text{ GHz}$	-23 dBm (nom.)

<sup>3</sup> Preselection off is only available in analyzer mode. In receiver mode the preselection is permanently on.

<sup>4</sup> With R&S®ESW-B24 option only.

<sup>5</sup> Default setting in receiver mode.

Third-order intercept point (TOI)	RF attenuation = 0 dB, level 2 $\times$ -15 dBm, $\Delta f > 5 \times$ RBW, preselection off <sup>3</sup> , preamplifier off, LNA off <sup>4</sup>	
	R&S®ESW8, R&S®ESW26, R&S®ESW44	
	$f_{in} < 10$ MHz	28 dBm (nom.)
	$10$ MHz $\leq f_{in} < 1$ GHz	> 20 dBm, typ. 25 dBm
	$1$ GHz $\leq f_{in} < 3$ GHz	> 20 dBm, typ. 25 dBm
	$3$ GHz $\leq f_{in} < 8$ GHz	> 17 dBm, typ. 20 dBm
	R&S®ESW26	
	$8$ GHz $\leq f_{in} < 10$ GHz	> 14 dBm, typ. 17 dBm
	$10$ GHz $\leq f_{in} < 12$ GHz	> 16 dBm, typ. 20 dBm
	$12$ GHz $\leq f_{in} < 17$ GHz	> 18 dBm, typ. 23 dBm
	$17$ GHz $\leq f_{in} < 19$ GHz	> 16 dBm, typ. 20 dBm
	$19$ GHz $\leq f_{in} \leq 26.5$ GHz	> 18 dBm, typ. 23 dBm
	R&S®ESW44	
	$8$ GHz $\leq f_{in} \leq 13.6$ GHz	> 8 dBm, typ. 11 dBm
	$13.6$ GHz $\leq f_{in} \leq 40$ GHz	> 10 dBm, typ. 15 dBm
	$f_{in} > 40$ GHz	12 dBm (nom.)
	RF attenuation = 0 dB, level 2 $\times$ -20 dBm, $\Delta f > 5 \times$ RBW, preselection on <sup>5</sup> , preamplifier off, LNA off <sup>4</sup>	
	R&S®ESW8, R&S®ESW26, R&S®ESW44	
	$f_{in} < 10$ MHz	20 dBm (nom.)
	$10$ MHz $\leq f_{in} < 1$ GHz	> 15 dBm, typ. 20 dBm
	$1$ GHz $\leq f_{in} < 8$ GHz	> 12 dBm, typ. 15 dBm
	R&S®ESW26	
	$8$ GHz $\leq f_{in} < 10$ GHz	> 14 dBm, typ. 17 dBm
	$10$ GHz $\leq f_{in} < 12$ GHz	> 16 dBm, typ. 20 dBm
	$12$ GHz $\leq f_{in} < 17$ GHz	> 18 dBm, typ. 23 dBm
	$17$ GHz $\leq f_{in} < 19$ GHz	> 16 dBm, typ. 20 dBm
	$19$ GHz $\leq f_{in} \leq 26.5$ GHz	> 18 dBm, typ. 23 dBm
	R&S®ESW44	
	$8$ GHz $\leq f_{in} \leq 13.6$ GHz	> 8 dBm, typ. 11 dBm
	$13.6$ GHz $\leq f_{in} \leq 40$ GHz	> 10 dBm, typ. 15 dBm
	$f_{in} > 40$ GHz	12 dBm (nom.)
	RF attenuation = 0 dB, level 2 $\times$ -45 dBm, $\Delta f > 5 \times$ RBW, preselection on <sup>5</sup> , preamplifier on, LNA off <sup>4</sup>	
	$f_{in} < 30$ MHz	-10 dBm (nom.)
	$30$ MHz $\leq f_{in} < 3$ GHz	> -8 dBm
	$3$ GHz $\leq f_{in} < 8$ GHz	> -10 dBm
	$8$ GHz $\leq f_{in} \leq 44$ GHz	-20 dBm (nom.)
	RF attenuation = 0 dB, level 2 $\times$ -55 dBm, $\Delta f > 5 \times$ RBW, preselection on <sup>5</sup> , preamplifier off, LNA on <sup>4</sup>	
	$10$ MHz $\leq f_{in} < 1$ GHz	-15 dBm (nom.)
	$1$ GHz $\leq f_{in} < 8$ GHz	-18 dBm (nom.)
	$8$ GHz $\leq f_{in} \leq 26.5$ GHz	-20 dBm (nom.)
	RF attenuation = 0 dB, level 2 $\times$ -55 dBm, $\Delta f > 5 \times$ RBW, preselection off <sup>3</sup> , preamplifier off, LNA on <sup>4</sup>	
	$10$ MHz $\leq f_{in} < 1$ GHz	-10 dBm (nom.)
	$1$ GHz $\leq f_{in} < 8$ GHz	-13 dBm (nom.)
	$8$ GHz $\leq f_{in} \leq 44$ GHz	-20 dBm (nom.)

Second-harmonic intercept point (SHI)	RF attenuation = 0 dB, level = -5 dBm, preselection off <sup>3</sup> , preamplifier off, LNA off <sup>4</sup>	
	R&S®ESW8, R&S®ESW26	
	1 MHz < f <sub>in</sub> ≤ 350 MHz	> 50 dBm, typ. 62 dBm
	350 MHz < f <sub>in</sub> ≤ 500 MHz	> 70 dBm, typ. 80 dBm
	500 MHz < f <sub>in</sub> < 1.5 GHz	> 47 dBm, typ. 52 dBm
	1.5 GHz ≤ f <sub>in</sub> ≤ 4 GHz	> 62 dBm, typ. 70 dBm
	4 GHz < f <sub>in</sub> ≤ 13.5 GHz	65 dBm (nom.)
	R&S®ESW44	
	1 MHz < f <sub>in</sub> ≤ 500 MHz	> 45 dBm, typ. 55 dBm
	500 MHz < f <sub>in</sub> < 1.5 GHz	> 47 dBm, typ. 56 dBm
	1.5 GHz ≤ f <sub>in</sub> ≤ 4 GHz	> 62 dBm, typ. 70 dBm
	4 GHz < f <sub>in</sub> ≤ 22 GHz	65 dBm (nom.)
	RF attenuation = 0 dB, level = -10 dBm, preselection on <sup>5</sup> , preamplifier off, LNA off <sup>4</sup>	
	1 MHz < f <sub>in</sub> ≤ 15 MHz	> 50 dBm (nom.)
	15 MHz < f <sub>in</sub> ≤ 65 MHz	> 50 dBm (nom.)
	65 MHz < f <sub>in</sub> ≤ 4000 MHz	> 60 dBm (nom.)
	4 GHz < f <sub>in</sub> ≤ 22 GHz	65 dBm (nom.)
	RF attenuation = 0 dB, level = -30 dBm, preselection on <sup>5</sup> , preamplifier on, LNA off <sup>4</sup>	
	1 MHz < f <sub>in</sub> ≤ 15 MHz	> 20 dBm (nom.)
	15 MHz < f <sub>in</sub> ≤ 105 MHz	> 25 dBm (nom.)
	105 MHz < f <sub>in</sub> ≤ 4000 MHz	> 40 dBm (nom.)
	4 GHz < f <sub>in</sub> ≤ 22 GHz	10 dBm (nom.) <sup>4</sup>
	RF attenuation = 0 dB, level = -55 dBm, preselection on <sup>5</sup> , preamplifier off, LNA on <sup>4</sup>	
	50 MHz < f <sub>in</sub> ≤ 21.75 GHz	5 dBm (nom.)
	RF attenuation = 0 dB, level = -50 dBm, preselection off <sup>3</sup> , preamplifier off, LNA on <sup>4</sup>	
	50 MHz < f <sub>in</sub> ≤ 21.75 GHz	10 dBm (nom.)

## Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

<b>Displayed average noise level of instruments without R&amp;S®ESW-B24 option (analyzer mode)</b>	
Preselection off/on <sup>3</sup> , preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
1 Hz ≤ f < 2 Hz	−80 dBm (nom.)
2 Hz ≤ f < 10 Hz	−100 dBm, typ. −110 dBm
10 Hz ≤ f ≤ 100 Hz	−110 dBm, typ. −120 dBm
100 Hz < f ≤ 1 kHz	−120 dBm, typ. −130 dBm
1 kHz < f < 9 kHz	−135 dBm, typ. −147 dBm
RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C	
R&S®ESW8	
9 kHz ≤ f ≤ 1 MHz	−145 dBm, typ. −150 dBm
1 MHz < f ≤ 1 GHz	−150 dBm, typ. −154 dBm
1 GHz < f < 3 GHz	−152 dBm, typ. −156 dBm
3 GHz ≤ f ≤ 8 GHz	−152 dBm, typ. −156 dBm
R&S®ESW26	
9 kHz ≤ f ≤ 1 MHz	−145 dBm, typ. −150 dBm
1 MHz < f ≤ 1 GHz	−149 dBm, typ. −154 dBm
1 GHz < f < 3 GHz	−151 dBm, typ. −156 dBm
3 GHz ≤ f ≤ 8 GHz	−150 dBm, typ. −155 dBm
8 GHz ≤ f < 13.6 GHz	−150 dBm, typ. −155 dBm
13.6 GHz ≤ f < 18 GHz	−149 dBm, typ. −153 dBm
18 GHz ≤ f < 25 GHz	−147 dBm, typ. −150 dBm
25 GHz ≤ f ≤ 26.5 GHz	−143 dBm, typ. −146 dBm
R&S®ESW44	
9 kHz ≤ f ≤ 1 MHz	−145 dBm, typ. −150 dBm
1 MHz < f ≤ 1 GHz	−149 dBm, typ. −154 dBm
1 GHz < f < 3 GHz	−151 dBm, typ. −156 dBm
3 GHz ≤ f ≤ 8 GHz	−150 dBm, typ. −155 dBm
8 GHz ≤ f < 13.6 GHz	−150 dBm, typ. −154 dBm
13.6 GHz ≤ f < 18 GHz	−149 dBm, typ. −153 dBm
18 GHz ≤ f < 25 GHz	−147 dBm, typ. −151 dBm
25 GHz ≤ f ≤ 34 GHz	−143 dBm, typ. −147 dBm
34 GHz < f ≤ 40 GHz	−140 dBm, typ. −144 dBm
40 GHz < f ≤ 44 GHz	−138 dBm, typ. −142 dBm

Preselection on <sup>5</sup> , preamplifier on	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	1 kHz < f < 9 kHz	-140 dBm, typ. -150 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C	
	R&S®ESW8	
	9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm
	1 MHz < f ≤ 30 MHz	-162 dBm, typ. -165 dBm
	30 MHz < f < 2.5 GHz	-165 dBm, typ. -168 dBm
	2.5 GHz ≤ f < 4.8 GHz	-162 dBm, typ. -165 dBm
	4.8 GHz ≤ f ≤ 8 GHz	-160 dBm, typ. -163 dBm
	R&S®ESW26	
R&S®ESW44	9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm
	1 MHz < f ≤ 30 MHz	-162 dBm, typ. -165 dBm
	30 MHz < f < 2.5 GHz	-163 dBm, typ. -166 dBm
	2.5 GHz ≤ f < 4.8 GHz	-160 dBm, typ. -163 dBm
	4.8 GHz ≤ f < 8 GHz	-157 dBm, typ. -160 dBm
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -155 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -153 dBm
	18 GHz ≤ f < 25 GHz	-147 dBm, typ. -150 dBm
	25 GHz ≤ f ≤ 26.5 GHz	-143 dBm, typ. -146 dBm
	9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm
	1 MHz < f ≤ 30 MHz	-162 dBm, typ. -165 dBm
	30 MHz < f < 2.5 GHz	-163 dBm, typ. -166 dBm
	2.5 GHz ≤ f < 4.8 GHz	-160 dBm, typ. -163 dBm
	4.8 GHz ≤ f < 8 GHz	-157 dBm, typ. -160 dBm
Rohde & Schwarz R&S®ESW EMI Test Receiver	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -154 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -153 dBm
	18 GHz ≤ f < 25 GHz	-147 dBm, typ. -151 dBm
	25 GHz ≤ f ≤ 34 GHz	-143 dBm, typ. -147 dBm
	34 GHz < f ≤ 40 GHz	-140 dBm, typ. -144 dBm
	40 GHz < f ≤ 44 GHz	-138 dBm, typ. -142 dBm

<b>Displayed average noise level of instruments with R&amp;S®ESW-B24 option (analyzer mode)</b>																																																																																																																				
Preselection off/on <sup>3</sup> , preamplifier off, LNA off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C <table> <tr><td>1 Hz ≤ f &lt; 2 Hz</td><td>-80 dBm (nom.)</td></tr> <tr><td>2 Hz ≤ f &lt; 10 Hz</td><td>-100 dBm, typ. -110 dBm</td></tr> <tr><td>10 Hz ≤ f ≤ 100 Hz</td><td>-110 dBm, typ. -120 dBm</td></tr> <tr><td>100 Hz &lt; f ≤ 1 kHz</td><td>-120 dBm, typ. -130 dBm</td></tr> <tr><td>1 kHz &lt; f &lt; 9 kHz</td><td>-135 dBm, typ. -147 dBm</td></tr> </table> RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C <table> <tr><td>R&amp;S®ESW8</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-145 dBm, typ. -150 dBm</td></tr> <tr><td>1 MHz &lt; f ≤ 1 GHz</td><td>-150 dBm, typ. -154 dBm</td></tr> <tr><td>1 GHz &lt; f &lt; 3 GHz</td><td>-152 dBm, typ. -156 dBm</td></tr> <tr><td>3 GHz ≤ f ≤ 8 GHz</td><td>-152 dBm, typ. -156 dBm</td></tr> <tr><td>R&amp;S®ESW26</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-145 dBm, typ. -150 dBm</td></tr> <tr><td>1 MHz &lt; f ≤ 1 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>1 GHz &lt; f &lt; 3 GHz</td><td>-150 dBm, typ. -155 dBm</td></tr> <tr><td>3 GHz ≤ f &lt; 8 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>8 GHz ≤ f &lt; 13.6 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>13.6 GHz ≤ f &lt; 18 GHz</td><td>-148 dBm, typ. -152 dBm</td></tr> <tr><td>18 GHz ≤ f &lt; 25 GHz</td><td>-145 dBm, typ. -149 dBm</td></tr> <tr><td>25 GHz ≤ f ≤ 26.5 GHz</td><td>-141 dBm, typ. -145 dBm</td></tr> <tr><td>R&amp;S®ESW44</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-145 dBm, typ. -150 dBm</td></tr> <tr><td>1 MHz &lt; f ≤ 1 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>1 GHz &lt; f &lt; 3 GHz</td><td>-150 dBm, typ. -155 dBm</td></tr> <tr><td>3 GHz ≤ f &lt; 8 GHz</td><td>-149 dBm, typ. -154 dBm</td></tr> <tr><td>8 GHz ≤ f &lt; 13.6 GHz</td><td>-148 dBm, typ. -152 dBm</td></tr> <tr><td>13.6 GHz ≤ f &lt; 18 GHz</td><td>-147 dBm, typ. -151 dBm</td></tr> <tr><td>18 GHz ≤ f &lt; 25 GHz</td><td>-145 dBm, typ. -149 dBm</td></tr> <tr><td>25 GHz ≤ f ≤ 34 GHz</td><td>-140 dBm, typ. -144 dBm</td></tr> <tr><td>34 GHz &lt; f ≤ 40 GHz</td><td>-137 dBm, typ. -141 dBm</td></tr> <tr><td>40 GHz &lt; f ≤ 44 GHz</td><td>-135 dBm, typ. -140 dBm</td></tr> </table> Preselection on <sup>5</sup> , preamplifier on, LNA off	1 Hz ≤ f < 2 Hz	-80 dBm (nom.)	2 Hz ≤ f < 10 Hz	-100 dBm, typ. -110 dBm	10 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm	100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm	1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm	R&S®ESW8		9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm	1 MHz < f ≤ 1 GHz	-150 dBm, typ. -154 dBm	1 GHz < f < 3 GHz	-152 dBm, typ. -156 dBm	3 GHz ≤ f ≤ 8 GHz	-152 dBm, typ. -156 dBm	R&S®ESW26		9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm	1 GHz < f < 3 GHz	-150 dBm, typ. -155 dBm	3 GHz ≤ f < 8 GHz	-149 dBm, typ. -154 dBm	8 GHz ≤ f < 13.6 GHz	-149 dBm, typ. -154 dBm	13.6 GHz ≤ f < 18 GHz	-148 dBm, typ. -152 dBm	18 GHz ≤ f < 25 GHz	-145 dBm, typ. -149 dBm	25 GHz ≤ f ≤ 26.5 GHz	-141 dBm, typ. -145 dBm	R&S®ESW44		9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm	1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm	1 GHz < f < 3 GHz	-150 dBm, typ. -155 dBm	3 GHz ≤ f < 8 GHz	-149 dBm, typ. -154 dBm	8 GHz ≤ f < 13.6 GHz	-148 dBm, typ. -152 dBm	13.6 GHz ≤ f < 18 GHz	-147 dBm, typ. -151 dBm	18 GHz ≤ f < 25 GHz	-145 dBm, typ. -149 dBm	25 GHz ≤ f ≤ 34 GHz	-140 dBm, typ. -144 dBm	34 GHz < f ≤ 40 GHz	-137 dBm, typ. -141 dBm	40 GHz < f ≤ 44 GHz	-135 dBm, typ. -140 dBm	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C <table> <tr><td>1 kHz &lt; f &lt; 9 kHz</td><td>-140 dBm, typ. -150 dBm</td></tr> </table> RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C <table> <tr><td>R&amp;S®ESW8</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-155 dBm, typ. -160 dBm</td></tr> <tr><td>1 MHz &lt; f ≤ 30 MHz</td><td>-162 dBm, typ. -165 dBm</td></tr> <tr><td>30 MHz &lt; f &lt; 2.5 GHz</td><td>-165 dBm, typ. -168 dBm</td></tr> <tr><td>2.5 GHz ≤ f &lt; 4.8 GHz</td><td>-162 dBm, typ. -165 dBm</td></tr> <tr><td>4.8 GHz ≤ f ≤ 8 GHz</td><td>-160 dBm, typ. -163 dBm</td></tr> <tr><td>R&amp;S®ESW26</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-155 dBm, typ. -160 dBm</td></tr> <tr><td>1 MHz &lt; f ≤ 30 MHz</td><td>-161 dBm, typ. -164 dBm</td></tr> <tr><td>30 MHz &lt; f &lt; 2.5 GHz</td><td>-162 dBm, typ. -165 dBm</td></tr> <tr><td>2.5 GHz ≤ f &lt; 4.8 GHz</td><td>-158 dBm, typ. -161 dBm</td></tr> <tr><td>4.8 GHz ≤ f &lt; 8 GHz</td><td>-155 dBm, typ. -158 dBm</td></tr> <tr><td>8 GHz ≤ f ≤ 13.6 GHz</td><td>-164 dBm, typ. -168 dBm</td></tr> <tr><td>13.6 GHz &lt; f ≤ 22 GHz</td><td>-162 dBm, typ. -166 dBm</td></tr> <tr><td>22 GHz &lt; f ≤ 26.5 GHz</td><td>-157 dBm, typ. -161 dBm</td></tr> <tr><td>R&amp;S®ESW44</td><td></td></tr> <tr><td>9 kHz ≤ f ≤ 1 MHz</td><td>-155 dBm, typ. -160 dBm</td></tr> <tr><td>1 MHz &lt; f ≤ 30 MHz</td><td>-161 dBm, typ. -164 dBm</td></tr> <tr><td>30 MHz &lt; f &lt; 2.5 GHz</td><td>-162 dBm, typ. -165 dBm</td></tr> <tr><td>2.5 GHz ≤ f &lt; 4.8 GHz</td><td>-158 dBm, typ. -161 dBm</td></tr> <tr><td>4.8 GHz ≤ f &lt; 8 GHz</td><td>-155 dBm, typ. -158 dBm</td></tr> <tr><td>8 GHz ≤ f ≤ 18 GHz</td><td>-162 dBm, typ. -167 dBm</td></tr> <tr><td>18 GHz &lt; f ≤ 26.5 GHz</td><td>-161 dBm, typ. -166 dBm</td></tr> <tr><td>26.5 GHz &lt; f ≤ 40 GHz</td><td>-160 dBm, typ. -164 dBm</td></tr> <tr><td>40 GHz &lt; f ≤ 43 GHz</td><td>-157 dBm, typ. -162 dBm</td></tr> <tr><td>43 GHz &lt; f ≤ 44 GHz</td><td>-146 dBm</td></tr> </table>	1 kHz < f < 9 kHz	-140 dBm, typ. -150 dBm	R&S®ESW8		9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm	1 MHz < f ≤ 30 MHz	-162 dBm, typ. -165 dBm	30 MHz < f < 2.5 GHz	-165 dBm, typ. -168 dBm	2.5 GHz ≤ f < 4.8 GHz	-162 dBm, typ. -165 dBm	4.8 GHz ≤ f ≤ 8 GHz	-160 dBm, typ. -163 dBm	R&S®ESW26		9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm	1 MHz < f ≤ 30 MHz	-161 dBm, typ. -164 dBm	30 MHz < f < 2.5 GHz	-162 dBm, typ. -165 dBm	2.5 GHz ≤ f < 4.8 GHz	-158 dBm, typ. -161 dBm	4.8 GHz ≤ f < 8 GHz	-155 dBm, typ. -158 dBm	8 GHz ≤ f ≤ 13.6 GHz	-164 dBm, typ. -168 dBm	13.6 GHz < f ≤ 22 GHz	-162 dBm, typ. -166 dBm	22 GHz < f ≤ 26.5 GHz	-157 dBm, typ. -161 dBm	R&S®ESW44		9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm	1 MHz < f ≤ 30 MHz	-161 dBm, typ. -164 dBm	30 MHz < f < 2.5 GHz	-162 dBm, typ. -165 dBm	2.5 GHz ≤ f < 4.8 GHz	-158 dBm, typ. -161 dBm	4.8 GHz ≤ f < 8 GHz	-155 dBm, typ. -158 dBm	8 GHz ≤ f ≤ 18 GHz	-162 dBm, typ. -167 dBm	18 GHz < f ≤ 26.5 GHz	-161 dBm, typ. -166 dBm	26.5 GHz < f ≤ 40 GHz	-160 dBm, typ. -164 dBm	40 GHz < f ≤ 43 GHz	-157 dBm, typ. -162 dBm	43 GHz < f ≤ 44 GHz	-146 dBm
1 Hz ≤ f < 2 Hz	-80 dBm (nom.)																																																																																																																			
2 Hz ≤ f < 10 Hz	-100 dBm, typ. -110 dBm																																																																																																																			
10 Hz ≤ f ≤ 100 Hz	-110 dBm, typ. -120 dBm																																																																																																																			
100 Hz < f ≤ 1 kHz	-120 dBm, typ. -130 dBm																																																																																																																			
1 kHz < f < 9 kHz	-135 dBm, typ. -147 dBm																																																																																																																			
R&S®ESW8																																																																																																																				
9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm																																																																																																																			
1 MHz < f ≤ 1 GHz	-150 dBm, typ. -154 dBm																																																																																																																			
1 GHz < f < 3 GHz	-152 dBm, typ. -156 dBm																																																																																																																			
3 GHz ≤ f ≤ 8 GHz	-152 dBm, typ. -156 dBm																																																																																																																			
R&S®ESW26																																																																																																																				
9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm																																																																																																																			
1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm																																																																																																																			
1 GHz < f < 3 GHz	-150 dBm, typ. -155 dBm																																																																																																																			
3 GHz ≤ f < 8 GHz	-149 dBm, typ. -154 dBm																																																																																																																			
8 GHz ≤ f < 13.6 GHz	-149 dBm, typ. -154 dBm																																																																																																																			
13.6 GHz ≤ f < 18 GHz	-148 dBm, typ. -152 dBm																																																																																																																			
18 GHz ≤ f < 25 GHz	-145 dBm, typ. -149 dBm																																																																																																																			
25 GHz ≤ f ≤ 26.5 GHz	-141 dBm, typ. -145 dBm																																																																																																																			
R&S®ESW44																																																																																																																				
9 kHz ≤ f ≤ 1 MHz	-145 dBm, typ. -150 dBm																																																																																																																			
1 MHz < f ≤ 1 GHz	-149 dBm, typ. -154 dBm																																																																																																																			
1 GHz < f < 3 GHz	-150 dBm, typ. -155 dBm																																																																																																																			
3 GHz ≤ f < 8 GHz	-149 dBm, typ. -154 dBm																																																																																																																			
8 GHz ≤ f < 13.6 GHz	-148 dBm, typ. -152 dBm																																																																																																																			
13.6 GHz ≤ f < 18 GHz	-147 dBm, typ. -151 dBm																																																																																																																			
18 GHz ≤ f < 25 GHz	-145 dBm, typ. -149 dBm																																																																																																																			
25 GHz ≤ f ≤ 34 GHz	-140 dBm, typ. -144 dBm																																																																																																																			
34 GHz < f ≤ 40 GHz	-137 dBm, typ. -141 dBm																																																																																																																			
40 GHz < f ≤ 44 GHz	-135 dBm, typ. -140 dBm																																																																																																																			
1 kHz < f < 9 kHz	-140 dBm, typ. -150 dBm																																																																																																																			
R&S®ESW8																																																																																																																				
9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm																																																																																																																			
1 MHz < f ≤ 30 MHz	-162 dBm, typ. -165 dBm																																																																																																																			
30 MHz < f < 2.5 GHz	-165 dBm, typ. -168 dBm																																																																																																																			
2.5 GHz ≤ f < 4.8 GHz	-162 dBm, typ. -165 dBm																																																																																																																			
4.8 GHz ≤ f ≤ 8 GHz	-160 dBm, typ. -163 dBm																																																																																																																			
R&S®ESW26																																																																																																																				
9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm																																																																																																																			
1 MHz < f ≤ 30 MHz	-161 dBm, typ. -164 dBm																																																																																																																			
30 MHz < f < 2.5 GHz	-162 dBm, typ. -165 dBm																																																																																																																			
2.5 GHz ≤ f < 4.8 GHz	-158 dBm, typ. -161 dBm																																																																																																																			
4.8 GHz ≤ f < 8 GHz	-155 dBm, typ. -158 dBm																																																																																																																			
8 GHz ≤ f ≤ 13.6 GHz	-164 dBm, typ. -168 dBm																																																																																																																			
13.6 GHz < f ≤ 22 GHz	-162 dBm, typ. -166 dBm																																																																																																																			
22 GHz < f ≤ 26.5 GHz	-157 dBm, typ. -161 dBm																																																																																																																			
R&S®ESW44																																																																																																																				
9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm																																																																																																																			
1 MHz < f ≤ 30 MHz	-161 dBm, typ. -164 dBm																																																																																																																			
30 MHz < f < 2.5 GHz	-162 dBm, typ. -165 dBm																																																																																																																			
2.5 GHz ≤ f < 4.8 GHz	-158 dBm, typ. -161 dBm																																																																																																																			
4.8 GHz ≤ f < 8 GHz	-155 dBm, typ. -158 dBm																																																																																																																			
8 GHz ≤ f ≤ 18 GHz	-162 dBm, typ. -167 dBm																																																																																																																			
18 GHz < f ≤ 26.5 GHz	-161 dBm, typ. -166 dBm																																																																																																																			
26.5 GHz < f ≤ 40 GHz	-160 dBm, typ. -164 dBm																																																																																																																			
40 GHz < f ≤ 43 GHz	-157 dBm, typ. -162 dBm																																																																																																																			
43 GHz < f ≤ 44 GHz	-146 dBm																																																																																																																			

Preselection off/on <sup>3</sup> , preamplifier off, LNA on	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C
<b>R&amp;S®ESW8</b>	
150 kHz < f ≤ 1 MHz	-130 dBm
1 MHz < f ≤ 5 MHz	-140 dBm
5 MHz < f ≤ 50 MHz	-150 dBm
50 MHz < f ≤ 150 MHz	-163 dBm, typ. -166 dBm
150 MHz < f ≤ 8 GHz	-166 dBm, typ. -169 dBm
<b>R&amp;S®ESW26</b>	
150 kHz < f ≤ 1 MHz	-130 dBm
1 MHz < f ≤ 5 MHz	-140 dBm
5 MHz < f ≤ 50 MHz	-150 dBm
50 MHz < f ≤ 150 MHz	-163 dBm, typ. -166 dBm
150 MHz < f ≤ 8 GHz	-166 dBm, typ. -169 dBm
8 GHz < f ≤ 13.6 GHz	-164 dBm, typ. -168 dBm
13.6 GHz < f ≤ 22 GHz	-162 dBm, typ. -166 dBm
22 GHz < f ≤ 26.5 GHz	-157 dBm, typ. -161 dBm
<b>R&amp;S®ESW44</b>	
150 kHz < f ≤ 1 MHz	-160 dBm, typ. -163 dBm
1 MHz < f ≤ 3 GHz	-165 dBm, typ. -169 dBm
3 GHz < f ≤ 8 GHz	-162 dBm, typ. -166 dBm
8 GHz < f ≤ 18 GHz	-162 dBm, typ. -167 dBm
18 GHz < f ≤ 26.5 GHz	-161 dBm, typ. -166 dBm
26.5 GHz < f ≤ 40 GHz	-160 dBm, typ. -164 dBm
40 GHz < f ≤ 43 GHz	-157 dBm, typ. -162 dBm
43 GHz < f ≤ 44 GHz	-146 dBm

<b>Noise indication of instruments without R&amp;S®ESW-B24 option (receiver mode)</b>		
Nominal, calculated from displayed average noise level (DANL) data		
Preamplifier = off	RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C	
all models		
1 Hz ≤ f < 2 Hz, BW = 1 Hz	27 dBµV (nom.)	
2 Hz ≤ f < 10 Hz, BW = 1 Hz	< 7 dBµV	
10 Hz ≤ f ≤ 100 Hz, BW = 10 Hz	< 7 dBµV	
100 Hz < f ≤ 1 kHz, BW = 100 Hz	< 7 dBµV	
1 kHz < f < 9 kHz, BW = 100 Hz	< -8 dBµV	
R&S®ESW8		
9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBµV	
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBµV	
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -4 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 8 dBµV	
1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 15 dBµV	
3 GHz ≤ f ≤ 8 GHz, BW = 1 MHz	< 15 dBµV	
R&S®ESW26		
9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBµV	
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBµV	
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 9 dBµV	
1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 16 dBµV	
3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 17 dBµV	
8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 17 dBµV	
13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 18 dBµV	
18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 20 dBµV	
25 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz	< 24 dBµV	
R&S®ESW44		
9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBµV	
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBµV	
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 9 dBµV	
1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 16 dBµV	
3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 17 dBµV	
8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 17 dBµV	
13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 18 dBµV	
18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 20 dBµV	
25 GHz ≤ f ≤ 34 GHz, BW = 1 MHz	< 24 dBµV	
34 GHz ≤ f < 40 GHz, BW = 1 MHz	< 27 dBµV	
40 GHz ≤ f ≤ 44 GHz, BW = 1 MHz	< 29 dBµV	

Preamplifier = on	RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C all models	
	1 kHz ≤ f < 9 kHz, BW = 100 Hz	< -13 dBµV
	R&S®ESW8	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -25 dBµV
	150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz	< -9 dBµV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -16 dBµV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -7 dBµV
	1 GHz ≤ f < 2.5 GHz, BW = 1 MHz	< 2 dBµV
	2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz	< 5 dBµV
	4.8 GHz ≤ f < 8 GHz, BW = 1 MHz	< 7 dBµV
	R&S®ESW26	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -25 dBµV
	150 kHz ≤ f < 1 MHz, BW = 9 kHz	< -9 dBµV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -16 dBµV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -5 dBµV
	1 GHz ≤ f < 2.5 GHz, BW = 1 MHz	< 4 dBµV
	2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz	< 7 dBµV
	4.8 GHz ≤ f < 8 GHz, BW = 1 MHz	< 10 dBµV
	8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 17 dBµV
	13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 18 dBµV
	18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 20 dBµV
	25 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz	< 24 dBµV
	R&S®ESW44	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -25 dBµV
	150 kHz ≤ f < 1 MHz, BW = 9 kHz	< -9 dBµV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -16 dBµV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -5 dBµV
	1 GHz ≤ f < 2.5 GHz, BW = 1 MHz	< 4 dBµV
	2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz	< 7 dBµV
	4.8 GHz ≤ f < 8 GHz, BW = 1 MHz	< 10 dBµV
	8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 17 dBµV
	13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 18 dBµV
	18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 20 dBµV
	25 GHz ≤ f ≤ 34 GHz, BW = 1 MHz	< 24 dBµV
	34 GHz ≤ f < 40 GHz, BW = 1 MHz	< 27 dBµV
	40 GHz ≤ f ≤ 44 GHz, BW = 1 MHz	< 29 dBµV

<b>Noise indication of instruments with R&amp;S®ESW-B24 option (receiver mode)</b>		
Nominal, calculated from DANL data		
Preamplifier = off, LNA = off	RF attenuation = 0 dB, termination = $50 \Omega$ , average (AV) detector, +5 °C to +40 °C	
all models		
1 Hz ≤ f < 2 Hz, BW = 1 Hz	27 dBµV (nom.)	
2 Hz ≤ f < 10 Hz, BW = 1 Hz	< 7 dBµV	
10 Hz ≤ f ≤ 100 Hz, BW = 10 Hz	< 7 dBµV	
100 Hz < f ≤ 1 kHz, BW = 100 Hz	< 7 dBµV	
1 kHz < f < 9 kHz, BW = 100 Hz	< -8 dBµV	
R&S®ESW8		
9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBµV	
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBµV	
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -4 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 8 dBµV	
1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 15 dBµV	
3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 15 dBµV	
R&S®ESW26		
9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBµV	
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBµV	
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 9 dBµV	
1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 17 dBµV	
3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 18 dBµV	
8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 18 dBµV	
13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 19 dBµV	
18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 22 dBµV	
25 GHz ≤ f < 26.5 GHz, BW = 1 MHz	< 26 dBµV	
R&S®ESW44		
9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBµV	
150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBµV	
1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBµV	
30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 9 dBµV	
1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 17 dBµV	
3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 18 dBµV	
8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 19 dBµV	
13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 20 dBµV	
18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 22 dBµV	
25 GHz ≤ f < 34 GHz, BW = 1 MHz	< 27 dBµV	
34 GHz ≤ f < 40 GHz, BW = 1 MHz	< 30 dBµV	
40 GHz ≤ f ≤ 44 GHz, BW = 1 MHz	< 32 dBµV	

Preamplifier = on, LNA = off	RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C all models	
	1 kHz ≤ f < 9 kHz, BW = 100 Hz	< -13 dBµV
	R&S®ESW8	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -25 dBµV
	150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz	< -9 dBµV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -16 dBµV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -7 dBµV
	1 GHz ≤ f < 2.5 GHz, BW = 1 MHz	< 2 dBµV
	2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz	< 5 dBµV
	4.8 GHz ≤ f ≤ 8 GHz, BW = 1 MHz	< 7 dBµV
	R&S®ESW26	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -25 dBµV
	150 kHz ≤ f < 1 MHz, BW = 9 kHz	< -9 dBµV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -15 dBµV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -4 dBµV
	1 GHz ≤ f < 2.5 GHz, BW = 1 MHz	< 5 dBµV
	2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz	< 9 dBµV
	4.8 GHz ≤ f < 8 GHz, BW = 1 MHz	< 12 dBµV
	8 GHz ≤ f ≤ 13.6 GHz, BW = 1 MHz	< 3 dBµV
	13.6 GHz < f ≤ 22 GHz, BW = 1 MHz	< 5 dBµV
	22 GHz < f ≤ 26.5 GHz, BW = 1 MHz	< 10 dBµV
	R&S®ESW44	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -25 dBµV
	150 kHz ≤ f < 1 MHz, BW = 9 kHz	< -9 dBµV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -15 dBµV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -4 dBµV
	1 GHz ≤ f < 2.5 GHz, BW = 1 MHz	< 5 dBµV
	2.5 GHz ≤ f < 4.8 GHz, BW = 1 MHz	< 9 dBµV
	4.8 GHz ≤ f < 8 GHz, BW = 1 MHz	< 12 dBµV
	8 GHz ≤ f ≤ 18 GHz, BW = 1 MHz	< 5 dBµV
	18 GHz < f ≤ 26.5 GHz, BW = 1 MHz	< 6 dBµV
	26.5 GHz < f ≤ 40 GHz, BW = 1 MHz	< 7 dBµV
	40 GHz < f ≤ 43 GHz, BW = 1 MHz	< 10 dBµV
	43 GHz < f ≤ 44 GHz, BW = 1 MHz	< 21 dBµV

Preamplifier = off, LNA = on	RF attenuation = 0 dB, termination = $50 \Omega$ , average (AV) detector, +5 °C to +40 °C
R&S®ESW8	
150 kHz $\leq f \leq 1$ MHz, BW = 9 kHz	< 16 dB $\mu$ V
1 MHz $< f \leq 5$ MHz, BW = 9 kHz	< 6 dB $\mu$ V
5 MHz $< f < 30$ MHz, BW = 9 kHz	< -4 dB $\mu$ V
30 MHz $\leq f \leq 50$ MHz, BW = 120 kHz	< 7 dB $\mu$ V
50 MHz $< f \leq 150$ MHz, BW = 120 kHz	< -5 dB $\mu$ V
150 MHz $< f < 1$ GHz, BW = 120 kHz	< -8 dB $\mu$ V
1 GHz $\leq f \leq 8$ GHz, BW = 1 MHz	< 1 dB $\mu$ V
R&S®ESW26	
150 kHz $\leq f \leq 1$ MHz, BW = 9 kHz	< 16 dB $\mu$ V
1 MHz $< f \leq 5$ MHz, BW = 9 kHz	< 6 dB $\mu$ V
5 MHz $< f < 30$ MHz, BW = 9 kHz	< -4 dB $\mu$ V
30 MHz $\leq f \leq 50$ MHz, BW = 120 kHz	< 7 dB $\mu$ V
50 MHz $< f \leq 150$ MHz, BW = 120 kHz	< -5 dB $\mu$ V
150 MHz $< f < 1$ GHz, BW = 120 kHz	< -8 dB $\mu$ V
1 GHz $\leq f \leq 8$ GHz, BW = 1 MHz	< 1 dB $\mu$ V
8 GHz $< f \leq 13.6$ GHz, BW = 1 MHz	< 3 dB $\mu$ V
13.6 GHz $< f \leq 22$ GHz, BW = 1 MHz	< 5 dB $\mu$ V
22 GHz $< f \leq 26.5$ GHz, BW = 1 MHz	< 10 dB $\mu$ V
R&S®ESW44	
150 kHz $\leq f \leq 1$ MHz, BW = 9 kHz	< -14 dB $\mu$ V
1 MHz $< f < 30$ MHz, BW = 9 kHz	< -19 dB $\mu$ V
30 MHz $\leq f < 1$ GHz, BW = 120 kHz	< -7 dB $\mu$ V
1 GHz $\leq f \leq 3$ GHz, BW = 1 MHz	< 2 dB $\mu$ V
3 GHz $< f \leq 8$ GHz, BW = 1 MHz	< 5 dB $\mu$ V
8 GHz $< f \leq 18$ GHz, BW = 1 MHz	< 5 dB $\mu$ V
18 GHz $< f \leq 26.5$ GHz, BW = 1 MHz	< 6 dB $\mu$ V
26.5 GHz $< f \leq 40$ GHz, BW = 1 MHz	< 7 dB $\mu$ V
40 GHz $< f \leq 43$ GHz, BW = 1 MHz	< 10 dB $\mu$ V
43 GHz $< f \leq 44$ GHz, BW = 1 MHz	< 21 dB $\mu$ V

## Spurious responses

Spurious responses	mixer level $\leq -10$ dBm <sup>6</sup> , sweep optimization: auto or dynamic
Image response	$f_{in} - 2 \times 8997$ MHz (1st IF) < -90 dBc $f_{in} - 2 \times 1317$ MHz (2nd IF) < -90 dBc $f_{in} - 2 \times 37$ MHz (3rd IF) < -90 dBc
Intermediate frequency response	1st IF (8997 MHz) < -90 dBc 2nd IF (1317 MHz) < -90 dBc 3rd IF (37 MHz) < -90 dBc
Residual spurious response	RF attenuation = 0 dB $f \leq 1$ MHz < -90 dBm 1 MHz $< f \leq 8900$ MHz < -110 dBm 8900 MHz $< f \leq 26.5$ GHz < -100 dBm 26.5 GHz $< f \leq 44$ GHz < -100 dBm
Local oscillator related spurious	$f_{in} < 1$ GHz $10$ Hz $\leq$ offset from carrier $< 200$ Hz < -90 dBc offset from carrier $> 200$ Hz < -100 dBc $f_{in} \geq 1$ GHz $10$ Hz $\leq$ offset from carrier $< 200$ Hz < -90 dBc + 20 log ( $f_{in}$ /GHz) offset from carrier $> 200$ Hz < -100 dBc + 20 log ( $f_{in}$ /GHz)
Vibrational environmental stimuli	max. 0.21 g (RMS) < -60 dBc + 20 log ( $f_{in}$ /GHz) (nom.)

<sup>6</sup> Mixer level = signal level – RF attenuation + preamplifier/LNA gain.

## Level measurement uncertainty

Absolute level uncertainty at 64 MHz	RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB preselection off <sup>3</sup> , +20°C to +30°C < 0.2 dB ( $\sigma = 0.07$ dB) preselection on or off <sup>3</sup> , +15°C to +40°C < 0.35 dB ( $\sigma = 0.12$ dB)
Frequency response, referenced to 64 MHz, preselection off <sup>3</sup>	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, LNA off <sup>4</sup> , +20 °C to +30 °C 1 Hz ≤ f < 2 Hz < 2 dB ( $\sigma = 0.67$ dB) 2 Hz ≤ f < 9 kHz < 1 dB ( $\sigma = 0.33$ dB) 9 kHz ≤ f < 10 MHz < 0.45 dB ( $\sigma = 0.17$ dB) 10 MHz ≤ f < 3.6 GHz < 0.3 dB ( $\sigma = 0.10$ dB) 3.6 GHz ≤ f ≤ 8 GHz < 0.5 dB ( $\sigma = 0.17$ dB) 8 GHz < f < 22 GHz, span < 1 GHz < 1.5 dB ( $\sigma = 0.50$ dB) 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz < 2 dB ( $\sigma = 0.67$ dB) 26.5 GHz < f ≤ 44 GHz, span < 1 GHz < 2.5 dB ( $\sigma = 0.83$ dB) any RF attenuation, LNA off <sup>4</sup> , +15 °C to +40 °C 1 Hz ≤ f < 2 Hz < 2 dB ( $\sigma = 0.67$ dB) 2 Hz ≤ f < 9 kHz < 1 dB ( $\sigma = 0.33$ dB) 9 kHz ≤ f < 3.6 GHz < 0.6 dB ( $\sigma = 0.20$ dB) 3.6 GHz ≤ f ≤ 8 GHz < 0.8 dB ( $\sigma = 0.27$ dB) 8 GHz < f < 22 GHz, span < 1 GHz < 2 dB ( $\sigma = 0.67$ dB) 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz < 2.5 dB ( $\sigma = 0.83$ dB) 26.5 GHz < f ≤ 44 GHz, span < 1 GHz < 3 dB ( $\sigma = 1.0$ dB) RF attenuation ≤ 20 dB, LNA on <sup>4</sup> , +20 °C to +30 °C 150 kHz ≤ f < 10 MHz < 1 dB 10 MHz ≤ f < 3.6 GHz < 0.6 dB ( $\sigma = 0.2$ dB) 3.6 GHz ≤ f ≤ 8 GHz < 0.8 dB ( $\sigma = 0.27$ dB) 8 GHz < f < 22 GHz, span < 1 GHz < 2 dB ( $\sigma = 0.67$ dB) 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz < 2.5 dB ( $\sigma = 0.83$ dB) 26.5 GHz < f ≤ 44 GHz, span < 1 GHz < 2.8 dB ( $\sigma = 0.93$ dB)
Frequency response, referenced to 64 MHz, preselection on <sup>5</sup>	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier and LNA off <sup>4</sup> , +20 °C to +30 °C 1 Hz ≤ f < 2 Hz < 2 dB ( $\sigma = 0.67$ dB) 2 Hz ≤ f < 9 kHz < 1 dB ( $\sigma = 0.33$ dB) 9 kHz ≤ f < 10 MHz < 0.65 dB ( $\sigma = 0.22$ dB) 10 MHz ≤ f < 3.6 GHz < 0.5 dB ( $\sigma = 0.17$ dB) 3.6 GHz ≤ f ≤ 8 GHz < 0.7 dB ( $\sigma = 0.23$ dB) 8 GHz < f < 22 GHz, span < 1 GHz < 1.5 dB ( $\sigma = 0.50$ dB) 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz < 2 dB ( $\sigma = 0.67$ dB) 26.5 GHz < f ≤ 44 GHz, span < 1 GHz < 2.5 dB ( $\sigma = 0.83$ dB) any RF attenuation, preamplifier and LNA off <sup>4</sup> , +15 °C to +40 °C 1 Hz ≤ f < 2 Hz < 2 dB ( $\sigma = 0.67$ dB) 2 Hz ≤ f < 9 kHz < 1 dB ( $\sigma = 0.33$ dB) 9 kHz ≤ f < 3.6 GHz < 0.8 dB ( $\sigma = 0.27$ dB) 3.6 GHz ≤ f ≤ 8 GHz < 1.2 dB ( $\sigma = 0.4$ dB) 8 GHz < f < 22 GHz, span < 1 GHz < 2 dB ( $\sigma = 0.67$ dB) 22 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz < 2.5 dB ( $\sigma = 0.83$ dB) 26.5 GHz < f ≤ 44 GHz, span < 1 GHz < 3 dB ( $\sigma = 1.0$ dB) RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier on, LNA off <sup>4</sup> , +20 °C to +30 °C 1 kHz ≤ f < 10 MHz < 1 dB ( $\sigma = 0.33$ dB) 10 MHz ≤ f < 3.6 GHz < 0.8 dB ( $\sigma = 0.27$ dB) 3.6 GHz ≤ f ≤ 8 GHz < 1.2 dB ( $\sigma = 0.4$ dB) 8 GHz < f < 13.6 GHz, span < 1 GHz < 1.5 dB ( $\sigma = 0.50$ dB) 13.6 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz < 2 dB ( $\sigma = 0.67$ dB) 26.5 GHz < f ≤ 44 GHz, span < 1 GHz < 2.8 dB ( $\sigma = 0.93$ dB) RF attenuation ≤ 20 dB, preamplifier off, LNA on <sup>4</sup> , +20 °C to +30 °C 150 kHz ≤ f < 10 MHz < 1 dB ( $\sigma = 0.33$ dB) 10 MHz ≤ f < 3.6 GHz < 0.8 dB ( $\sigma = 0.27$ dB) 3.6 GHz ≤ f ≤ 8 GHz < 1.2 dB ( $\sigma = 0.4$ dB) 8 GHz < f < 13.6 GHz, span < 1 GHz < 1.5 dB ( $\sigma = 0.50$ dB) 13.6 GHz ≤ f ≤ 26.5 GHz, span < 1 GHz < 2 dB ( $\sigma = 0.67$ dB) 26.5 GHz < f ≤ 44 GHz, span < 1 GHz < 2.8 dB ( $\sigma = 0.93$ dB)

Attenuator switching uncertainty	$f = 64 \text{ MHz}$ , 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ( $\sigma = 0.07 \text{ dB}$ )
Uncertainty of reference level setting	input mixer level $\leq -15 \text{ dBm}$	0 dB <sup>7</sup>
	input mixer level $> -15 \text{ dBm}$	< 0.1 dB (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz	< 0.1 dB ( $\sigma = 0.04 \text{ dB}$ )

<b>Nonlinearity of displayed level</b>		
Logarithmic level display	S/N > 16 dB, 0 dB $\leq$ level $\leq -70 \text{ dB}$	< 0.1 dB ( $\sigma = 0.04 \text{ dB}$ )
	S/N > 16 dB, $-70 \text{ dB} < \text{level} \leq -90 \text{ dB}$	< 0.2 dB ( $\sigma = 0.08 \text{ dB}$ )
Linear level display	S/N > 16 dB, 0 dB to $-70 \text{ dB}$	< 5 % of reference level (nom.)

<b>CISPR detectors</b>		
Max. peak, quasi-peak, CISPR-average, RMS-average	receiver mode or analyzer mode with preselection on, span = 0 Hz	level measurement uncertainty in line with CISPR 16-1-1:2015

<b>Total measurement uncertainty</b>		
Preselection off <sup>3</sup>	signal level = 0 dB to $-70 \text{ dB}$ below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, LNA off <sup>4</sup> , span/RBW < 100, 95 % confidence level, $+20^\circ\text{C}$ to $+30^\circ\text{C}$	
	9 kHz $\leq f \leq 10 \text{ MHz}$	$\pm 0.37 \text{ dB}$
	10 MHz $< f \leq 3.6 \text{ GHz}$	$\pm 0.27 \text{ dB}$
	3.6 GHz $< f \leq 8 \text{ GHz}$	$\pm 0.37 \text{ dB}$
	8 GHz $< f \leq 22 \text{ GHz}$	$\pm 1 \text{ dB}$
	22 GHz $< f \leq 26.5 \text{ GHz}$	$\pm 1.33 \text{ dB}$
	26.5 GHz $< f \leq 44 \text{ GHz}$	$\pm 1.65 \text{ dB}$
Preselection on <sup>5</sup>	signal level = 0 dB to $-70 \text{ dB}$ below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier off, LNA off <sup>4</sup> , span/RBW < 100, 95 % confidence level, $+20^\circ\text{C}$ to $+30^\circ\text{C}$	
	9 kHz $\leq f \leq 10 \text{ MHz}$	$\pm 0.51 \text{ dB}$
	10 MHz $< f \leq 3.6 \text{ GHz}$	$\pm 0.43 \text{ dB}$
	3.6 GHz $< f \leq 8 \text{ GHz}$	$\pm 0.54 \text{ dB}$
	8 GHz $< f \leq 22 \text{ GHz}$	$\pm 1 \text{ dB}$
	22 GHz $< f \leq 26.5 \text{ GHz}$	$\pm 1.33 \text{ dB}$
	26.5 GHz $< f \leq 44 \text{ GHz}$	$\pm 1.65 \text{ dB}$
	signal level = 0 dB to $-70 \text{ dB}$ below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, preamplifier on or LNA on <sup>4</sup> , span/RBW < 100, 95 % confidence level, $+20^\circ\text{C}$ to $+30^\circ\text{C}$	
	150 kHz $\leq f \leq 10 \text{ MHz}$	$\pm 0.71 \text{ dB}$
	10 MHz $< f \leq 3.6 \text{ GHz}$	$\pm 0.59 \text{ dB}$
	3.6 GHz $< f \leq 8 \text{ GHz}$	$\pm 0.83 \text{ dB}$
	8 GHz $< f \leq 13.6 \text{ GHz}$	$\pm 1 \text{ dB}$
	13.6 GHz $< f \leq 26.5 \text{ GHz}$	$\pm 1.33 \text{ dB}$
	26.5 GHz $< f \leq 44 \text{ GHz}$	$\pm 1.84 \text{ dB}$

<sup>7</sup> The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself.  
The reference level setting causes no additional uncertainty in measurement results.

## Measurement speed<sup>8</sup>

<b>Receiver mode</b>		
Time domain scan	CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 100 ms, peak detector	110 ms (meas.)
	CISPR band B, 150 kHz to 30 MHz, RBW = 9 kHz, measurement time = 1 s, quasi-peak + CISPR-average detector	2 s (meas.)
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 120 kHz, measurement time = 10 ms, peak detector	620 ms (meas.)
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 9 kHz, measurement time = 10 ms, peak detector	840 ms (meas.)
	CISPR band C/D, 30 MHz to 1000 MHz, RBW = 120 kHz, measurement time = 1 s, quasi-peak + CISPR-average detector	80 s (meas.)
<b>Analyzer mode</b>		
Local measurement and display update rate	1001 sweep points	1.25 ms (800/s) (meas.)
Remote measurement, 1000 sweep averages <sup>9</sup>	1001 sweep points	1.0 ms (1000/s) (meas.)
Remote measurement and LAN transfer <sup>9</sup>		5 ms (200/s) (meas.)
Marker peak search <sup>9</sup>		1.7 ms (meas.)
Center frequency tune and transfer <sup>9</sup>	f ≤ 8 GHz	15 ms (meas.)
	f > 8 GHz	65 ms (meas.)

## Trigger functions

<b>Trigger</b>		
Trigger source	analyzer mode	free run, video, external, IF power, RF power
	receiver mode	free run, video, external
Trigger offset	span ≥ 10 Hz	5 ns to 20 s
	span = 0 Hz	(–sweep time) to 20 s
Min. trigger offset resolution	span > 0 Hz	5 ns
	span = 0 Hz, trigger offset > 0	5 ns
	span = 0 Hz, trigger offset < 0	sweep time/number of sweep points
Max. deviation of trigger offset		5 ns
<b>IF power trigger (analyzer mode)</b>		
Sensitivity	min. signal power	–60 dBm + RF attenuation – LNA gain (nom.)
	max. signal power	–10 dBm + RF attenuation – LNA gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz	20 MHz (nom.) <sup>10</sup>
	RBW ≤ 500 kHz, FFT	20 MHz (nom.)
	RBW ≤ 500 kHz, swept	6 MHz (nom.)
<b>RF power trigger (analyzer mode)</b>		
Sensitivity	min. signal power	–30 dBm + RF attenuation – LNA gain (nom.)
	max. signal power	+10 dBm + RF attenuation – LNA gain (nom.)
RF power trigger frequency range	f ≤ 8 GHz	8 GHz (nom.)
	f > 8 GHz	center frequency ± 25 MHz (nom.)
<b>Gated sweep</b>		
Gate source		video, external, IF power, RF power
Gate delay		5 ns to 20 s, min. resolution 5 ns
Gate length		5 ns to 20 s, min. resolution 5 ns
Max. deviation of gate length		±5 ns

<sup>8</sup> Sweep points set to 1001 points (= default), sweep optimization set to “speed”.

<sup>9</sup> Measured with PC equipped with Intel® Core™ i7 CPU 2.8 GHz and Gbit LAN interface.

<sup>10</sup> Sweep optimization = auto.

## Audio demodulator

Demodulation	
AF demodulation types	AM and FM
Audio output	loudspeaker and phone jack
Marker stop time in spectrum mode	100 ms to 60 s

## Inputs and outputs

RF input																																											
Impedance	50 Ω																																										
Connector	R&S®ESW8 R&S®ESW26 R&S®ESW44																																										
VSWR of R&S®ESW8	<p>RF attenuation ≤ 4 dB</p> <table> <tr><td>1 Hz ≤ f &lt; 9 kHz, DC coupled</td><td>2.0 (nom.) <sup>11</sup></td></tr> <tr><td>9 kHz ≤ f &lt; 10 MHz, DC coupled</td><td>&lt; 2.0</td></tr> <tr><td>10 MHz ≤ f ≤ 1 GHz</td><td>&lt; 2.0</td></tr> <tr><td>1 GHz &lt; f ≤ 8 GHz</td><td>&lt; 3.0</td></tr> </table> <p>5 dB ≤ RF attenuation ≤ 9 dB</p> <table> <tr><td>1 Hz ≤ f &lt; 9 kHz, DC coupled</td><td>1.5 (nom.)</td></tr> <tr><td>9 kHz ≤ f &lt; 10 MHz, DC coupled</td><td>&lt; 1.5, typ. 1.20 <sup>12</sup></td></tr> <tr><td>10 MHz ≤ f &lt; 1 GHz</td><td>&lt; 1.5, typ. 1.20 <sup>12</sup></td></tr> <tr><td>1 GHz ≤ f &lt; 3.6 GHz</td><td>&lt; 1.5, typ. 1.31 <sup>12</sup></td></tr> <tr><td>3.6 GHz ≤ f ≤ 8 GHz</td><td>&lt; 2.0, typ. 1.51 <sup>12</sup></td></tr> </table> <p>RF attenuation ≥ 10 dB</p> <table> <tr><td>1 Hz ≤ f &lt; 9 kHz, DC coupled</td><td>1.2 (nom.)</td></tr> <tr><td>9 kHz ≤ f &lt; 10 MHz, DC coupled</td><td>&lt; 1.2, typ. 1.09 <sup>12</sup></td></tr> <tr><td>10 MHz ≤ f &lt; 1 GHz</td><td>&lt; 1.2, typ. 1.09 <sup>12</sup></td></tr> <tr><td>1 GHz ≤ f &lt; 3.6 GHz</td><td>&lt; 1.5, typ. 1.19 <sup>12</sup></td></tr> <tr><td>3.6 GHz ≤ f ≤ 8 GHz</td><td>&lt; 2.0, typ. 1.42 <sup>12</sup></td></tr> </table>	1 Hz ≤ f < 9 kHz, DC coupled	2.0 (nom.) <sup>11</sup>	9 kHz ≤ f < 10 MHz, DC coupled	< 2.0	10 MHz ≤ f ≤ 1 GHz	< 2.0	1 GHz < f ≤ 8 GHz	< 3.0	1 Hz ≤ f < 9 kHz, DC coupled	1.5 (nom.)	9 kHz ≤ f < 10 MHz, DC coupled	< 1.5, typ. 1.20 <sup>12</sup>	10 MHz ≤ f < 1 GHz	< 1.5, typ. 1.20 <sup>12</sup>	1 GHz ≤ f < 3.6 GHz	< 1.5, typ. 1.31 <sup>12</sup>	3.6 GHz ≤ f ≤ 8 GHz	< 2.0, typ. 1.51 <sup>12</sup>	1 Hz ≤ f < 9 kHz, DC coupled	1.2 (nom.)	9 kHz ≤ f < 10 MHz, DC coupled	< 1.2, typ. 1.09 <sup>12</sup>	10 MHz ≤ f < 1 GHz	< 1.2, typ. 1.09 <sup>12</sup>	1 GHz ≤ f < 3.6 GHz	< 1.5, typ. 1.19 <sup>12</sup>	3.6 GHz ≤ f ≤ 8 GHz	< 2.0, typ. 1.42 <sup>12</sup>														
1 Hz ≤ f < 9 kHz, DC coupled	2.0 (nom.) <sup>11</sup>																																										
9 kHz ≤ f < 10 MHz, DC coupled	< 2.0																																										
10 MHz ≤ f ≤ 1 GHz	< 2.0																																										
1 GHz < f ≤ 8 GHz	< 3.0																																										
1 Hz ≤ f < 9 kHz, DC coupled	1.5 (nom.)																																										
9 kHz ≤ f < 10 MHz, DC coupled	< 1.5, typ. 1.20 <sup>12</sup>																																										
10 MHz ≤ f < 1 GHz	< 1.5, typ. 1.20 <sup>12</sup>																																										
1 GHz ≤ f < 3.6 GHz	< 1.5, typ. 1.31 <sup>12</sup>																																										
3.6 GHz ≤ f ≤ 8 GHz	< 2.0, typ. 1.51 <sup>12</sup>																																										
1 Hz ≤ f < 9 kHz, DC coupled	1.2 (nom.)																																										
9 kHz ≤ f < 10 MHz, DC coupled	< 1.2, typ. 1.09 <sup>12</sup>																																										
10 MHz ≤ f < 1 GHz	< 1.2, typ. 1.09 <sup>12</sup>																																										
1 GHz ≤ f < 3.6 GHz	< 1.5, typ. 1.19 <sup>12</sup>																																										
3.6 GHz ≤ f ≤ 8 GHz	< 2.0, typ. 1.42 <sup>12</sup>																																										
VSWR of R&S®ESW26, R&S®ESW44	<p>RF attenuation ≤ 4 dB</p> <table> <tr><td>1 Hz ≤ f &lt; 9 kHz, DC coupled</td><td>2.0 (nom.) <sup>11</sup></td></tr> <tr><td>9 kHz ≤ f &lt; 10 MHz, DC coupled</td><td>&lt; 2.0</td></tr> <tr><td>10 MHz ≤ f ≤ 1 GHz</td><td>&lt; 2.0</td></tr> <tr><td>1 GHz &lt; f ≤ 40 GHz</td><td>&lt; 3.0</td></tr> <tr><td>40 GHz &lt; f ≤ 44 GHz</td><td>3.0 (nom.)</td></tr> </table> <p>5 dB ≤ RF attenuation ≤ 9 dB</p> <table> <tr><td>1 Hz ≤ f &lt; 9 kHz, DC coupled</td><td>1.5 (nom.)</td></tr> <tr><td>9 kHz ≤ f &lt; 10 MHz, DC coupled</td><td>&lt; 1.5, typ. 1.24 <sup>12</sup></td></tr> <tr><td>10 MHz ≤ f ≤ 3.5 GHz</td><td>&lt; 1.5, typ. 1.24 <sup>12</sup></td></tr> <tr><td>3.5 GHz &lt; f ≤ 8 GHz</td><td>&lt; 1.8, typ. 1.26 <sup>12</sup></td></tr> <tr><td>8 GHz &lt; f ≤ 18 GHz</td><td>&lt; 1.8, typ. 1.39 <sup>12</sup></td></tr> <tr><td>18 GHz &lt; f ≤ 26.5 GHz</td><td>&lt; 2.0, typ. 1.43 <sup>12</sup></td></tr> <tr><td>26.5 GHz &lt; f ≤ 40 GHz</td><td>&lt; 2.5, typ. 1.8 <sup>12</sup></td></tr> <tr><td>40 GHz &lt; f ≤ 44 GHz</td><td>2.0 (nom.)</td></tr> </table> <p>RF attenuation ≥ 10 dB</p> <table> <tr><td>1 Hz ≤ f &lt; 9 kHz, DC coupled</td><td>1.2 (nom.)</td></tr> <tr><td>9 kHz ≤ f &lt; 10 MHz, DC coupled</td><td>&lt; 1.2, typ. 1.12 <sup>12</sup></td></tr> <tr><td>10 MHz ≤ f ≤ 3.5 GHz</td><td>&lt; 1.2, typ. 1.12 <sup>12</sup></td></tr> <tr><td>3.5 GHz &lt; f ≤ 8 GHz</td><td>&lt; 1.5, typ. 1.19 <sup>12</sup></td></tr> <tr><td>8 GHz &lt; f ≤ 18 GHz</td><td>&lt; 1.5, typ. 1.25 <sup>12</sup></td></tr> <tr><td>18 GHz &lt; f ≤ 26.5 GHz</td><td>&lt; 2.0, typ. 1.37 <sup>12</sup></td></tr> <tr><td>26.5 GHz &lt; f ≤ 40 GHz</td><td>&lt; 2.5, typ. 1.7 <sup>12</sup></td></tr> <tr><td>40 GHz &lt; f ≤ 44 GHz</td><td>2.0 (nom.)</td></tr> </table>	1 Hz ≤ f < 9 kHz, DC coupled	2.0 (nom.) <sup>11</sup>	9 kHz ≤ f < 10 MHz, DC coupled	< 2.0	10 MHz ≤ f ≤ 1 GHz	< 2.0	1 GHz < f ≤ 40 GHz	< 3.0	40 GHz < f ≤ 44 GHz	3.0 (nom.)	1 Hz ≤ f < 9 kHz, DC coupled	1.5 (nom.)	9 kHz ≤ f < 10 MHz, DC coupled	< 1.5, typ. 1.24 <sup>12</sup>	10 MHz ≤ f ≤ 3.5 GHz	< 1.5, typ. 1.24 <sup>12</sup>	3.5 GHz < f ≤ 8 GHz	< 1.8, typ. 1.26 <sup>12</sup>	8 GHz < f ≤ 18 GHz	< 1.8, typ. 1.39 <sup>12</sup>	18 GHz < f ≤ 26.5 GHz	< 2.0, typ. 1.43 <sup>12</sup>	26.5 GHz < f ≤ 40 GHz	< 2.5, typ. 1.8 <sup>12</sup>	40 GHz < f ≤ 44 GHz	2.0 (nom.)	1 Hz ≤ f < 9 kHz, DC coupled	1.2 (nom.)	9 kHz ≤ f < 10 MHz, DC coupled	< 1.2, typ. 1.12 <sup>12</sup>	10 MHz ≤ f ≤ 3.5 GHz	< 1.2, typ. 1.12 <sup>12</sup>	3.5 GHz < f ≤ 8 GHz	< 1.5, typ. 1.19 <sup>12</sup>	8 GHz < f ≤ 18 GHz	< 1.5, typ. 1.25 <sup>12</sup>	18 GHz < f ≤ 26.5 GHz	< 2.0, typ. 1.37 <sup>12</sup>	26.5 GHz < f ≤ 40 GHz	< 2.5, typ. 1.7 <sup>12</sup>	40 GHz < f ≤ 44 GHz	2.0 (nom.)
1 Hz ≤ f < 9 kHz, DC coupled	2.0 (nom.) <sup>11</sup>																																										
9 kHz ≤ f < 10 MHz, DC coupled	< 2.0																																										
10 MHz ≤ f ≤ 1 GHz	< 2.0																																										
1 GHz < f ≤ 40 GHz	< 3.0																																										
40 GHz < f ≤ 44 GHz	3.0 (nom.)																																										
1 Hz ≤ f < 9 kHz, DC coupled	1.5 (nom.)																																										
9 kHz ≤ f < 10 MHz, DC coupled	< 1.5, typ. 1.24 <sup>12</sup>																																										
10 MHz ≤ f ≤ 3.5 GHz	< 1.5, typ. 1.24 <sup>12</sup>																																										
3.5 GHz < f ≤ 8 GHz	< 1.8, typ. 1.26 <sup>12</sup>																																										
8 GHz < f ≤ 18 GHz	< 1.8, typ. 1.39 <sup>12</sup>																																										
18 GHz < f ≤ 26.5 GHz	< 2.0, typ. 1.43 <sup>12</sup>																																										
26.5 GHz < f ≤ 40 GHz	< 2.5, typ. 1.8 <sup>12</sup>																																										
40 GHz < f ≤ 44 GHz	2.0 (nom.)																																										
1 Hz ≤ f < 9 kHz, DC coupled	1.2 (nom.)																																										
9 kHz ≤ f < 10 MHz, DC coupled	< 1.2, typ. 1.12 <sup>12</sup>																																										
10 MHz ≤ f ≤ 3.5 GHz	< 1.2, typ. 1.12 <sup>12</sup>																																										
3.5 GHz < f ≤ 8 GHz	< 1.5, typ. 1.19 <sup>12</sup>																																										
8 GHz < f ≤ 18 GHz	< 1.5, typ. 1.25 <sup>12</sup>																																										
18 GHz < f ≤ 26.5 GHz	< 2.0, typ. 1.37 <sup>12</sup>																																										
26.5 GHz < f ≤ 40 GHz	< 2.5, typ. 1.7 <sup>12</sup>																																										
40 GHz < f ≤ 44 GHz	2.0 (nom.)																																										
Setting range of attenuator	0 dB to 79 dB, in 1 dB steps <sup>13</sup>																																										

<sup>11</sup> Preselection off<sup>12</sup> Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.<sup>13</sup> Mechanical RF attenuator: 5 dB steps. Electronic IF attenuator: 1 dB steps.

**Probe power supply**

Supply voltages, selectable	probe 1: 3-pin connector probe 2: 5-pin connector	+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.) ±10 V DC and ground, max. 100 mA (nom.)
-----------------------------	--	--

**USB interface**

	7 ports, type A plug, version 2.0 1 port, type B plug, version 2.0
--	---

**AF output**

Connector	3.5 mm mini-jack
Output impedance	10 Ω (nom.)
Open-circuit voltage	up to 1.5 V, adjustable

**External trigger/gate**

Number of ports	1 × input, 2 × input/output, selectable
Connector	BNC female
Trigger input voltage	0.5 V to 3.5 V (nom.)
Trigger output voltage	TTL-compatible, 0 V/5 V (nom.)
Impedance	10 kΩ (nom.)

**Reference input 1 MHz to 20 MHz**

Connector	BNC female
Impedance	50 Ω (nom.)
Input frequency range	1 MHz ≤ f <sub>in</sub> ≤ 20 MHz, in 1 Hz steps
Required level	> 0 dBm

**Reference input 100 MHz**

Connector	SMA female
Impedance	50 Ω (nom.)
Input frequency range	100 MHz
Required level	0 dBm to 10 dBm

**Reference output 10 MHz**

Connector	BNC female
Impedance	50 Ω (nom.)
Output frequency	10 MHz
Level	10 dBm (nom.)

**Reference output 1 MHz to 20 MHz**

Connector	BNC female
Impedance	50 Ω (nom.)
Output frequency	internal reference external reference
Level	not active same as reference input signal same as reference input signal

**Reference output 100 MHz**

Connector	SMA female
Impedance	50 Ω (nom.)
Output frequency	100 MHz
Level	6 dBm (nom.)

**Reference output 640 MHz**

Connector	SMA female
Impedance	50 Ω (nom.)
Output frequency	640 MHz
Level	16 dBm (nom.)

<b>IF/video output</b>		
Connector		BNC female, 50 Ω (nom.)
<b>IF out</b>		
Bandwidth		equal to RBW setting
IF frequency		(RBW/2) to (240 MHz – RBW/2)
Output level	center frequency > 10 MHz, span = 0 Hz or I/Q analyzer on, signal at reference level and center frequency	0 dBm (nom.)
<b>Video out</b>		
Bandwidth		equal to VBW setting
Output scaling	log. display scale lin. display scale	logarithmic linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V at 50 Ω load (nom.)

<b>IEC/IEEE bus control</b>		interface in line with IEC 625-2 (IEEE 488.2)
Command set		SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		10/100/1000BASE-T
Connector		RJ-45

<b>External monitor</b>		
Connector		DVI-D, DisplayPort Rev 1.1

## General data

<b>Display</b>	30.7 cm (12.1") WXGA color touchscreen	
Resolution	1280 × 800 pixel (WXGA resolution)	
Pixel failure rate	< 1 × 10 <sup>-5</sup>	

<b>Data storage</b>		
Internal	standard	solid state disk ≥ 32 Gbyte
External		supports USB 2.0 compatible memory devices

<b>Temperature</b>		
Temperature	operating temperature range	+5 °C to +50 °C
	permissible temperature range	0 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading	without condensation	+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

<b>Altitude</b>		
Max. operating altitude	above sea level	4600 m (approx. 15100 ft)

<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz acceleration: 0.5 g constant, in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E method no. 516.4, procedure I, MIL-PRF-28800F, class 3

<b>EMC</b>	in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 <sup>14, 15</sup> IEC/EN 61326-2-1 CISPR 11/EN 55011 <sup>14</sup> IEC/EN 61000-3-2 IEC/EN 61000-3-3
------------	--

<b>Recommended calibration interval</b>	1 year
---	--------

<sup>14</sup> Emission limits for class B equipment apply.

<sup>15</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

<b>Power supply</b>		
AC input voltage range		100 V to 240 V
AC supply frequency		50 Hz to 60 Hz/400 Hz
Max. input current		7.3 A (100 V) to 4.6 A (240 V)
Power consumption	R&S®ESW8	
	without options	150 W
	with all options	250 W (meas.)
	R&S®ESW26	
	without options	175 W
	with all options	275 W (meas.)
R&S®ESW44	R&S®ESW44	
	without options	200 W
	with all options	300 W (meas.)
Safety		in line with IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1
Test mark		VDE-GS, cCSA <sub>us</sub>

<b>Dimensions and weight</b>		
Dimensions (nom.)	W × H × D, including front handles and rear feet	462 mm × 240 mm × 504 mm (18.15 in × 9.44 in × 19.81 in)
Net weight, without options (nom.)	R&S®ESW8	20.6 kg (45.42 lb)
	R&S®ESW26	22.1 kg (48.72 lb)
	R&S®ESW44	25.2 kg (55.56 lb)

## Options

### R&S®ESW-B10 external generator control

Interface	
IEC/IEEE bus control	24-pin Amphenol female
Aux control	9-pin D-Sub female

Supported signal generators	R&S®SGS100A, R&S®SMA100A, R&S®SMB100A, R&S®SMBV100A, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMW200A, R&S®SMX, R&S®SMY
-----------------------------	--

### R&S®ESW-B21 LO/IF connections for external mixers (not available for R&S®ESW8)

LO signal		
Frequency range		7.65 GHz to 17.45 GHz
Level	+20 °C to +30 °C	+15.5 dBm ± 1 dB
	+5 °C to +40 °C	+15.5 dBm ± 3 dB

IF input		
IF frequency	set signal analysis bandwidth ≤ 80 MHz, bandwidth-dependent	1310 MHz to 1330 MHz
Full-scale level	compression < 1 dB 2-port mixer (LO output/IF input, front panel)	-20 dBm (nom.)
	3-port mixer (IF input, front panel)	-20 dBm (nom.)
Level uncertainty at IF frequency	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 2-port mixer, LO output/IF input connector (front panel) +20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 3-port mixer, IF input connector (front panel) +20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

Inputs and outputs		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

## Ordering information

Designation	Type	Order No.
EMI test receiver, 1 Hz to 8 GHz	R&S®ESW8	1328.4100.08
EMI test receiver, 1 Hz to 26.5 GHz	R&S®ESW26	1328.4100.26
EMI test receiver, 1 Hz to 44 GHz	R&S®ESW44	1328.4100.44
<b>Accessories supplied</b>		
Power cable, quick start guide		
R&S®ESW26: adapter 3.5 mm (APC3.5-compatible) female/female		
R&S®ESW44: adapter 2.92 mm female/female		

## Options

Designation	Type	Order No.	Retrofittable	Remarks
OCXO precision frequency reference	R&S®ESW-B4	1328.5012.02	yes	user-retrofittable
Resolution bandwidth > 10 MHz	R&S®ESW-B8	1325.1474.26	no	for R&S®ESW8/26
Resolution bandwidth > 10 MHz	R&S®ESW-B8	1325.1474.02	no	for R&S®ESW44; export licence required
External generator control	R&S®ESW-B10	1328.5006.02	yes	contact service center
Spare solid state drive (removable hard drive) <sup>16</sup>	R&S®ESW-B18	1328.4997.10	yes	user-retrofittable
Low noise amplifier, 150 kHz to 8 GHz	R&S®ESW-B24	1328.4980.08	yes	for R&S®ESW8; contact service center
LO/IF connections for external mixers	R&S®ESW-B21	1331.6945.26	yes	for R&S®ESW26; contact service center
LO/IF connections for external mixers	R&S®ESW-B21	1331.6945.44	yes	for R&S®ESW44; contact service center
Low noise amplifier, 150 kHz to 26.5 GHz	R&S®ESW-B24	1328.4980.26	yes	for R&S®ESW26; contact service center
Low noise amplifier, 150 kHz to 44 GHz	R&S®ESW-B24	1328.4980.44	yes	for R&S®ESW44; no export license required; contact service center
USB mass memory write protection	R&S®FSW-B33	1313.3602.02	no	pre-installed in factory

## Firmware

Designation	Type	Order No.	Retrofittable	Remarks
Analog modulation analysis for AM/FM/φM	R&S®ESW-K7	1331.6216.02		
Security write protection of solid state drive	R&S®ESW-K33	1328.4916.02		
80 MHz real-time measurement application, POI > 15 µs	R&S®ESW-K55	1328.4968.02		no export license required

<sup>16</sup> For instruments delivered with Windows 10 ex factory or instruments with upgrade R&S®ESW-U10 only. For other models and spare parts contact your local Rohde & Schwarz service center.

## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IIEEE bus cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IIEEE bus cable, length: 2 m	R&S®PCK	0292.2013.20
Front cover	R&S®ZZF-511	1174.8825.00
19" rack adapter	R&S®ZZA-KN5	1175.3040.00
<b>Matching pads, 50/75 Ω</b>		
L section, matching at both ends	R&S®RAM	0358.5414.02
Series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>High-power attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>RF adapters and cables</b>		
Coaxial adapter 2.92 mm (f) – 2.92 mm (f)		3588.8664.00
Coaxial adapter 3.5 mm (f) – 3.5 mm (f), APC3.5-compatible		3587.7793.00
Coaxial adapter 3.5 mm (m) – 3.5 mm (m), APC3.5-compatible		3587.7770.00
Coaxial adapter N (f) – 3.5 mm (m), APC3.5-compatible		3587.7806.00
Coaxial adapter N (f) – 3.5 mm (f), APC3.5-compatible		3587.7829.00
Coaxial cable SMA (m) – SMA (m), length: 1 m		3586.9970.00
<b>Connectors and cables</b>		
Probe power connector, 3-pin		1065.9480.00
<b>DC block</b>		
DC block, 10 kHz to 18 GHz (N type)	R&S®FSE-Z4	1084.7443.02
<b>External harmonic mixers (for R&amp;S®ESW26 and R&amp;S®ESW44 with R&amp;S®ESW-B21 option)</b>		
Harmonic mixer, 40 GHz to 60 GHz <sup>17</sup>	RPG FS-Z60	1048.0171.02
Harmonic mixer, 50 GHz to 75 GHz <sup>17</sup>	RPG FS-Z75	3638.2240.02
Harmonic mixer, 60 GHz to 90 GHz <sup>17</sup>	RPG FS-Z90	3638.2270.02
Harmonic mixer, 75 GHz to 110 GHz <sup>17</sup>	RPG FS-Z110	3638.2292.02
Harmonic mixer, 90 GHz to 140 GHz <sup>17</sup>	RPG FS-Z140	3622.0708.02
Harmonic mixer, 110 GHz to 170 GHz <sup>17</sup>	RPG FS-Z170	3622.0714.02
Harmonic mixer, 140 GHz to 220 GHz <sup>17</sup>	RPG FS-Z220	3593.3250.02
Harmonic mixer, 220 GHz to 325 GHz <sup>17</sup>	RPG FS-Z325	3593.3267.02
Harmonic mixer, 325 GHz to 500 GHz <sup>17</sup>	RPG FS-Z500	3593.3273.02
<b>Waveguide to coaxial adapters</b>		
Waveguide to coaxial adapter, WR10 to 1 mm (f)	WCA110	3626.1067.02
Waveguide to coaxial adapter, WR10 to 1 mm (m)	WCA110	3626.1067.03
Waveguide to coaxial adapter, WR12 to 1 mm (f)	WCA90	3626.1050.02
Waveguide to coaxial adapter, WR12 to 1 mm (m)	WCA90	3626.1050.03
Waveguide to coaxial adapter, WR15 to 1 mm (f)	WCA75	3626.1044.02
Waveguide to coaxial adapter, WR15 to 1 mm (m)	WCA75	3626.1044.03
<b>Horn antennas</b>		
Horn antenna, 110 GHz to 170 GHz	FH-SG-170	3629.2493.02
Horn antenna, 26 GHz to 40 GHz	FH-SG-40	3629.2393.02
Horn antenna, 50 GHz to 75 GHz	FH-SG-75	3629.2458.02
Horn antenna, 60 GHz to 90 GHz	FH-SG-90	3629.2464.02
<b>Tools</b>		
Torque wrench for type N connectors, 1.5 Nm coupling torque (for R&S®ESW8)	R&S®ZN-ZTW	1328.8534.71
Torque wrench for 3.5/2.92 mm connectors, 0.9 Nm coupling torque (for R&S®ESW26/44)	R&S®ZN-ZTW	1328.8534.35

<sup>17</sup> RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company.

## Service options

<b>Service options</b>		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

### Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge <sup>18</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

### Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>18</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

### Extended warranty with accredited calibration (AW1 and AW2)

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs <sup>18</sup> and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

<sup>18</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.







## Service that adds value

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Sustainable product design

- | Environmental compatibility and eco-footprint
- | Energy efficiency and low emissions
- | Longevity and optimized total cost of ownership

Certified Quality Management  
**ISO 9001**

Certified Environmental Management  
**ISO 14001**

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East | +49 89 4129 12345  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America | 1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America | +1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia Pacific | +65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)
- | China | +86 800 810 82 28 | +86 400 650 58 96  
[customersupport.china@rohde-schwarz.com](mailto:customersupport.china@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG

Trade names are trademarks of the owners

PD 3607.2810.22 | Version 05.00 | May 2019 (fi)

R&S®ESW EMI Test Receiver

Data without tolerance limits is not binding | Subject to change

© 2016 - 2019 Rohde & Schwarz GmbH & Co. KG | 81671 Munich, Germany



3607281022