


# ISC CAM CONNECTION DIAGRAM

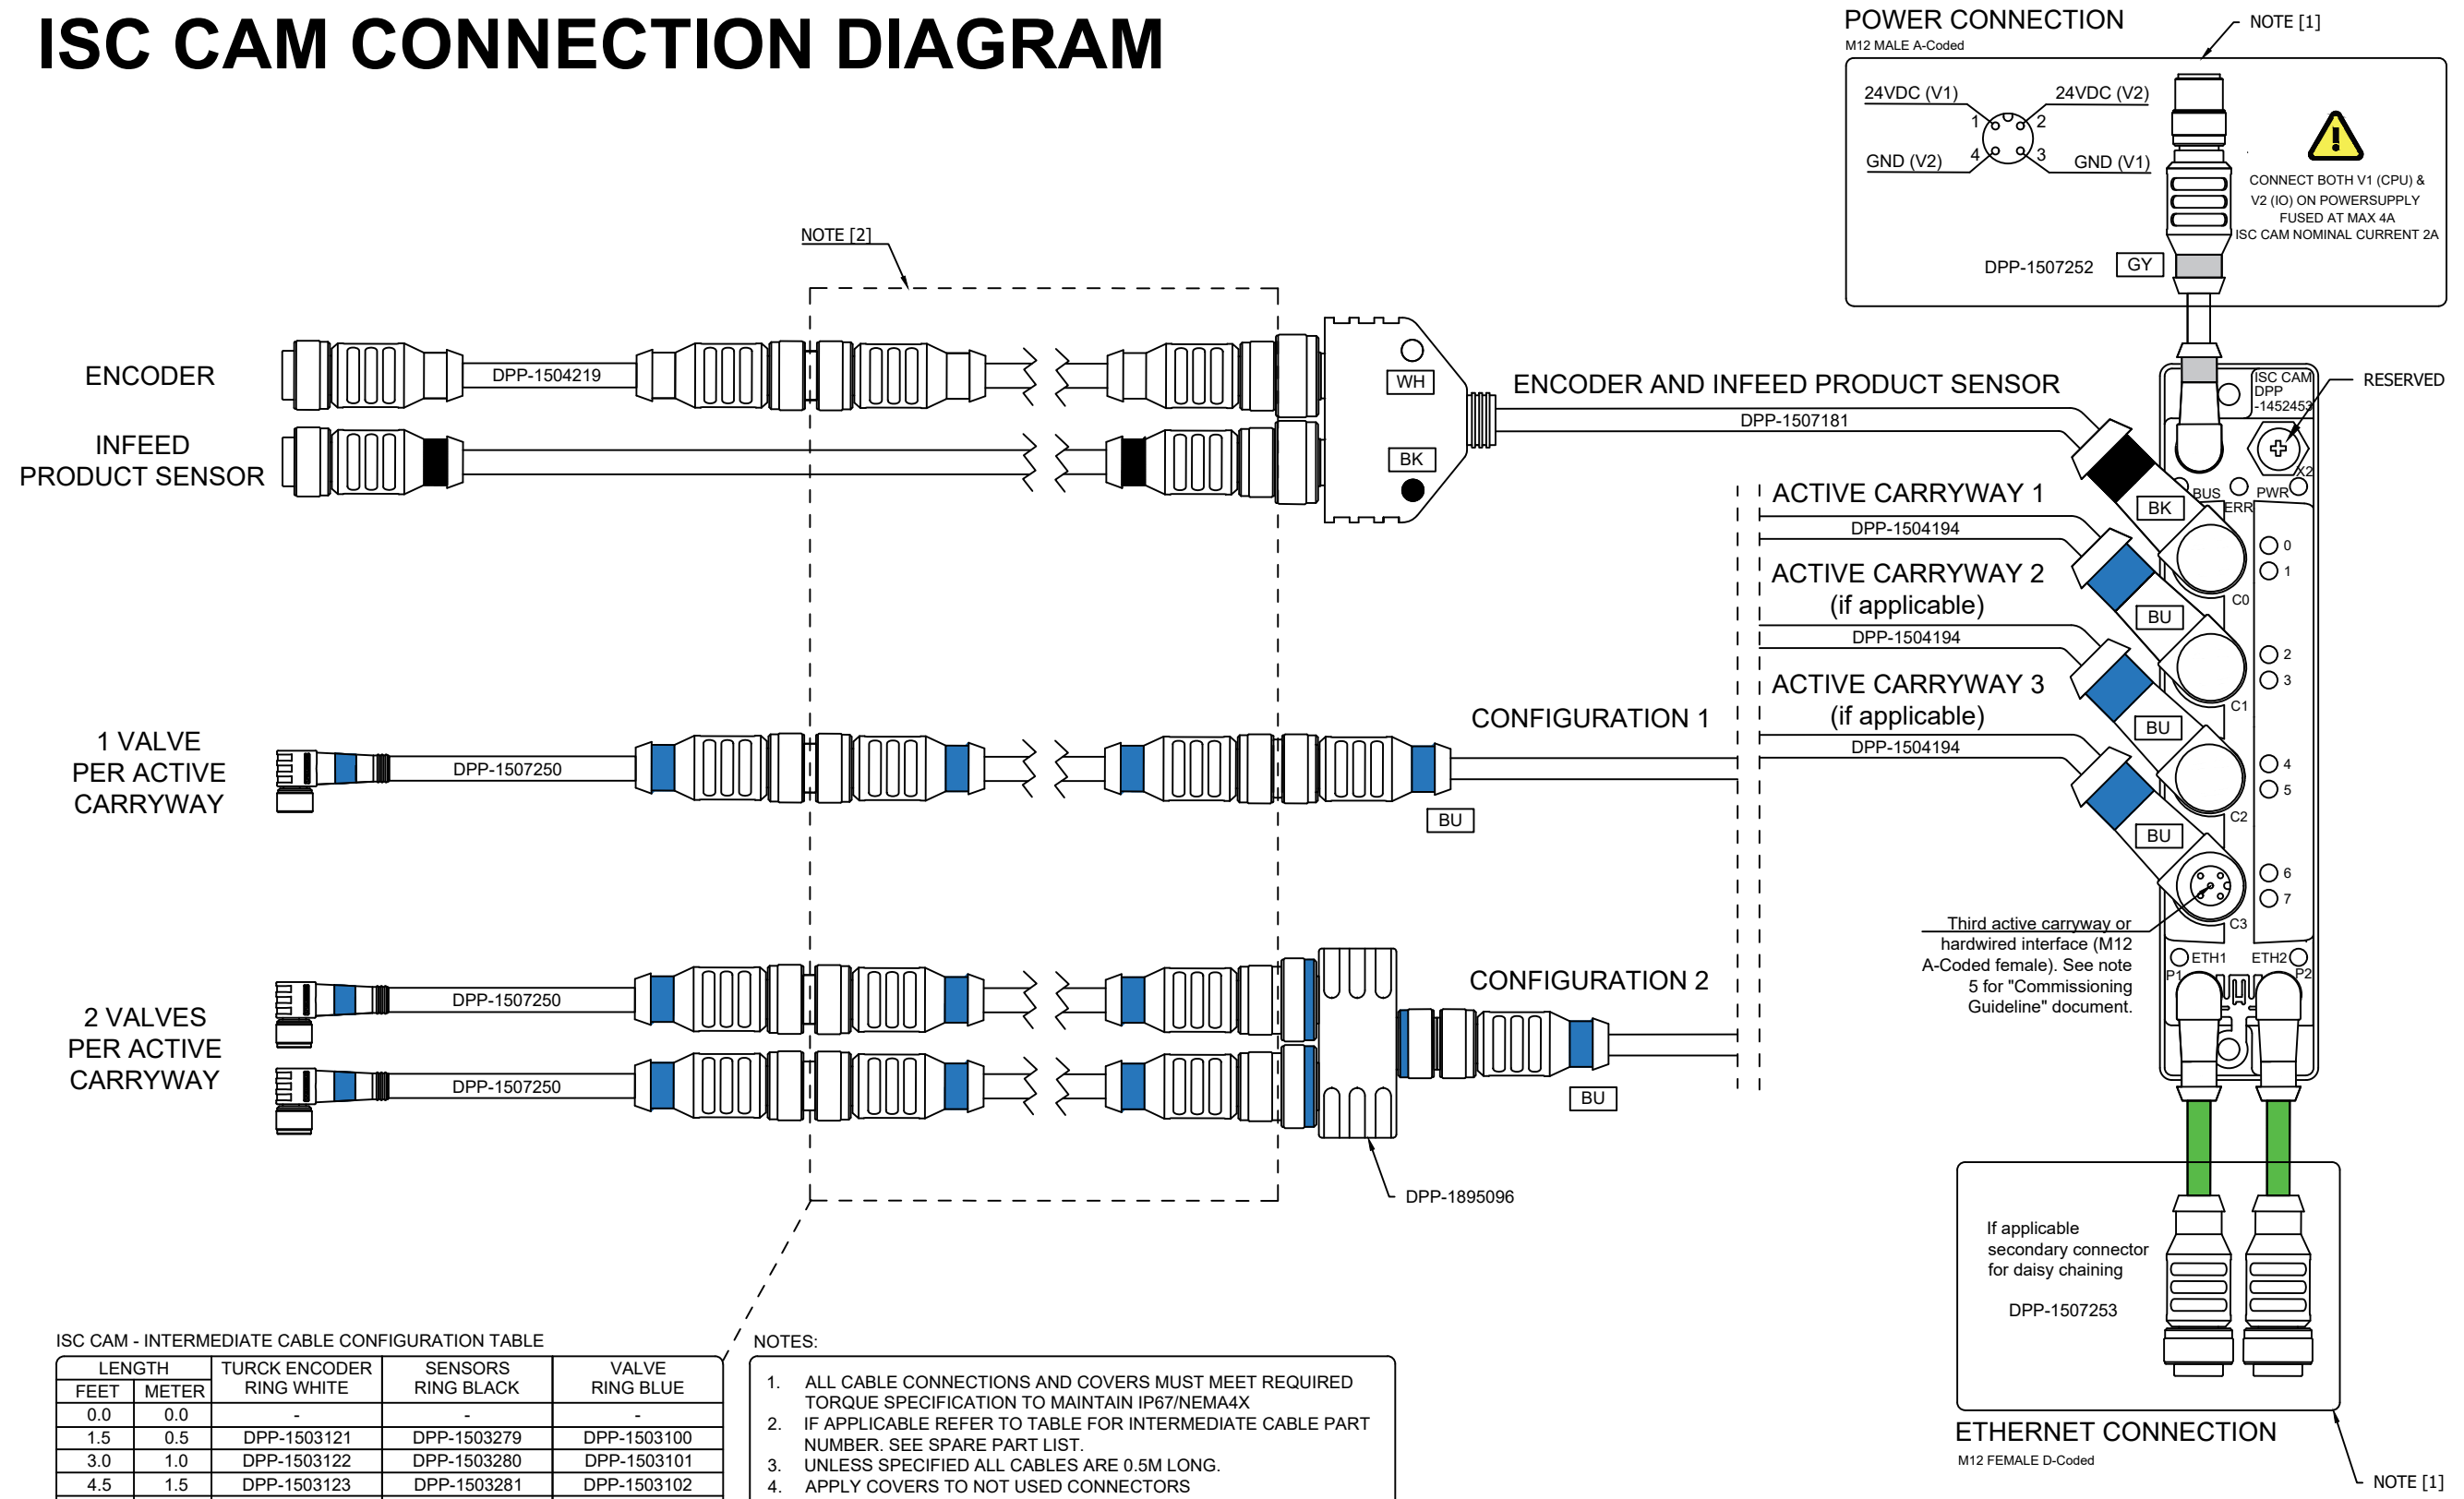

ISC CAM - INTERMEDIATE CABLE CONFIGURATION TABLE

LENGTH		TURCK ENCODER RING WHITE	SENSORS RING BLACK	VALVE RING BLUE
FEET	METER			
0.0	0.0	-	-	-
1.5	0.5	DPP-1503121	DPP-1503279	DPP-1503100
3.0	1.0	DPP-1503122	DPP-1503280	DPP-1503101
4.5	1.5	DPP-1503123	DPP-1503281	DPP-1503102
6.0	2.0	DPP-1503124	DPP-1503282	DPP-1503103
7.5	2.5	DPP-1503125	DPP-1503283	DPP-1503104
9.0	3.0	DPP-1503126	DPP-1503284	DPP-1503105
10.5	3.5	DPP-1503127	DPP-1503285	DPP-1503106
13.0	4.0	DPP-1503128	DPP-1503286	DPP-1503107
14.5	4.5	DPP-1503129	DPP-1503287	DPP-1503108
16.0	5.0	DPP-1503133	DPP-1503288	DPP-1503109

- NOTES:**
- ALL CABLE CONNECTIONS AND COVERS MUST MEET REQUIRED TORQUE SPECIFICATION TO MAINTAIN IP67/NEMA4X
  - IF APPLICABLE REFER TO TABLE FOR INTERMEDIATE CABLE PART NUMBER. SEE SPARE PART LIST.
  - UNLESS SPECIFIED ALL CABLES ARE 0.5M LONG.
  - APPLY COVERS TO NOT USED CONNECTORS
  - GO TO <https://www.intralox.com/iscam> FOR MORE INFO
- REQ. CONNECTOR TORQUE**
- |       |       |
|-------|-------|
| M8    | M12   |
| 0.5Nm | 0.9Nm |