


ISC CAM CONNECTION DIAGRAM

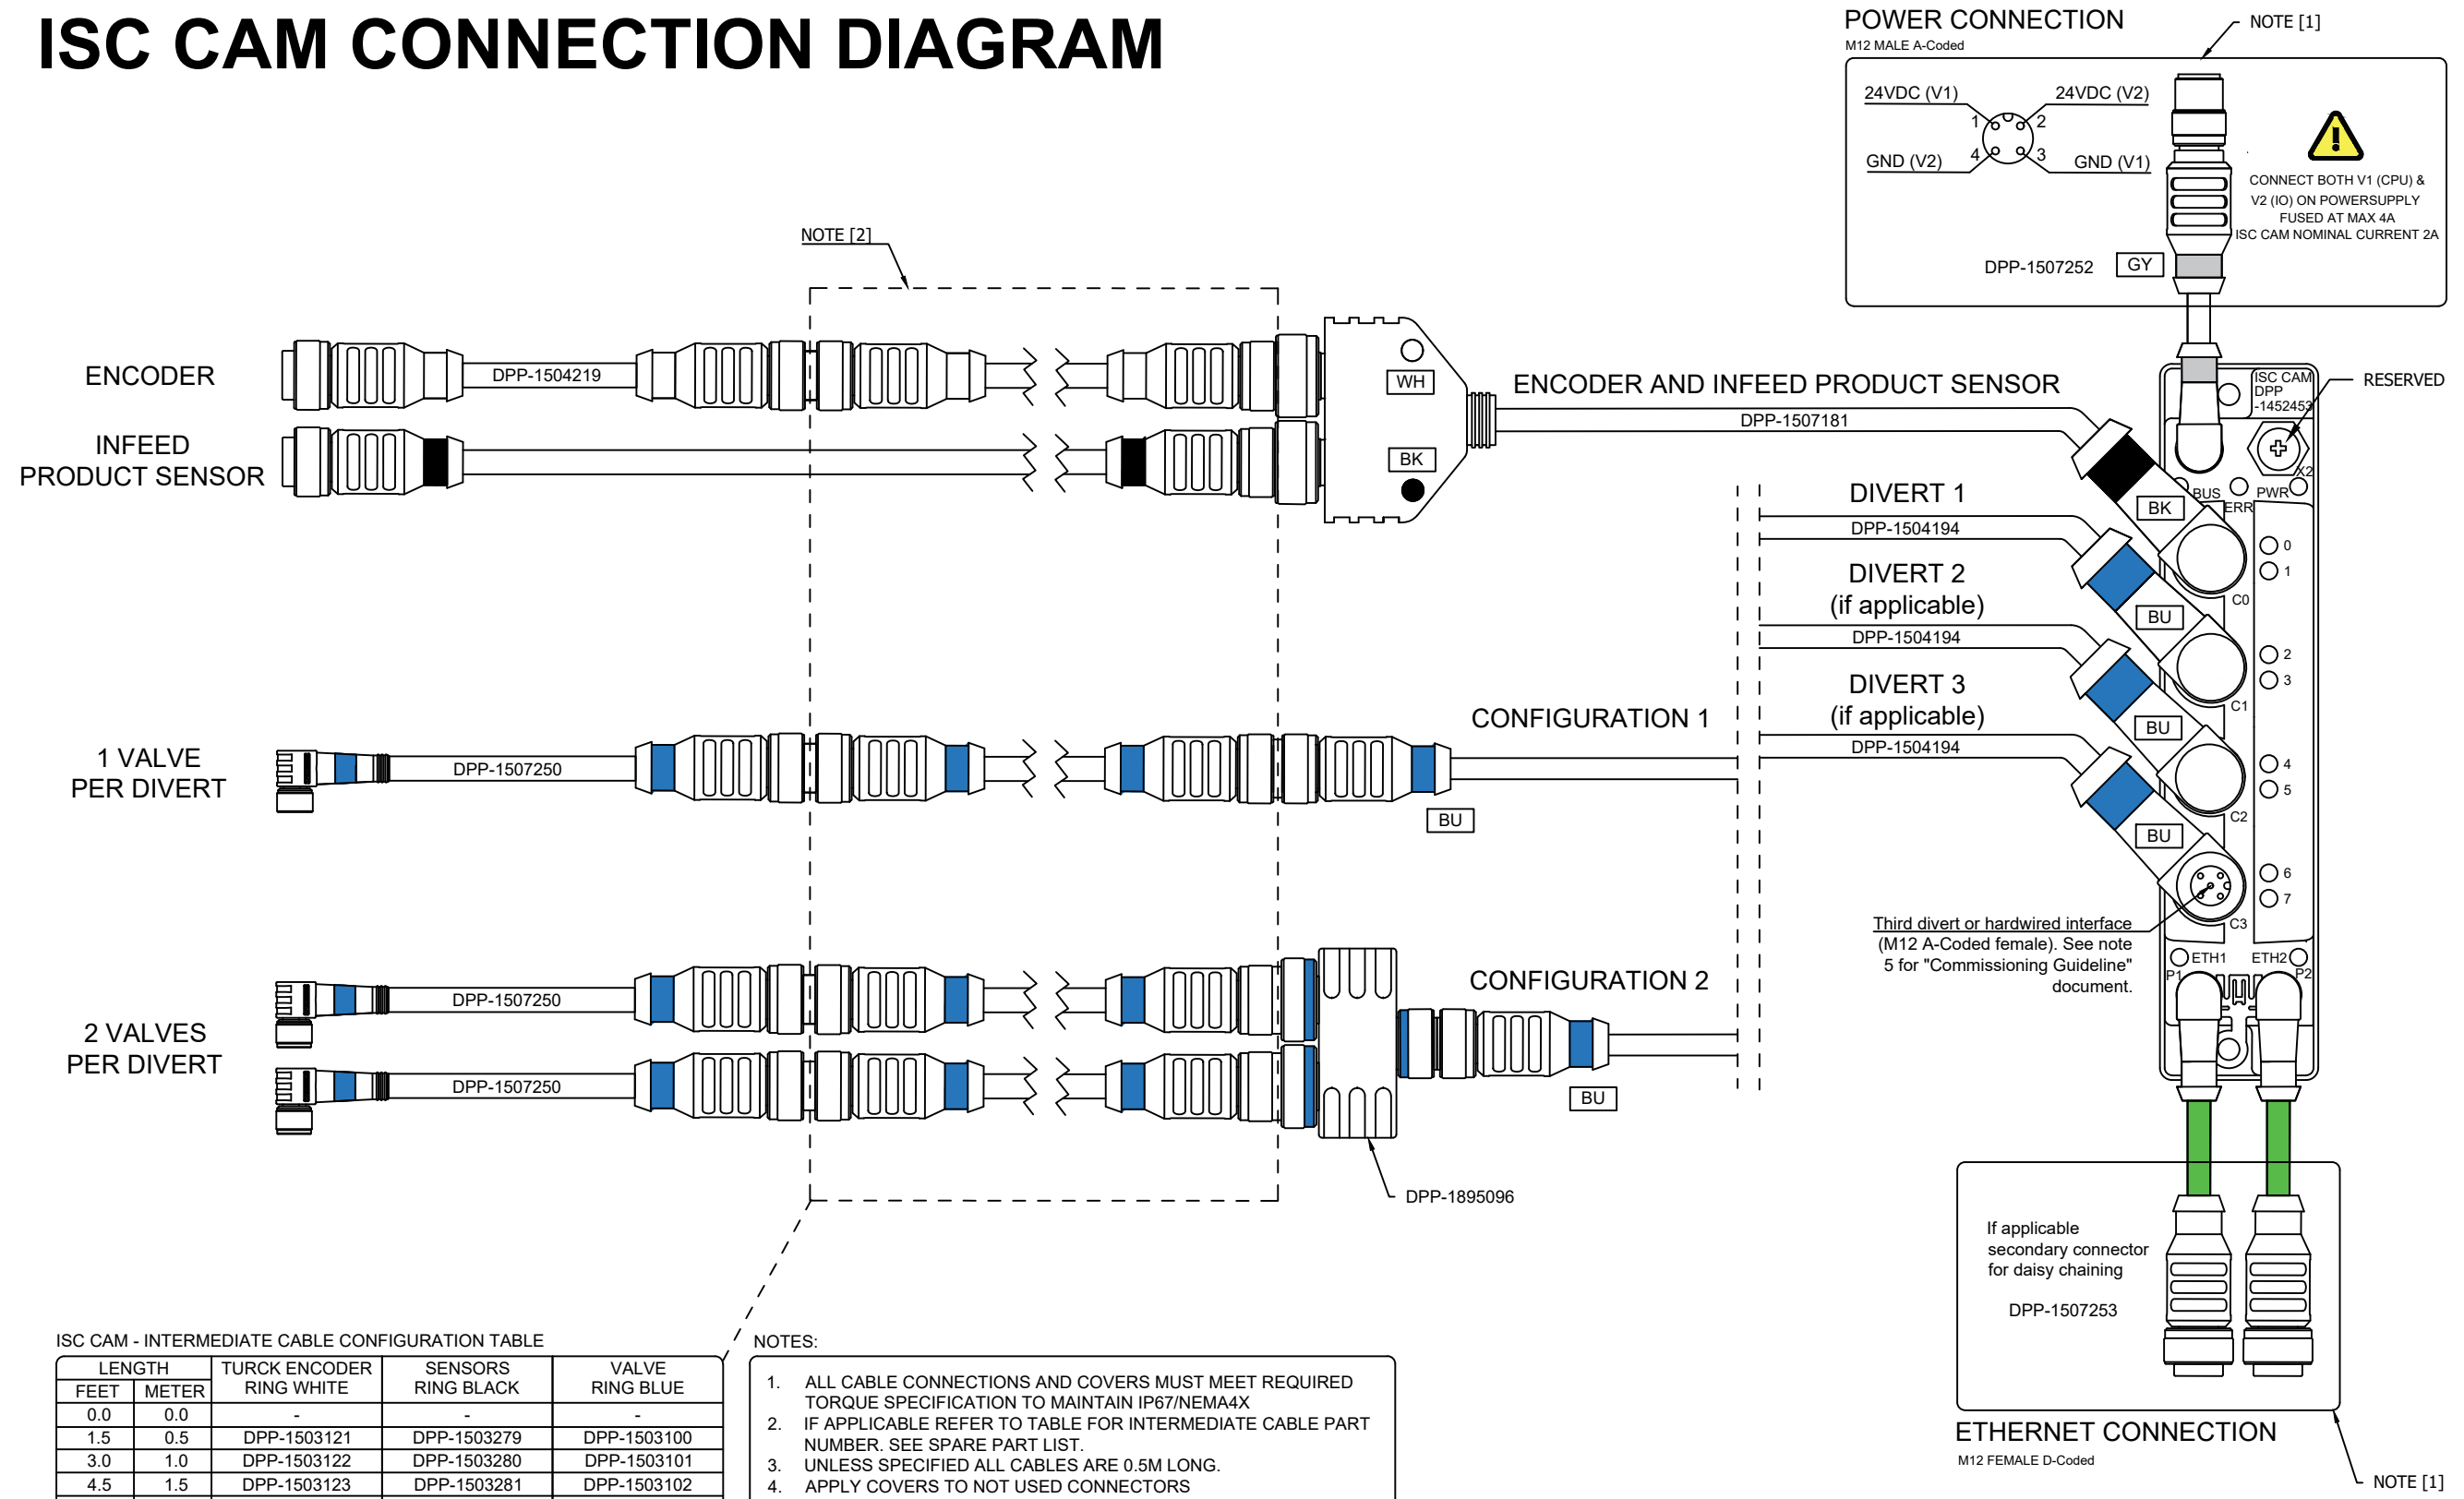

ISC CAM - INTERMEDIATE CABLE CONFIGURATION TABLE

LENGTH		TURCK ENCODER RING WHITE	SENSORS RING BLACK	VALVE RING BLUE
FEET	METER			
0.0	0.0	-	-	-
1.5	0.5	DPP-1503121	DPP-1503279	DPP-1503100
3.0	1.0	DPP-1503122	DPP-1503280	DPP-1503101
4.5	1.5	DPP-1503123	DPP-1503281	DPP-1503102
6.0	2.0	DPP-1503124	DPP-1503282	DPP-1503103
7.5	2.5	DPP-1503125	DPP-1503283	DPP-1503104
9.0	3.0	DPP-1503126	DPP-1503284	DPP-1503105
10.5	3.5	DPP-1503127	DPP-1503285	DPP-1503106
13.0	4.0	DPP-1503128	DPP-1503286	DPP-1503107
14.5	4.5	DPP-1503129	DPP-1503287	DPP-1503108
16.0	5.0	DPP-1503133	DPP-1503288	DPP-1503109

- NOTES:
- ALL CABLE CONNECTIONS AND COVERS MUST MEET REQUIRED TORQUE SPECIFICATION TO MAINTAIN IP67/NEMA4X
 - IF APPLICABLE REFER TO TABLE FOR INTERMEDIATE CABLE PART NUMBER. SEE SPARE PART LIST.
 - UNLESS SPECIFIED ALL CABLES ARE 0.5M LONG.
 - APPLY COVERS TO NOT USED CONNECTORS
 - GO TO WWW.INTRALOX.COM/ISCCAM FOR MORE INFO
- REQ. CONNECTOR TORQUE
- | | |
|-------|-------|
| M8 | M12 |
| 0.5Nm | 0.9Nm |