


ISC CAM CONNECTION DIAGRAM

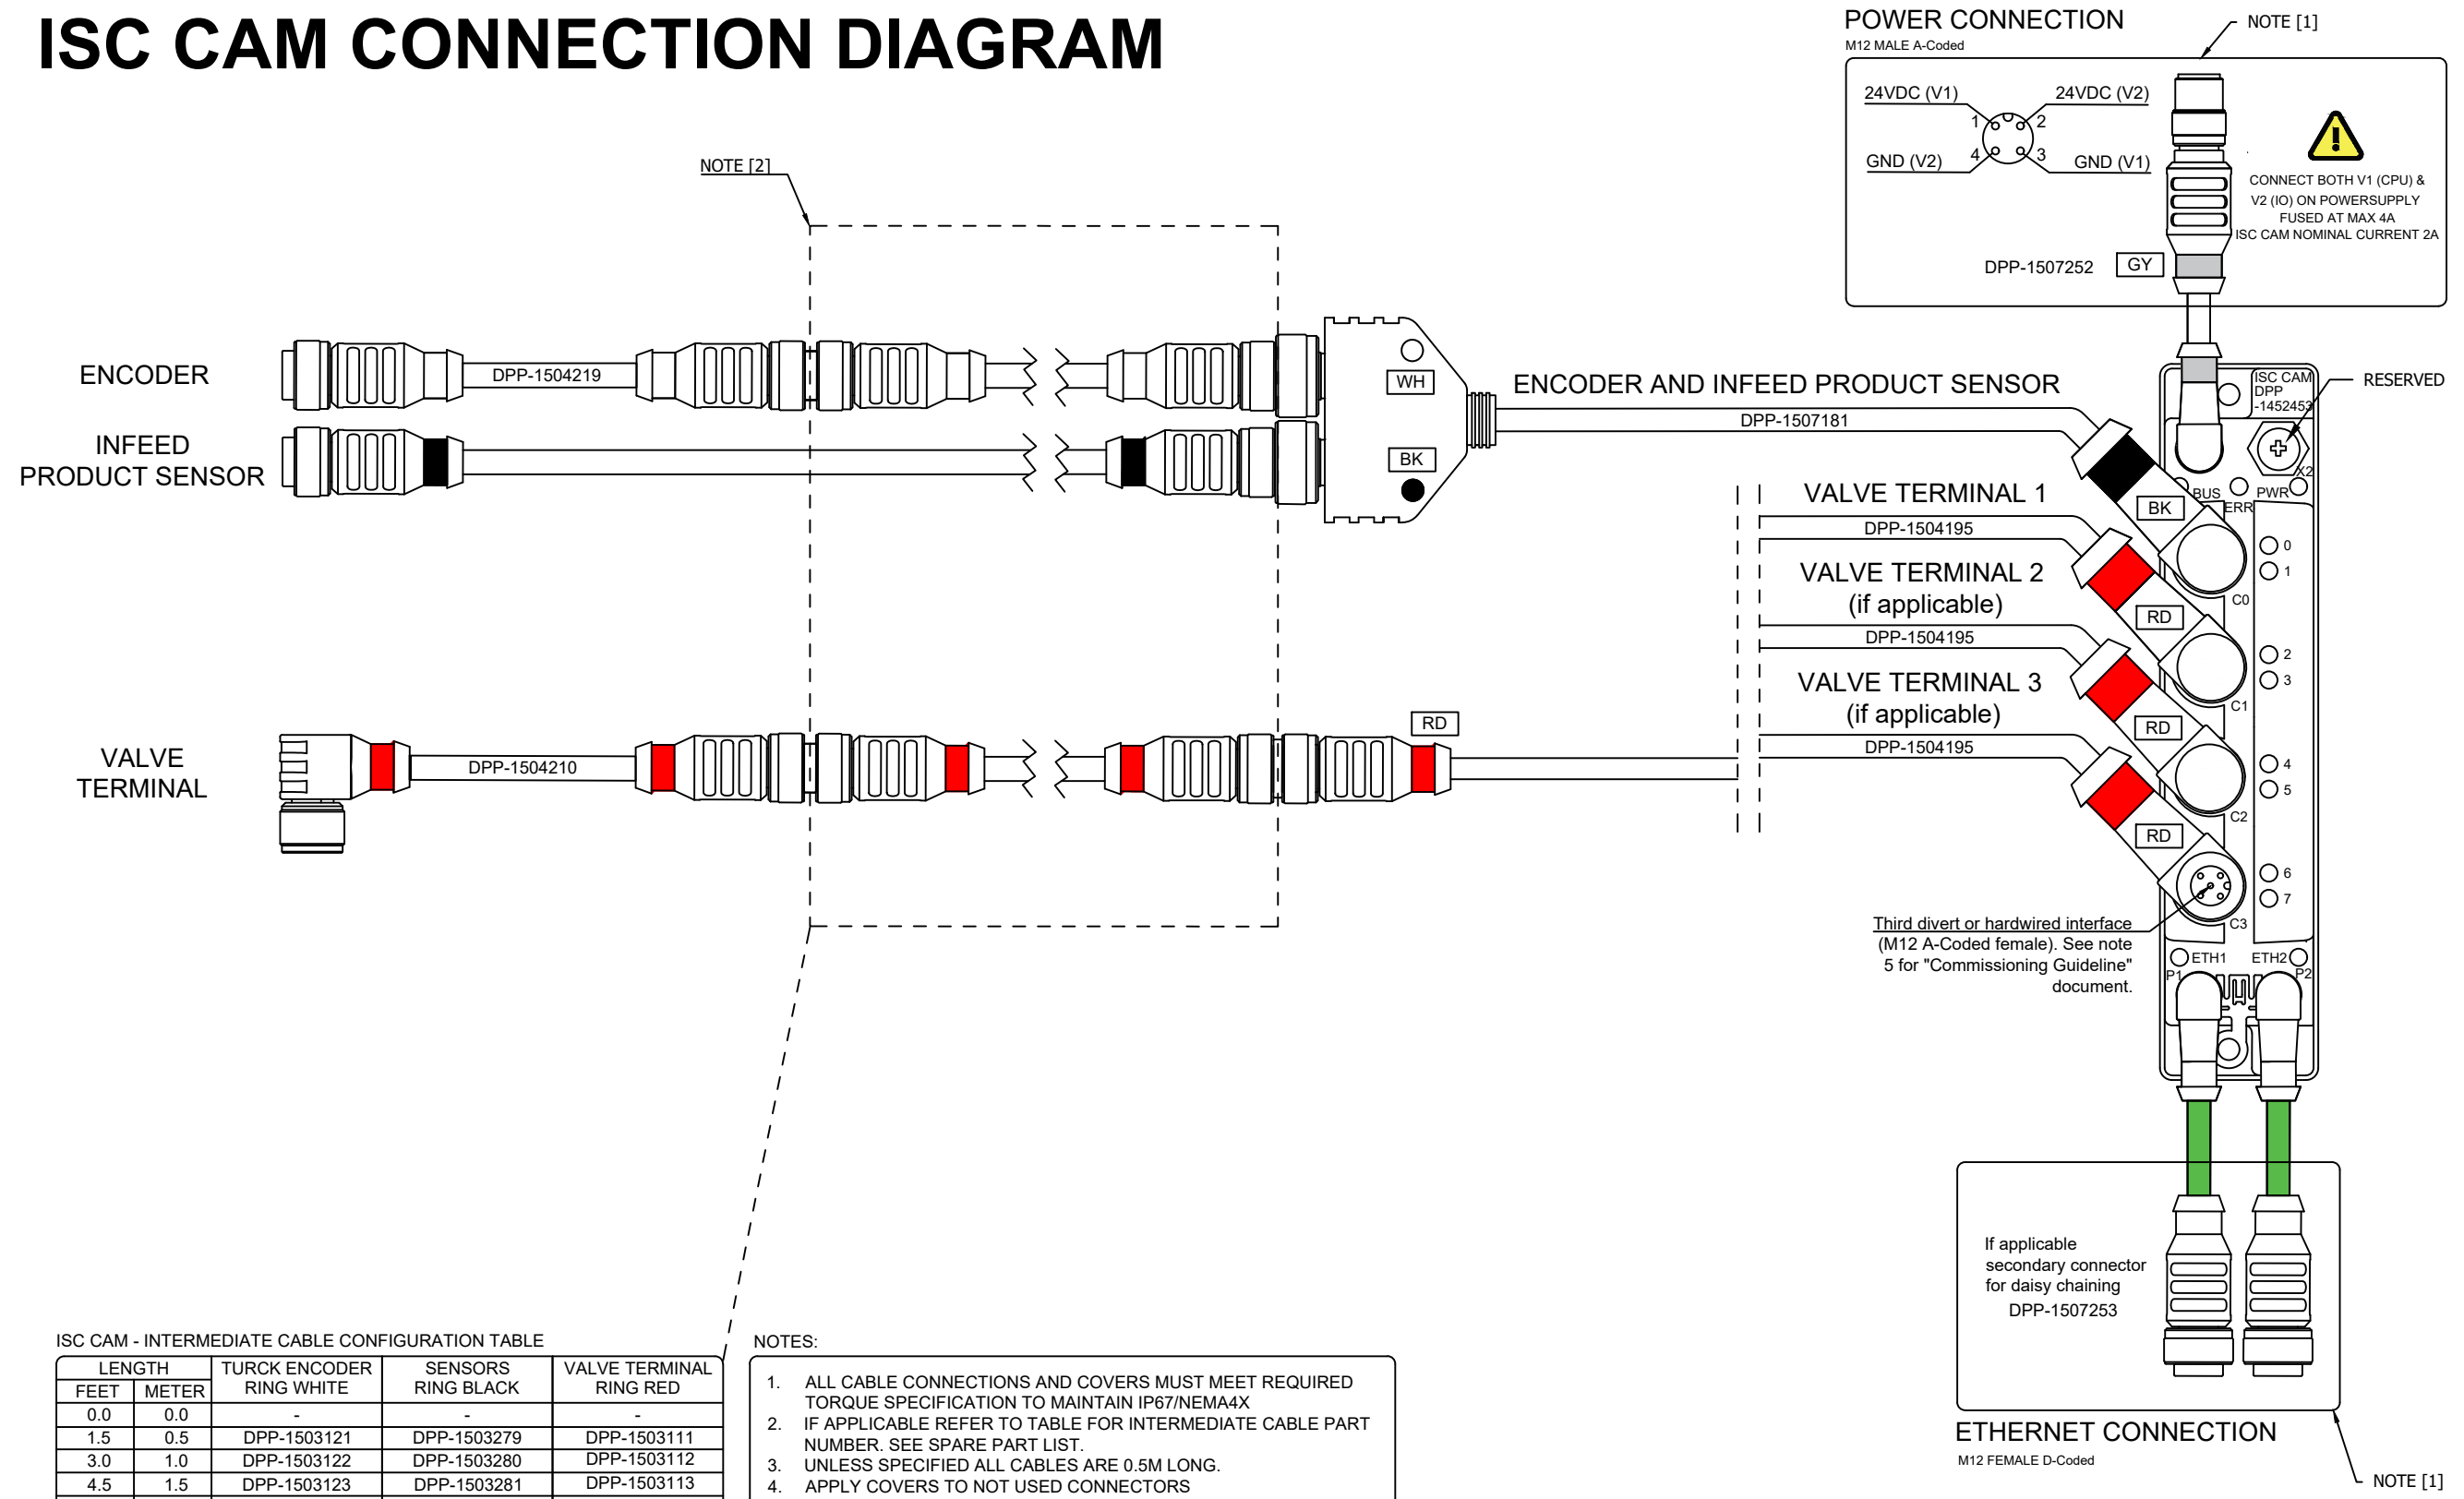

ISC CAM - INTERMEDIATE CABLE CONFIGURATION TABLE

LENGTH		TURCK ENCODER RING WHITE	SENSORS RING BLACK	VALVE TERMINAL RING RED
FEET	METER			
0.0	0.0	-	-	-
1.5	0.5	DPP-1503121	DPP-1503279	DPP-1503111
3.0	1.0	DPP-1503122	DPP-1503280	DPP-1503112
4.5	1.5	DPP-1503123	DPP-1503281	DPP-1503113
6.0	2.0	DPP-1503124	DPP-1503282	DPP-1503114
7.5	2.5	DPP-1503125	DPP-1503283	DPP-1503115
9.0	3.0	DPP-1503126	DPP-1503284	DPP-1503116
10.5	3.5	DPP-1503127	DPP-1503285	DPP-1503117
13.0	4.0	DPP-1503128	DPP-1503286	DPP-1503118
14.5	4.5	DPP-1503129	DPP-1503287	DPP-1503119
16.0	5.0	DPP-1503133	DPP-1503288	DPP-1503120

- NOTES:**
1. ALL CABLE CONNECTIONS AND COVERS MUST MEET REQUIRED TORQUE SPECIFICATION TO MAINTAIN IP67/NEMA4X
 2. IF APPLICABLE REFER TO TABLE FOR INTERMEDIATE CABLE PART NUMBER. SEE SPARE PART LIST.
 3. UNLESS SPECIFIED ALL CABLES ARE 0.5M LONG.
 4. APPLY COVERS TO NOT USED CONNECTORS
 5. GO TO WWW.INTRALOX.COM/ISCCAM FOR MORE INFO
- REQ. CONNECTOR TORQUE**
- | | |
|-------|-------|
| M8 | M12 |
| 0.5Nm | 0.9Nm |