

S900 MTW BELT: EASY SOURCING, LONGER LIFE

Engineered specifically for can manufacturing, the S900 Mold to Width (MTW) belt optimizes high-speed single filers such as pin strippers and light testers. Its robust sprocket system, unique “tight wrap” pitch diameter, and superior belting material ensure a longer life span than comparable solutions.


The High Heat Resistant (HHR) nylon belt also helps prevent the spread of flames in case of fire on adjacent belts. Its color reduces glare and provides optimal contrast for camera readings. Consistent can-to-can spacing and reduced movement record more accurate data and reduce false rejections.

Compared to other options:

- **Easier sourcing**
- **Longer life span**
- **Higher flammability rating (UL-94 V-2)**
- **Increased inspection camera accuracy**

A global solution | Available widths:

- **3 in**
- **85 mm**

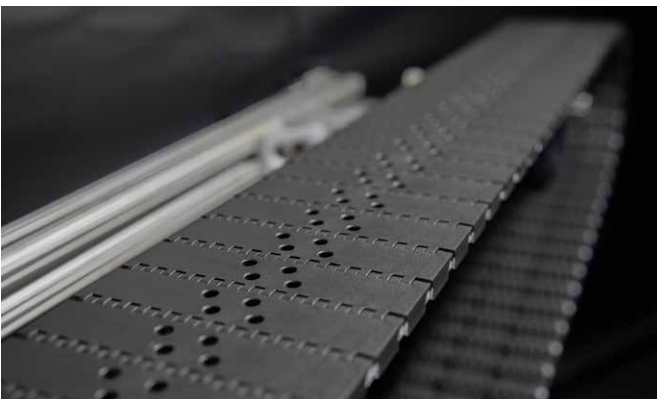

Get more from your line and enjoy even more improvements. [Contact Intralox Customer Service](#) to discuss how the S900 MTW belt can optimize your operations.