

Keysight Technologies

LTE and LTE-Advanced FDD/TDD

X-Series Measurement App, Multi-Touch

N9080C and N9082C

Technical Overview



- Perform LTE and LTE-Advanced FDD and TDD base station (eNB) and user equipment (UE) transmitter tests
- Accelerate measurements with one-button RF conformance tests as defined by 3GPP TS 36.141 and 36.521 specification
- Analyze carrier-aggregated signal of up to 5 contiguous/noncontiguous component carriers
- Pursue improved spectral efficiency with higher-order demodulation to 256 QAM
- Use multi-touch interface and SCPI remote interface
- Extend test assets with transportable licenses between X-Series signal analyzers with multi-touch UI

LTE/LTE-Advanced FDD and TDD Measurement Applications

The LTE/LTE-Advanced FDD and TDD measurement applications transform the X-Series signal analyzers with multi-touch into 3GPP LTE/LTE-Advanced standard-based RF transmitter testers. The applications provide fast, one-button RF conformance measurements to help you design, evaluate, and manufacture your LTE and LTE-Advanced base stations (eNB) and user equipment (UE). The measurement applications closely follow the 3GPP standard, allowing you to stay on the leading edge of your design and manufacturing challenges.

X-Series measurement applications

X-Series measurement applications increase the capability and functionality of Keysight Technologies, Inc. signal analyzers to speed time to insight. They provide essential measurements for specific tasks in general-purpose, cellular communications, wireless connectivity applications, covering established standards or modulation types. Applications are supported on both benchtop and modular, with the only difference being the level of performance achieved by the hardware you select.


Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.



Start with a 30-day free trial.

www.keysight.com/find/X-Series_trial

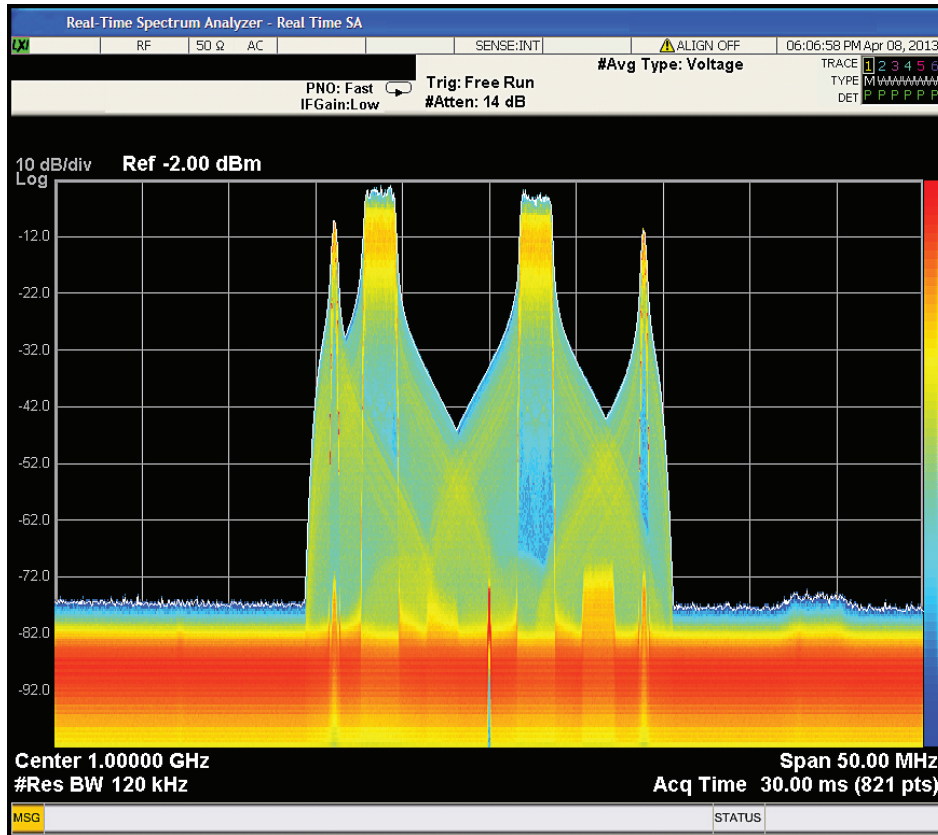

Top Features

With the LTE/LTE-Advanced FDD and TDD measurement application, you can perform RF transmitter measurements on eNB and UE devices in time, frequency, and modulation domains. Measurement setups are simplified with automatic detection of downlink channels and signals. For eNB conformance testing, measurement is simplified by recalling E-TM presets according to 3GPP TS 36.141 specifications.

Downlink eNB measurements

LTE downlink modulation analysis

Figure 1 is an LTE downlink modulation analysis up to 256 QAM measurement showing constellation, detected allocation, frame summary, and error summary information. Measurements are color-coded based on channel type for ease of troubleshooting.

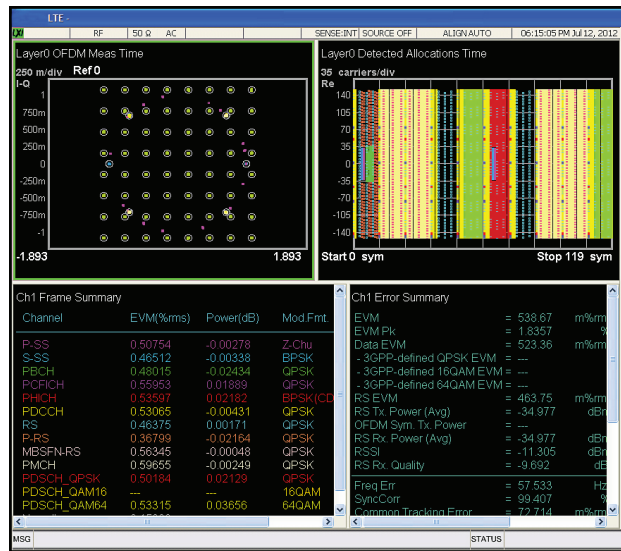


Figure 1

LTE-Advanced downlink analysis

An LTE-Advanced downlink modulation analysis showing constellation of five component carriers side-by-side is displayed in Figure 2.

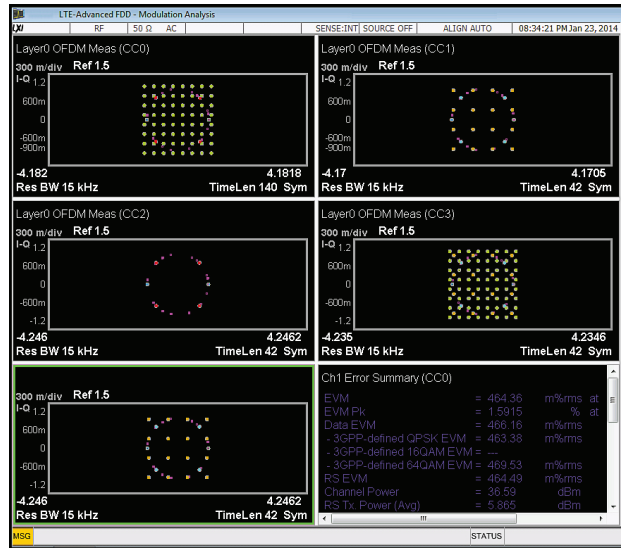


Figure 2

Downlink transport layer channel decoding

Figure 3 shows a downlink transport layer channel decoding measurement with decoded information for PBCH, PDCCH, PCFICH, and PHICH channels. Similar capability is also available for uplink.

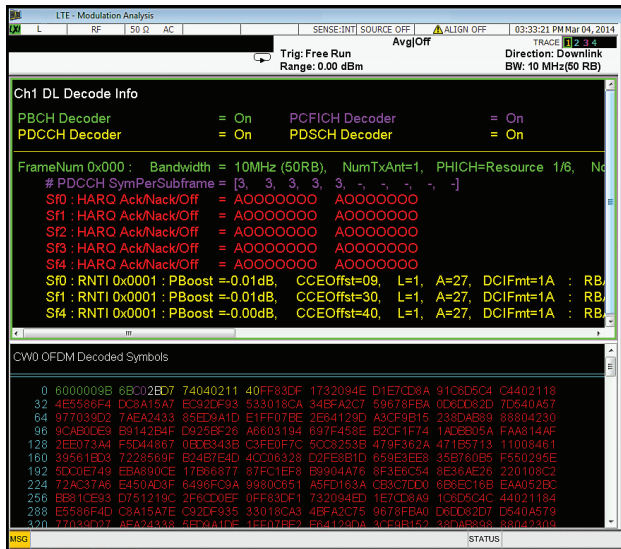


Figure 3

Top Features (continued)

Downlink eNB measurements (continued)

LTE-Advanced cross-carrier summary

LTE-Advanced cross-carrier summary trace showing time alignment error (TAE) and channel power of each CC relative to CC0 is displayed in Figure 4.

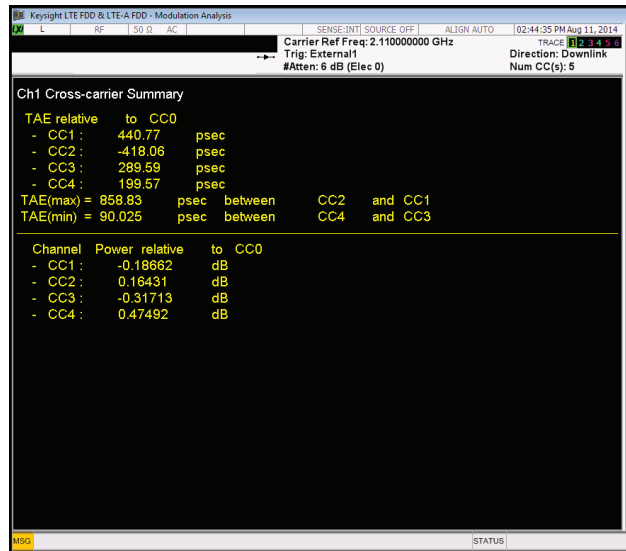


Figure 4

LTE-Advanced ACLR measurement

Figure 5 shows an LTE-Advanced ACLR measurement with five contiguous component carriers.

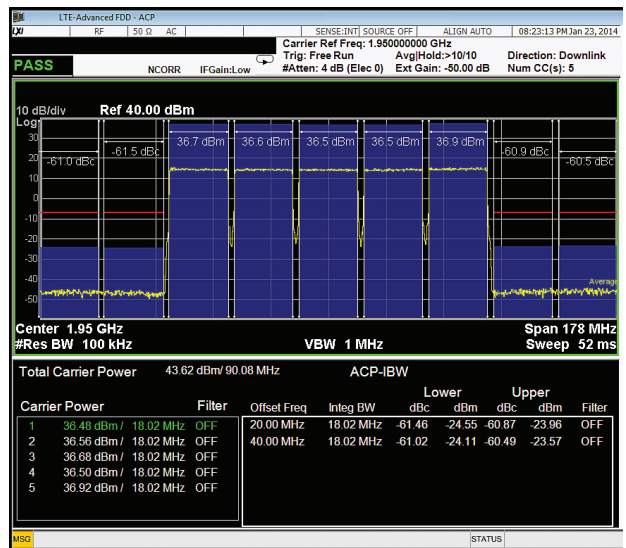


Figure 5

LTE-Advanced cumulative ACLR

LTE-Advanced cumulative ACLR (CACLR) for non-contiguous carrier aggregation is shown in Figure 6.

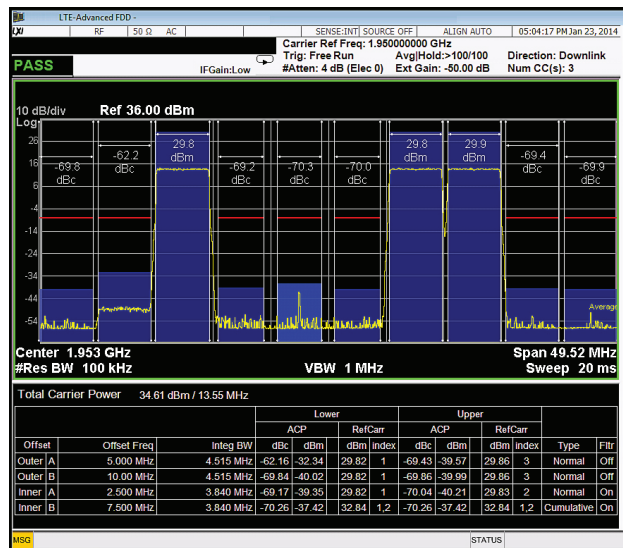


Figure 6

Top Features (continued)

Downlink eNB measurements (continued)

Transmit ON/OFF power measurement

Figure 7 shows a transmit ON/OFF power measurement of an LTE-Advanced TDD downlink signal with two component carriers.

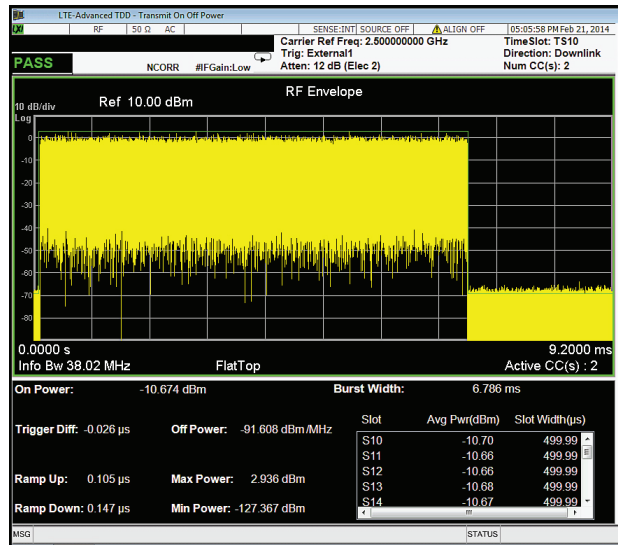


Figure 7

SEM measurement

Figure 8 shows how an SEM measurement can be made on a single carrier LTE or up to five component carrier LTE-Advanced signals simultaneously.



Figure 8

LTE-Advanced non-contiguous carrier aggregation SEM measurement

An LTE-Advanced non-contiguous carrier aggregation SEM measurement with a special cumulative mask inside the sub-block gap is shown in Figure 9.

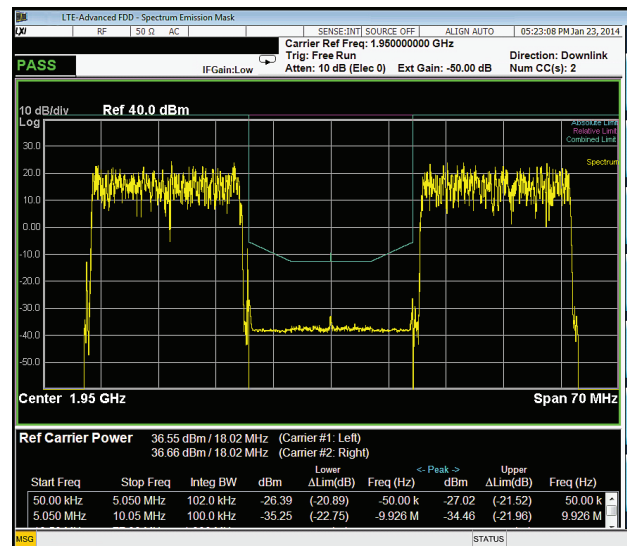


Figure 9

Top Features (continued)

Uplink UE measurements

Uplink modulation analysis

Uplink modulation analysis measurement showing constellation, EVM vs. subcarrier, detected allocation, and EVM vs. symbol information for two component carriers. Measurements are color-coded based on channel type and up to 12 markers with marker coupling between measurements are available for easier troubleshooting. (Figure 10)

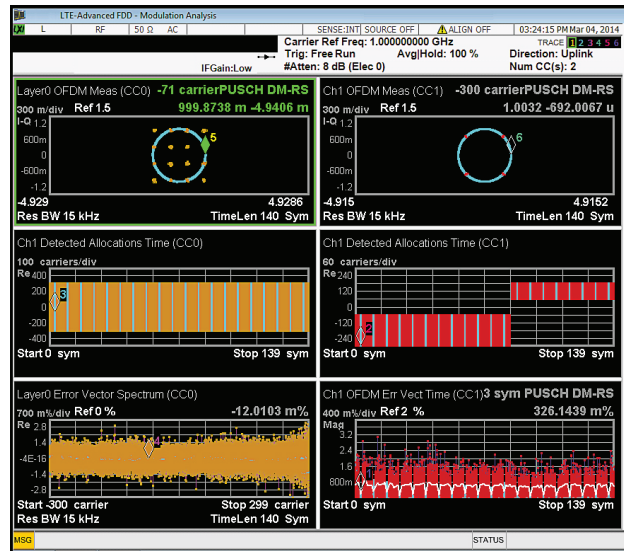


Figure 10

Conformance EVM measurement

Conformance EVM measurement showing all required modulation quality metrics. This measurement is optimized for manufacturing because of its fast measurement speed. (Figure 11)

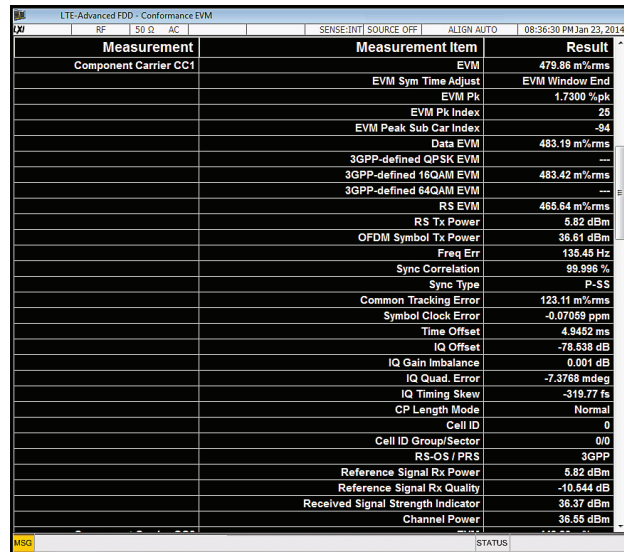


Figure 11

Real-time view of LTE-Advanced FDD uplink

Figure 12 shows a real-time view of LTE-Advanced FDD uplink with simultaneous PUCCH and frequency hopped PUSCH signal configuration using the RTSA option on a PXA or MXA signal analyzer.

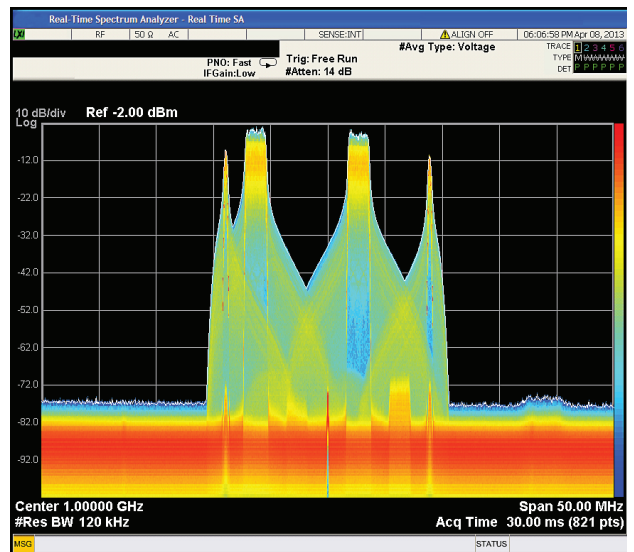


Figure 12

Measurement Summary

One-button standards-based measurements

Required base station (eNB) RF transmitter measurements

| 3GPP TS36.141 paragraph # | Transmitter test | E-TM required | N9080C (FDD) & N9082C (TDD) measurement applications ¹ |
|---------------------------|---------------------------------------------|----------------------|-------------------------------------------------------------------|
| 6.2 | Base station output power | E-TM 1.1 | Channel power ² |
| 6.3.2 | Total power dynamic range | E-TM 2 E-TM 3.1 | OFDM symbol Tx. power (OSTP) ³ |
| 6.4 | Transmit ON/OFF power (TDD only) | E-TM1.1 | Transmit ON/OFF power (N9082C only) ⁴ |
| 6.5.1 | Frequency error | E-TM 2 E-TM 3.1 | Frequency error ³ |
| 6.5.2 | Error vector magnitude | E-TM 3.2 E-TM 3.3 | EVM ³ |
| 6.5.3 | Time alignment error (TAE) | E-TM 1.1 | MIMO summary or cross-carrier summary ⁵ |
| 6.5.4 | DL RS power | E-TM 1.1 | RS Tx power (RSTP) ³ |
| 6.6.1 | Occupied bandwidth | E-TM 1.1 | Occupied BW |
| 6.6.2 | Adjacent channel leakage power ratio (ACLR) | E-TM 1.1 E-TM 1.2 | ACP |
| 6.6.2.6 | Cumulative ACLR (LTE-Advanced only) | E-TM 1.1 E-TM 1.2 | ACP |
| 6.6.3 | Operating band unwanted emissions (SEM) | E-TM 1.1 E-TM 1.2 | Spectrum emission mask |
| 6.6.3 | Cumulative mask for SEM (LTE-Advanced only) | E-TM 1.1 E-TM 1.2 | Spectrum emission mask |
| 6.6.4 | Transmitter spurious emission | E-TM 1.1 | Spurious emissions |
| 6.7 | Transmitter intermodulation | E-TM 1.1 | ACP, SEM, spurious emissions |

1. All of the measurements are available for single carrier (LTE) or multiple-carrier LTE-Advanced with up to 5 component carriers. Option 1FP is LTE, Option 2FP is LTE-Advanced.
2. These are pre-demodulation channel power measurements. Channel power reading is also available after demodulation under "Error Summary" trace.
3. These measurements are available under "Error Summary" trace in Mod Analysis as well as under "Conformance EVM" measurement.
4. For LTE-Advanced, this measurement is supported for contiguous carrier aggregation and requires analysis bandwidth on X-Series signal analyzer wide enough to cover the aggregated bandwidth.
5. "MIMO Summary"/"MIMO Info Table" traces are used to measure TAE for MIMO and Tx diversity signals. For carrier aggregation, "Cross-carrier Summary" trace is used to measure TAE.

Measurement Summary (continued)

One-button standards-based measurements

Required user equipment (UE) RF transmitter measurements

| 3GPP TS 36.521-1 paragraph # | | | Transmitter test | N9080C (FDD) & N9082C (TDD) measurement applications |
|------------------------------|----------------------|-----------------------------|---------------------------------------------|------------------------------------------------------------------------|
| LTE Rel 8 and up | LTE-Ad- vanced CA | LTE- Advanced UL-MIMO | | |
| 6.2.2 | 6.2.2A | 6.2.2B | UE maximum output power (MOP) | Channel power |
| 6.2.3 | 6.2.3A | 6.2.3B | Maximum power reduction (MPR) | |
| 6.2.4 | 6.2.4A | 6.2.4B | Additional maximum power reduction (A-MPR) | |
| 6.2.5 | 6.2.5A | 6.2.5B | Configured UE transmitted output power | |
| 6.3.2 | 6.3.2A | 6.3.2B | Minimum output power | |
| 6.3.3 | 6.3.3A | 6.3.3B | Transmit off power | Channel power or transmit on/off power |
| 6.3.4 | 6.3.4A | 6.3.4B | On/off time mask | Transmit on/off power |
| 6.3.5 | 6.3.5A | 6.3.5B | Power control | Not available |
| 6.5.1 | 6.5.1A | 6.5.1B | Frequency error | Frequency error ¹ and frequency error per slot ² |
| 6.5.2.1 | 6.5.2A.1 | 6.5.2B.1 | Error vector magnitude (EVM) | EVM ¹ |
| 6.5.2.1A | N/A | N/A | PUSCH-EVM with exclusion period | EVM ¹ |
| 6.5.2.2 | 6.5.2A.2 | 6.5.2B.2 | Carrier leakage | IQ offset ¹ and IQ offset per slot ² |
| 6.5.2.3 | 6.5.2A.3 | 6.5.2B.3 | In-band emissions for non-allocated RB | In-band emissions ² |
| 6.5.2.4 | N/A | 6.5.2B.4 | EVM equalizer spectrum flatness | Equalizer channel frequency response per slot ³ |
| 6.6.1 | 6.6.1A | 6.6.1B | Occupied bandwidth | Occupied BW |
| 6.6.2.1 | 6.6.2.1A | 6.6.2.1B | Spectrum emission mask (SEM) | SEM |
| 6.6.2.2 | 6.6.2.2A | 6.6.2.2B | Additional SEM | SEM |
| 6.6.2.3 | 6.6.2.3A | 6.6.2.3B | Adjacent channel leakage power ratio (ACLR) | ACP |
| 6.6.3.1 | 6.6.3.1A | 6.6.3B.1 | Transmitter spurious emission | Spurious emissions |
| 6.6.3.2 | 6.6.3.2A | 6.6.3B.2 | Spurious emission band UE co-existence | Spurious emissions |
| 6.6.3.3 | 6.6.3.3A | 6.6.3B.3 | Additional spurious emissions | Spurious emissions |
| 6.7 | 6.7A | 6.7B | Transmit intermodulation | ACP |
| N/A | N/A | 6.8B | Time alignment | Time offset ¹ |

1. These values are found in "Error Summary" table under Mod Analysis measurement or under Conformance EVM measurements.

2. These measurements are part of the Mod Analysis measurement. Once in Mod Analysis, they are found under [Trace/Detector] -> {Data} > {Demod Error}.

3. This measurement is part of the Mod Analysis measurement. Once in Mod Analysis, it is found under [Trace/Detector] -> {Data} > {Response}.

Measurement Summary (continued)

Measurement details

All of the RF transmitter measurements as defined by the 3GPP standard, as well as a wide range of additional measurements and analysis tools are available with a press of a button. These measurements are fully remote controllable via the IEC/IEEE bus or LAN, using SCPI commands.

Analog baseband measurements for LTE/LTE-Advanced are available on a PXA or MXA signal analyzer equipped with BBIQ hardware. Supported baseband measurements include all of the modulation quality plus I/Q waveform measurement.

It is important to note that the measurements shown in the LTE FDD and TDD tables are available for a single carrier, while the measurements for LTE-Advanced FDD and TDD columns are available for multiple carriers with up to 5 component carriers.

eNB measurements

| Technology | LTE FDD | LTE-Advanced FDD | LTE TDD | LTE-Advanced TDD |
|----------------------------------------------------------------------------------------------------------------------|------------|------------------|------------|------------------|
| Model-Option | N9080C-1FP | N9080C-2FP | N9082C-1FP | N9082C-2FP |
| Modulation quality (error summary table) | | | | |
| – EVM (RMS, peak, data, RS) | • | • | • | • |
| – Channel power | • | • | • | • |
| – RS Tx. power (RSTP) | • | • | • | • |
| – OFDM symbol Tx. power (OSTP) | • | • | • | • |
| – RS Rx. power (RSRP) | • | • | • | • |
| – RSSI | • | • | • | • |
| – RS Rx. quality (RSRQ) | • | • | • | • |
| – Frequency error | • | • | • | • |
| – Common tracking error | • | • | • | • |
| – Symbol clock error | • | • | • | • |
| – Time offset | • | • | • | • |
| – IQ (Offset, gain imbalance, quad error, timing skew) | • | • | • | • |
| Conformance EVM | • | • | • | • |
| Demodulated error traces | | | | |
| – EVM vs. frequency (sub-carrier) | • | • | • | • |
| – EVM vs. time (symbol) | • | • | • | • |
| – EVM vs. resource block | • | • | • | • |
| – EVM vs. slot | • | • | • | • |
| – Frequency error per slot | • | • | • | • |
| – Power vs. resource block | • | • | • | • |
| – Power vs. slot | • | • | • | • |
| Symbols table | | | | |
| – Numerical values of demodulated symbols (encoded) | • | • | • | • |
| Decoded symbol table | | | | |
| – Numerical values of demodulated data include demapped, deinterleaved, descrambled, deratematched, and decoded data | • | • | • | • |
| Downlink decode table | | | | |
| – Decode information from PBCH, PDCCH, PHICH, and PCFICH | • | • | • | • |
| Frame summary table | | | | |
| – EVM, power, modulation format, and number of allocated RB and RNTI for all active channels and signals | • | • | • | • |
| Cross-carrier summary | | | | |
| – Time alignment error (TAE) and channel power summary of each CC relative to the selected reference CC | | • | | • |

Measurement Summary (continued)

eNB measurements (continued)

| Technology | LTE FDD | LTE-Advanced FDD | LTE TDD | LTE-Advanced TDD |
|-----------------------------------------------------------------|------------|------------------|------------|------------------|
| Model-Option | N9080C-1FP | N9080C-2FP | N9082C-1FP | N9082C-2FP |
| TX diversity MIMO (up to 4 Tx antenna) traces | | | | |
| – Info table | | | | |
| – RS power | • | • | • | • |
| – RS EVM | • | • | • | • |
| – RS CTE | • | • | • | • |
| – RS timing | • | • | • | • |
| – RS phase | • | • | • | • |
| – RS symbol clock | • | • | • | • |
| – RS frequency | • | • | • | • |
| – IQ gain imbalance | • | • | • | • |
| – IQ quadrature error | • | • | • | • |
| – IQ time skew | • | • | • | • |
| – Channel frequency response | • | • | • | • |
| – Channel frequency response difference | • | • | • | • |
| – Equalizer impulse response | • | • | • | • |
| – Common tracking error | • | • | • | • |
| Detected allocations trace (resource block vs. symbol) | • | • | • | • |
| Response | | | | |
| – Equalizer channel frequency response | • | • | • | • |
| – Instantaneous equalizer channel frequency response | • | • | • | • |
| – Equalizer channel frequency response difference | • | • | • | • |
| – Instantaneous equalizer channel frequency response difference | • | • | • | • |
| – Equalizer impulse response | • | • | • | • |
| Channel power | • | • | • | • |
| ACP | • | • | • | • |
| Cumulative ACLR (CACLR) | | • | | • |
| Transmit on/off power | | | • | • |
| Spectrum emission mask (SEM) | • | • | • | • |
| Cumulative SEM | | • | | • |
| Spurious emissions | • | • | • | • |
| Occupied bandwidth | • | • | • | • |
| CCDF | • | • | • | • |
| Monitor spectrum | • | • | • | • |
| I/Q waveform | • | • | • | • |

Measurement Summary (continued)

UE measurements

| Technology | LTE FDD | LTE-Advanced FDD | LTE TDD | LTE-Advanced TDD |
|------------------------------------------------------------------------------------------------|------------|------------------|------------|------------------|
| Model-Option | N9080C-1FP | N9080C-2FP | N9082C-1FP | N9082C-2FP |
| Modulation quality (error summary trace) | | | | |
| – EVM (RMS, peak, data, RS) | • | • | • | • |
| – Frequency error | • | • | • | • |
| – Common tracking error | • | • | • | • |
| – Symbol clock error | • | • | • | • |
| – Time offset | • | • | • | • |
| – IQ (offset, gain imbalance, quad error, timing skew) | • | • | • | • |
| – Channel power | • | • | • | • |
| – In-band emissions result without carrier aggregation | • | • | • | • |
| – In-band emissions result with carrier aggregation | • | | • | |
| – Spectral flatness result | • | • | • | • |
| Conformance EVM | • | • | • | • |
| In-band emissions without carrier aggregation | • | • | • | • |
| In-band emissions with carrier aggregation | | • | | • |
| Spectrum flatness (eq. ch freq response per slot) | • | • | • | • |
| Demodulated error traces | | | | |
| – EVM vs. frequency (sub-carrier) | • | • | • | • |
| – EVM vs. time (symbol) | • | • | • | • |
| – EVM vs. resource block | • | • | • | • |
| – EVM vs. slot | • | • | • | • |
| – IQ offset per slot | • | • | • | • |
| – Frequency error per slot | • | • | • | • |
| – Power vs. resource block | • | • | • | • |
| – Power vs. slot | • | • | • | • |
| Symbols table | | | | |
| – Numerical values of demodulated symbols (encoded) | • | • | • | • |
| Decoded symbol table | | | | |
| – Numerical values of demodulated data and descrambled data for PUSCH | • | • | • | • |
| Frame summary table | | | | |
| – EVM, power, modulation format and number of allocated RB for all active channels and signals | • | • | • | • |
| Detected allocations trace (resource block vs. symbol) | • | • | • | • |
| Response | | | | |
| – Equalizer channel frequency response | • | • | • | • |
| – Instantaneous equalizer channel frequency response | • | • | • | • |
| – Equalizer channel frequency response difference | • | • | • | • |
| – Instantaneous equalizer channel frequency response difference | • | • | • | • |
| – Equalizer impulse response | • | • | • | • |
| – Equalizer channel frequency response per slot | • | • | • | • |
| Channel power | • | • | • | • |
| ACP | • | • | • | • |
| Transmit on/off power | • | • | • | • |
| Spectrum emission mask (SEM) | • | • | • | • |
| Spurious emissions | • | • | • | • |
| Occupied bandwidth | • | • | • | • |
| CCDF | • | • | • | • |
| Monitor spectrum | • | • | • | • |
| I/Q waveform | • | • | • | • |

Key Specifications

Definitions

- Specifications describe the performance of parameters covered by the product warranty.
- The specifications apply to single carrier case only, unless otherwise stated.
- 95th percentile values indicate the breadth of the population ($\approx 2\sigma$) of performance tolerances expected to be met in 95% of cases with a 95% confidence. These values are not covered by the product warranty.
- Typical values are designated with the abbreviation "typ." These are performance beyond specification that 80% of the units exhibit with a 95% confidence. These values are not covered by the product warranty.
- Nominal values are designated with the abbreviation "nom." These values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

Note: Data subject to change.

Supported standards

| Technology | LTE FDD/TDD | LTE-Advanced FDD/TDD |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model-Option | N9080C-1FP N9082C-1FP | N9080C-2FP N9082C-2FP |
| Standard versions | 36.211 v9.1.0 (2010-03) 36.212 v9.4.0 (2011-09) 36.213 v9.3.0 (2010-09) 36.214 v9.2.0 (2010-06) 36.141 v9.11.0 (2012-09) 36.521-1 v9.8.0 (2012-03) | 36.211 v12.3.0 (2014-09) 36.212 v12.2.0 (2014-09) 36.213 v12.3.0 (2014-09) 36.214 v10.1.0 (2011-03) 36.141 v12.6.0 (2014-12) 36.521-1 v11.3.0 (2013-12) |
| Signal structure | FDD Frame Structure Type 1 TDD Frame Structure Type 2 Special subframe configurations 0-8 | FDD Frame Structure Type 1 TDD Frame Structure Type 2 Special subframe configurations 0-9 |
| Signal direction | Uplink and downlink UL/DL configurations 0-6 | Uplink and downlink UL/DL configurations 0-6 |
| Signal bandwidth | 1.4 MHz (6 RB), 3 MHz (15 RB), 5 MHz (25 RB), 10 MHz (50 RB), 15 MHz (75 RB), 20 MHz (100 RB) | Bandwidth per component carrier: 1.4 MHz (6 RB), 3 MHz (15 RB), 5 MHz (25 RB), 10 MHz (50 RB), 15 MHz (75 RB), 20 MHz (100 RB) |
| Number of component carriers | 1 | 1, 2, 3, 4, or 5 |
| Physical signals | | |
| – Downlink | PBCH, PCFICH, PHICH, PDCCH, PDSCH, PMCH | |
| – Uplink | PUCCH, PUSCH, PRACH | |
| Physical channels | | |
| – Downlink | P-SS, S-SS, C-RS, UE-RS, P-PS (positioning), MBSFN-RS | P-SS, S-SS, C-RS, UE-RS, P-PS (positioning), MBSFN-RS, CSI-RS |
| – Uplink | PUCCH-DMRS, PUSCH-DMRS, S-RS (sounding) | PUCCH-DMRS, PUSCH-DMRS, S-RS (sounding) |

For a complete list of specifications refer to the appropriate specifications guide.

UXA: http://www.keysight.com/find/uxa_specifications

PXA: http://www.keysight.com/find/pxa_specifications

MXA: http://www.keysight.com/find/mxa_specifications

EXA: http://www.keysight.com/find/exa_specifications

CXA: http://www.keysight.com/find/cxa_specifications

Key Specifications, continued

| Description | | UXA | PXA | MXA | EXA | CXA |
|-------------------------------------------------------|------------------------|-------------------|--------------------|-----------------------------------|--------------------|--------------------|
| Channel power | | | | | | |
| Minimum power at RF input | | | | | -50 dBm (nom) | |
| Power accuracy ¹ | | ± 0.63 dB | ± 0.63 dB | ± 0.82 dB | ± 1.04 dB | ± 1.33 dB |
| Power accuracy (95% confidence) ¹ | | ± 0.19 dB | ± 0.19 dB | ± 0.23 dB | ± 0.27 dB | ± 0.61 dB |
| Measurement floor (@ 10 MHz BW) | | -79.7 dBm (typ) | -81.7 dBm (nom) | -79.7 dBm (nom) | -76.7 dBm (nom) | -72.7 dBm (nom) |
| Transmit on/off power (only applies to N9082C) | | | | | | |
| Burst type | | | | Traffic, UpPTS, DwPTS, SRS, PRACH | | |
| Measurement time | | | | Up to 20 slots | | |
| Dynamic range for 5 MHz BW ² | | 124.5 dB (nom) | 124.5 dB (nom) | 124.5 dB (nom) | 122.5 dB (nom) | 119.5 dB (nom) |
| Adjacent channel power | | | | | | |
| Minimum power at RF input | | | | | -36 dBm (nom) | |
| Accuracy | | | | | | |
| Radio | Offset frequency | | | | | |
| MS | Adjacent ³ | ±0.08 dB (5 MHz) | ± 0.07 dB (5 MHz) | ± 0.13 dB (5 MHz) | ± 0.15 dB (5 MHz) | ± 0.37 dB (5 MHz) |
| | | ±0.10 dB (10 MHz) | ± 0.11 dB (10 MHz) | ± 0.20 dB (10 MHz) | ± 0.20 dB (10 MHz) | ± 0.63 dB (10 MHz) |
| | | ±0.13 dB (20 MHz) | ± 0.21 dB (20 MHz) | ± 0.38 dB (20 MHz) | ± 0.25 dB (20 MHz) | ± 0.92 dB (20 MHz) |
| (ACPR range -33 to -27 dBc with Opt ML) | | | | | | |
| BTS | Adjacent ⁴ | ±0.30 dB (5 MHz) | ± 0.23 dB (5 MHz) | ± 0.57 dB (5 MHz) | ± 0.88 dB (5 MHz) | ± 2.16 dB (5 MHz) |
| | | ±0.40 dB (10 MHz) | ± 0.33 dB (10 MHz) | ± 0.82 dB (10 MHz) | ± 1.14 dB (10 MHz) | ± 3.03 dB (10 MHz) |
| | | ±0.57 dB (20 MHz) | ± 0.52 dB (20 MHz) | ± 1.19 dB (20 MHz) | ± 1.64 dB (20 MHz) | ± 4.49 dB (20 MHz) |
| (ACPR range -48 to -42 dBc with Opt ML) | | | | | | |
| BTS | Alternate ⁴ | ±0.09 dB (5 MHz) | ± 0.11 dB (5 MHz) | ± 0.21 dB (5 MHz) | ± 0.20 dB (5 MHz) | ± 0.91 dB (5 MHz) |
| | | ±0.12 dB (10 MHz) | ± 0.21 dB (10 MHz) | ± 0.35 dB (10 MHz) | ± 0.26 dB (10 MHz) | ± 1.55 dB (10 MHz) |
| | | ±0.18 dB (20 MHz) | ± 0.40 dB (20 MHz) | ± 0.65 dB (20 MHz) | ± 0.37 dB (20 MHz) | ± 2.48 dB (20 MHz) |
| (ACPR range -48 to -42 dBc with Opt ML) | | | | | | |
| Dynamic range E-UTRA | | | | | | |
| Offset | Channel BW | | | | | |
| Adjacent | 5 MHz | 83.5 dB (nom) | 83.5 dB (nom) | 74.2 dB (nom) | 70.0 dB (nom) | 66.8 dB (nom) |
| | | (Opt ML -8.5 dBm) | (Opt ML -8.5 dBm) | (Opt ML -18.4 dBm) | (Opt ML -16.5 dBm) | (Opt ML -20.3 dBm) |
| Adjacent | 10 MHz | 82.1 dB (nom) | 82.1 dB (nom) | 73.8 dB (nom) | 69.3 dB (nom) | 67.6 dB (nom) |
| | | (Opt ML -8.3 dBm) | (Opt ML -8.3 dBm) | (Opt ML -18.4 dBm) | (Opt ML -16.5 dBm) | (Opt ML -20.3 dBm) |
| Adjacent | 20 MHz | Not available | Not available | 71.7 dB (nom) | 68.4 dB (nom) | 65.0 dB (nom) |
| | | | | (Opt ML -18.2 dBm) | (Opt ML -16.3 dBm) | (Opt ML -20.3 dBm) |
| Alternate | 5 MHz | 86.7 dB (nom) | 86.7 dB (nom) | 77.6 dB (nom) | 75.8 dB (nom) | 71.1 dB (nom) |
| | | (Opt ML -8.5 dBm) | (Opt ML -8.5 dBm) | (Opt ML -18.6 dBm) | (Opt ML -16.6 dBm) | (Opt ML -20.3 dBm) |
| Alternate | 10 MHz | 83.7 dB (nom) | 83.7 dB (nom) | 75.1 dB (nom) | 73.2 dB (nom) | 68.0 dB (nom) |
| | | (Opt ML -8.3 dBm) | (Opt ML -8.3 dBm) | (Opt ML -18.4 dBm) | (Opt ML -16.4 dBm) | (Opt ML -20.3 dBm) |
| Alternate | 20 MHz | Not available | Not available | 72.1 dB (nom) | 70.3 dB (nom) | 65.0 dB (nom) |
| | | | | (Opt ML -18.2 dBm) | (Opt ML -16.3 dBm) | (Opt ML -20.3 dBm) |

1. Power accuracy includes all error sources for in-band signals except mismatch errors and repeatability due to incomplete averaging. It applies when the mixer level is high enough that measurement floor contribution is negligible. 20 to 30 °C, attenuation = 10 dB
2. This dynamic range is for the case of 5 MHz information bandwidth. For other information bandwidths, the dynamic range can be derived using the following equation: dynamic range = dynamic range for 5 MHz - 10*log₁₀ (Info BW/5.0e6).
3. Measurement bandwidths for mobile stations are 4.5, 9.0 and 18.0 MHz for channel bandwidths of 5, 10 and 20 MHz, respectively.
4. Measurement bandwidths for base transceiver stations are 4.515, 9.015 and 18.015 MHz for channel bandwidths of 5, 10 and 20 MHz, respectively.

Key Specifications (continued)

| Description | UXA | PXA | MXA | EXA | CXA | | | | |
|--------------------------------------|-----------------------|------------------------------------|------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-----------------------------------------------------------------|-----------------------|-----------------------|
| Adjacent channel power | | | | | | | | | |
| Dynamic range UTRA ¹ | | | | | | | | | |
| Offset | Channel BW | | | | | | | | |
| 2.5 MHz | 5 MHz | 86.2 dB (nom) (Opt ML -8.5 dBm) | 86.2 dB (nom) (Opt ML -8.5 dBm) | 75.9 dB (nom) (Opt ML -18.5 dBm) | 70.5 dB (nom) (Opt ML -16.6 dBm) | 65.8 dB (nom) (Opt ML -20.3 dBm) | | | |
| | 10 MHz | 84.2 dB (nom) (Opt ML -8.3 dBm) | 84.2 dB (nom) (Opt ML -8.3 dBm) | 76.2 dB (nom) (Opt ML -18.4 dBm) | 70.5 dB (nom) (Opt ML -16.4 dBm) | 70.6 dB (nom) (Opt ML -20.3 dBm) | | | |
| | 20 MHz | Not available | Not available | 75.0 dB (nom) (Opt ML -18.2 dBm) | 71.4 dB (nom) (Opt ML -16.3 dBm) | 71.1 dB (nom) (Opt ML -20.3 dBm) | | | |
| 7.5 MHz | 5 MHz | 87.3 dB (nom) (Opt ML -8.7 dBm) | 87.3 dB (nom) (Opt ML -8.7 dBm) | 78.4 dB (nom) (Opt ML -18.5 dBm) | 76.5 dB (nom) (Opt ML -16.6 dBm) | 71.1 dB (nom) (Opt ML -20.3 dBm) | | | |
| | 10 MHz | 87.0 dB (nom) (Opt ML -8.4 dBm) | 87.0 dB (nom) (Opt ML -8.4 dBm) | 78.6 dB (nom) (Opt ML -18.4 dBm) | 76.5 dB (nom) (Opt ML -16.4 dBm) | 71.9 dB (nom) (Opt ML -20.3 dBm) | | | |
| | 20 MHz | Not available | Not available | 78.1 dB (nom) (Opt ML -18.2 dBm) | 75.7 dB (nom) (Opt ML -16.3 dBm) | 71.8 dB (nom) (Opt ML -20.3 dBm) | | | |
| Spectrum emission mask | | | | | | | | | |
| Dynamic range | | | | | | | | | |
| - 5 MHz | 80.9 (84.8 dB typ) | | | | | 82.9 (86.8 dB typ) | 76.2 (82.9 dB typ) | 73.8 (80.2 dB typ) | 69.0 (75.4 dB typ) |
| - 10 MHz | 84.6 (88.6 dB typ) | | | | | 86.6 (90.7 dB typ) | 77.8 (83.8 dB typ) | 74.9 (81.4 dB typ) | 69.3 (75.5 dB typ) |
| - 20 MHz | 82.4 (87.7 dB typ) | | | | | 84.3 (89.7 dB typ) | 78.2 (84.9 dB typ) | 75.0 (82.7 dB typ) | 69.8 (76.0 dB typ) |
| Sensitivity | -96.5 (-99.5 dBm typ) | | | | | -98.5 (-101.5 dBm typ) | -94.5 (-99.5 dBm typ) | -92.5 (-96.5 dBm typ) | -86.5 (-92.5 dBm typ) |
| Accuracy | | | | | | | | | |
| - Relative | ±0.11 dB | | | | | ±0.11 dB | ±0.13 dB | ±0.21 dB | ±0.33 dB |
| - Absolute | ±0.62 (±0.20 dB 95%) | | | | | ±0.62 (±0.21 dB 95%) | ±0.88 (±0.27 dB 95%) | ±1.15 (±0.31 dB 95%) | ±1.53 (±0.97 dB 95%) |
| Spurious emissions | | | | | | | | | |
| Dynamic range, relative ² | 87.3 (90.3 dB typ) | | | | | 88.8 (92.1 dB typ) | 81.3 (82.2 dB typ) | 80.4 (82.9 dB typ) | 70.7 (75.9 dB typ) |
| Sensitivity, absolute ³ | -86.5 (-89.5 dBm typ) | | | | | -88.5 (-91.5 dBm typ) | -84.5 (-89.5 dBm typ) | -82.5 (-86.5 dBm typ) | -76.5 (-82.5 dBm typ) |
| Accuracy (attenuation = 10 dB) | ±0.19 dB (95%) | | | | | ±0.19 dB (95%) | ±0.29 dB (95%) | ±0.38 dB (95%) | ±0.81 dB (95%) |
| - Frequency range | 20 Hz to 3.6 GHz | | | | | 20 Hz to 3.6 GHz | 20 Hz to 3.6 GHz | 9 kHz to 3.6 GHz | 100 kHz to 3.0 GHz |
| | ±1.13 dB (95%) | | | | | ±1.08 dB (95%) | ±1.17 dB (95%) | ±1.22 dB (95%) | ±1.80 dB (95%) |
| - Frequency range | 3.5 to 8.4 GHz | | | | | 3.5 to 8.4 GHz | 3.5 to 8.4 GHz | 3.5 to 7.0 GHz | 3.0 to 7.5 GHz |
| | ±1.50 dB (95%) | | | | | ±1.48 dB (95%) | ±1.54 dB (95%) | ±1.59 dB (95%) | |
| - Frequency range | 8.3 to 13.6 GHz | | | | | 8.3 to 13.6 GHz | 8.3 to 13.6 GHz | 6.9 to 13.6 GHz | |
| Occupied bandwidth | | | | | | | | | |
| Minimum power at RF input | | | | | | | -30 dBm (nom) | | |
| Frequency accuracy | | | | | | | ± 10 kHz (RBW = 30 kHz, Number of points = 1001, Span = 10 MHz) | | |
| Modulation analysis | | | | | | | | | |
| Input range | | | | | | | Signal level within one range step of overload | | |
| OFTP/RSTP ⁴ | | | | | | | | | |
| Absolute accuracy | ± 0.21 dB (nom) | | | | | ± 0.21 dB (nom) | ± 0.27 dB (nom) | ± 0.30 dB (nom) | ± 0.61 dB |

1. E-TM1.1 and E-TM1.2 used for test. Noise correction is set to on.

2. The dynamic range is specified at 12.5 MHz offset from center frequency with mixer level of 1 dB compression point, which will degrade accuracy by 1 dB.

3. The sensitivity is specified at far offset from carrier, where phase noise does not contribute. You can derive the dynamic range at far offset from 1 dB compression mixer level and sensitivity.

4. The accuracy specification applies when EVM is less than 1% and no power boost is applied on reference signal.

Key Specifications (continued)

| Description | UXA | PXA | MXA | EXA | CXA |
|-------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------|----------------------|------------------|-------------------------|
| EVM floor for downlink (OFDMA) ¹ | | | | | |
| Signal bandwidth | | | | | |
| - 5 MHz | 0.15% (-56.4 dB) | 0.34% (-49.3 dB) 0.28% (-51.2 dB) nom | 0.36% (-48.8 dB) | 0.43% (47.3 dB) | 0.63% (-44.0 dB) nom |
| - 10 MHz | 0.15% (-56.4 dB) | 0.35% (-49.1 dB) 0.31% (-50.3 dB) nom | 0.36% (-48.8 dB) | 0.43% (47.3 dB) | 0.64% (-43.8 dB) nom |
| - 20 MHz | 0.2% (-53.9 dB) | 0.39% (-48.1 dB) 0.34% (-49.5 dB) nom | 0.40% (-47.9 dB) | 0.48% (46.3 dB) | 0.70% (-43.0 dB) nom |
| EVM floor for downlink (OFDMA) with Option BBA | | | | | |
| Signal bandwidth | | | | | |
| - 5 MHz | | 0.18% (-54.8 dB) nom | 0.18% (-54.8 dB) nom | | |
| - 10 MHz | | 0.18% (-54.8 dB) nom | 0.18% (-54.8 dB) nom | | |
| - 20 MHz ³ | | 0.18% (-54.8 dB) nom | 0.18% (-54.8 dB) nom | | |
| EVM accuracy for Downlink (OFDMA) ² | | | | | |
| EVM range: 0 to 8% | ± 0.3% nom | ± 0.3% nom | ± 0.3% nom | ± 0.3% nom | ± 0.3% nom |
| EVM floor for uplink (SC-FDMA) ¹ | | | | | |
| Signal bandwidth | | | | | |
| - 5 MHz | 0.15% (-56.4 dB) | 0.31% (-50.1 dB) 0.21% (-53.5 dB) nom | 0.35% (-49.1 dB) | 0.42% (-47.5 dB) | 0.60% (-44.4 dB) nom |
| - 10 MHz | 0.15% (-56.4 dB) | 0.32% (-49.8 dB) 0.21% (-53.5 dB) nom | 0.35% (-49.1 dB) | 0.42% (-47.5 dB) | 0.61% (-44.2 dB) nom |
| - 20 MHz ³ | 0.2% (-53.9 dB) | 0.35% (-49.1 dB) 0.22% (-53.2 dB) nom | 0.40% (-47.9 dB) | 0.48% (-46.3 dB) | 0.63% (-44.0 dB) nom |
| Frequency error | | | | | |
| Lock range | ± 2.5 x subcarrier spacing = 37.5 kHz for default 15 kHz subcarrier spacing (nom) | | | | |
| Accuracy | ± 1 Hz + tfa ⁴ (nom) | | | | |
| Time offset ⁵ | | | | | |
| Absolute frame offset accuracy | ± 20 ns | ± 20 ns | ± 20 ns | ± 20 ns | ± 20 ns |
| Relative frame offset accuracy | ± 5 ns (nom) | ± 5 ns (nom) | ± 5 ns (nom) | ± 5 ns (nom) | ± 5 ns (nom) |
| MIMO RS timing accuracy | ± 5 ns (nom) | ± 5 ns (nom) | ± 5 ns (nom) | ± 5 ns (nom) | ± 5 ns (nom) |

- For MXA and EXA instruments with serial number prefix ≥ MY/SG/US5233 and ≥ MY/SG/US5340, refer to the LTE section in the MXA and EXA specification guides for more information: www.keysight.com/find/mxa_specifications; www.keysight.com/find/exa_specifications. For the UXA, overall EVM and Data EVM using 3GPP standard-defined calculation. Phase Noise Optimization set to Best Close-in (<600 kHz).
- The accuracy specification applies when the EVM to be measured is well above the measurement floor. When the EVM does not greatly exceed the floor, the errors due to the floor add to the accuracy errors. Refer to specification guide for information on calculating the errors due to the floor.
- Requires IF bandwidth above 10 MHz (Option B25, B40, B85, B1A, B1X, B2X, or B5X).
- tfa = transmitter frequency x frequency reference accuracy.
- The accuracy specification applies when EVM is less than 1% and no power boost is applied for resource elements.

Key Specifications (continued)

| In-band frequency range | | | UXA | PXA | MXA | EXA | CXA |
|-------------------------|----------------------|----------------------|-----|-----|-----|-----|-----|
| Operating Band, FDD | Uplink | Downlink | | | | | |
| 1 | 1920 to 1980 MHz | 2110 to 2170 MHz | • | • | • | • | • |
| 2 | 1850 to 1910 MHz | 1930 to 1990 MHz | • | • | • | • | • |
| 3 | 1710 to 1785 MHz | 1805 to 1880 MHz | • | • | • | • | • |
| 4 | 1710 to 1755 MHz | 2110 to 2155 MHz | • | • | • | • | • |
| 5 | 824 to 849 MHz | 869 to 894 MHz | • | • | • | • | • |
| 6 | 830 to 840 MHz | 875 to 885 MHz | • | • | • | • | • |
| 7 | 2500 to 2570 MHz | 2620 to 2690 MHz | • | • | • | • | • |
| 8 | 880 to 915 MHz | 925 to 960 MHz | • | • | • | • | • |
| 9 | 1749.9 to 1784.9 MHz | 1844.9 to 1879.9 MHz | • | • | • | • | • |
| 10 | 1710 to 1700 MHz | 2110 to 2170 MHz | • | • | • | • | • |
| 11 | 1427.9 to 1452.9 MHz | 1475.9 to 1500.9 MHz | • | • | • | • | • |
| 12 | 698 to 716 MHz | 728 to 746 MHz | • | • | • | • | • |
| 13 | 777 to 787 MHz | 746 to 756 MHz | • | • | • | • | • |
| 14 | 788 to 798 MHz | 758 to 768 MHz | • | • | • | • | • |
| 17 | 704 to 716 MHz | 734 to 746 MHz | • | • | • | • | • |
| 18 | 815 to 830 MHz | 860 to 875 MHz | • | • | | • | • |
| 19 | 830 to 845 MHz | 875 to 890 MHz | • | • | | • | • |
| 20 | 832 to 862 MHz | 791 to 821 MHz | • | • | | • | • |
| 21 | 1447.9 to 1462.9 MHz | 1495.9 to 1510.9 MHz | • | • | | • | |
| 22 ¹³ | 3410 to 3490 MHz | 3510 to 3590 MHz | • | • | | • | |
| 23 | 2000 to 2020 MHz | 2180 to 2200 MHz | • | • | | • | |
| 24 | 1626.5 to 1660.5 MHz | 1525 to 1559 MHz | • | • | | • | |
| 25 | 1850 to 1915 MHz | 1930 to 1995 MHz | • | • | | • | |
| 26 | 814 to 849 MHz | 859 to 894 MHz | • | • | | • | |
| 27 | 807 to 824 MHz | 852 to 869 MHz | • | • | | • | |
| 28 | 703 to 748 MHz | 758 to 803 MHz | • | • | | • | |
| 29 | N/A | 717 to 728 MHz | • | • | | • | |
| 30 | 2305 to 2315 MHz | 2350 to 2360 MHz | • | • | | • | |
| 31 | 452.5 to 457.5 MHz | 462.5 to 467.5 MHz | • | • | | • | |
| 32 | N/A | 1452 to 1496 MHz | • | • | | • | |

Software Licensing and Configuration

Choose from two license types:

- Fixed, perpetual license:
This allows you to run the application in the X-Series analyzer in which it is initially installed.
- Transportable, perpetual license:
This allows you to run the application in the X-Series analyzer in which it is initially installed, plus it may be transferred from one X-Series analyzer to another.

You Can Upgrade!

Options can be added after your initial purchase.

All of our X-Series application options are license-key upgradeable.



For more information, please visit the respective product Web pages.

LTE/LTE-Advanced FDD measurement application

| Model-Option | Description | Additional information |
|--------------|---------------------------------------------------------------------------|------------------------|
| N9080C-1FP | LTE FDD measurement application, fixed perpetual license | |
| N9080C-1TP | LTE FDD measurement application, transportable perpetual license | |
| N9080C-2FP | LTE-Advanced FDD measurement application, fixed perpetual license | Requires 1FP |
| N9080C-2TP | LTE-Advanced FDD measurement application, transportable perpetual license | Requires 1TP |

Note: N9080C application requires X-Series signal analyzers with multi-touch user interface. For more information, see hardware configurations.

LTE/LTE-Advanced TDD measurement application

| Model-Option | Description | Additional information |
|--------------|---------------------------------------------------------------------------|------------------------|
| N9082C-1FP | LTE TDD measurement application, fixed perpetual license | |
| N9082C-1TP | LTE TDD measurement application, transportable perpetual license | |
| N9082C-2FP | LTE-Advanced TDD measurement application, fixed perpetual license | Requires 1FP |
| N9082C-2TP | LTE-Advanced TDD measurement application, transportable perpetual license | Requires 1TP |

Note: N9082C application requires X-Series signal analyzers with multi-touch user interface. For more information, see hardware configurations.

Hardware configuration

For optimizing measurements on LTE signals with LTE TDD/FDD measurement applications, Keysight recommends a minimum level of X-Series multi-touch instrument hardware functionality at each instrument performance point.

Supported instruments include:

- UXA N9040B
- PXA N9030B
- MXA N9020B
- EXA N9010B
- CXA N9000B

| Capability | Instrument Option | Benefit |
|---------------------------------|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analysis bandwidth | 25 MHz minimum (-B25) or wider | Required: Up to full aggregated bandwidth for multiple carrier capture for LTE-Advanced TDD transmit on/off power measurement |
| Precision Frequency Reference | -PRF | Recommended: For enhanced frequency accuracy and repeatability for lower measurement uncertainty |
| Electronic Attenuator | -EA3 | Recommended: Fast and reliable attenuation changes ideal for manufacturing without the wear associated with mechanical attenuators up to 3.6 GHz in 1 dB steps |
| Pre-amplifier | 3.6 GHz (-P03) or higher | Recommended: For maximizing the measurement sensitivity |
| Fine Resolution Step attenuator | -FSA | Recommended: Useful for maximizing useable dynamic range to see signals |
| Analog baseband I/Q inputs | -BBA on PXA and MXA only | Optional: To extend measurements at baseband if required by device under test |

Additional Information

Literature

3GPP Long Term Evolution: System Overview, Product Development, and Test Challenges, Application Note, literature number 5989-8139EN

Introducing LTE-Advanced, Application Note, literature number 5990-6706EN

Stimulus-Response Testing for LTE Components, Application Note, literature number 5990-5149EN

Measuring ACLR Performance in LTE Transmitters, Application Note, literature number 5990-5089EN

TD-LTE E-UTRA Base Station Transmit ON/OFF Power Measurement Using a Keysight X-Series Signal Analyzer, Application Note, literature number 5990-5989EN

Web

Measurement, User's and Programmer guides can be found on the product Web pages of the respective document libraries.

N9080C: www.keysight.com/find/N9080C

N9082C: www.keysight.com/find/N9082C



Application pages:

www.keysight.com/find/lte

www.keysight.com/find/lteadvanced

From Hewlett-Packard through Agilent to Keysight

For more than 75 years, we've been helping you unlock measurement insights. Our unique combination of hardware, software and people can help you reach your next breakthrough. **Unlocking measurement insights since 1939.**



1939

THE FUTURE

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada (877) 894 4414
 Brazil 55 11 3351 7010
 Mexico 001 800 254 2440
 United States (800) 829 4444

Asia Pacific

Australia 1 800 629 485
 China 800 810 0189
 Hong Kong 800 938 693
 India 1 800 11 2626
 Japan 0120 (421) 345
 Korea 080 769 0800
 Malaysia 1 800 888 848
 Singapore 1 800 375 8100
 Taiwan 0800 047 866
 Other AP Countries (65) 6375 8100

Europe & Middle East

Austria 0800 001122
 Belgium 0800 58580
 Finland 0800 523252
 France 0805 980333
 Germany 0800 6270999
 Ireland 1800 832700
 Israel 1 809 343051
 Italy 800 599100
 Luxembourg +32 800 58580
 Netherlands 0800 0233200
 Russia 8800 5009286
 Spain 800 000154
 Sweden 0200 882255
 Switzerland 0800 805353
 Opt. 1 (DE)
 Opt. 2 (FR)
 Opt. 3 (IT)
 United Kingdom 0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-01-01-16)



www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2008
 Quality Management System

This information is subject to change without notice.
 © Keysight Technologies, 2014 - 2016
 Published in USA, January 21, 2016
 5992-1305EN
www.keysight.com

myKeysight

myKeysight

www.keysight.com/find/mykeysight
 A personalized view into the information most relevant to you.

Three-Year Warranty



www.keysight.com/find/ThreeYearWarranty
 Keysight's committed to superior product quality and lower total cost of ownership. Keysight is the only test and measurement company with a three-year warranty standard on all instruments, worldwide. And, we provide a one-year warranty on many accessories, calibration devices, systems and custom products.

Keysight Assurance Plans



www.keysight.com/find/AssurancePlans
 Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Infoline

Keysight Infoline

www.keysight.com/find/service
 Keysight's insight to best in class information management. Free access to your Keysight equipment company reports and e-library.

Keysight Channel Partners

www.keysight.com/find/channelpartners
 Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/n9080c
www.keysight.com/find/n9082c