



## IFP Absolute PP Filter Cartridge

PP Pleated Cartridge Filter uses FDA approved raw materials. This type of cartridge tolerates a variety of chemical solvents used in the filtration of ordinary or corrosive fluid. The high surface area of these filters ensure long service life and low initial pressure drops. All cartridge hardware components are high purity polypropylene materials for use in critical process applications. These cartridges are manufactured and assembled in a clean room environment to minimize the possibility of contamination. These absolute PP cartridges are available in a wide range of configurations to fit most commercially available filter housings.

### Application

- Acids & Bases
- Fine and specialty chemicals
- Food and Beverage Processing
- Product Sterilization
- Pharmaceuticals
- Etch Baths
- High Purity Chemicals
- Chemical Mechanical Polishing
- Plating Baths

### IFP PP Filter Cartridge with different End Modification

Cartridges are available in the following lengths:

- 10 – Inch
- 20 – Inch
- 30 – Inch
- 40 – Inch



Nominal 10-inch cartridge

Fin End Cap

226 O-Ring

222 O-Ring

DOE End Cap





## Technical Data Sheet

### Popular Configuration:

Part Number	End Modification	Standard O-Ring
CRT- PP - _ _ - _ _ - A2S	222 O-Rings, Flat	Silicone
CRT- PP - _ _ - _ _ - A3S	222 O-Rings, Fin	Silicone
CRT- PP - _ _ - _ _ - A6S	226 O-Rings, Fin	Silicone
CRT- PP - _ _ - _ _ - A7S	226 O-Rings, Flat	Silicone
CRT- PP - _ _ - _ _ - A0S	Double Open Ended (DOE)	Silicone
❖ The blank spaces are for filter length micron rating code. Find the codes below.		

### PP Micron Rating:

Element Length Code	Micron Rating Code
	<b>002:</b> 0.2 µm
	<b>004:</b> 0.45 µm
<b>10:</b> 10-Inch	<b>006:</b> 0.65 µm
<b>20:</b> 20-Inch	<b>010:</b> 1.0 µm
<b>30:</b> 30-Inch	<b>030:</b> 3.0 µm
<b>40:</b> 40-Inch	<b>050:</b> 5.0 µm
	<b>100:</b> 10.0 µm
	<b>250:</b> 25.0 µm

### Materials of Construction

- Filter Media: Nano Polypropylene
- Inner Support Core: Reinforce Polypropylene
- Outer Protection Cage: Reinforce Polypropylene
- End Caps: Reinforce Polypropylene

### Effective Filtration Area:

7.53 ft<sup>2</sup> (0.7 m<sup>2</sup>) PER 10-Inch Cartridge Element

### Nominal Dimensions:

- Lengths: 10.0 inch (25.4 cm), 20.0 inch (50.8 cm), 30.0 inch (76.2 cm) and 40.0 inch (101.6 cm)
- Inside Diameter: 1.3" (33mm)
- Outside Diameter: 2.67" (68mm)





## Operating Conditions:

Maximum Differential Pressure: 5.5 bar (80 psi) at 69.8°F/21°C  
3.4 bar (50 psid) at 150.8°F/66°C  
Maximum Operating Temperature: 176°F/80°C ≤ 2.4 Bar (35 psid)

## Filtration Efficiency:

≥ 99.98%

## Regulatory Compliance:

The filters are constructed with polypropylene resins and filtration media in compliance with 21CFR Part 177 of the US Code of Federal Regulations and USP Class VI Biological Test for Plastic

## Material Compliance:

All materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, and 177.1520, as applicable for food and beverage contact.

## Sterilization:

The filters can be steam sterilize at 121°C (250°F) for 30 minutes.

## Special Configuration:

### Size Option:

- 10-inch [Filtration Area: 7.53 ft<sup>2</sup>]
- 20-inch [Filtration Area: 15.06 ft<sup>2</sup>]
- 30-inch [Filtration Area: 22.59 ft<sup>2</sup>]
- 40-inch [Filtration Area: 30.12 ft<sup>2</sup>]

### Micron Rating Option:

- 0.2 µm
- 0.45 µm
- 0.65 µm
- 1.0 µm
- 3.0 µm
- 5.0 µm
- 10.0 µm
- 25.0 µm

### Seal Option:

- Silicone
- Viton
- NBR
- EPDM
- Teflon Encapsulated Viton
- Teflon Encapsulated Silicone


### End Modification:

- 222 O-Rings, Flat
- 222 O-Rings, Fin
- 226 O-Rings, Flat
- 226 O-Rings, Fin
- 222 O-Rings, Fin with 316L SS Insert
- 226 O-Rings, Fin with 316L SS Insert
- DOE Flat Gasket



## Ordering Information:

### FILTER PART NUMBER

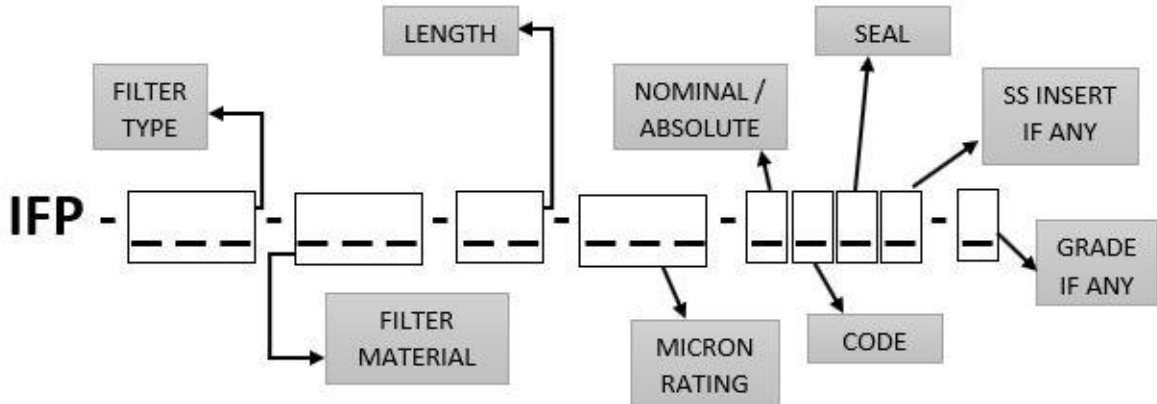

Filter Type	Filter Material	Length	Micron Rating	Absolute / Nominal	End Modification Code	Seal	Insert
<b>CRT:</b> Cartridge	<b>PP:</b> Polypropylene	<b>10:</b> 10-Inch <b>20:</b> 20-Inch <b>30:</b> 30-Inch <b>40:</b> 40-Inch	<b>002:</b> 0.2 µm	<b>A:</b> Absolute <b>N:</b> Nominal	<b>0:</b> DOE <b>2:</b> 222/Flat <b>3:</b> 222/Fin <b>6:</b> 226 Fin <b>7:</b> 226/Flat	<b>S:</b> Silicone <b>E:</b> EPDM <b>V:</b> Viton <b>N:</b> NBR <b>F:</b> Teflon	<b>5:</b> SS Insert
			<b>004:</b> 0.45 µm				
			<b>006:</b> 0.65 µm				
			<b>010:</b> 1.0 µm				
			<b>030:</b> 3.0 µm				
			<b>050:</b> 5.0 µm				
			<b>100:</b> 10.0 µm				
			<b>250:</b> 25.0 µm				