THIS DOCUMENT IS FOR REFERENCE ONLY AND IS PROPRIETARY INFORMATION BELONGING TO INTERNATIONAL FILTER PRODUCTS UNAUTHORIZED COPIES OR USE FOR OTHER PURPOSES STRICTLY PROHIBITED.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	SALES DRAWING	10/28/2022	YA ZANKI

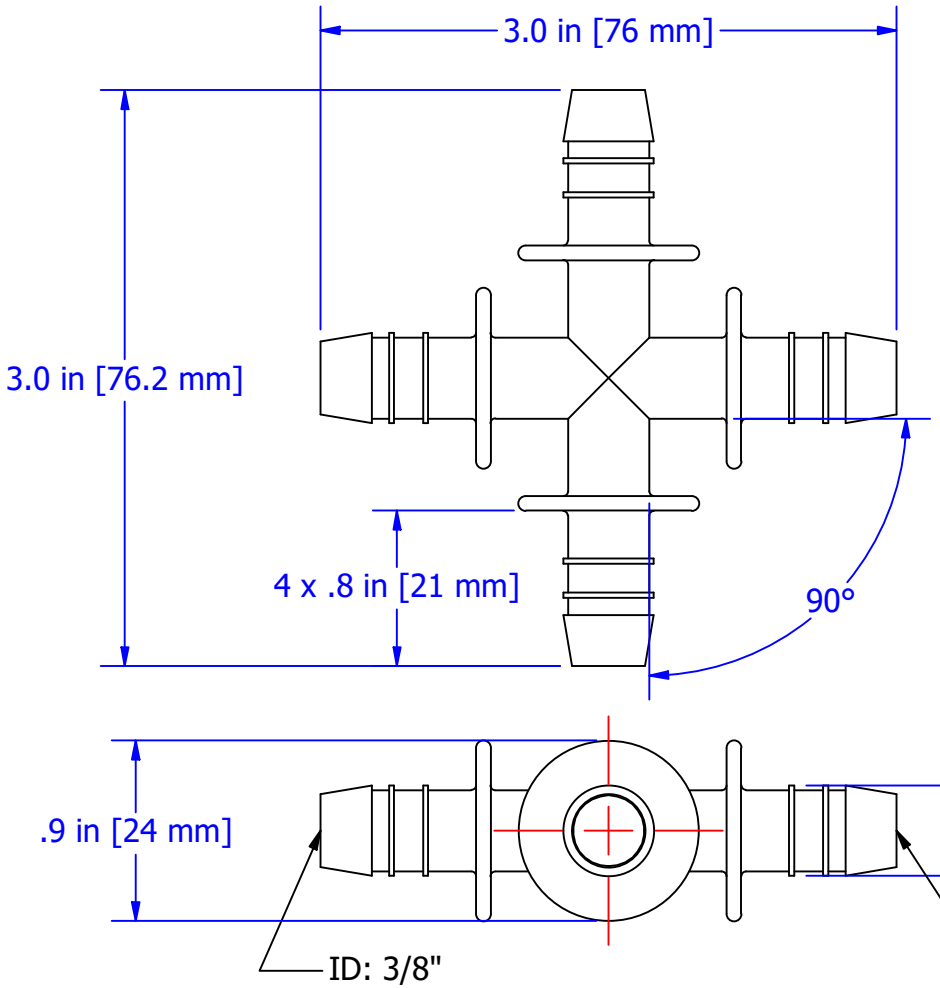

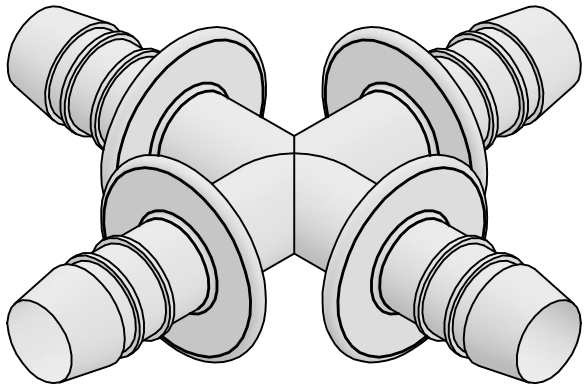

NOTE:
1.0 Material: Polypropylene
2.0 Can be Sterilized by Gamma Radiation
3.0 Max. Working Pressure @ 200 °F (93.3 °C): 100 PSI
4.0 Max. Working Pressure @ 72 °F (22.2 °C): 250 PSI
5.0 Max. Working Temperature: 200 °F (93.3 °C)
6.0 Manufactured and Packaged in a Certified Clean Room
7.0 Regulatory Information is Found in Catalog

DRAWN	NV GABRIEL	10/7/2022
CHECKED	YA ZANKI	10/28/2022
APPROVED	YA ZANKI	10/28/2022

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES

DECIMALS X +/- .030 XX +/- .015 XXX +/- .005
FRACTIONS +/- 1/16
ANGLES +/- 1/2
SURFACE ROUGHNESS 125

CONCENTRICITIES .010 (FIM)
INTERNAL RADII .015~.030
BREAK CORNERS .005~.015

International Filter Products
7914 AJAY DRIVE
SUN VALLEY, CA 91352
PHONE: 818-504-8115
FAX: 818-841-2947
email: charlie@internationalfilterproducts.com

TITLE
FITTING CROSS, 4 WAY, 0.375 in ID, PP

SIZE	ISOF NO	DWG NO	REV
A		PFX375PPAF	-

SCALE NA | WEIGHT | SHEET 1 OF 1