



MA24105A


Inline Peak Power Sensor

True-RMS, 350 MHz to 4 GHz

A Standalone, Compact, and Highly Accurate
Bi-Directional Inline Peak Power Sensor for your
RF Power Measurement Needs

MA24105A at a Glance

Feature	Benefit
Broad Frequency Range (350 MHz to 4 GHz)	Covers all major cellular and communication bands, such as WLL, GSM/EDGE, CDMA/EV-DO, W-CDMA/HSPA+, WiMAX, and TD-SCDMA
Widest Measurement Range Inline Power Sensor in its Class	Eliminates need for additional low level power sensors
Forward and Reverse Measurements	Measures both transmitted power and reflections from antenna or other system components using the single inline tool
True-RMS Measurements to 150 W	Enables accurate average power measurements of modulated signals Excellent tool for LTE average power measurements Ideal for high crest factor signal and base station transmitter output power measurements
Standalone, Low Cost, Plug and Play Device	Eliminates the need for 1 mW user calibration Compatible with Anritsu handheld instruments No base unit needed No extra elements or element holder required

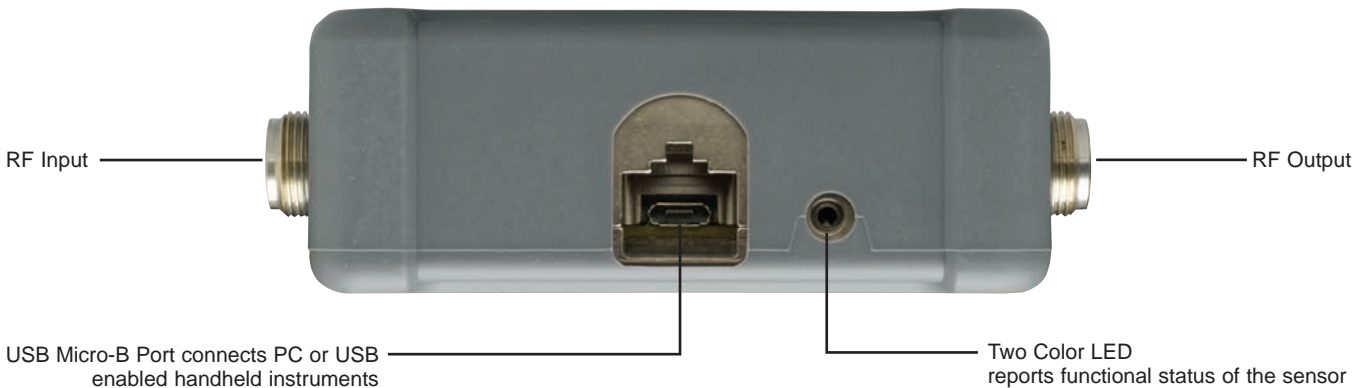

Complements Your Existing Instrument

The Anritsu MA24105A Inline Peak Power Sensor is designed to take accurate average power measurements over 2 mW to 150 W, from 350 MHz to 4 GHz. The sensor employs a “dual path” architecture that enables True-RMS measurements over the entire frequency and dynamic range allowing users to measure CW, multi-tone and digitally modulated signals such as GSM/EDGE, CDMA/EV-DO, W-CDMA/HSPA+, WiMAX, and TD-SCDMA. The forward direction path also include a 4 MHz bandwidth channel that has peak and comparator/integrator circuits that add measurement functions such as peak envelope power (PEP), crest factor, complimentary cumulative distribution function (CCDF), and burst average power. Another detection circuit on the reverse direction adds reverse power measurement capabilities including reverse power, reflection coefficient, return-loss, and SWR. The presence of a micro-controller along with signal conditioning circuitry, ADC, and power supply in the sensor makes it a complete miniature power meter.

Operation with Personal Computer (PC)

The power sensor can be used with a personal computer running Microsoft® Windows via USB. It comes with a complimentary copy of the PowerXpert™ application (version 2.11 or greater) for data display, analysis, and sensor control. The software provides a front panel display making the personal computer appear like a traditional power meter. The application has abundant features like data logging, power versus time graph, and offset table that enable quick and accurate measurements.



Operation with Anritsu Handheld Instruments

The MA24105 is compatible with most Anritsu RF and microwave handheld analyzers. In some cases, the high accuracy power meter software option (Option 19) is required.



MA24105A Applications

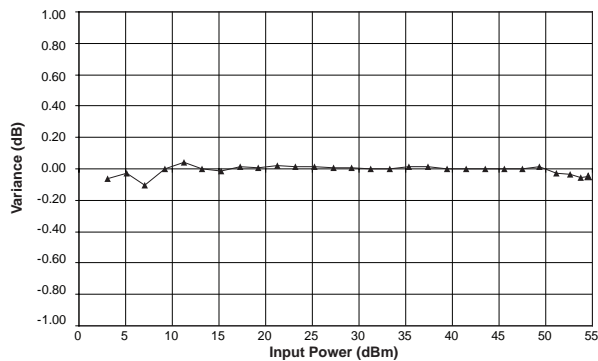


Figure 1. Measurement linearity error referenced to an ideal thermal power sensor measurement of a 900 MHz CW signal in the forward direction.

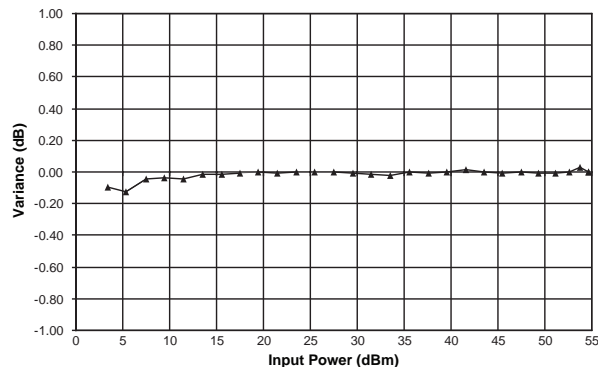


Figure 2. Measurement linearity error referenced to an ideal thermal power sensor measurement of a 900 MHz CW signal in the reverse direction.

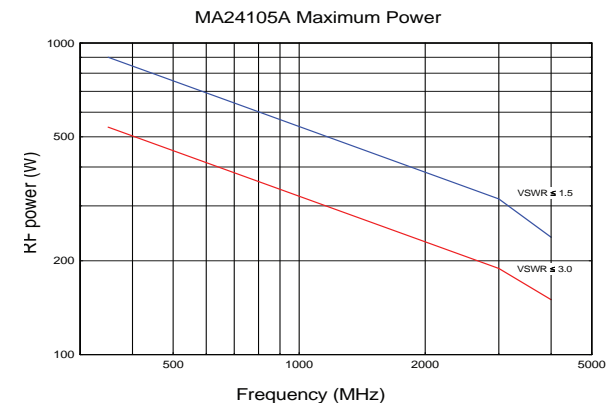


Figure 3. Maximum power handling capacity of the sensor terminated with a load having VSWR of 1.5 and 3.0.

High Accuracy Measurements

Accurate power measurements in the field are important for verifying that transmitter outputs are operating at specified levels. For example, service technicians need to verify base station output power because lower output power can quickly translate into large coverage differences. Highly accurate average power measurements to 150 W are assured as the calibration data is stored directly in the sensor and all necessary corrections (frequency and temperature) are done inside the microprocessor of the sensor. Also, the return loss and directivity of the instrument are optimized to maintain high accuracy. The standards used to calibrate this sensor are directly traceable to NIST.

Continuous Monitoring of Radio Systems

This sensor is designed to have good match and low insertion loss making it ideal for continuous monitoring of transmitter power and antenna reflections. The data logging function in the PowerXpert software application for PC equips the user the ability to record measured power over time to a hard disc or other storage media. This is useful for long term drift measurements, environmental testing, and trend analysis. A user settable data logging interval allows a frequency of measurement adjustment to match the user test application requirements. Data are stored as comma-separated values (.csv) that can be directly opened in Microsoft® Excel allowing powerful custom analysis of measured data.

Ideal for Field

The MA24105A power sensor provides lab performance accuracy in a rugged and portable field solution. The sensor is accurate over a wide temperature range (0 °C to 55 °C), making it perfect for cellular base station installation and maintenance applications. Field and service technicians will appreciate the small size and versatility of this stand-alone unit as they will not have to carry extra elements, heavy high power attenuators, or power meters. A very easy to use PC application with a large display makes the job even easier for technicians who need accurate measurement results quickly.

Average Measurements of CW, Pulsed, or Modulated Signals

The MA24105A is rated to meet all specifications up to an average input power level of 150 W, depending on load match (see figure 3). Time varying and burst signals can have a peak power up to 300 W. To ensure accurate readings, the peak to average ratio (crest factor) of signals must be less than 12 dB.

Peak Power, Crest Factor, Burst Average and Complementary Cumulative Distribution Function (CCDF)

The MA24105A and associated PowerXpert™ application provide information critical to development, manufacturing and operation of modern communications systems. The Peak Power function enables the user to determine the maximum power of the modulated signal envelope for signals with a modulation bandwidth of < 4 MHz. The ratio between the Peak Power and Average Power result provides the Crest Factor. Of particular use in TDMA systems, the Burst Average Function uses duty cycle information obtained either automatically or as user-entry to calculate the average power during a burst based on the measurement of Average Power. Critical to those working with spread spectrum systems, which exhibit a non-deterministic envelope, the CCDF feature shows the percentage of the time that the peak power exceeds a user-set threshold.

More Applications

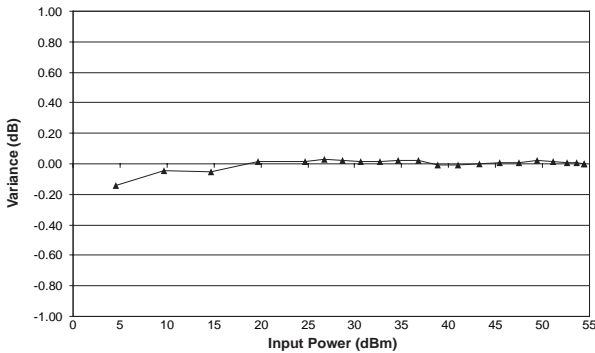


Figure 4. Forward average power linearity error referenced to an ideal thermal power sensor measurement of a W-CDMA signal at 2 GHz.

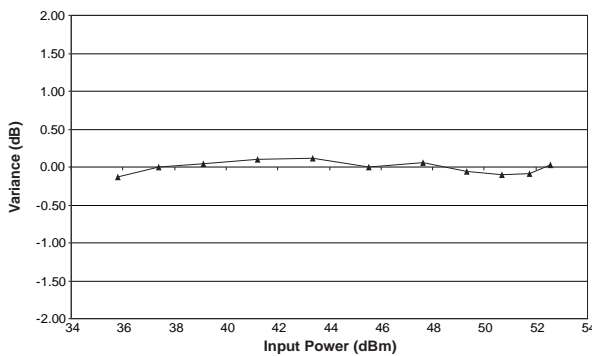


Figure 5. Forward Peak power linearity error referenced to Anritsu MA2491A peak power sensor measurement of a W-CDMA signal.

Reverse Power, Reflection Coefficient (magnitude), Return Loss and Standing Wave Ratio (SWR)

The MA24105A sensor's capability to measure both forward and reverse average power also permits the user to gain information about the load mismatch. This result is conveniently available in Reflection Coefficient (magnitude), Return Loss and SWR forms.

Optimized for Production


The MA24105A facilitates lab quality measurements on the production floor for a fraction of cost of existing solutions. Since the sensor is connected directly to the PC, there is no need for a base unit saving valuable rack space. The Inline Sensor can measure signals with levels as low as 2 mW, thus eliminating the need of terminated power sensors in the production line resulting in reduced capital expenditure and set up costs. The sensor's speed is optimized for best accuracy and noise performance thus making it suitable for wide variety of ATE applications. Multiple sensors can be connected and remote controlled via a single PC allowing flexibility to match specific measurement needs. A software toolkit is supplied with every sensor containing a sample program with source code for controlling the sensor. The 1 mW reference calibrator typically needed by power meters has also been eliminated as the connecting USB cable only transfers digital data (corrected power), minimizing test station complexity, sensor handling and test times.

Remote Monitoring via LAN or Data-Logging

Since the USB cable connected to the sensor only transfers corrected power back to the host, a 1 mW reference calibrator is not required. USB data transfer capabilities limit the cable length to 5 meters prohibiting remote monitoring. However, this limitation can be overcome by installing a low cost USB-to-LAN hub converter (e.g. BELKIN® F5L009) at the measurement site along with the MA24105A. In this way, power monitoring can be performed across continents if desired. Or, data can be logged in a .csv file for offline analysis (see figure 6).

Initial setup information			
1	Initial setup information		
2	Sensor Model	MA24105A	
3	Sensor Serial No	P3-3	
4	Frequency	0.35 GHz	
5	Fixed Forward Offset	0 dB	
6	Video BW:	4 KHz	
7	Sample Interval	Full Speed	
8	Forward Mode	Average Power	
9	Reverse Mode	Average Power	
Any setup information is not updated during data logging.			
11	13:35:04	-1.811 dBm	0.703 dBm
12	13:35:05	-8.287 dBm	0.304 dBm
13	13:35:05	-7.832 dBm	-0.319 dBm
14	13:35:06	-4.027 dBm	-1.242 dBm
15	13:35:06	-13.572 dBm	-0.084 dBm
16	13:35:07	-6.918 dBm	0.016 dBm
17	13:35:08	-15.611 dBm	0.682 dBm
18	13:35:08	-2.229 dBm	-0.712 dBm
19	13:35:09	-6.166 dBm	0.508 dBm
20	13:35:09	-9.593 dBm	-1.342 dBm
21	13:35:10	-2.111 dBm	-0.059 dBm
22	13:35:10	-14.819 dBm	-0.266 dBm
23	13:35:11	-7.832 dBm	0.91 dBm
24	13:35:12	-7.979 dBm	1.03 dBm
25	13:35:12	-12.6 dBm	0.682 dBm
26	13:35:13	-4.969 dBm	-2.824 dBm

Figure 6. Remote monitoring via LAN or data-logging

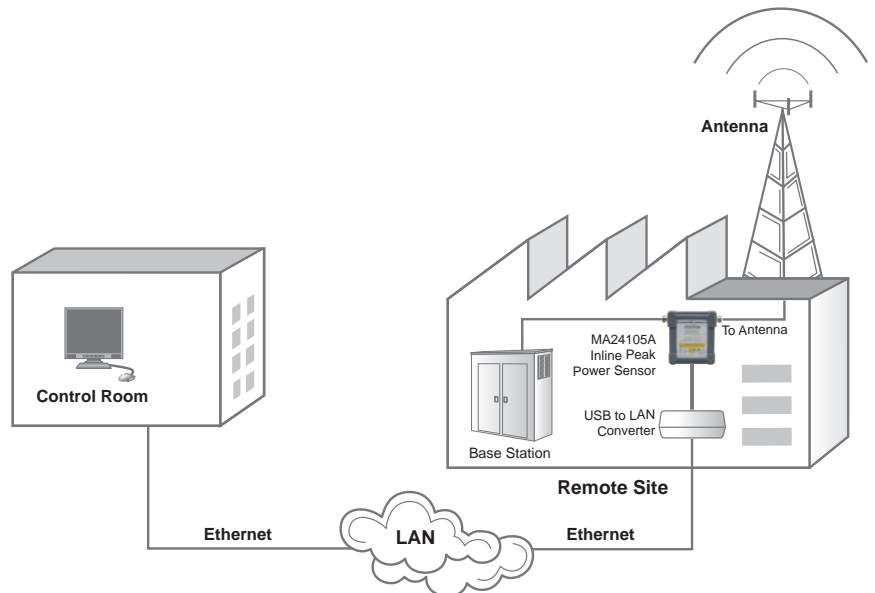

Specifications

Sensor	
Frequency Range	350 MHz to 4 GHz
Measurement Range	2 mW to 150 W (+3 dBm to +51.76 dBm)
Input Return Loss	≥ 29.5 dB from 350 MHz to 3 GHz ≥ 26.5 dB from > 3 GHz to 4 GHz
Insertion Loss (typical)	≤ 0.15 dB from 350 MHz to 1.25 GHz ≤ 0.20 dB from > 1.25 GHz to 4 GHz
Directivity	≥ 28 dB from 350 MHz to < 1 GHz ≥ 30 dB from ≥ 1 GHz to ≤ 3 GHz ≥ 28 dB from > 3 GHz to 4 GHz
Measurement Channel	2 (Forward and Reverse)
Signal Channel Bandwidth	Average: 100 Hz Peak (Selectable): 4 MHz (full) 200 kHz 4 kHz

Base Average Power Measurement	
Measurement Range	Range 1: 2 mW to 6.31 W (+3 dBm to +38 dBm) Range 2: 6.31 W to 150 W (+38 dBm to +51.76 dBm)
Maximum Power ⁽⁷⁾	150 W average, 300 W pulse
Measurement Uncertainty ⁽¹⁾	± 3.8% (Range 1 and Range 2)
Effect of Noise ⁽²⁾	± 170 μW (Range 1) ± 1.9 mW (Range 2)
Effect of Zero Set ⁽³⁾	± 250 μW (Range 1) ± 3.0 mW (Range 2)
Effect of Zero Drift ⁽³⁾	± 230 μW (Range 1) ± 2.7 mW (Range 2)
Effect of Temperature (0 °C to 50 °C)	± 0.06 dB
Effect of Digital Modulation ⁽⁴⁾	± 0.02 dB

Forward Average Power Measurement (Forward Average Power Uncertainty is same as Base Average Power Uncertainty)

Forward Peak Power Measurement⁽⁵⁾		
Measurement Range	2 W to 300 W (+ 33 dBm to + 54.77 dBm)	
Burst Signal Measurement Base Uncertainty	Repetition Rate: ≥ 10/s Duty Cycle: ≥ 10%:	Full Bandwidth: ± (Base Average Power Uncertainty +7% + 400 mW) 4 kHz and 200 kHz Bandwidth: ± (Base Average Power Uncertainty +3% + 200 mW)
Effect of Low Repetition Rate (≤ 10/s)	± 1.6% ± 150 mW	
Effect of Low Duty Cycle (0.1% to 10%)	± 100 mW	
Effect of Short Burst Width (500 ps to 1 μs) (200 ps to < 500 ps)	± 5% ± 10%	
Effect of Temperature on Peak Circuit (0 °C to 50 °C)	± 6%	
Spread-spectrum Measurement Uncertainty	± (Base Average Power Uncertainty + 15% + 400 mW)	

Reverse Power Measurement⁽⁵⁾	
Measurements Range	2 mW to 150 W (+ 3 dBm to + 51.76 dBm)
Maximum Power ⁽⁷⁾	150 W average
Measurement Uncertainty ⁽¹⁾	± (Base Average Power Uncertainty)
Spread-spectrum Measurement Uncertainty	± (Base Average Power Uncertainty + 15% + 400 mW)

Complementary Cumulative Distribution Function (CCDF)	
Measurement Uncertainty ⁽¹⁰⁾	± 0.2%
Threshold Range	2 mW to 300 mW (+ 3 dBm to + 54.77 dBm)
Accuracy of Threshold	± (Base Average Power Uncertainty + 5% + 500 mW)

Burst Average Power	
Measurement Uncertainty (User Mode)	Same as Base Average Power Uncertainty except Zero Set, Zero Drift and Noise are divided by duty cycle (t_f)
Measurement Uncertainty (Auto Mode) ⁽¹¹⁾	± (Base Average Power Uncertainty except Zero Set, Zero Drift and Noise are divided by duty cycle (t_f) ± 2%)

Combination Measurements	
Reflection Measurement Uncertainty	± (Base Average Power Uncertainty + Reverse Power Measurement Uncertainty)
Crest Factor Uncertainty	± (Base Average Power Uncertainty + Forward Peak Power Measurement Uncertainty)

System					
Measurand	Forward/Reverse True-RMS/Average power	Peak Power	Crest Factor	Burst Average Power	CCDF
Measurement Resolution	0.01 dB	0.01 dB	0.01 dB	0.01 dB	0.01%
Offset Range	100 dB	100 dB	100 dB	100 dB	100%
Averaging Range	1 to 512	1 to 512	1 to 512	1 to 512	1 to 512
Measurement Speed (typical) ⁽⁹⁾	1.7 meas. per second	2.5 meas. per second	1.4 meas. per second	0.7 meas. per second	1.6 meas. per second
Interface	USB 2.0				
Host Operating System (PowerXpert™ version 2.11 compatibility)	Microsoft® Windows® Vista, Window® 7, Windows® XP, and Windows® 2000				

Specifications

General		
USB	Current (via host USB) ⁽⁶⁾	180 mA typical at 5 V
Size (H x W x D) ⁽⁸⁾	102 mm x 87 mm x 30 mm	
Weight	535 g (1.18 lb)	
Environmental Tests were performed per MIL-PRF-28800F (Class 2)		
Operating Temperature Range	0 °C to + 55 °C	
Storage Temperature Range	– 50 °C to + 80 °C	
Humidity	45% relative humidity at 55 °C (non-condensing) 75% relative humidity at 40 °C (non-condensing) 95% relative humidity at 30 °C (non-condensing)	
Shock	30 g's half-sine, 11 ms duration	
Vibration	Sinusoidal: 5 Hz to 55 Hz, 3 g's max. Random: 10 Hz to 500 Hz Power Spectral Density: 0.03 g ² /Hz	
EMC	Meets EN 61326, EN 55011	
Safety	Meets EN 61010-1	

Notes:

All specs are applicable after twenty minutes warm-up at room temperature and after zeroing unless specified otherwise.

- (1) Expanded uncertainty with K=2 for power measurements of a CW signal with a matched load. Measurement results referenced to the input side of the sensor.
- (2) Expanded uncertainty with K=2 after zero operation when measured with 128 averages for 5 minutes. In high aperture time mode, noise is 50 µW and 12 mW in range 1 and range 2 respectively.
- (3) After one hour warm-up and zero operation. Measured with 128 averages for one hour keeping the temperature within ± 1 °C.
- (4) Measurement uncertainty with reference to a CW signal of equal power and frequency at 25 °C.
- (5) All measurement errors "Effects" should be RSSed before directly added to "Base" error for overall measurement uncertainty.
- (6) 150 mA max.
- (7) Maximum power depends upon the system SWR and frequency of operation (see Figure 3)
- (8) Not including N connectors.
- (9) Measurement speed is the rate at which the measurement or calculation is updated in a data log.
- (10) Pulse Power > + 37 dBm, T > 50 µs (Full BW), T > 400 µs (200 kHz BW), T > 20 ms (4 kHz BW)
- (11) Average Power > + 33 dBm, Pulse width > 5 µs (Full BW), Pulse Width > 40 µs (200 kHz BW), Pulse Width > 2 ms (4 kHz BW)

Ordering Information

Model	Description
MA24105A	Inline Peak Power Sensor

Available Options

Option Number	Description
MA24105A-098	Option 98, Standard calibration to Z540, ISO-17025
MA24105A-099	Option 99, Premium calibration to Z540, ISO-17025

Included Accessories

Model	Description
2000-1606-R	1.8 m USB 2.0 A to Micro-B cable
2300-283	Product CD - Anritsu PowerXpert and USB power sensors
10585-00021	Quick Start Guide

Optional Accessories

Calibrated Torque Wrenches

Model	Description
01-200	Calibrated torque wrench for N connector

Power Attenuators

Model	Frequency range	Rating	Connectors
3-1010-122	DC to 12.4 GHz	20 dB, 5 W, 50 Ω	N male to N female
3-1010-123	DC to 8.5 GHz	30 dB, 50 W, 50 Ω	N male to N female
3-1010-124	DC to 8.5 GHz	40 dB, 100 W, 50 Ω	N male to N female
42N50-20	DC to 18 GHz	20 dB, 5 W, 50 Ω	N male to N female
42N50A-30	DC to 18 GHz	30 dB, 50 W, 50 Ω	N male to N female
1010-121	DC to 18 GHz	40 dB, 100 W, 50 Ω	N male to N female
1010-127-R	DC to 3 GHz	30 dB, 150 W, 50 Ω	N male to N female
1010-128-R	DC to 3 GHz	40 dB, 150 W, 50 Ω	N male to N female

Precision Terminations

(To be used in conjunction with appropriate Power Attenuators)

Model	Frequency range	Description	Connectors
28N50-3	DC to 8.6 GHz	50 Ω	N male
28N50-2	DC to 18 GHz	40 dB, 50 Ω	N male
28NF50-2	DC to 18 GHz	40 dB, 50 Ω	N female

Precision Coaxial Adapters

Model	Frequency range	Connectors
510-90	DC to 3.3 GHz	N male to 7/16 DIN female
510-91	DC to 3.3 GHz	N female to 7/16 DIN female
510-92	DC to 3.3 GHz	N male to 7/16 DIN male
510-93	DC to 3.3 GHz	N female to 7/16 DIN male
33NFN50B	DC to 18 GHz	N female to N female
33NNF50B	DC to 18 GHz	N male to N female
33NN50B	DC to 18 GHz	N male to N male
34AN50	DC to 18 GHz	GPC-7 to N male
34ANF50	DC to 18 GHz	GPC-7 to N female
34NFK50	DC to 18 GHz	N female to K male
34NFKF50	DC to 18 GHz	N female to K female
34NK50	DC to 18 GHz	N male to K male
34NKF50	DC to 18 GHz	N male to K female

• **United States**

Anritsu Company

1155 East Collins Boulevard, Suite 100,
Richardson, TX, 75081 U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• **Canada**

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120,
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• **Brazil**

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP - Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• **Mexico**

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• **United Kingdom**

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

• **France**

Anritsu S.A.

12 avenue du Québec, Batiment Iris 1-Silic 612,
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• **Germany**

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• **Italy**

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• **Sweden**

Anritsu AB

Kistagången 20B, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• **Finland**

Anritsu AB

Teknobulevardi 3-5, FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• **Denmark**

Anritsu A/S

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• **Russia**

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• **United Arab Emirates**

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• **Singapore**

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• **India**

Anritsu India Pvt Ltd.

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• **P. R. China (Shanghai)**

Anritsu (China) Co., Ltd.

27th Floor, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, Xu Hui Di District,
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• **P. R. China (Hong Kong)**

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P. R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• **Japan**

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi,
Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• **Korea**

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• **Australia**

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road,
Notting Hill, Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• **Taiwan**

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817



The Master Users Group is an organization dedicated to providing training, technical support, networking opportunities and links to Master product development teams. As a member you will receive the Insite Quarterly Newsletter with user stories, measurement tips, new product news and more.

Visit us to register today: www.anritsu.com/MUG



Customers in the United States can receive a quote to purchase a product or order accessories by visiting our online ordering site: www.ShopAnritsu.com

Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job.

For available training courses visit: www.anritsu.com/training

Anritsu utilizes recycled paper and environmentally conscious inks and toner.



©Anritsu All trademarks and registered trademarks are the property of their respective owners. Data subject to change without notice. For the most recent specifications visit: www.anritsu.com



11410-00621



D

Please Contact: