


# Agilent E1474A

## Six 1x4, 75 $\Omega$ RF Multiplexer

### Data Sheet

- 1-Slot, C-size, register based
- Six 1x4 multiplexers
- Switch signals up to 1.3 GHz
- SMB male connectors for high performance
- Controls the E1475A/E1473A RF expanders
- Tree switching for high isolation, low VSWR

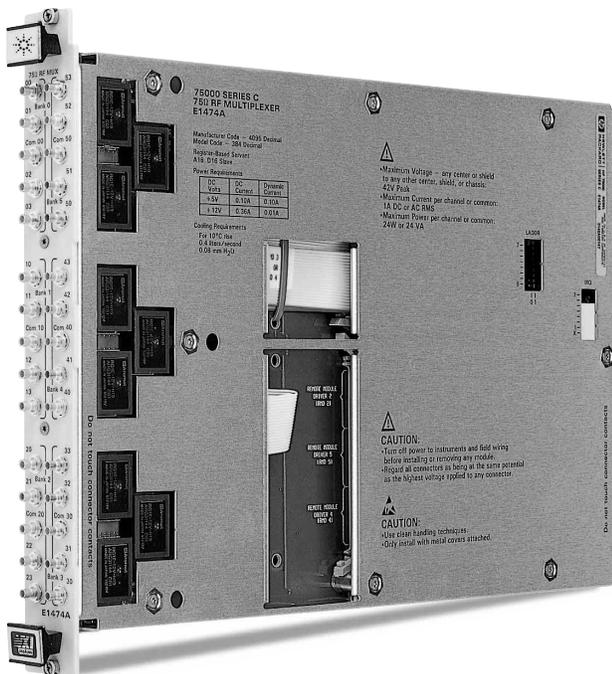

Agilent E1474A

### Description

The Agilent E1474A 75  $\Omega$  RF Multiplexer is a **C-size, 1-slot, register-based VXI module**. It is the ideal choice for video and telecommunications applications. The E1474A is functionally identical to the E1472A except for output impedance.

The RF multiplexer can be used as six multiplexers or combined with others to form a larger tree-switched multiplexer or a limited stubless matrix. You can easily and inexpensively expand the E1474A via the E1475A 75 $\Omega$  RF multiplexer expander or via the E1473A 50 $\Omega$  RF multiplexer expander.

The E1474A can easily be programmed with SCPI commands to scan multiple channels, where each channel is switched to its common, one at a time. This module is arranged as six independent banks of channels (Bank 0 through Bank 5), each acting as a 1x4 one-wire multiplexer. Only one channel in each bank can be connected to its common at any time. The multiplexer relays are arranged in a tree-switched configuration, providing high isolation and low VSWR. Each channel consists of a non-latching armature relay.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

## Configuration

Each channel consists of a non-latching armature relay. At power-on or reset, channels 00, 10, ... 50 are connected to COM 00, 10, ... 50, respectively, and all other channels are open (unterminated).

The RF multiplexer can be used as six multiplexers or combined with others to form a larger tree-switched multiplexer or a limited stubless matrix as shown in the accompanying diagram.

To expand the E1474A refer to the E1475A 75Ω RF multiplexer expander or the E1473A 50Ω RF multiplexer expander. The E1474A can control other external relays requiring 5V, 12V, or 24V drive.

## Cables and Connectors

Various 75 Ω cables are available from Agilent for connecting to the SNB connectors on the front panel of the multiplexer. Adapters and other connectors are also available. Connectors are also available from Johnson Components:

U.S.A. Tel.: 1-800-247-8256  
Outside U.S.A. Tel.: (507) 835-6222  
Fax.: (507) 835-8356

## Product Specifications

### Input

Maximum voltage (center or shield-to-center, shield or chassis): 42 V

Maximum current (per channel or common):

DC: 1 A  
AC rms: 1 A

Maximum power (per channel or common):

DC: 24 W  
AC: 24 VA

### DC

Maximum thermal offset: 6 μV

Closed channel resistance (typical): <1 Ω initial

Insulation resistance (between any two terminals): >10E8 Ω ≤40 °C, ≤65% RH

### AC

*Note: For AC performance, ZL=ZS=ZO, ≤40 °C, RH ≤95% for C-size, RH ≤65% for B-size*

Characteristic impedance

(Zo): 75 Ω

Insertion loss:

<10 MHz: <0.3 dB  
<100 MHz: <0.4 dB  
<500 MHz: <0.8 dB  
<1.3 GHz: <1.0 dB  
<3 GHz (typ): n/a

Crosstalk (channel-to-channel):

<10 MHz: <-85 dB  
<100 MHz: <-75 dB

Crosstalk (channel-to-channel, one channel closed or channel-to-common) (terminated):

<200 MHz: n/a  
<500 MHz: <-60 dB  
<1.3 GHz: <-42 dB  
<3 GHz (typ): n/a

VSWR:

<10 MHz: <1.05  
<100 MHz: <1.15  
<200 MHz: n/a  
<500 MHz: <1.35  
<1.3 GHz: <1.5  
<3 GHz: n/a

Risetime: <300 ps

Signal delay: <3 ns

Capacitance:

Center-shield: n/a  
Chassis-shield: n/a

### General Characteristics

Relays: Non-latching armature

Power up/down state: All open

Minimum relay life:

No load: 5x10E6 operations  
Rated load: 10E5 operations

### General Specifications

#### VXI Characteristics

VXI device type: Register based, A16, slave only

Size: C

Slots: 1

Connectors: P1/2

Shared memory: None

VXI busses: None

C-size compatibility: n/a

## Instrument Drivers

See the Agilent Technologies Website ([http://www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)) for driver availability and downloading.

<b>Command module</b>	
firmware:	Downloadable
<b>Command module</b>	
firmware rev:	A.02
I-SCPI Win 3.1:	Yes
I-SCPI Series 700:	Yes
C-SCPI LynxOS:	Yes
C-SCPI Series 700:	Yes
Panel Drivers:	Yes
<b>VXIplug&amp;play Win</b>	
Framework:	Yes
<b>VXIplug&amp;play Win95/NT</b>	
Framework:	Yes
<b>VXIplug&amp;play HP-UX</b>	
Framework:	No

## Module Current

	$I_{PM}$	$I_{DM}$
+5 V:	0.1	0.1
+12 V:	0.36	0.01
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0
-2 V:	0	0

## Cooling/Slot




Watts/slot:	6.00
$\Delta P$ mm H <sub>2</sub> O:	0.10
Air Flow liter/s:	0.50

## Ordering Information

Description	Product No.
Six 1x4 75 $\Omega$ RF Multiplexer	E1474A
Service Manual	E1474A 0B3
Component Lvl Info Pkt	E1472-90033



Agilent E1474A front panel detail

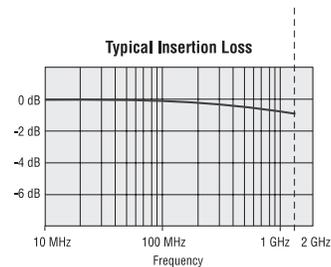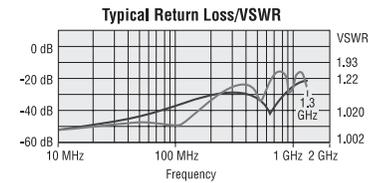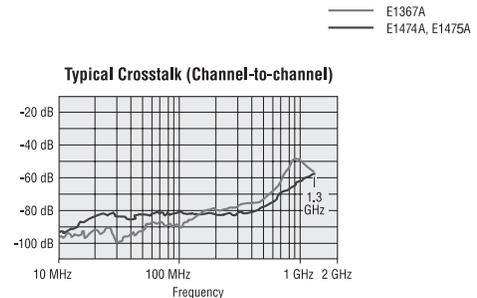

## Related Literature

*2000 Test System and VXI Catalog CD-ROM*,  
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

*2000 Test System and VXI Catalog*,  
Agilent Pub. No. 5980-0307E (overview of VXI products )

*1998 Test System and VXI Products Data Book*,  
Agilent Pub. No. 5966-2812E

## Online

Internet access for Agilent product information, services and support  
[www.agilent.com/find/tmdir](http://www.agilent.com/find/tmdir)

VXI product information  
[www.agilent.com/find/vxi](http://www.agilent.com/find/vxi)

Defense Electronics Applications  
[www.agilent.com/find/defense\\_ATE](http://www.agilent.com/find/defense_ATE)

Agilent Technologies VXI Channel Partners  
[www.agilent.com/find/vxichanpart](http://www.agilent.com/find/vxichanpart)

Agilent Technologies' HP VEE Application Website  
[www.agilent.com/find/vee](http://www.agilent.com/find/vee)

Agilent Technologies Data Acquisition and Control Website  
[www.agilent.com/find/data\\_acq](http://www.agilent.com/find/data_acq)

Agilent Technologies Instrument Driver Downloads  
[www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)

Agilent Technologies Electronics Manufacturing Test Solutions  
[www.agilent.com/go/manufacturing](http://www.agilent.com/go/manufacturing)

**Get assistance with all your test and measurement needs at**  
[www.agilent.com/find/assist](http://www.agilent.com/find/assist)  
**or check your local phone book for the Agilent office**  
**near you.**

## Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources ([www.agilent.com](http://www.agilent.com)).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

## Phone or Fax

**United States:**  
(tel) 1 800 829 4444

**Canada:**  
(tel) 1 877 894 4414  
(fax) (905) 282 6495

**China:**  
(tel) 800 810 0189  
(fax) 800 820 2816

**Europe:**  
(tel) (31 20) 547 2323  
(fax) (31 20) 547 2390

**Japan:**  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

**Korea:**  
(tel) (82 2) 2004 5004  
(fax) (82 2) 2004 5115

**Latin America:**  
(tel) (305) 269 7500  
(fax) (305) 269 7599

**Taiwan:**  
(tel) 0800 047 866  
(fax) 0800 286 331

**Other Asia Pacific Countries:**  
(tel) (65) 6375 8100  
(fax) (65) 6836 0252  
(e-mail) [tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)

Data Subject to Change  
© Agilent Technologies, Inc. 2000  
Printed in the U.S.A. May 1, 2004  
5965-9666E



**Agilent Technologies**