



IFP Absolute PP Filter Cartridge

PP Pleated Cartridge Filter uses FDA approved raw materials. This type of cartridge tolerates a variety of chemical solvents used in the filtration of ordinary or corrosive fluid. The high surface area of these filters ensure long service life and low initial pressure drops. All cartridge hardware components are high purity polypropylene materials for use in critical process applications. These cartridges are manufactured and assembled in a clean room environment to minimize the possibility of contamination. These absolute PP cartridges are available in a wide range of configurations to fit most commercially available filter housings.

Application

- Acids & Bases
- Fine and specialty chemicals
- Food and Beverage Processing
- Product Sterilization
- Pharmaceuticals
- Etch Baths
- High Purity Chemicals
- Chemical / Mechanical Polishing
- Ultra-Pure / DI Water

IFP PP Filter Cartridge with different End Modification

Cartridges are available in the following lengths:

- 10 – Inch
- 20 – Inch
- 30 – Inch
- 40 – Inch



Nominal 10-inch cartridge

Fin End Cap

226 O-Ring

222 O-Ring

DOE End Cap



International Filter Products

Revolutionary systems for your industry

Technical Data Sheet

Popular Configuration:

Part Number	End Modification	Standard O-Ring
CRT- PP - _ _ - _ _ - A2S	222 O-Rings, Flat	Silicone
CRT- PP - _ _ - _ _ - A3S	222 O-Rings, Fin	Silicone
CRT- PP - _ _ - _ _ - A6S	226 O-Rings, Fin	Silicone
CRT- PP - _ _ - _ _ - A7S	226 O-Rings, Flat	Silicone
CRT- PP - _ _ - _ _ - A0S	Double Open Ended (DOE)	Silicone
❖ The blank spaces are for filter length micron rating code. Find the codes below.		

PP Micron Rating:

Element Length Code	Micron Rating Code
	002: 0.2 µm
	004: 0.45 µm
	006: 0.65 µm
10: 10-Inch	010: 1.0 µm
20: 20-Inch	030: 3.0 µm
30: 30-Inch	050: 5.0 µm
40: 40-Inch	100: 10.0 µm
	200: 20.0 µm
	250: 25.0 µm
	500: 50.0 µm

Materials of Construction

Filter Media: Nano Polypropylene

Inner Support Core: Reinforce Polypropylene

Outer Protection Cage: Reinforce Polypropylene



www.internationalfilterproducts.com
 7914 Ajay Dr.
 Sun Valley, CA 91352
 Tel: (818) 504-8115 - Office
 Tel: (818) 917-9538 - Cell
 E-mail: sales@internationalfilterproducts.com





International Filter Products

Revolutionary systems for your industry

End Caps: Reinforce Polypropylene

Effective Filtration Area:

7.53 ft^2 (0.7 m^2) PER 10-Inch Cartridge Element

Nominal Dimensions:

Lengths: 10.0 inch (25.4 cm), 20.0 inch (50.8 cm), 30.0 inch (76.2 cm) and 40.0 inch (101.6 cm)

Inside Diameter: 1.3" (33mm)

Outside Diameter: 2.67" (68mm)


Operating Conditions:

Maximum Differential Pressure: 5.5 bar (80 psi) at 69.8°F/21°C

3.4 bar (50 psid) at 150.8°F/66°C

Maximum Operating Temperature: 176°F/80°C ≤ 2.4 Bar (35 psid)

Pressure and Flow Rate:

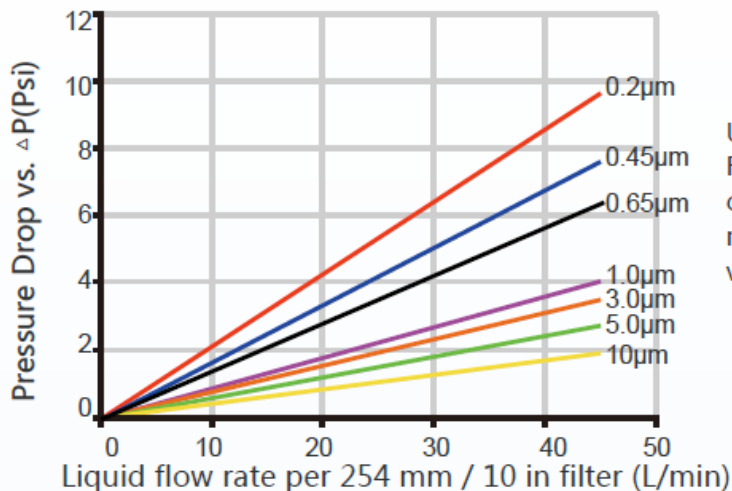

Unit conversion : 1bar=14.5Psi
Flow rate is for a 25.4cm (10inch)
cartridge. For liquids other than water,
multiply differential pressure by fluid
viscosity (cP)

Filtration Efficiency:

≥ 99.98%

Regulatory Compliance:

The filters are constructed with polypropylene resins and filtration media in compliance with 21CFR Part 177 of the US Code of Federal Regulations and USP Class VI Biological Test for Plastic

Material Compliance:

All materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, and 177.1520, as applicable for food and beverage contact.

Sterilization:

The filters can be steam sterilize at 121°C (250°F) for 30 minutes.

Flushing Criteria:

The filter cartridges can be flushed with pyrogens-free water (filtered down to 0.05 µm). Once flushed, the filter cartridges are dried before packaging.



www.internationalfilterproducts.com
7914 Ajay Dr.
Sun Valley, CA 91352
Tel: (818) 504-8115 - Office
Tel: (818) 917-9538 - Cell
E-mail: sales@internationalfilterproducts.com



PROUD MEMBER
Alliance for
Pharmacy
Compounding



CORPORATE PARTNER



International Filter Products

Revolutionary systems for your industry

Special Configuration:

Size Option:

- 10-inch [Filtration Area: 7.53 ft²]
- 20-inch [Filtration Area: 15.06 ft²]
- 30-inch [Filtration Area: 22.59 ft²]
- 40-inch [Filtration Area: 30.12 ft²]

Micron Rating Option:

- 0.2 µm
- 0.45 µm
- 0.65 µm
- 1.0 µm
- 3.0 µm
- 5.0 µm
- 10.0 µm
- 20.0 µm
- 25.0 µm
- 50.0 µm

Seal Option:

- Silicone
- Viton
- NBR
- EPDM
- Teflon Encapsulated Viton
- Teflon Encapsulated Silicone

End Modification:


- 222 O-Rings, Flat
- 222 O-Rings, Fin
- 226 O-Rings, Flat
- 226 O-Rings, Fin
- 222 O-Rings, Fin with 316L SS Insert
- 226 O-Rings, Fin with 316L SS Insert
- DOE Flat Gasket





Ordering Information:

FILTER PART NUMBER

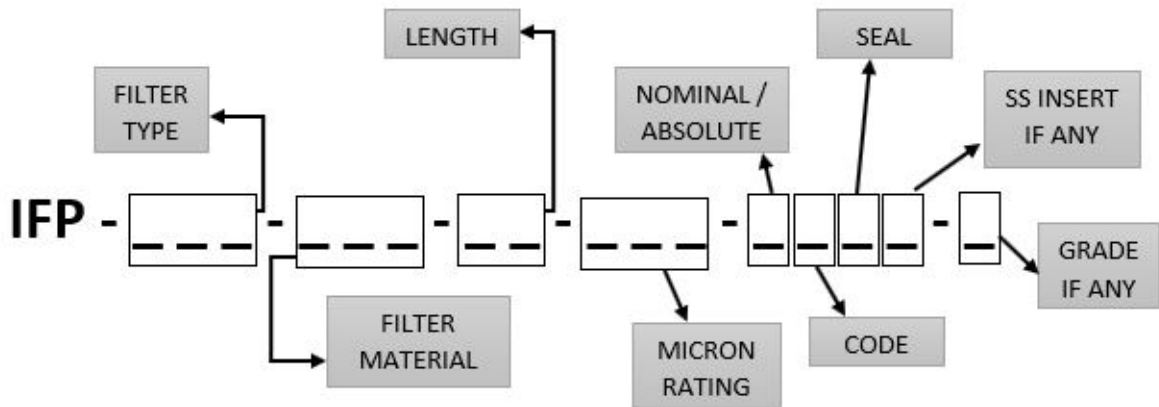

Filter Type	Filter Material	Length	Micron Rating	Absolute / Nominal	End Modification Code	Seal	Insert	Grade
CRT: Cartridge	PP: Polypropylene	10: 10-Inch 20: 20-Inch 30: 30-Inch 40: 40-Inch	002: 0.2 µm 004: 0.45 µm 006: 0.65 µm 010: 1.0 µm 030: 3.0 µm 050: 5.0 µm 100: 10.0 µm 250: 25.0 µm 500: 25.0 µm	A: Absolute N: Nominal	0: DOE 2: 222/Flat 3: 222/Fin 6: 226 Fin 7: 226/Flat	S: Silicone E: EPDM V: Viton N: NBR F: Teflon PV: Teflon Encapsulated Viton PS: Teflon Encapsulated Silicone	5: SS Insert (Optional)	F: Flushed with Ultrapure Water (Optional)