

# GDS-3000 Series

**VPO**  
Visual Persistence Oscilloscope

500/350/250/150MHz Digital Storage Oscilloscope

**3** Year WARRANTY

DISTRIBUTOR :

DS-3000GD6BH

Global Headquarters

**GOOD WILL INSTRUMENT CO., LTD.**  
No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan  
T +886-2-2268-0389 F +886-2-2268-0639  
E-mail: marketing@goodwill.com.tw

China Subsidiary

**GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.**  
No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China  
T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary

**GOOD WILL INSTRUMENT (SEA) SDN. BHD.**  
No. 1-3-18, Elit Avenue, Jalan Mayang Pasir 3,  
11950 Bayan Baru, Penang, Malaysia  
T +604-6111122 F +604-6115225

Europe Subsidiary

**GOOD WILL INSTRUMENT EURO B.V.**  
De Run 5427A, 5504DG Veldhoven, THE NETHERLANDS  
T +31(0)40-2557790 F +31(0)40-2541194

U.S.A. Subsidiary

**INSTEK AMERICA CORP.**  
5198 Brooks Street Montclair, CA 91763, U.S.A.  
T +1-909-399-3535 F +1-909-399-0819

Japan Subsidiary

**TEXIO TECHNOLOGY CORPORATION.**  
7F Towa Fudosan Shin Yokohama Bldg., 2-18-13 Shin  
Yokohama, Kohoku-ku, Yokohama, Kanagawa,  
222-0033 Japan  
T +81-45-620-2305 F +81-45-534-7181

Korea Subsidiary

**GOOD WILL INSTRUMENT KOREA CO., LTD.**  
Room No.503, Gyeonginro 775 (Mullae-Dong 3Ga,  
Ace Hightech-City B/D 1Dong), Yeongduengpo-Gu,  
Seoul 150093, Korea.  
T +82-2-3439-2205 F +82-2-3439-2207

India Subsidiary

**GW INSTEK INDIA LLP.**  
No.2707/B&C, 1st Floor UNNATHI Building,  
E-Block, Sahakara Nagar, Bengaluru-560 092, India  
T +91-80-6811-0600 F +91-80-6811-0626

**GW INSTEK**  
Simply Reliable



Website Facebook LinkedIn

## FEATURES

- 500/350/250/150MHz Bandwidth, 2/4 Input Channel
- 5GSa/s Real-time Sampling Rate and 100GSa/s Equivalent Time Sampling Rate
- 25k Points Memory for Each Input Channel
- VPO (Visual Persistence Oscilloscope) Technology to Display Less-Frequently-Occurred Signals
- 8" 800 x 600 High Resolution TFT LCD Display
- Unique Split Screen System with Independent Setting and Display for Each Input Channel
- Three Built-in Input Impedance Selections: 50Ω/75Ω/1MΩ
- Optional Power Analysis Software for Power Source Measurement and Analysis
- Optional Serial bus Analysis Software for Trigger & Decode of I<sup>2</sup>C, SPI and UART Interfaces

**GW INSTEK**  
Simply Reliable

VPO technology easily captures episodic events and reveals the complexity of the original signals.

5GSa/s real-time sampling rate accurately depict waveforms to satisfy a broad range of test applications.

50Ω, 75Ω and 1MΩ input impedances are built in to meet various test application needs.



The 8" TFT LCD display makes it easy to observe a signal.

The split-screen function enables each channel to be triggered and displayed independently.



## GDS-3000 Series



The GDS-3000 Series digital storage oscilloscope is a full-featured and powerful tool that allows you to tackle complex measurement issues with ease.


The GDS-3000 Series, carrying a maximum bandwidth of 500MHz, is equipped with a real-time sampling rate up to 5GSa/s and an equivalent-time sampling rate of 100GSa/s. The large 8-inch SVGA LCD screen, combined with the advanced digital signal processing technology VPO, provides meticulous detail and clarity for the displayed waveforms. The GDS-3000 Series gives you confidence not to miss any part of the test signal in the product verification and debugging stages and allows you to speed up your task without hesitation.

### 5GSa/s Sampling & VPO Technology


The GDS-3000 Series adopts VPO (Visual Persistence Oscilloscope) signal processing technology to enhance the performance of multi-gray-scale waveform display. The FPGA parallel processing, instead of conventional microprocessor architecture, is applied in GDS-3000 Series design to significantly increase the data processing speed and therefore increase the waveform update rate. This technology allows the GDS-3000 Series to display waveforms with various gray scales based on the occurrence frequencies, a fashion analogous to the analog oscilloscope display. As the visual persistence oscilloscope contains 3-dimension waveform data, including amplitude, time and intensity, for each waveform spot, it provides more useful signal information than a normal digital storage oscilloscope can do. The high-speed data processing of VPO technology enables the signal analysis of rapid events such as video, jitter, glitch and runt.

The GDS-3000 Series features a maximum real-time sampling rate of 5GSa/s, which is superior to most of the equivalent oscilloscopes available in the market today. (4GSa/s maximum sampling rate for GDS-3502 & GDS-3504 and 2.5GSa/s maximum sampling rate for GDS-3152 & GDS-3252). The series is also equipped with an equivalent-time sampling rate of 100 GSa/s, providing an economic solution for the waveform acquisition and reconstruction of very high-speed repetitive signals. The fast-acquisition capability along with VPO signal processing technology, make GDS-3000 a very handy tool for observing occasionally-occurred signals such as transient and inrush events. With powerful technology, GDS-3000 Series gives you full confidence in every acquisition of complex waveform that adheres to high-speed circuit design of modern products.


## VPO Visual Persistence Oscilloscope Signal Processing Technology

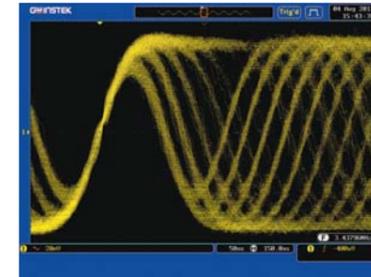

Gray Mode

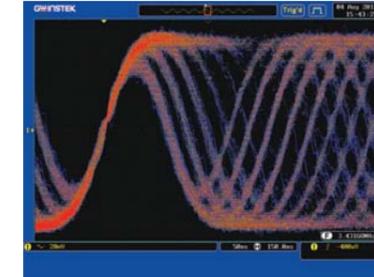

Color Mode

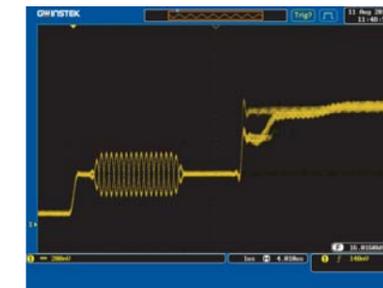

The GDS-3000 Series equipped with VPO signal processing technology and 5GSa/s high-speed real-time sampling rate, allows you to view the video signal clearly.

### A Hi-tech DSO Platform

The GDS-3000 Series is a new platform of 4-input channels, 500MHz bandwidth, 5GSa/s sampling rate, and VPO waveform display. The split screen feature has been designed to meet the requirements of multi-window & multi-signal tests in the research and the manufacturing fields. The optional power analysis software and the optional serial bus analysis software are available to facilitate the engineer's tasks in testing and manufacturing of the associated products. Three new differential probes, GDP-025, GDP-050 & GDP-100, and five new current probes, GCP-005, GCP-020, GCP-100, GCP-530 & GCP-1030, are coming along with the GDS-3000 Series to provide total solutions for a wide variety of applications in the industry, service and education market sectors. The GDS-3000 Series, a high-tech platform carrying thoughtful features, brings very high customer value to both general purpose market and professional market.

### Serial Bus Analysis Software and Power Quality Analysis Software

With widespread applications of embedded system adopting serial bus communication standards, resolving unexpected issues, such as propagation delay and bus contention, is often a challenge to design and testing engineers. The GDS-3000 Series provides (optional) design and testing engineers with powerful tools for the communication analysis and debugging of most the popular serial interface projects including I<sup>2</sup>C, SPI and UART.

To fulfill the increasing power measurement demands, as a green energy trend, GDS-3000 provides an embedded power analysis software (optional), which includes measurements of Power Quality, Harmonics, Ripple and Inrush Current, meeting requirements of most power measurement standards.

## A High-tech Platform Carrying Advanced Technologies

### 1. 8" TFT LCD Panel

The bright 8" TFT LCD display makes multiple signal observation easy.

### 2. 5GSa/s Real-time Sampling Rate for Fast Waveform Capture

The high speed sampling technology used for data acquisition truthfully reconstructs complex signals.

### 3. **VPO** Signal Processing Technology

VPO signal processing technology displays waveforms in 3 dimensions - amplitude, time and intensity.

### 4. Compact Design

With a depth of only 5 inches, the compact size of the product doesn't occupy valuable work space.

### 5. Split Window Function (Split Screen)

The GDS-3000 Series supports up to four independently operated and triggered windows at a time so that you can simultaneously monitor up to 4 signals carrying different characteristics.

### 6. Auto-Range Function

The Auto Range function automatically adjusts the time base and/or the vertical scale of displayed waveform when the frequency and/or the amplitude of input signal changed.

### 7. High Speed USB 2.0 Port

USB Host port for easy access of stored data.

### 8. Three Input Impedance Selections


The three built-in input impedances (75Ω, 50Ω, 1MΩ) can be selected to meet the requirements of various applications.

### 9. Serial Bus Triggering and Decode ( Optional )

2 dedicated keys used for setting recall in the serial bus analysis applications supporting UART, I<sup>2</sup>C and SPI serial bus.

### 10. Independent Channel Design

The independent zone of vertical operations for each channel substantially increases the measurement efficiency.

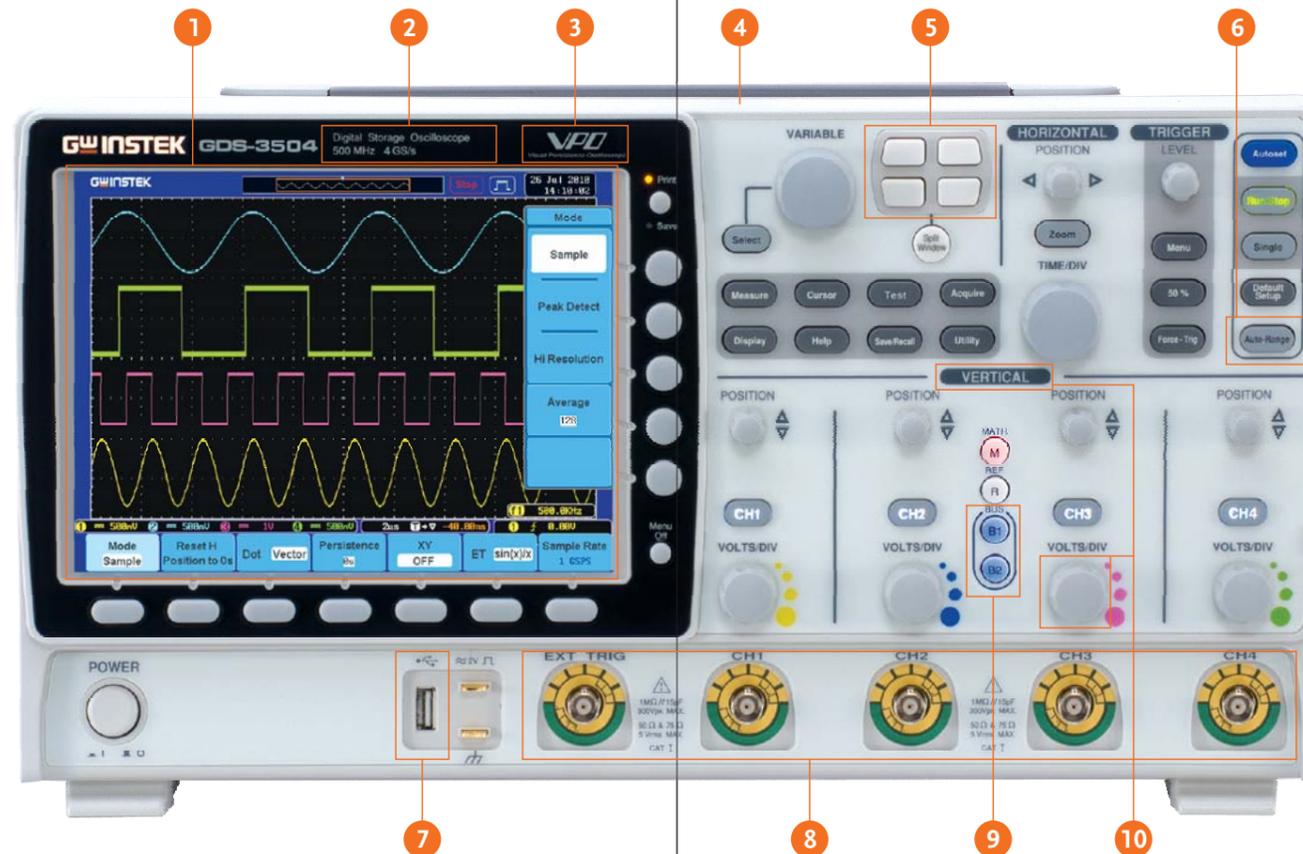

4 Channel Model



2 Channel Model

	SELECTION GUIDE							
Model	GDS-3504	GDS-3502	GDS-3354	GDS-3352	GDS-3254	GDS-3252	GDS-3154	GDS-3152
Bandwidth	500MHz	500MHz	350MHz	350MHz	250MHz	250MHz	150MHz	150MHz
Channels	4	2	4	2	4	2	4	2
Record Length	25k/Channel	25k/Channel	25k/Channel	25k/Channel	25k/Channel	25k/Channel	25k/Channel	25k/Channel
Real-Time Sampling	4 GSa/s	4 GSa/s	5 GSa/s	5 GSa/s	5 GSa/s	2.5 GSa/s	5 GSa/s	2.5 GSa/s
Equivalent-Time Sampling	100GSa/s	100GSa/s	100GSa/s	100GSa/s	100GSa/s	100GSa/s	100GSa/s	100GSa/s

\* 2 Channels on Max Sampling Rate : 2GSa/s (GDS-3504/3502); 2.5GSa/s (GDS-3354/3352/3254/3154); 1.25GSa/s (GDS-3252/3152)

\* 3, 4 Channels on Max Sampling Rate : 2GSa/s (GDS-3504); 1.25GSa/s (GDS-3354/3254/3154)



### 11. USB Ports as Standard

USB Host/Device interfaces for easy access of stored data and direct print-out through a PictBridge compatible printer.

### 12. LAN Port as Standard

LAN interfaces for remote control and monitoring.

### 13. Line Output

3.5mm stereo sound output for Go/NoGo buzzer.

### 14. RS-232 Interface

### 15. SVGA Video Output

SVGA video output port allows the transfer of DSO screen image to an external projector or monitor for remote monitoring or big screen observation.

### 16. Go/NoGo BNC

The open collector output signal allows external instrument to be controlled by the test result.


### 17. Trigger Output Port

A 5V TTL Level trigger signal is available for the synchronization with other devices.

### 18. Self-Calibration Signal Output


Self-Calibration signal output for input channel vertical gain calibration.

### Multi-Language Support

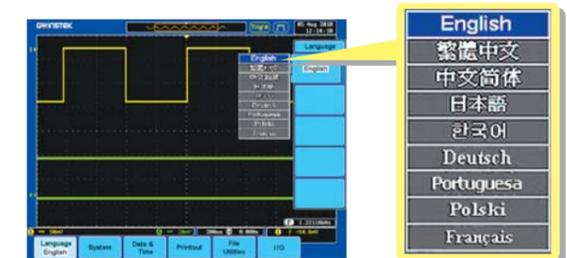


The GDS-3000 Series interface supports multiple languages to provide the utmost convenience for cross-country team cooperation and multinational engineering efforts.

**A. UNIQUE SPLIT SCREEN FUNCTION**




The unique split screen feature of GDS-3000 Series allows each input channel to be operated independently with respective setting and waveform display. The time base, the vertical sensitivity, and the trigger selections can be done by each channel separately, and the waveform of each input signal can be shown on the individual part of the screen. This nearly four-DSO-in-one feature\* is very useful for the applications that need to simultaneously see the details of multiple waveforms with very different characteristics. The 8-inch high resolution 800x600 LCD display makes the split screen a pleasant observation environment to view the details of complex signals.

**B. COMPLETE SET of TRIGGER FUNCTIONS**




Besides Edge trigger, the GDS-3000 Series also offers various trigger functions, including Video, Pulse Width, Runt, Rise Time & Fall Time (specific time length), Alternate, Delay by Time, Delay by Event, and Hold-Off. The high sampling rate, the VPO signal processing & display, and the flexible trigger function all together make the GDS-3000 Series a powerful tool for waveform capture and display of various types of signals.

**C. AUTO RANGE for both TIME BASE and VERTICAL SCALE**

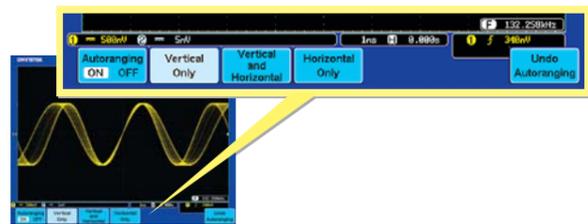

The Auto Range function automatically adjusts the time base and/or the vertical scale of displayed waveform when the frequency and/or the amplitude of input signal changed. This function gives user the convenience to have DSO always display waveform in a proper fashion on the screen tracking the frequency and amplitude changes of the input signal. It is especially useful when the user needs to alternately probe and test multiple circuit points containing signals with different frequencies and amplitudes.

**D. DUAL DISPLAY WINDOW ZOOM**




The GDS-3000 Series Window Zoom function provides dual display mode to show the main waveform and the magnified section of zoomed-in waveform at the same time. Under "Zoom" mode, the width and the position of zoom-in window over the main waveform can be selected to get the magnified waveform as needed for detailed observation. To quickly and accurately move the zoom-in window to the expected position, the "Coarse" mode helps move the window to the needed position immediately and the "Fine" mode provides fine adjustment to precisely place the window in the exact position.

**E. 28 AUTOMATIC MEASUREMENTS**




The GDS-3000 Series supports simultaneous measurement of up to 28 waveform measurement items grouped into three main waveform parameters: amplitude, time and delay measurements. The display modes include an individual mode and a Display All mode. The former can display any 8 of the automatic measurements while the later can display all the automatic measurements for a channel.

**F. FFT TEST FUNCTION**




To observe fundamental and harmonic frequency components of a signal, the FFT function on a digital storage oscilloscope is often used. Typically the traditional unit of the FFT is decibel (dB). However, when using dB it is sometimes difficult to identify the fundamental frequency of a signal from a noisy spectrum. With FFTrms function, the GDS-3000 Series can clearly display the fundamental frequency of an acquired waveform. The FFT function of GDS-3000 supports Rectangular, Hamming, Hanning, and Black-harris windows.

**G. THREE INPUT IMPEDANCE SELECTIONS**

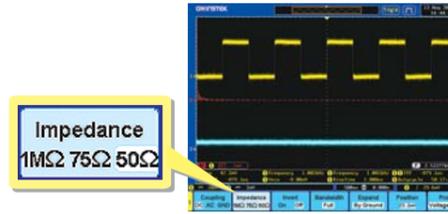

Three input impedance, 1MΩ, 75Ω, and 50Ω are available for user's selection. The flexibility of impedance selections, including 1MΩ to get minimum loading effect, 75Ω to accommodate Video transmission applications and 50Ω to fit RF communication applications, extends the GDS-3000 Series utilization range.

**H. X-Y MODE**



The X-Y mode of GDS-3000 defines CH1 and CH3 as the horizontal axis and CH2 and CH4 as the vertical axis, allowing the display of 2 sets of X-Y pattern simultaneously. The measurement items include Rectangular, Polar, Product and Ratio that fits most of the popular X-Y applications. The X-Y pattern and the time domain waveforms can be shown on the screen simultaneously. Two cursors on the time domain waveforms allow the identification of cursor-associated locations on the X-Y pattern display.

**I. EXTENDABLE APPLICATION SOFTWARE**




The GDS-3000 Series allows future installation of additional application software at the user site. This provides an open environment for optional software upgrade and additional feature built-in in whenever the GDS-3000 Series user has the need. The flexibility of software installation platform keeps the DSO being in use always up-to-date.

**J. WAVEFORM FILE PREVIEW**



The GDS-3000 provides an optimized operation interface for viewing screen captures. Generally, the oscilloscope may store large amounts of waveform data after a long period of time. To help prevent engineers from selecting the wrong file from a large number of stored waveform files, the screen capture preview function can be used to preview the waveform file without opening files so that operation of the oscilloscope is more efficient and convenient.

**K. FREE REMOTE CONTROL SOFTWARE**

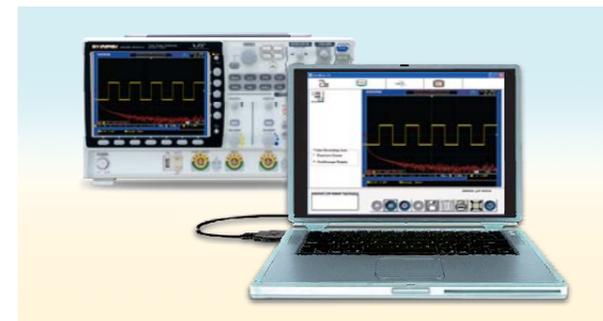

Using a USB port coupled with FreeWave remote monitoring software is the easiest and most convenient way to capture data from the GDS-3000 Series. With FreeWave, a screenshot can be saved as an image file (.bmp/.jpg) and waveform data (.csv). Not only can FreeWave monitor and record waveforms over a long period of time, but previously recorded waveforms can also be observed. Instrument settings can even be configured without the need to learn incomprehensible command line syntax. With the simple user interface and robust features, FreeWave allows you to get the most out of the GDS-3000 with little effort.

**L. SVGA OUTPUT**



A SVGA video output port in the rear panel of GDS-3000 Series allows the screen-image transfer from DSO to an external projector or a monitor for remote monitoring or big screen observation. This direct image transfer feature greatly increase the efficiency of presentation in the meeting, teaching in the class, remote monitoring of hazardous events from a secured zone, and fast and easy monitoring in the production line.

**M. VARIOUS INTERFACES SUPPORT**



Two high-speed USB 2.0 Host ports located in both front panel and rear panel are used for easy access of stored data. In the rear panel, a USB Device port is available for remote control and hardcopy print-out through a PictBridge compatible printer. RS-232 and LAN interfaces are provided as standard for system communication & ATE applications.

A SVGA video output port allows the transfer of DSO screen image to an external projector or monitor for remote monitoring or big screen observation. A GPIB to USB adaptor is available as an option for interface conversion through the USB Device port in the front panel.


**N. SERIAL BUS ANALYSIS SOFTWARE SUPPORTING I<sup>2</sup>C, SPI and UART (OPTIONAL)**



I<sup>2</sup>C Serial Bus Analysis Software



SPI Serial Bus Analysis Software



UART Serial Bus Analysis Software



The GDS-3000 Series provides two dedicated keys in the front panel for two sets of setting recall

With serial bus technology being widely used in embedded applications, the proper triggering and analysis of flowing data, control signal and associated pulse waveforms in serial bus communication has been a difficult job and challenge to design engineers. The Serial Bus Analysis software of GDS-3000 Series carries complete analysis tools for triggering and decoding of commonly used serial bus interfaces, including I<sup>2</sup>C, SPI


and UART. Without spending time to study serial bus regulation details, the user only needs to set the trigger condition on GDS-3000 to get the data slots of interest.

*\* Only four-channel models support SPI function.*

**O. POWER ANALYSIS SOFTWARE FOR POWER SUPPLY MEASUREMENTS (OPTIONAL)**




Power Quality



Harmonics



Ripple



In-rush Current

The Power Analysis software contains four measurement functions, including Power Quality, Harmonics, Ripple and Inrush Current. The Power Quality analysis function allows the measurements of Voltage, Current, Frequency, Power and other quality related parameters for power source efficiency improvement. The Harmonics analysis function performs evaluation of power waveform distortion and gives harmonic

test data for power source design and quality check. This function is complied with IEC 61000-3-2 standard. The Ripple measurement function, acquiring the ripple and noise overriding the DC waveform, is used to evaluate the DC power source quality. The Inrush Current measurement function is used to measure the power-on surge current, which may cause the damage of the device circuit.



GCP-100/020 GCP-300/500/1000 GCP-530/1030,GCP-206P/425P GDP-025 GDP-050/100 GDP-040D (for GDS-300/200 only)

In addition to the standard passive probes, the optional current or differential probes can be used to perform additional tests or power analysis. The differential probes come in three bandwidths: 25MHz, 50MHz and 100MHz. The current probes come in a broad variety of bandwidth and current ranges (ranging from 50MHz/30A, 100MHz/30A, 40kHz/240A and 100kHz/100A), to cover any number of power supply testing applications.

*\* The GCP-530/1030 must be used in conjunction with the GCP-206P/425P current probe power supply.  
\* The GCP-206P is capable of powering 2 units of GCP-530 or GCP-1030 and the GCP-425P is capable of powering 4 units.  
\* The GCP-100 requires a standard 9V battery; The GCP-020 do not require batteries or a power supply source.*

CURRENT PROBE							
	GCP-100	GCP-020	GCP-300	GCP-500	GCP-530	GCP-1000	GCP-1030
Probe Bandwidth	DC-100kHz	40Hz-40kHz	DC-300kHz	DC-500kHz	DC-50MHz	DC-1MHz	DC-100MHz
Rise Time	-	-	1.2µs (Typ.)	0.7µs (Typ.)	7ns or less	0.35µs (Typ.)	3.5ns or less
Maximum Continuous Input Range	0.05-10A(100mV/A) 1-100A(10mV/A)	0.1-24A(100mV/A) 0.5-240A(10mV/A)	200A(10mV/A) 20A(100mV/A)	150A(20mV/A) 15A(200mV/A)	30Apeak	7A(50mV/A) 70A(500mV/A)	30Apeak
Maximum Peak Current Value	100A	60A(100mV/A) 600A(10mV/A)	DC: 200A AC: 140Arms	DC: 150A AC: 100Arms	50A	DC: 70A AC: 50Arms	50A
Output Voltage Rate	100mV/A;10mV/A	10mV/A;100mV/A	100mV/A;10mV/A	200mV/A;20mV/A	0.1V/A	500mV/A;50mV/A	0.1V/A
DC Amplitude Accuracy	≤3%±5mV (50mA-10A peak) ≤4%±500µV (0.5A-40A peak) ≤15%(40-100A peak)	≤2%±50mV (100mA-20A peak) ≤3.5%±5mV (0.5-10A peak) ≤3%±5mV (10-40A peak) ≤1.5%±5mV (100A-240A peak)	±3% ±50 mA at 100 mV/A (50 mA - 20A peak range) ±4% ±50 mA at 10 mV/A (500 mA - 80A peak range) ±15% max at 10 mV/A (80A peak - 200A peak range)	±3% ±30 mA at 200 mV/A (50 mA - 15 A peak range) ±4% ±300 mA at 20 mV/A (300 mA - 80 A peak range) ±15% max at 20 mV/A (80A peak - 150A peak range)	±1.0%rdg±1mV (0-30Arms/DC, 45-66Hz);±2.0%rdg (30Arms-50A peak /DC, 45-66Hz)	±3% ±20 mA at 500 mV/A (20 mA - 7A peak range) ±4% ±200 mA at 50 mV/A (200 mA - 50 A peak range) ±15% max at 50 mV/A (50A peak - 70A peak range)	±1.0%rdg±1mV (0-30Arms/DC, 45-66Hz);±2.0%rdg (30Arms-50A peak /DC, 45-66Hz)
Noise	-	-	-	-	2.5mArms or less	-	2.5mArms or less
Rate Supply Voltage	-	-	-	-	±12V± 0.5V	-	±12V± 0.5V
Maximum Rated Power	-	-	-	-	5.6VA	-	5.3VA
Maximum Rated Voltage	600V, CAT III	600V, CAT III	CAT III 300V/CAT II 600V	CAT III 600V	300V, CAT I	CAT III 600V	300V, CAT I

CURRENT PROBE POWER SUPPLY		
	GCP-206P	GCP-425P
Compatible Current Probe	GCP-530/GCP-1030	GCP-530/GCP-1030
Number of Power Supply Connectors	2	4
Output Voltage	±12V± 0.5V	±12V± 0.5V
Rated Output Current	±600mA	±2.5A
Rated Supply Voltage(50/60Hz)	110V/120V, 220V/240V AC±10%	100V-240V AC±10%
Maximum Rated Power	20VA	170VA
Dimensions & Weight	73(W)x110(H)x186(D)mm; Approx.1.1kg	80(W)x119(H)x200(D) mm; Approx.1.1kg
Accessories	Power cord, fuse	Power cord, fuse

HIGH-VOLTAGE DIFFERENTIAL PROBE			DUAL-CHANNEL DIFFERENTIAL PROBE	
	GDP-025	GDP-050	GDP-040D	
Probe Bandwidth	DC - 25MHz (attenuation x50, x200); DC - 15MHz(attenuation x20)	DC - 50MHz(attenuation x200, x500, x1000); DC - 25MHz(attenuation x100)	DC - 100MHz(attenuation x200, x500, x1000); DC - 50MHz(attenuation x100)	
Attenuation	x20, x50, x200	x100, x200, x500, x1000	x100, x200, x500, x1000	
Accuracy	±2%	±2%	±2%	
Voltage Input Range (DC+AC peak to peak)	≤140Vp-p for x 20, ≤350Vp-p for x 50, ≤1400Vp-p for x 200	≤700Vp-p for x 100 ≤1400Vp-p for x 200 ≤3500Vp-p for x 500 ≤7000Vp-p for x 1000	≤700Vp-p for x 100 ≤1400Vp-p for x 200 ≤3500Vp-p for x 500 ≤7000Vp-p for x 1000	
Permitted Max Input Voltage	Maximum differential voltage: Max voltage between input terminal and ground: 600Vrms	Maximum differential voltage: Max voltage between input terminal and ground: 650Vrms	Maximum differential voltage: Max voltage between input terminal and ground: 650Vrms	
Input Impedance	Differential:4MΩ/1.2pF; Between terminals and ground:2MΩ/2.3pF	Differential:54MΩ/1.2pF; Between terminals and ground:27MΩ/2.3pF	Differential: 54MΩ/1.2pF; Between terminals and ground: 27MΩ/2.3pF	
Output	≤7.0V	≤7.0V	≤7.0V	
Output impedance	50Ω	50Ω	50Ω	
Rise Time	14ns (x50, x200 attenuation); 23.4ns (x20 attenuation)	7ns (x200, x500, x1000 attenuation); 14ns (x100 attenuation)	3.5ns (x200, x500, x1000 attenuation); 7ns (x100 attenuation)	
Rejection Rate on Common Mode(CMRR)	60Hz>80dB, 100Hz>60dB, 1MHz>50dB	60Hz>80dB, 100Hz>60dB, 1MHz>50dB	60Hz>80dB, 100Hz>60dB, 1MHz>50dB	
Power Supply	External DC adapter	External DC adapter	External DC adapter	
Consumption	Maximum 35mA (0.4Watt)	Maximum 35mA (0.4Watt)	Maximum 35mA (0.4Watt)	
Channel	2			
Bandwidth (-3dB)	DC - 40MHz (x200)			
Attenuation	200 X			
Voltage Input Range	600Vpp Max. CAT III			
Output	≤ ±3V			
Maximum Input Voltage to Earth	600Vpp for x200			
Typical CMRR	80dB@60Hz; 60dB@100Hz; 50dB@1MHz			
Input Impedance	Differential: 2MΩ//1.2pF, Ground 1MΩ//2.4pF			
Output Impedance	50Ω			
Rise Time	8.75ns for x200			
Power Supply	5V DC from GDS-300/200 Series			
Accuracy	±2%			
Dimension	81.7(H) x 123.0(W) x 28.0(D) mm			

