

Keysight 855xxA/B Series CalPods and 85523B CalPod Controller

85530B 20 GHz CalPod (Standard)
85531B 20 GHz CalPod (Temperature Characterized)
85532B 20 GHz CalPod (Thermal-Vacuum Environment)
85540A 40 GHz CalPod (Standard)
85541A 40 GHz CalPod (Temperature Characterized)
85542A 40 GHz CalPod (Thermal-Vacuum Environment)
85523B CalPod Controller



NOTICE: This document contains references to Agilent Technologies. Agilent's former Test and Measurement business has become Keysight Technologies. For more information, go to www.keysight.com.



Notices

© Keysight Technologies, Inc. 2011 – 2015

No part of this manual may be reproduced in any form or by any means (including electronic storage and retrieval or translation into a foreign language) without prior agreement and written consent from Keysight Technologies, Inc. as governed by United States and international copyright laws.

Manual Part Number

85523-90007

Edition

January 2015

Supersedes: February 2014

Keysight Technologies
1400 Fountaingrove Parkway
Santa Rosa, CA 95403

Warranty

The material contained in this document is provided “as is,” and is subject to being changed, without notice, in future editions. Further, to the maximum extent permitted by applicable law, Keysight disclaims all warranties, either express or implied, with regard to this manual and any information contained herein, including but not limited to the implied warranties of merchantability and fitness for a particular purpose. Keysight shall not be liable for errors or for incidental or consequential damages in connection with the furnishing, use, or performance of this document or of any information contained herein. Should Keysight and the user have a separate written agreement with warranty terms covering the material in this document that conflict with these terms, the warranty terms in the separate agreement shall control.

Technology Licenses

The hardware and/or software described in this document are furnished under a license and may be used or copied only in accordance with the terms of such license.

Restricted Rights Legend

If software is for use in the performance of a U.S. Government prime contract or sub-contract, Software is delivered and

licensed as “Commercial computer software” as defined in DFAR 252.227-7014 (June 1995), or as a “commercial item” as defined in FAR 2.101(a) or as “Restricted computer software” as defined in FAR 52.227-19 (June 1987) or any equivalent agency regulation or contract clause. Use, duplication or disclosure of Software is subject to Keysight Technologies’ standard commercial license terms, and non-DOD Departments and Agencies of the U.S. Government will receive no greater than Restricted Rights as defined in FAR 52.227-19(c)(1-2) (June 1987). U.S. Government users will receive no greater than Limited Rights as defined in FAR 52.227-14 (June 1987) or DFAR 252.227-7015 (b)(2) (November 1995), as applicable in any technical data.

Safety Notices

CAUTION

A **CAUTION** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in damage to the product or loss of important data. Do not proceed beyond a **CAUTION** notice until the indicated conditions are fully understood and met.

WARNING

A **WARNING** notice denotes a hazard. It calls attention to an operating procedure, practice, or the like that, if not correctly performed or adhered to, could result in personal injury or death. Do not proceed beyond a **WARNING** notice until the indicated conditions are fully understood and met.

Printing Copies of Documentation from the Web

To print copies of documentation from the Web, download the PDF file from the Keysight web site:

- Go to <http://www.keysight.com>.
- Enter the product model number (Ex: 85531B) in the **Search** function.
- Click **Search**.
- Click the **Manuals** hyperlink.
- Click the hyperlink title for the document you want to print - this downloads the PDF.
- Print the document after the PDF has fully downloaded.

CalPod Calibration Refresh Module Capabilities

The CalPod Calibration Refresh Modules are a new application of the ECal technology that provides an in-situ calibration refresh capability for the PNA family of vector network analyzers. There are many error sources that are present when making microwave measurements with a vector network analyzer. Systematic errors can be characterized and mathematically removed from the measurement by performing a user calibration, usually utilizing an electronic ECal calibration module. Other random errors such as switch and connector repeatability, variations due to cable movement, and thermal effects of cables, connectors, and adaptors have been the bane of the microwave test engineer for decades. With CalPod Calibration Refresh Modules, many of these random errors can be eliminated from the measurement by performing periodic calibration refreshes.

The CalPods are used in-situ at the end of the test port cables, and located directly at the interface to the DUT. When desired, a CalPod calibration refresh can be performed, and a fresh valid calibration re-established at the DUT interface. This calibration refresh will remove the random errors due to the test cable movement or thermal effects, as well as connector and switch matrix repeatability.

Trade-offs of the CalPod Calibration Refresh Modules are the additional insertion loss of the CalPod modules, as well as the time required to perform a calibration refresh. The CalPods have the capability to do a source power calibration at the output of the CalPod module, so this can be used to set a power level at the input to the DUT. To do a calibration refresh, three sweeps in the forward direction, and three sweeps in the reverse direction need to be performed, to allow each of the CalPods to measure their three reflection standards. The amount of time to perform these six sweeps will depend upon the number of frequency points, the IF bandwidth of the receiver, and the amount of averaging being used in the measurement configuration. Typically these sweep times are quite small. Additionally, for greater recorection accuracy, open, short, and load (OSL) averaging can be used to measure each of the reflection states multiple times, and then average the measured values to provide a more accurate measurement. The trade-off is that more sweeps need to be performed.

Applications for CalPods


CalPods are useful in any measurement situation where it is desirable to have assurance that a valid calibration is present before recording measurement data. Some of the measurement applications where CalPods have proven useful are as follows:

- Thermal-vacuum testing
- Temperature chamber testing
- Measurement of low-loss devices
- Phase measurements requiring a high level of accuracy
- Applications that require frequent recalibrations
- Production test measurements for close device tolerances
- Applications requiring complex and lengthy calibrations, such as multi-port measurements
- Measurement of cables installed in aircraft
- Removal of switch matrix repeatability errors
- Removal of switch and connector repeatability errors in complex ATE systems

Measurement Uncertainty

The information supplied in this CalPod Performance Characteristics document can be used to predict the typical re-correction values that can be obtained when using CalPod calibration refresh modules. Ideally one would want all calibration refresh operations to result in exactly the same value as the initial calibration, and exactly the same measurement value for the DUT. However, all microwave measurements are subject to small measurement uncertainties, and the CalPods also have small measurement uncertainties associated with their recorrections as well. This document explains how to determine the measurement uncertainty that can be expected with CalPods.


Figure 1 Typical 2-Port DUT Measurement with CalPods

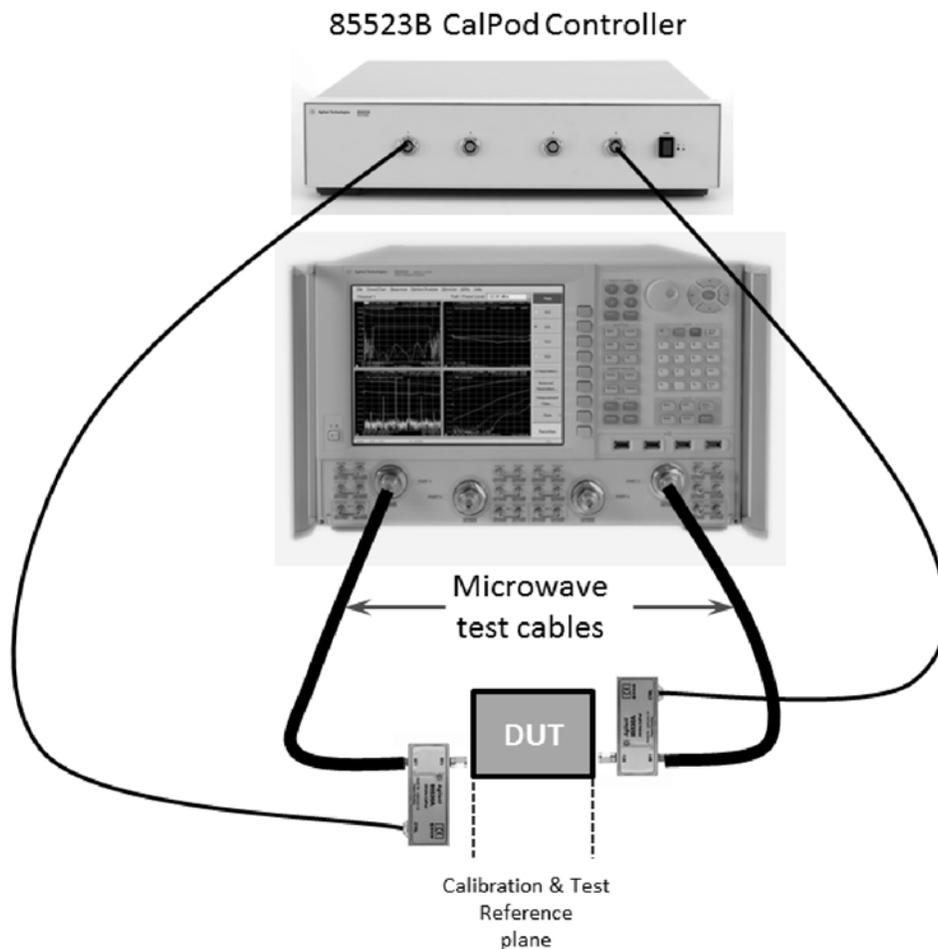

85523_007_001

The measurement uncertainty of a CalPod recorrection of a 2-port DUT can be determined by adding the recorrection residual S_{21} error of CalPod 1 and the recorrection residual S_{21} error of CalPod 2 together. The tables and graphs in this document provide values for the recorrection of residual S_{21} error versus frequency for the different models of CalPods.

Figure 2 Measurement Uncertainty of Both CalPods are Added Together For a 2-Port Measurement

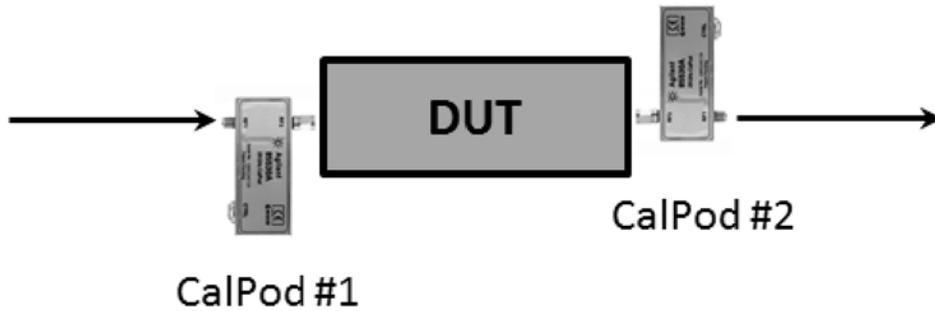

85523_007_002


For an ambient temperature application, the measurement uncertainty of a CalPod re-correction is as follows:

$$\text{Measurement uncertainty of a CalPod re-correction} = \text{Re-correction residual S21 error for CalPod \#1} + \text{Re-correction residual S21 error for CalPod \#2}$$

Temperature Change and Temperature Hysteresis Effects

As the CalPods are subjected to wide temperature range variations, there is some measurement uncertainty that occurs due to the temperature change, and some uncertainty due to temperature hysteresis effects. The following graph provides an example of this effect, and provides information on how to interpret these temperature graphs in this document.

Figure 3 Example: Temperature Change Effects and Temperature Hysteresis Effects for CalPods

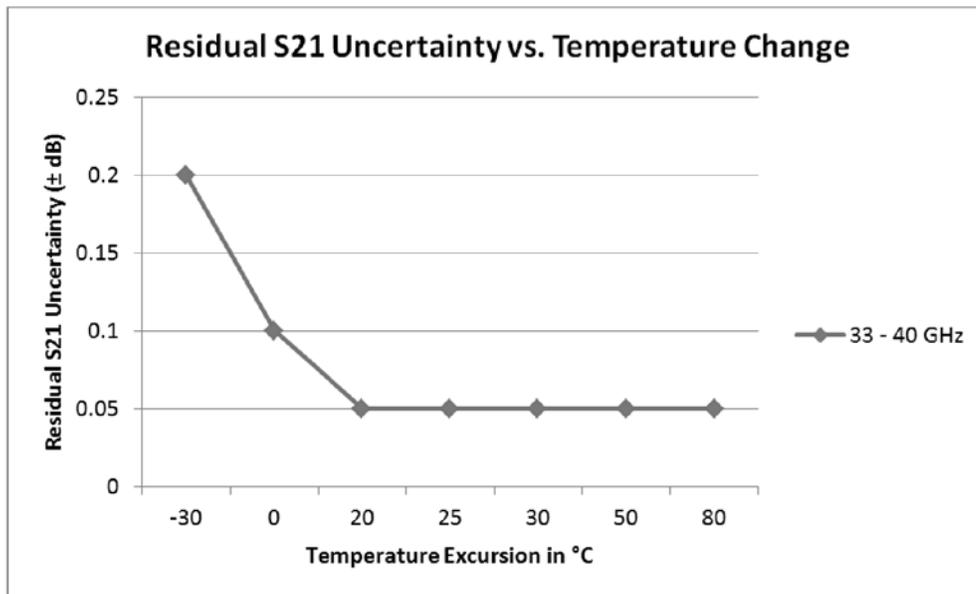

85523_007_004

In this document there are graphs and tables of residual S21 uncertainties versus temperature changes. **Figure 3** serves as an example of how to interpret these graphs.

Temperature Change

As the CalPod temperature changes over wide ranges, there is some residual S21 uncertainty in the CalPod re-correction associated with a large temperature change. For example, let’s assume that the CalPods are being used in a temperature chamber to measure DUT performance over a wide temperature range. As shown in **Figure 3**, if the CalPod is initialized at a room temperature of 25 °C, and then the temperature of the chamber containing the CalPod is decreased to 0 °C, the residual S21 measurement uncertainty due to this temperature change would be ±0.10 dB. If the temperature of the chamber containing the CalPod is decreased to –30 °C, the residual measurement uncertainty due to this temperature change would be ±0.20 dB.

Temperature Hysteresis

As the CalPod temperature changes from ambient room temperature to a widely different temperature, and then back to ambient room temperature, there can be a residual S21 measurement uncertainty due to a temperature hysteresis effect. For example, referring to **Figure 3**, if the CalPods are initialized at a room temperature of +25 °C, and the temperature of the chamber containing the CalPods is decreased to –30 °C, and then returned to +25 °C, the residual S21 measurement uncertainty due to a temperature hysteresis effect would be ±0.05 dB. Similarly, if initialized at +25 °C and then elevated to +25 °C and then returned to +25 °C, the measurement uncertainty due to a hysteresis effect would be ±0.05 dB.


In an application where the temperature of the DUT and the CalPods see temperature excursions, the measurement uncertainty of a CalPod re-correction for a 2-port DUT is as follows:

$$\text{Measurement uncertainty of a CalPod re-correction} = \text{Re-correction residual S21 error}^+ \text{ for CalPod \#1} + \text{Re-correction residual S21 error}^+ \text{ for CalPod \#2} + \text{Temperature uncertainty effects of CalPod \#1} + \text{Temperature uncertainty effects of CalPod \#2}$$

Residual Directivity and 1-Port Measurements

For measuring a 1-port device, there is a different way of specifying the measurement uncertainty of the re-corrected measurement.

Figure 4 Example of Residual Directivity

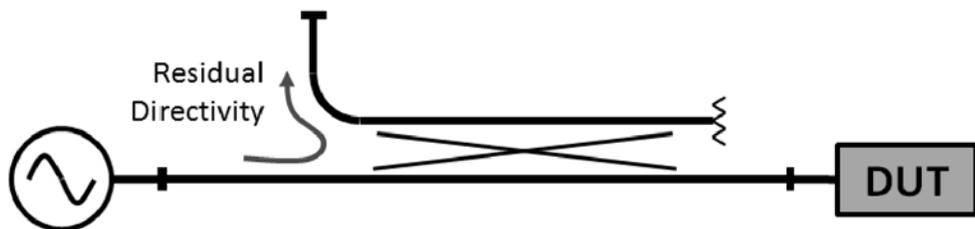


85523_007_006

For a 1-port DUT measurement, measured with one CalPod, we use the term “residual directivity” to define the measurement uncertainty of this 1-port re-corrected measurement. The directivity of the coupler shown in **Figure 4** limits the ability to resolve small reflection changes of the DUT. For example, if the return loss of

the DUT shown in Figure 4 is -60 dB, and the directivity of the coupler is -32 dB, the measurement system used with this coupler can only resolve a reflection to -32 dB.

Figure 5 Reflection Measurement with a CalPod

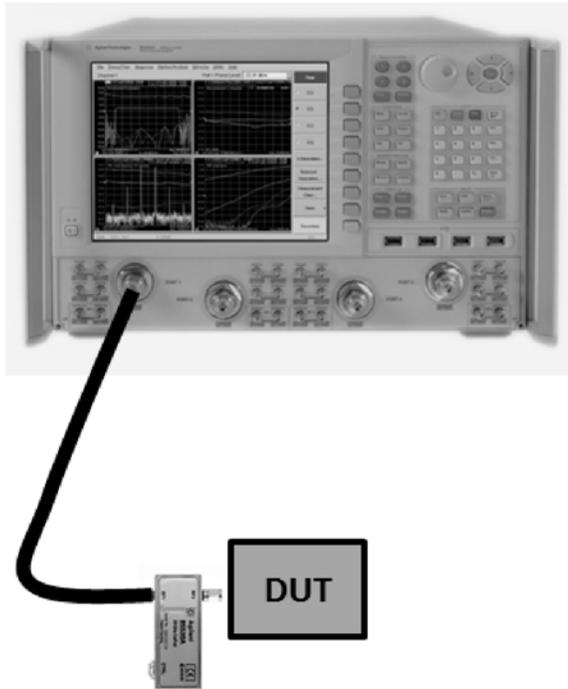

85523_007_007

When using a CalPod in a measurement system for a 1-port DUT, the residual directivity of the CalPod limits and defines the lowest reflection that can be resolved with the measurement system. Mathematically, the residual directivity can be defined as:

$$\text{Residual directivity (dB)} = 20 \text{ Log}_{10} (S_{11n} - S_{11\text{ref}})$$

Where:

$S_{11\text{ref}}$ is the initial S_{11} baseline or reference measurement

S_{11n} is the n th S_{11} recorrection measurement

To calculate the measurement uncertainty of a recorrection of a 1-port device when using a CalPod, the following formula can be used to determine the measurement uncertainty due to the CalPod.

$$\text{Measurement uncertainty of a CalPod re-correction} = \text{Degradation of residual directivity for CalPod \#1} + \text{Temperature uncertainty effects of CalPod \#1}$$

Definitions

Typical

Describes additional product performance information that is not covered by the product warranty. It is performance that 80% of the units exhibit with a 95% confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

Supplemental Characteristics

Describes Typical, but non-warranted performance parameters, denoted as “Typical,” “Nominal,” or “Approximate.”

Typical Performance for 20 GHz CalPods

Keysight 85530B 20 GHz CalPod (Standard)

Keysight 85531B 20 GHz CalPod (Temperature Characterized)

Keysight 85532B 20 GHz CalPod (Thermal-Vacuum Environments)

Frequency of Operation	100 MHz to 20 GHz
Insertion Loss	
100 MHz to 10 GHz	3.5 dB maximum
10 GHz to 20 GHz	4.0 dB maximum
Return Loss (at RF2 output port)	
100 MHz to 5 GHz	12.0 dB minimum
5 GHz to 20 GHz	9.0 dB minimum

Table 1 Corrected Performance Repeatability for Transmission Measurements^{1,2}

Frequency	Amplitude (S21 and S12)	Phase (S21 and S12)
100 MHz to 750 MHz	±0.10 dB	±1.5 °
750 MHz to 18 GHz	±0.05 dB	±1.5 °
18 GHz to 20 GHz	±0.20 dB	±2.0 °

1. Measured at 25 °C with a 3 dB loss between the PNA test port and the CalPod, with 1 kHz IF BW, -5 dBm power level, and eight averages.
2. The transmission measurement uncertainty is for a single CalPod. When two CalPods are used together with a 2-port DUT, the total measurement uncertainty is twice this value.

Table 2 Corrected Performance Repeatability for Reflection Measurements¹

Frequency	Residual Directivity ²
100 MHz to 750 MHz	-32 dB
750 MHz to 18 GHz	-38 dB
18 GHz to 20 GHz	-32 dB

1. Measured at 25 °C with a 3 dB loss between the PNA test port and the CalPod, with 1 kHz IF BW, -5 dBm power level, and eight averages.
2. Residual directivity = $20 \log_{10}(S_{11n} - S_{11ref})$, where S_{11n} is the nth recorection, and S_{11ref} is the initial S11 measurement.

Residual Recorrection Errors of S21 and S12 Measurements Versus Attenuation

Keysight 85530B 20 GHz CalPod (Standard)


Keysight 85531B 20 GHz CalPod (Temperature Characterized)

Keysight 85532B 20 GHz CalPod (Thermal-Vacuum Environments)

As the test port cable loss between the PNA and the CalPod increases, the residual S21 recorrection error tends to increase. This increase in the residual error is due to signal-to-noise degradation of the measurements of the CalPod reflection standards with increasing cable loss. The following graphs and tables provide guidance on the CalPod recorrection residual error that can be expected versus cable attenuation. Note that the cable attenuation is one-way attenuation from one of the PNA test ports to the CalPod. To reduce the effects of signal-to-noise degradation of the measurements of the CalPod reflection standards, the (open, short, load) OSL averaging feature in the CalPod firmware dialog box can be used. This will measure the reflection standards multiple times (as specified by the user), and average the value, to reduce the effects of signal-to-noise effects on measuring the reflection standards.

NOTE The values in the following tables and graphs use no OSL averaging.

Figure 6 Residual Recorrection Errors of S21 or S12 Measurements Versus Attenuation for Keysight 8553xB 20 GHz CalPods

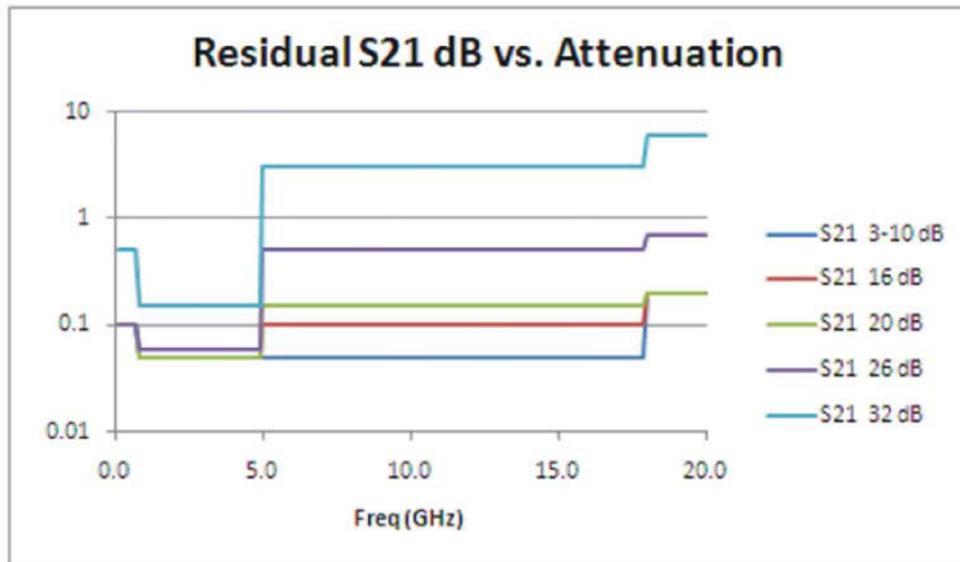


85523_007_009

Residual S21 or S12 Error Versus Attenuation (one way insertion loss between PNA port and CalPod)					
Frequency	3 – 10 dB	16 dB	20 dB	26 dB	32 dB
Frequency	Residual Error (dB)				
100 MHz	±0.10 dB	±0.10 dB	±0.10 dB	±0.10 dB	±0.50 dB
700 MHz	±0.10 dB	±0.10 dB	±0.10 dB	±0.10 dB	±0.50 dB
800 MHz	±0.05 dB	±0.05 dB	±0.05 dB	±0.06 dB	±0.15 dB
4.9 GHz	±0.05 dB	±0.05 dB	±0.05 dB	±0.06 dB	±0.15 dB
5.0 GHz	±0.05 dB	±0.10 dB	±0.15 dB	±0.50 dB	±3.0 dB
17.9 GHz	±0.05 dB	±0.10 dB	±0.15 dB	±0.50 dB	±3.0 dB
18.0 GHz	±0.20 dB	±0.20 dB	±0.20 dB	±0.70 dB	±6.0 dB
20.0 GHz	±0.20 dB	±0.20 dB	±0.20 dB	±0.70 dB	±6.0 dB

Residual Recorrection Errors of S21 and S12 Phase Measurements Versus Attenuation

Keysight 85530B 20 GHz CalPod (Standard)
 Keysight 85531B 20 GHz CalPod (Temperature Characterized)
 Keysight 85532B 20 GHz CalPod (Thermal-Vacuum Environments)

Figure 7 Residual Recorrection Errors of S21 or S12 Phase Measurements Versus Attenuation for Keysight 8553xB 20 GHz CalPods

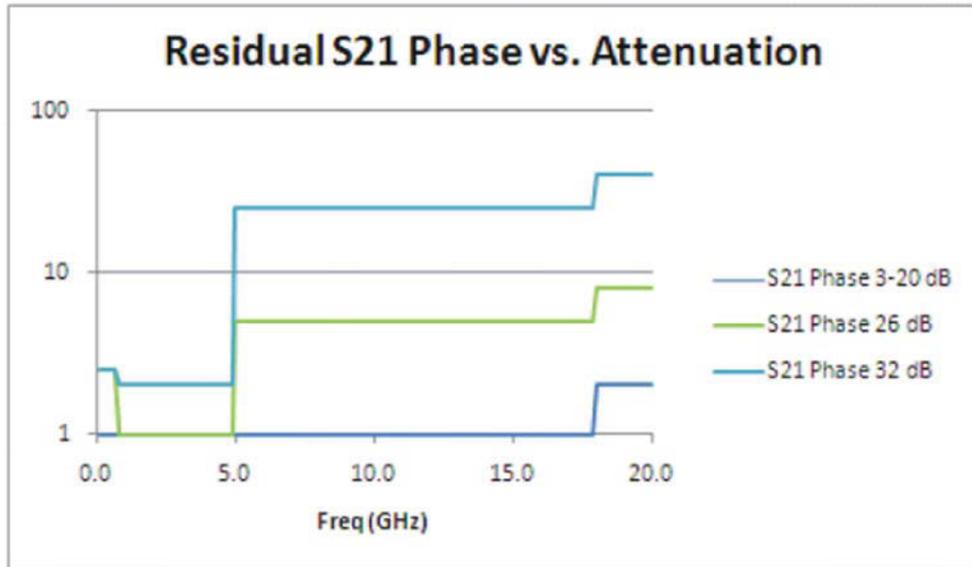


85523_007_010

Residual Phase Versus Attenuation (one way insertion loss between PNA port and CalPod)					
Frequency	3 – 10 dB	16 dB	20 dB	26 dB	32 dB
Frequency	Residual Phase (degree)				
100 MHz	1	1	1	2.5	2.5
700 MHz	1	1	1	2.5	2.5
800 MHz	1	1	1	1	2
4.9 GHz	1	1	1	1	2
5.0 GHz	1	1	1	5	25
17.9 GHz	1	1	1	5	25
18.0 GHz	2	2	2	8	40
20.0 GHz	2	2	2	8	40

Residual Recorrection Directivity Errors for S11 and S22 Measurements Versus Attenuation

Keysight 85530B 20 GHz CalPod (Standard)
 Keysight 85531B 20 GHz CalPod (Temperature Characterized)
 Keysight 85532B 20 GHz CalPod (Thermal-Vacuum Environments)

Figure 8 Residual Recorrection Directivity Errors Versus Test Cable Attenuation for S11 or S22 Measurements for Keysight 8553xB 20 GHz CalPods

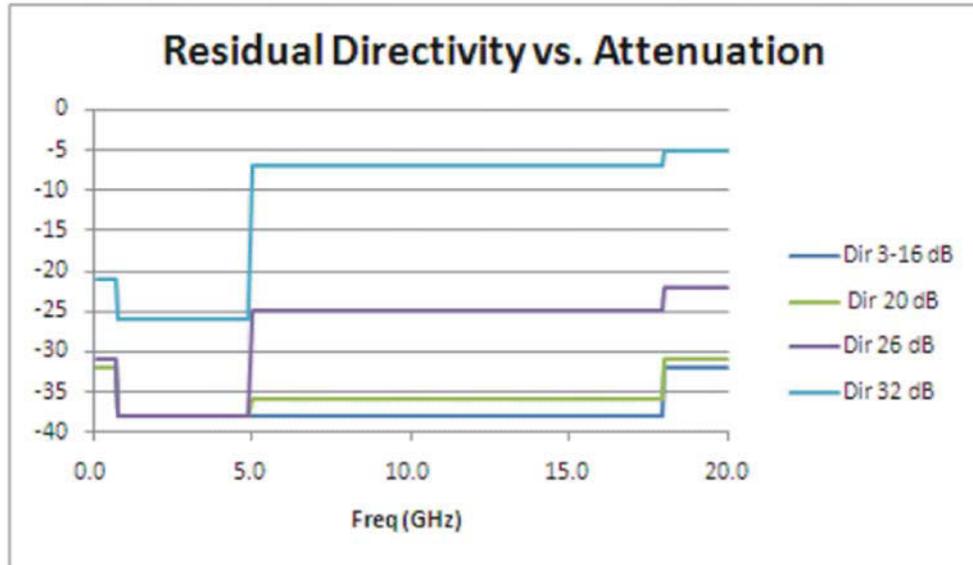

85523_007_011

Residual Directivity Versus Attenuation (one way insertion loss between PNA port and CalPod)					
Frequency	3 – 10 dB	16 dB	20 dB	26 dB	32 dB
100 MHz	-32	-32	-32	-31	-21
700 MHz	-32	-32	-32	-31	-21
800 MHz	-38	-38	-38	-38	-26
4.9 GHz	-38	-38	-38	-38	-26
5.0 GHz	-38	-38	-36	-25	-7
17.9 GHz	-38	-38	-36	-25	-7
18.0 GHz	-32	-32	-31	-22	-5
20.0 GHz	-32	-32	-31	-22	-5

Typical Performance for 40 GHz CalPods

Keysight 85540A 40 GHz CalPod (Standard)

Keysight 85541A 40 GHz CalPod (Temperature Characterized)

Keysight 85542A 40 GHz CalPod (Thermal-Vacuum Environments)

Frequency of Operation 500 MHz to 40 GHz

Insertion Loss (maximum)

500 MHz to 750 MHz 4.6 dB

750 MHz to 1 GHz 3.9 dB

1 GHz to 2 GHz 3.6 dB

2 GHz to 12 GHz 3.5 dB

12 GHz to 18 GHz 3.5 dB

18 GHz to 20 GHz 3.7 dB

20 GHz to 27 GHz 5.5 dB

27 GHz to 34 GHz 5.5 dB

34 GHz to 36 GHz 7.0 dB

36 GHz to 40 GHz 7.2 dB

Return Loss (at RF2 output port, minimum return loss)

500 MHz to 750 MHz 8.0 dB

750 MHz to 1 GHz 11.0 dB

1 GHz to 2 GHz 12.0 dB

2 GHz to 7 GHz 12.0 dB

7 GHz to 20 GHz 12.0 dB

20 GHz to 33 GHz 9.5 dB

33 GHz to 40 GHz 6.5 dB

Table 5 Corrected Performance Repeatability for Transmission Measurements^{1,2}

Frequency	Amplitude (S21 and S12)	Phase (S21 and S12)
500 MHz to 750 MHz	±0.10 dB	±1.5 °
750 MHz to 18 GHz	±0.05 dB	±1.5 °
18 GHz to 23 GHz	±0.20 dB	±2.0 °
23 GHz to 33 GHz	±0.10 dB	±1.5 °
33 GHz to 40 GHz	±0.20 dB	±2.0 °

1. Measured at 25 °C with a 3 dB loss between the PNA test port and the CalPod, with 1 kHz IF BW, -5 dBm power level, and eight averages.
2. The transmission measurement uncertainty is for a single CalPod. When two CalPods are used together with a 2-port DUT, the total measurement uncertainty is twice this value.

Table 6 Corrected Performance Repeatability for Reflection Measurements¹

Frequency	Residual Directivity ²
500 MHz to 750 MHz	-32 dB
750 MHz to 18 GHz	-38 dB
18 GHz to 23 GHz	-32 dB
23 GHz to 33 GHz	-34 dB
33 GHz to 40 GHz	-32 dB

1. Measured at 25 °C with a 3 dB loss between the PNA test port and the CalPod, with 1 kHz IF BW, -5 dBm power level, and eight averages.
2. Residual directivity = $20 \text{ Log}_{10} (S_{11n} - S_{11ref})$, where S_{11n} is the nth recorection, and S_{11ref} is the initial S_{11} measurement.


Residual Recorrection Errors of S21 and S12 Measurements Versus Attenuation

Keysight 85540A 40 GHz CalPod (Standard)
 Keysight 85541A 40 GHz CalPod (Temperature Characterized)
 Keysight 85542A 40 GHz CalPod (Thermal-Vacuum Environments)

As the test port cable loss between the PNA and the CalPod increases, the residual S21 recorrection error tends to increase. This increase in the residual error is due to signal-to-noise degradation of the measurements of the CalPod reflection standards with increasing cable loss. The following graphs and tables provide guidance on the CalPod recorrection residual error that can be expected versus cable attenuation. Note that the cable attenuation is one-way attenuation from one of the PNA test ports to the CalPod. To reduce the effects of signal-to-noise degradation of the measurements of the CalPod reflection standards, the (open, short, load) OSL averaging feature in the CalPod firmware dialog box can be used. This will measure the reflection standards multiple times (as specified by the user), and average the value, to reduce the effects of signal-to-noise effects on measuring the reflection standards.

NOTE The values in the following tables and graphs use no OSL averaging.

Figure 9 Residual Recorrection Errors of S21 and S12 Versus Test Cable Attenuation for Keysight 8554xA 40 GHz CalPods

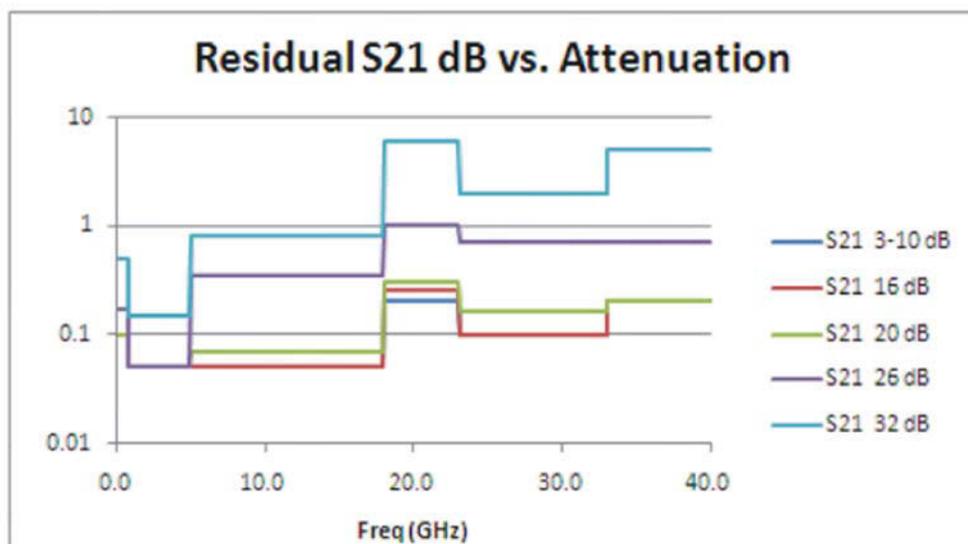

85523_007_012


Residual S21 and S12 Error Versus Attenuation (one way insertion loss between PNA port and CalPod)					
Frequency	3 – 10 dB	16 dB	20 dB	26 dB	32 dB
Frequency	Residual Error (dB)				
100 MHz	±0.10 dB	±0.10 dB	±0.10 dB	±0.17 dB	±0.50 dB
700 MHz	±0.10 dB	±0.10 dB	±0.10 dB	±0.17 dB	±0.50 dB
800 MHz	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.15 dB

Residual S21 and S12 Error Versus Attenuation (one way insertion loss between PNA port and CalPod)					
Frequency	3 – 10 dB	16 dB	20 dB	26 dB	32 dB
Frequency	Residual Error (dB)				
4.9 GHz	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.15 dB
5.0 GHz	±0.05 dB	±0.05 dB	±0.07 dB	±0.35 dB	±0.80 dB
17.9 GHz	±0.05 dB	±0.05 dB	±0.07 dB	±0.35 dB	±0.80 dB
18.0 GHz	±0.20 dB	±0.25 dB	±0.30 dB	±0.70 dB	±6.0 dB
23.0 GHz	±0.20 dB	±0.25 dB	±0.30 dB	±1.0 dB	±6.0 dB
23.1 GHz	±0.10 dB	±0.10 dB	±0.16 dB	±1.0 dB	±2.0 dB
33.0 GHz	±0.10 dB	±0.10 dB	±0.16 dB	±0.70 dB	±2.0 dB
33.1 GHz	±0.20 dB	±0.20 dB	±0.20 dB	±0.70 dB	±5.0 dB
40.0 GHz	±0.20 dB	±0.20 dB	±0.20 dB	±0.70 dB	±5.0 dB

Residual Recorrection Errors of S21 and S12 Phase Measurements Versus Attenuation

Keysight 85540A 40 GHz CalPod (Standard)
 Keysight 85541A 40 GHz CalPod (Temperature Characterized)
 Keysight 85542A 40 GHz CalPod (Thermal-Vacuum Environments)

Figure 10 Residual Recorrection Errors of S21 and S12 Phase Measurements Versus Test Cable Attenuation for Keysight 8554xA CalPods

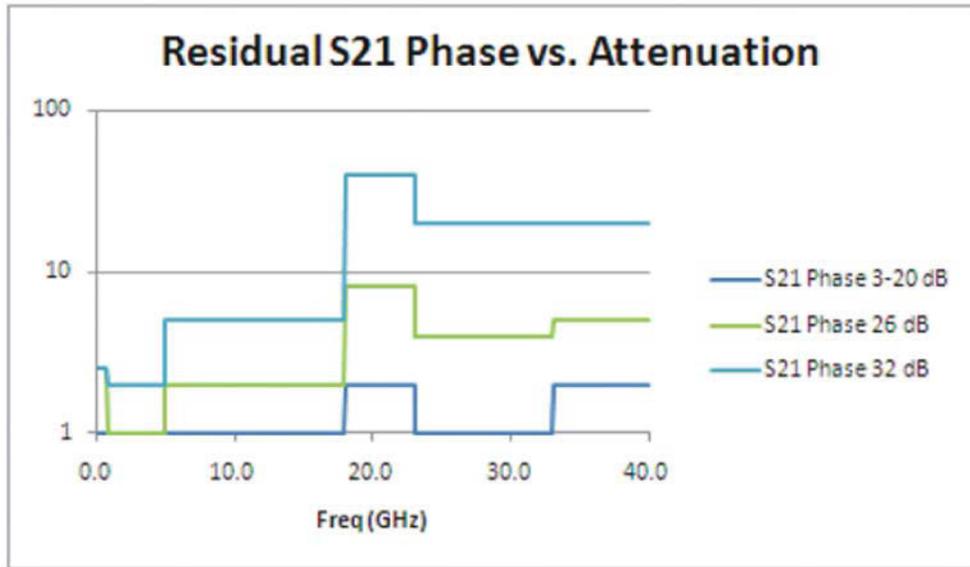


85523_007_013

Residual Phase Versus Attenuation (one way insertion loss between PNA port and CalPod)					
Frequency	3 – 10 dB	16 dB	20 dB	26 dB	32 dB
Frequency	Residual Phase (degree)				
100 MHz	1	1	1	2.5	2.5
700 MHz	1	1	1	2.5	2.5
800 MHz	1	1	1	1	2
4.9 GHz	1	1	1	1	2
5.0 GHz	1	1	1	5	25
17.9 GHz	1	1	1	5	25
18.0 GHz	2	2	2	8	40
23.0 GHz	2	2	2	8	40
23.1 GHz	1	1	1	4	20
33.0 GHz	1	1	1	4	20
33.1 GHz	2	2	2	5	20
40.0 GHz	2	2	2	5	20

Residual Recorrection Directivity Errors of S11 and S22 Measurements Versus Attenuation

Keysight 85540A 40 GHz CalPod (Standard)
 Keysight 85541A 40 GHz CalPod (Temperature Characterized)
 Keysight 85542A 40 GHz CalPod (Thermal-Vacuum Environments)

Figure 11 Residual Recorrection Directivity Error for S11 and S22 Measurements Versus Test Cable Attenuation for Keysight 8554xA CalPods

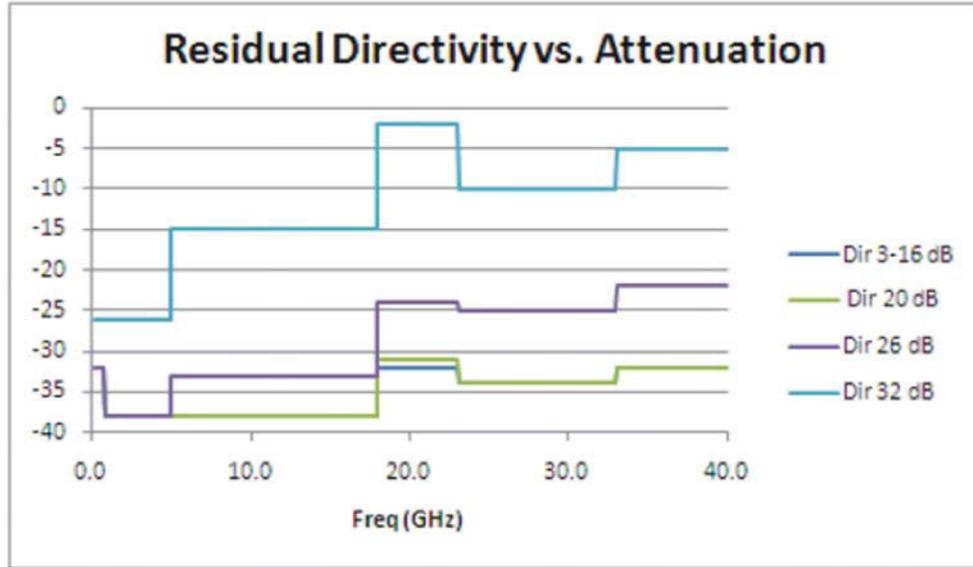

85523_007_014

Residual Directivity Versus Attenuation (one way insertion loss between PNA port and CalPod)					
Frequency	3 – 10 dB	16 dB	20 dB	26 dB	32 dB
100 MHz	-32	-32	-32	-31	-26
700 MHz	-32	-32	-32	-31	-26
800 MHz	-38	-38	-38	-38	-26
4.9 GHz	-38	-38	-38	-38	-26
5.0 GHz	-38	-38	-38	-33	-15
17.9 GHz	-38	-38	-38	-33	-15
18.0 GHz	-32	-32	-31	-24	-2
23.0 GHz	-32	-32	-31	-24	-2
23.1 GHz	-34	-34	-34	-25	-10
33.0 GHz	-34	-34	-34	-25	-10
33.1 GHz	-32	-32	-32	-22	-5
40.0 GHz	-32	-32	-32	-22	-5

Residual Recorrection Errors Due to Temperature Changes


Refer to [“Temperature Change and Temperature Hysteresis Effects”](#) on page -4 for an explanation of how these temperature errors affect the overall measurement uncertainty.

Amplitude Variations Versus Temperature for 20 GHz CalPods

Keysight 85531B 20 GHz CalPod (Temperature Characterized)

Keysight 85532B 20 GHz CalPod (Thermal-Vacuum Environments)

Figure 12 Typical Degradation of Residual S21 Versus Temperature Excursions for the 85531/32B CalPods

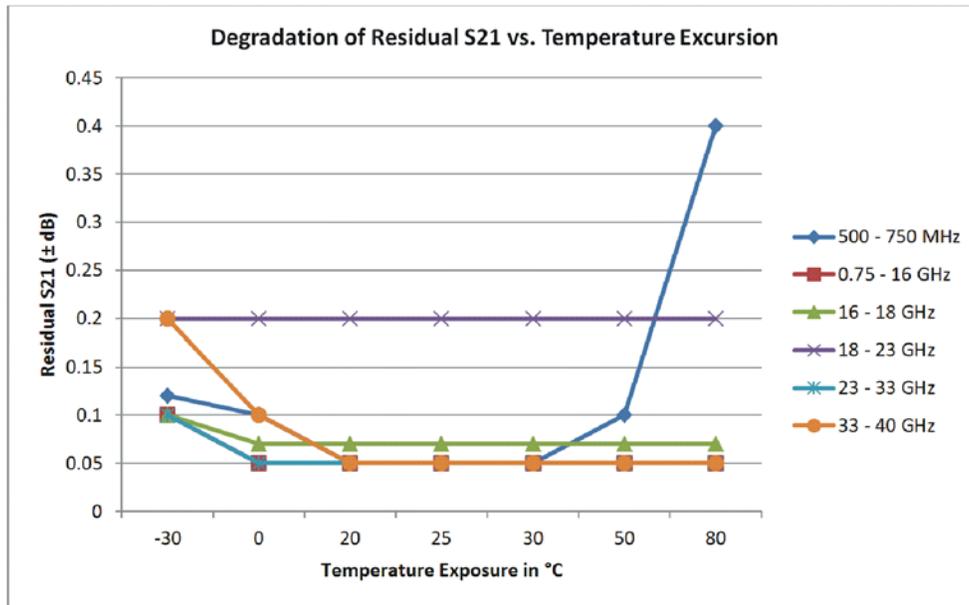


85523_007_015

Temperature Exposure in °C							
Frequency	-30 °C	0 °C	20 °C	25 °C	30 °C	50 °C	80 °C
Frequency	Residual Error (dB)						
500 MHz – 750 MHz	±0.12 dB	±0.10 dB	±0.05 dB				
750 MHz – 16 GHz	±0.10 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB
16 GHz – 18 GHz	±0.10 dB	±0.07 dB	±0.07 dB	±0.07 dB	±0.07 dB	±0.07 dB	±0.07 dB
18 GHz – 20 GHz	±0.20 dB	±0.20 dB	±0.20 dB	±0.20 dB	±0.20 dB	±0.20 dB	±0.20 dB

Amplitude Variations Versus Temperature for 40 GHz CalPods

Keysight 85541A 40 GHz CalPod (Temperature Characterized)
 Keysight 85542A 40 GHz CalPod (Thermal-Vacuum Environments)

Figure 13 Typical Degradation of Residual S21 Versus Temperature Excursions for the 85541/42A CalPods

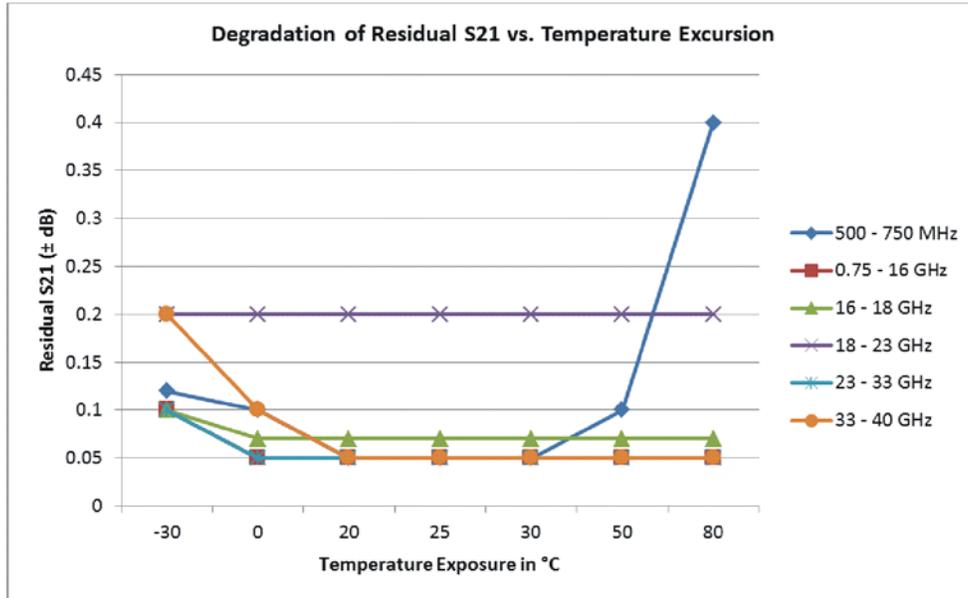

85523_007_016


Temperature Exposure in °C							
Frequency	-30 °C	0 °C	20 °C	25 °C	30 °C	50 °C	80 °C
Frequency	Residual Error (dB)						
500 MHz – 750 MHz	±0.12 dB	±0.10 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.10 dB	±0.40 dB
750 MHz – 16 GHz	±0.10 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB
16 GHz – 18 GHz	±0.10 dB	±0.07 dB	±0.07 dB	±0.07 dB	±0.07 dB	±0.07 dB	±0.07 dB
18 GHz – 23 GHz	±0.20 dB	±0.20 dB	±0.20 dB	±0.20 dB	±0.20 dB	±0.20 dB	±0.20 dB
23 GHz – 33 GHz	±0.10 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB	±0.05 dB
33 GHz – 40 GHz	±0.20 dB	±0.10 dB	±0.05 dB				

Residual Directivity Variations Versus Temperature for 85531B 20 GHz and 85541A 40 GHz CalPods

Keysight 85531B 20 GHz CalPod (Temperature Characterized)

Keysight 85541A 40 GHz CalPod (Thermal-Vacuum Environments)

Figure 14 Typical Degradation of Residual Directivity Versus Temperature Excursions for the 85531B/85541A CalPods

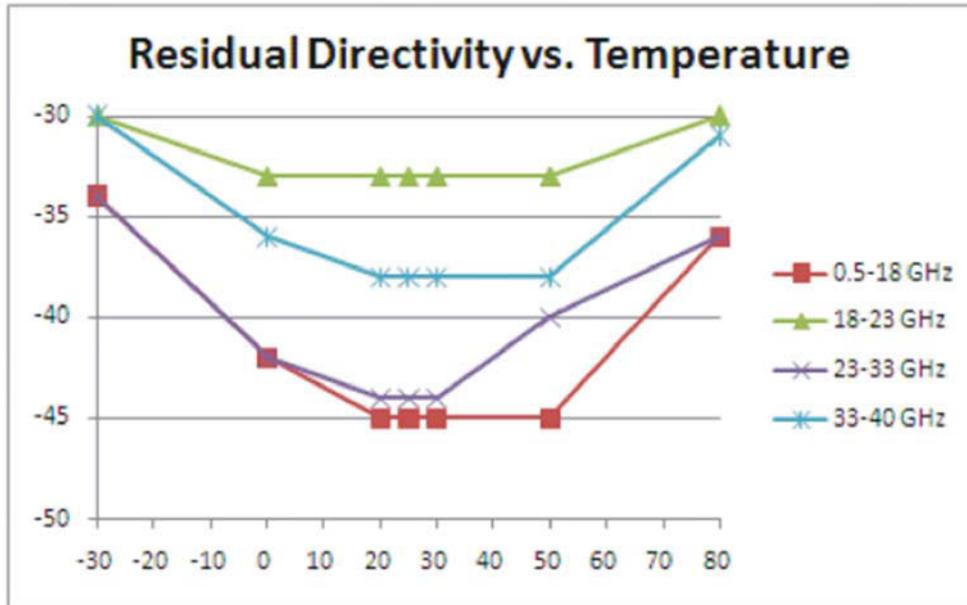


85523_007_017

Temperature Exposure in °C							
Frequency	-30 °C	0 °C	20 °C	25 °C	30 °C	50 °C	80 °C
Frequency	Residual Error (dB)						
500 MHz – 750 MHz	-34 dB	-42 dB	-45 dB	-45 dB	-45 dB	-45 dB	-36 dB
750 MHz – 18 GHz	-34 dB	-42 dB	-45 dB	-45 dB	-45 dB	-45 dB	-36 dB
18 GHz – 23 GHz	-30 dB	-33 dB	-33 dB	-33 dB	-33 dB	-33 dB	-30 dB
23 GHz – 33 GHz	-34 dB	-42 dB	-44 dB	-44 dB	-44 dB	-40 dB	-36 dB
33 GHz – 40 GHz	-30 dB	-36 dB	-38 dB	-38 dB	-38 dB	-38 dB	-31 dB

Residual Directivity Variations Versus Temperature for 85530B 20 GHz and 85540A 40 GHz CalPods

Keysight 85530B 20 GHz CalPod (Temperature Characterized)
 Keysight 85540A 40 GHz CalPod (Thermal-Vacuum Environments)

Figure 15 Typical Degradation of Residual Directivity Versus Temperature Excursions for the 85530B/85540A CalPods

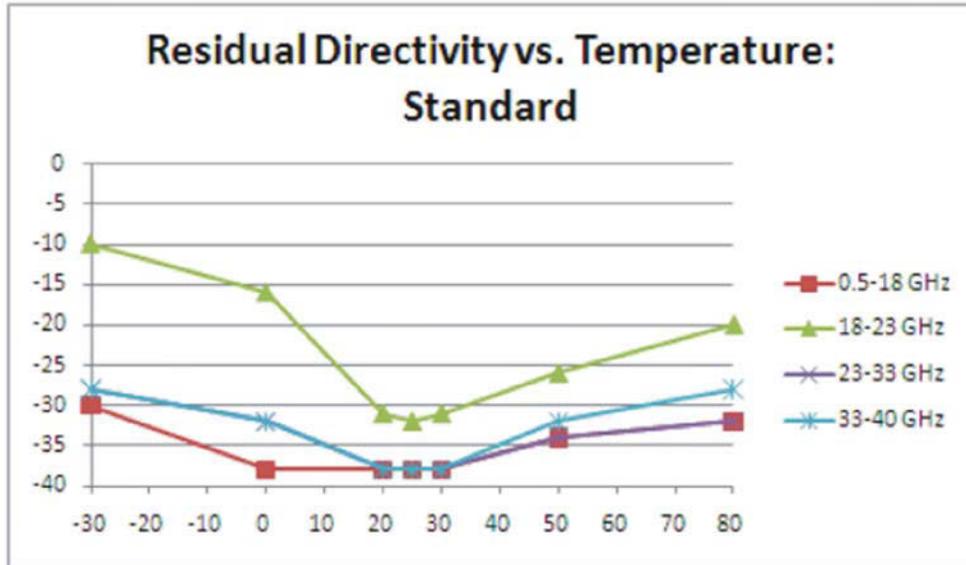

85523_007_018

Temperature Exposure in °C							
Frequency	-30 °C	0 °C	20 °C	25 °C	30 °C	50 °C	80 °C
Frequency	Residual Error (dB)						
500 MHz – 18 GHz	-30 dB	-38 dB	-38 dB	-38 dB	-38 dB	-34 dB	-32 dB
18 GHz – 23 GHz	-10 dB	-16 dB	-31 dB	-32 dB	-31 dB	-26 dB	-20 dB
23 GHz – 33 GHz	-28 dB	-32 dB	-38 dB	-38 dB	-38 dB	-34 dB	-32 dB
33 GHz – 40 GHz	-28 dB	-32 dB	-38 dB	-38 dB	-38 dB	-32 dB	-28 dB

Supplemental Characteristics

Keysight 85530B 20 GHz CalPod (Standard)

Keysight 85531B 20 GHz CalPod (Temperature Characterized)

Keysight 85532B 20 GHz CalPod (Thermal-Vacuum Environments)

Keysight 85540A 40 GHz CalPod (Standard)

Keysight 85541A 40 GHz CalPod (Temperature Characterized)

Keysight 85542A 40 GHz CalPod (Thermal-Vacuum Environments)

Table 7 Supplemental Characteristics

Input 1 dB Compression point (> 1 GHz)	26 dB minimum
Input 3rd order intercept point (> 1 GHz)	45 dBm minimum
Input level for 3rd order intercept point	2 tones @ +15 dBm maximum
Safe RF input level (damage limit)	30 dBm minimum
Temperature (Standard CalPods)	
Operating ²	25 °C ±5 °C
Storage	-40 °C to +90 °C
Temperature (Temperature characterized and thermal-vacuum environments CalPods)	
Operating	-30 °C to +80 °C
Storage	-40 °C to +90 °C
Pressure	
For ambient and temperature compensated CalPods	Atmospheric pressure
For thermal-vacuum compatible CalPods	Atmospheric pressure to below 1 x 10 ⁻⁸ Torr
Dimensions	
Length x Width x Height, excluding connectors	2.8 in. x 1.2 in. x 0.6 in. (70 mm x 29 mm x 14 mm)
Weight	~ 100 grams
Connectors	
Input (RF1)	2.92 mm (male)
Output (RF2)	2.92 mm (female)
DC control signals	9-pin LEMO connector

This information is subject to change without notice.
© Keysight Technologies 2011 – 2015
January 2015



85523-90007
www.keysight.com