

Agilent U2941A Parametric Test Fixture

Data Sheet

Features

- Closed lid minimizes ESD on sensitive circuits and components
- Up to 3 source/measure channels supported
- Different socket modules to match a wide variety of pin configurations
- Assembly Teflon plate for low-current measurements
- Bundled Agilent Parametric Measurement Manager software eases set-up, testing and data recording

The Agilent U2941A parametric test fixture is designed to complement usage of the Agilent U2722A USB modular source measure unit in the testing of semiconductor components, including SMT and DIP ICs.

The bundled Agilent Parametric Measurement Manager software also supports the Agilent U2751A USB modular switch matrix when used with the U2722A.

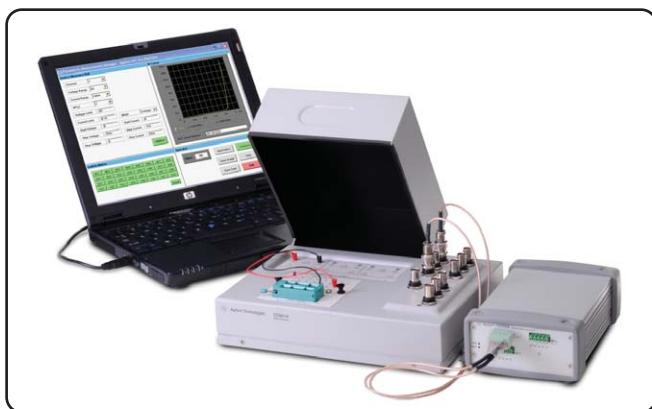


Figure 1: Sample setup of the U2941A connected directly to the U2722A source measure unit, and fastened with the DIP socket module.

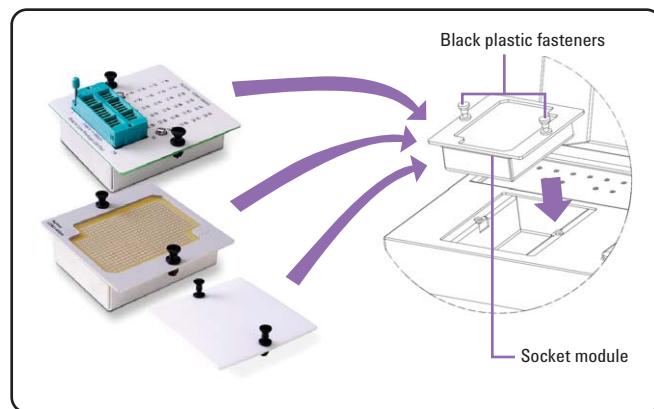


Figure 2: Socket modules are interchangeable to match pin configuration of device-under-test (DUT).




Agilent Technologies

Features of the Agilent Parametric Measurement Manager software

The Agilent Parametric Measurement Manager software comes bundled with the U2941A parametric test fixture. The software helps kick start tasks sooner with the below features:

- Out-of-box configuration of instruments for easy set-up
- User-friendly graphical user interface
- IV curve plotting with various graph tools, including autoscale, zoom and markers
- Saving of IV curve data to text file format
- Saving of IV curve graph to JPEG file format
- Print graph function

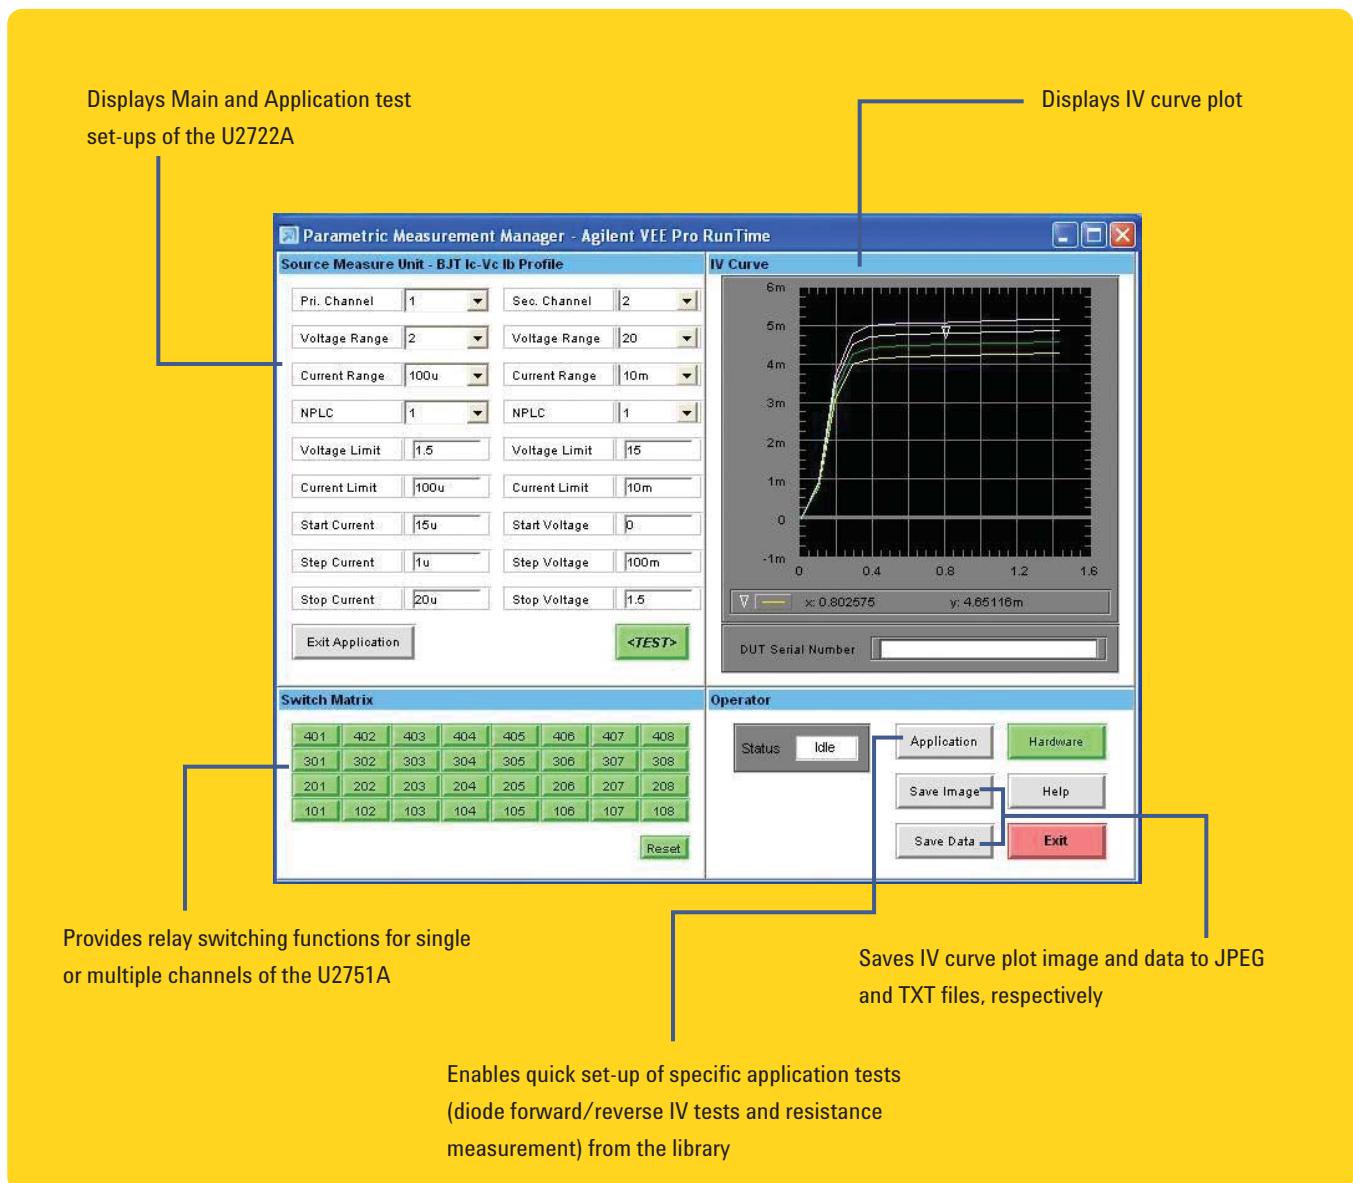


Specifications and system requirements

Specifications

The following specifications are valid for $23^{\circ}\text{C} \pm 5^{\circ}\text{C}$ and <70% relative humidity.

Electrical specifications	Electrical specifications
Voltage rating	60 VDC
Current rating	1 A
Environmental specifications	
Operating temperature	0 °C to 50 °C
Storage temperature	-20 °C to 70 °C
Operating humidity	20% to 85% RH non-condensing
Storage humidity	5% to 90% RH non-condensing
Altitude	Up to 2000 m
Physical specifications	
Dimensions (WxDxH)	250 mm × 200 mm × 120 mm
Weight	1.33 kg (approx.)
Warranty	3 months

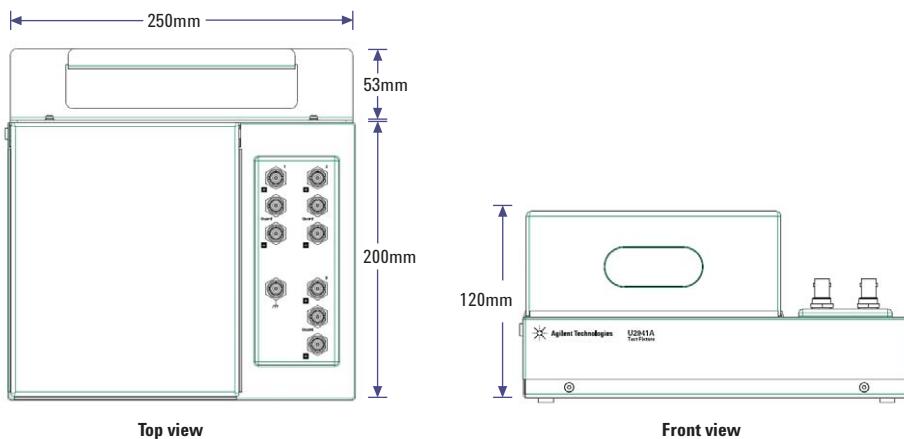

Minimum system requirements

Hardware	
Processor	1.6 GHz Pentium® IV or higher
RAM	512 MB (1.0 GB or higher recommended)
Hard disk space	1.0 GB free disk space at runtime
Display resolution	1024 × 768 recommended
Operating system and browser	
Operating system	<ul style="list-style-type: none">Windows® XP Professional or Home Edition, Service Pack 1 or later; orWindows 2000 Professional, Service Pack 4 or later
Browser	Microsoft Internet Explorer 5.01 (6.0 or higher recommended)
Software	
Agilent IO Libraries Suite ¹	Version 15.0 or higher
Agilent VEE ²	Runtime version 8.5, patch 8.5.1
Agilent Measurement Manager ³	Version 1.6 or higher
Microsoft .NET Framework ¹	Version 1.1 and 2.0

1. Available on Agilent Automation-Ready CD

2. Bundled with Agilent Parametric Measurement Manager CD

3. Bundled with Agilent U2722A USB modular source measure unit or Agilent U2751A USB modular switch matrix

Ordering information

Parametric test fixture

U2941A



Items shipped as standard with parametric test fixture:

- Assembly Teflon plate
- 28-pin dual-in-line package (DIP) socket module
- 0.1-inch universal socket module
- 0.075-inch universal socket module
- 0.05-inch universal socket module
- Pin plug-to-pin plug cables, black (4 pcs)
- Pin plug-to-pin plug cables, red (4 pcs)
- Pin plug-to-pin plug cables, blue (4 pcs)
- Pin plug-to-miniature clip cables, black (4 pcs)
- Pin plug-to-miniature clip cables, red (4 pcs)
- Pin plug-to-miniature clip cables, blue (4 pcs)
- PCB jumper pin
- BNC to two-wire cable, 1 m (3 pcs)
- Agilent Parametric Measurement Manager CD (includes installation and operating guides)

Socket modules

U2941A-201



Assembly Teflon plate

- Insulation board with minimal leakage current: suitable for extremely low-current measurements.

U2941A-202



28-pin dual-in-line package (DIP) socket module

- Lever actuated zero insertion force (ZIF) socket

U2941A-203



0.1-inch universal socket module

- 0.1-inch pitch: suitable for virtually any device such as components, DIP IC, or small scale circuit

U2941A-204



0.075-inch universal socket module

- 0.075-inch pitch: suitable for virtually any device such as components, DIP IC, or small scale circuit

U2941A-205



0.05-inch universal socket module

- 0.05-inch pitch: suitable for virtually any device such as components, DIP IC, or small scale circuit

Cables

U2941A-101



Pin plug-to-pin plug cable, black

U2941A-102



Pin plug-to-pin plug cable, red

U2941A-103



Pin plug-to-pin plug cable, blue

U2941A-104



Pin plug-to-miniature clip cable, black

U2941A-105



Pin plug-to-miniature clip cable, red

U2941A-106



Pin plug-to-miniature clip cable, blue

U2941A-107



BNC to two-wire cable, 1 m

www.agilent.com
www.agilent.com/find/u2941a

Agilent Email Updates

www.agilent.com/find/emailupdates
Get the latest information on the products and applications you select.

Agilent Direct

www.agilent.com/find/agilentdirect
Quickly choose and use your test equipment solutions with confidence.

Pentium is a U.S. registered trademark of Intel Corporation. Windows and Microsoft are U.S. registered trademarks of Microsoft Corporation.

Remove all doubt

Our repair and calibration services will get your equipment back to you, performing like new, when promised. You will get full value out of your Agilent equipment throughout its lifetime. Your equipment will be serviced by Agilent-trained technicians using the latest factory calibration procedures, automated repair diagnostics and genuine parts. You will always have the utmost confidence in your measurements.

Agilent offers a wide range of additional expert test and measurement services for your equipment, including initial start-up assistance onsite education and training, as well as design, system integration, and project management.

For more information on repair and calibration services, go to

www.agilent.com/find/removealldoubt

Product specifications and descriptions in this document subject to change without notice.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Phone or Fax

Americas

Canada	(877) 894-4414
Latin America	305 269 7500
United States	(800) 829-4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Thailand	1 800 226 008

Europe & Middle East

Austria	01 36027 71571
Belgium	32 (0) 2 404 93 40
Denmark	45 70 13 15 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125€/minute
Germany	07031 464 6333**
	**0.14€/minute
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
Switzerland	0800 80 53 53
United Kingdom	44 (0) 118 9276201

Other European Countries:

www.agilent.com/find/contactus

Revised: October 1, 2008

© Agilent Technologies, Inc. 2008
Printed in USA, October 8, 2008
5989-9741EN



Agilent Technologies