

Automotive Ethernet Transmitter Test Application

10 Mbps to 10 Gbps

The Keysight AE6000T Automotive Ethernet Transmitter Test solution provides you with an easy and accurate way to verify and debug the physical layer of your Automotive Ethernet designs.



Table of Contents

- Compliance Testing of Transmitters..... 3
- Outlining the Transmitter Specifications 5
- Applying Configurability and Guided Connections 10
- Generating Pass/Fail Reports 12
- Minimum Requirements: Instruments and Accessories 14
- Ordering information hardware **Error! Bookmark not defined.**
- Ordering information accessories..... 15
- Configuration guidelines 16
- Software license types for AE6910T, AE6920T and D9020AUTP **Error! Bookmark not defined.**

Compliance Testing of Transmitters

Advanced Driver Assistance Systems (ADAS) connected cars and Autonomous Vehicles (AVs) are transforming commercial and passenger transportation. Every leap in performance demands more and faster data, and this is driving a transition to Automotive Ethernet for in-vehicle networks.

Unlike CAN, LIN, Automotive Ethernet demands rigorous compliance verification using test cases that cover transmitters (Tx), receivers (Rx), and harness/connector assemblies. The requirements include complex measurements that, until recently, have been uncommon in the auto industry: vector network analysis with S-parameters, bit error rate (BER) testing, and electrical compliance of high-speed digital signals.

To help you save time and effort, Keysight offers solutions that automate the testing and validation across Transmitter (Tx), Receiver (Rx), and the connections between Automotive Ethernet devices. Our engineers have invested thousands of hours in learning the standards and creating automated, repeatable compliance tests. These proven applications help you ensure proper test configuration and valid measurement results. Ultimately, you'll have greater confidence that your device is compliant.

The Keysight AE6910T/AE6920T Automotive Ethernet Transmitter Test Application lets you automatically execute physical-layer (PHY) electrical tests for transmitter compliance using IEEE and/or Open Alliance (OABR) specifications. In addition to the measurement data, the report provides a margin analysis that shows how closely your device passed or failed each test.

The AE6910T/AE6920T software performs a wide range of electrical tests required to meet the current Automotive Ethernet specifications all in one installation. The application helps you execute a wide subset of the conformance tests performed with a variety of Keysight equipment.

The AE6910T/AE6920T Automotive Ethernet Transmitter Test Application allows you to select the reference specification and the test plan depending on the selected specification and currently supports the following data rates and standards:

- 10BASE-T1S, IEEE 802.3cg and OPEN Alliance TC14¹
- 100BASE-T1², IEEE 802.3bw and OPEN Alliance TC1¹
- 100BASE-T1 ECU test and OPEN Alliance TC8 specification
- 1000BASE-T1, IEEE 802.3bp and OPEN Alliance TC12¹
- 2.5/5/10GBASE-T1, IEEE 802.3ch and OPEN Alliance TC15¹

Note: The software is installed and runs on a Keysight Infiniium oscilloscope and is available with a node-locked, transportable, floating, and USB dongle license type. Each license can be purchased with 6-, 12-, 24-, or 36-months of support. Please see the ordering information for additional details on software license types.

¹ The software does not have dropdown selection for all of the OA standards however the cross reference is very close between IEEE and OA.

² Also supports BroadR-Reach

Overview of benefits

Using the AE6910T/AE6920T software greatly simplifies testing. The Automotive Ethernet electrical performance validation and conformance software offers several features to simplify the validation of Automotive Ethernet designs:

- Automatic configuration of all the required test equipment, reducing overall test time
- Wide range of tests for standards conformance of IEEE and OPEN Alliance test cases, saving the hassle of multiple installations and licenses while reducing cost.
- Trust the results, accurate and repeatable results with Keysight oscilloscopes.
- Be confident in the test setup, with setup instructions and calibration cues for all required test equipment.
- Detailed information on each test that ran in case you need to follow up and debug.
- Automated reporting in a comprehensive pass/fail HTML format with margin analysis

Outlining the Transmitter Specifications

The AE6910T/AE6920T Automotive Ethernet Tx test software saves you time by setting the stage for automatic execution of electrical tests. Some of the difficulties of performing electrical tests for Automotive Ethernet are properly connecting to the oscilloscope, loading the proper setup files, and then analyzing the measured results by comparing them to limits published in the specification. The AE6910T/AE6920T software does much of this work for you.

The AE6910T/AE6920T software automatically configures the oscilloscope for each test and provides an informative report with results that includes margin analysis, indicating how close your product is to passing or failing the specification.

There are two governing standards bodies, IEEE and OPEN Alliance, as well as different data rates for conformance tests set by those bodies.

An oscilloscope is used as the main testing tool for the above tests. There are a few additional instruments needed for distortion, MDI return loss, MDI mode conversion loss and power spectral density (PSD) tests. The following tables identify those differences and provide an equipment recommendation. All tests require an oscilloscope, though in addition, a network analyzer will also be needed for the MDI return loss test and the MDI mode conversion loss test. An arbitrary waveform generator (or function generator) is required for transmitter distortion for 100 Mbps and 1 Gbps tests.

Data rate	Oscilloscope minimum bandwidth	Additional equipment required
10BASE-T1S	500 MHz	NA
100BASE-T1	1 GHz	VNA, AWG
1000BASE-T1	2 GHz	VNA, AWG
2.5GBASE-T1	4 GHz	VNA
5GBASE-T1	6 GHz	VNA
10GBASE-T1	13 GHz	VNA

There are some variations in test description naming across the different standards. To be clear you can compare the below tables and see a complete list of the measurements made by the test software. The software provides a dropdown selection of IEEE 802.3cg, 802.3bw, 802.3bp, and 802.3ch, the OPEN Alliance specifications map to the IEEE specifications as described below. All these standards are accessible from one software application in the AE6910T/AE6920T.

10BASE-T1S transceiver specification IEEE 802.3cg and OPEN Alliance TC14³

Standard test number

IEEE802.3cg	OPEN Alliance TC14 ³	Description
147.5.4.2	147.1.2	Transmitter output positive droop
147.5.4.2	147.1.2	Transmitter output negative droop
147.5.4.3	147.1.3	Transmitter timing jitter
147.5.4.4	147.1.4	Transmitter power spectral density
147.5.4.1	147.1.1	Transmitter peak differential output

100BASE-T1 transceiver specification IEEE 802.3bw, OPEN Alliance TC1³, and TC8

Standard test number

IEEE 802.3bw	OPEN Alliance TC1 ³	OPEN Alliance TC8	Description
96.5.4.1	5.1.1	2.2 OABR_PMA_TX_01	Transmitter output positive /negative droop
96.5.4.2	5.1.2	2.2 OABR_PMA_TX_08	Transmitter distortion
96.5.4.3	5.1.3	2.2 OABR_PMA_TX_02	Transmitter timing jitter (master & slave)
96.5.4.4	5.1.4	2.2 OABR_PMA_TX_04	Transmitter power spectral density (PSD)
96.5.4.5	5.1.5	2.2 OABR_PMA_TX_03	Transmit clock frequency (master & slave)
96.5.6	5.1.8		Transmitter peak differential output
96.8.2.1	5.1.6	2.2 OABR_PMA_TX_05	MDI return loss
96.8.2.2	5.1.7	2.2 OABR_PMA_TX_06	MDI mode conversion loss
		2.2 OABR_PMA_TX_07	MDI common mode emission

1000BASE-T1 transceiver specification IEEE 802.3bp and OPEN Alliance TC12³

Standard test number

IEEE 802.3bp	OPEN Alliance TC12 ³	Description
97.5.3.1	97.1.1	Transmitter output positive droop
97.5.3.1	97.1.1	Transmitter output negative droop
97.5.3.2	97.1.2	Transmitter distortion
97.5.3.3	97.1.3	Transmitter timing jitter (master & slave)
97.5.3.3	97.1.3	Transmitter MDI jitter
97.5.3.4	97.1.4	Transmitter power spectral density (PSD)
97.5.3.5	97.1.5	Transmitter peak differential output
97.7.2.1	97.3.1	MDI return loss
97.5.3.6	97.1.6	Transmit clock (TX_TCLK125) frequency

³ Although the software does not have a dropdown selection for all of the OA standards the cross reference is very close between the two

2.5/5/10GBASE-T1 transceiver specification IEEE 802.3ch and OPEN Alliance TC15

Standard test number

IEEE 802.3ch	OPEN Alliance TC15 ³	Description
149.5.2.1	5.1.1	Transmitter output droop
149.5.2.2	5.1.2	Transmitter output linearity
149.5.2.3	5.1.3	Transmitter timing jitter (master & slave)
149.5.2.4	5.1.6	Transmitter power spectral density (PSD) and power level
149.5.2.5	5.1.7	Transmitter peak differential output
149.5.2.6	5.1.8	Transmitter clock frequency
149.5.2.3.1	5.1.4	MDI random jitter in master mode
149.5.2.3.2	5.1.5	MDI deterministic jitter in master mode
149.5.2.3.2	5.1.5	MDI even-odd jitter in master mode
149.7.1.3	5.3.1	MDI return loss

Saving time with the AE6910T/AE6920T software

The AE6910T/AE6920T Automotive Ethernet Tx test application extends the ease-of-use advantages of Keysight's Infiniium oscilloscopes to testing Automotive Ethernet designs. The Keysight automated test engine quickly walks you through the steps required to select, set up, and perform the tests. You can then easily view the results.

The test selections available in the following steps are then filtered according to the choices made in the setup page. You can select a category of tests all at once or specify individual tests. You can save tests and configurations as project files and recall them later for quick testing or review of previous test results. Straightforward menus let you perform tests with a minimum number of mouse clicks.

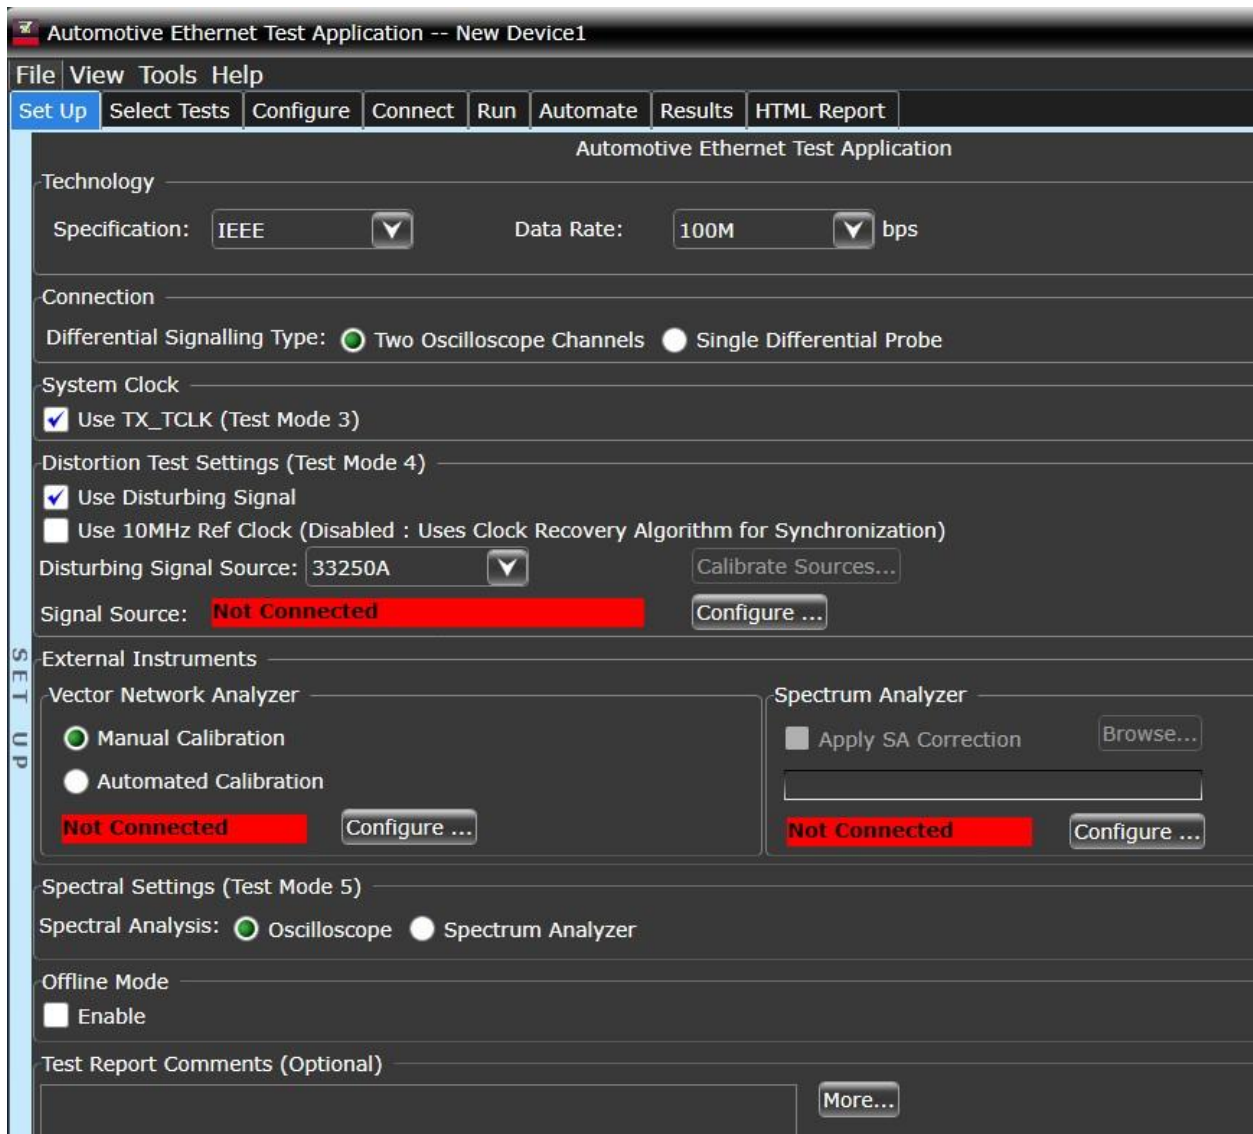


Figure 1. The clean interface allows you to select tests and create a test plan according to the selected specification.

To select between the specifications and data rates, there are drop-down menus on the first two selections as shown below.

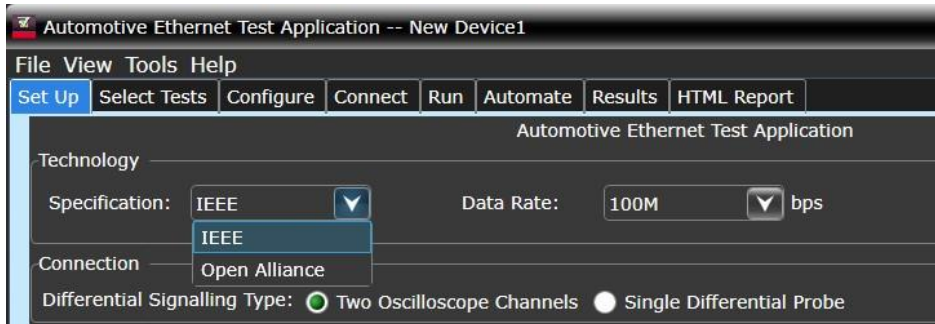


Figure 2. A drop-down menu to select which standard specification you want to test against.

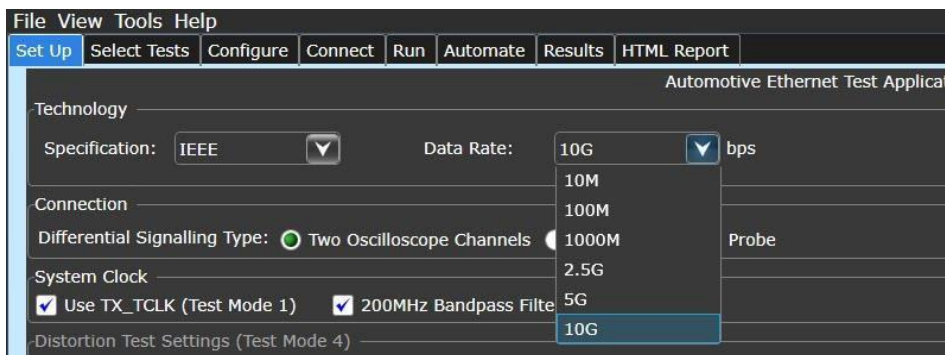


Figure 3. A second drop-down menu allows you to select the data rate you are interested in testing.

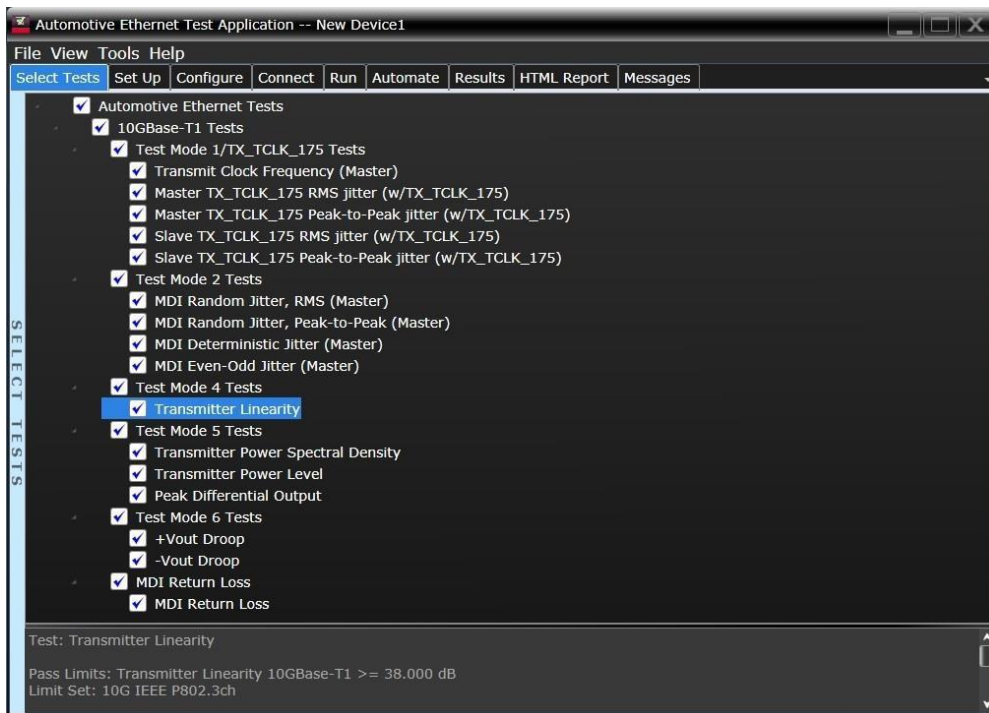


Figure 4. You can easily select individual tests or groups of tests with just a mouse-click.

Applying Configurability and Guided Connections

The AE6910T/AE6920T software provides flexibility in your test setup. It guides you to make connection changes with hook-up diagrams when the specific tests require it. Test connections are clearly identified including additional hardware and cables. When you select multiple tests where the connections must be changed, the software prompts you with a message and appropriate connection diagrams. In addition, the connection setup provides step-by-step instructions along with example signals to help make sure you are getting the intended readings.

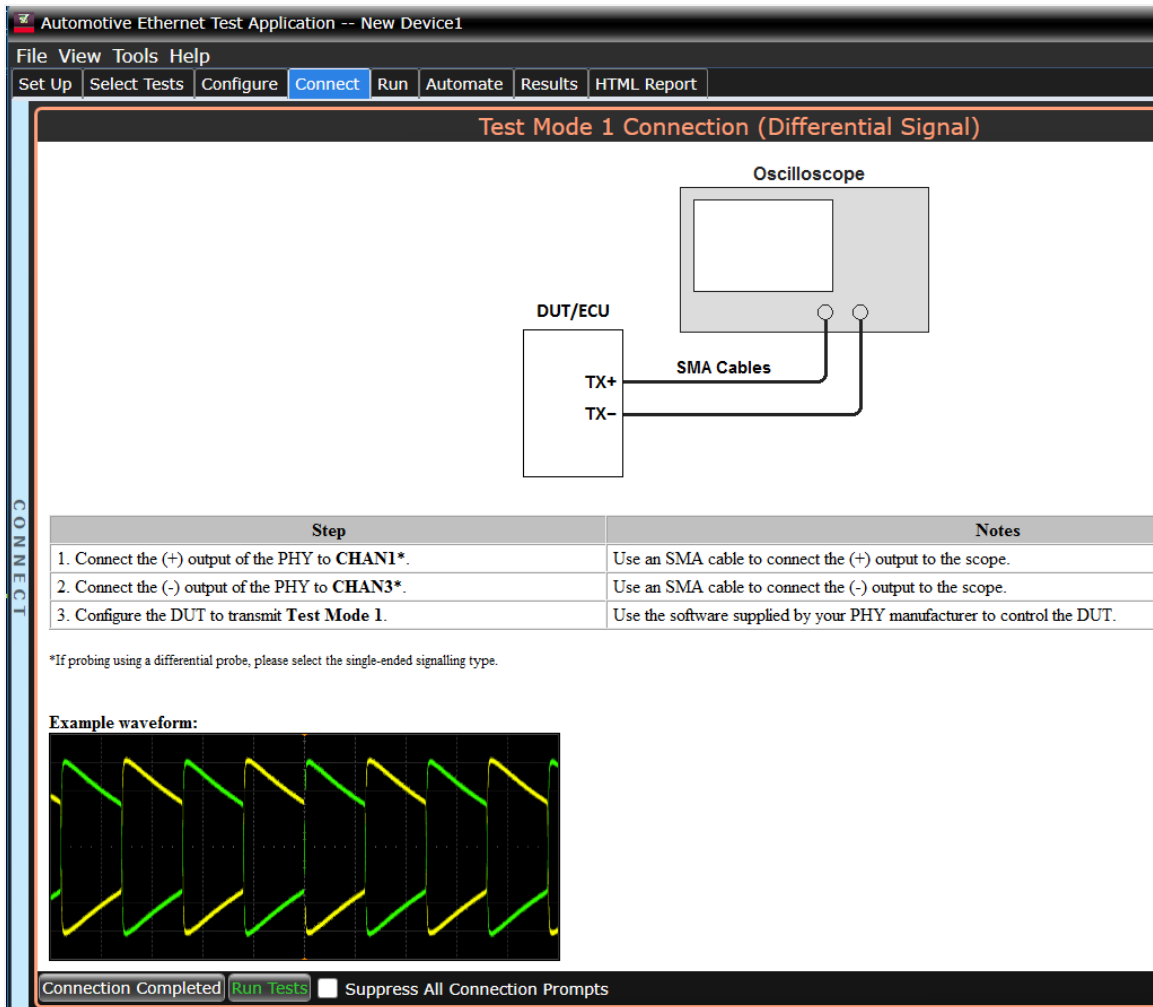


Figure 5. The software will guide you to setup each test including oscilloscope configuration and probing.

Automotive Ethernet Test Application -- New Device1

File View Tools Help

Set Up Select Tests Configure **Connect** Run Automate Results HTML Report

Test Mode 4 Connection w/Disturbing Signal

Step	Notes
1. Connect the DUT to the Ethernet Test Fixture, Section 11 using a pair of SMA cables.	Connect the DUT to the SMA connectors labeled "DUT"
2. Connect the Function Generator(s) to the Ethernet Test Fixture, Section 11 using of BNC cable(s).	Please calibrate the Function Generator(s) before running the test.
3. Connect the output of the Ethernet Test Fixture, Section 11 to the oscilloscope.	Connect the oscilloscope to the SMA connectors labeled "Scope"
4. If frequency/clock divider available, connect the 10 MHz output(s) of the clock/frequency divider to the 10 MHz Ref In Input(s) of the oscilloscope and function gen for clock synchronization.	Please ensure the 10 MHz output(s) are identical and phase locked to the input clock.
5. Configure the DUT to transmit Test Mode 4 .	Use the software supplied by your PHY manufacturer to control the DUT.

Example waveform:

Connection Completed **Run Tests** Suppress All Connection Prompts

Figure 6. In the connection setup, step-by-step instructions along with example signals are displayed to help with the test setup.

Generating Pass/Fail Reports

In addition to giving you measurement results, the AE6910T/AE6920T software also provides a report format that shows you not only where your product passes or fails but also reports how close you are to the limits specified for a particular test. You can select the margin test report parameter, which means you can specify the level at which warnings are issued to alert you to electrical tests where your product is operating close to the official test limit defined by the specification. How close your device comes to passing or failing a test is indicated as a percentage in the margin field. A result highlighted in yellow or red indicates that your device has tripped the margin threshold level for a warning or failure.

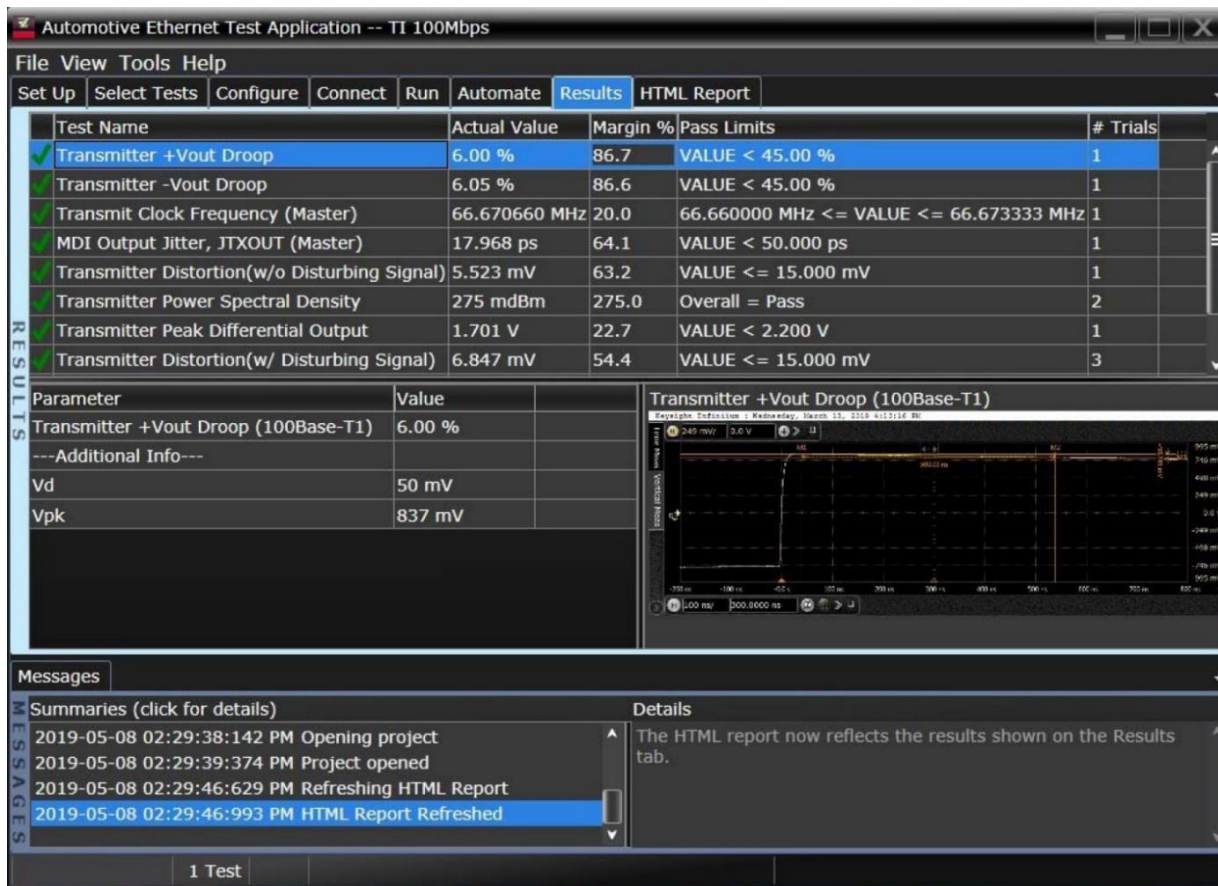


Figure 7. The test software results screen shows a summary of the tests performed, pass/fail status, and the margin that it passed or failed at. Clicking on a specific test also shows the test specification and a measurement waveform, if appropriate.

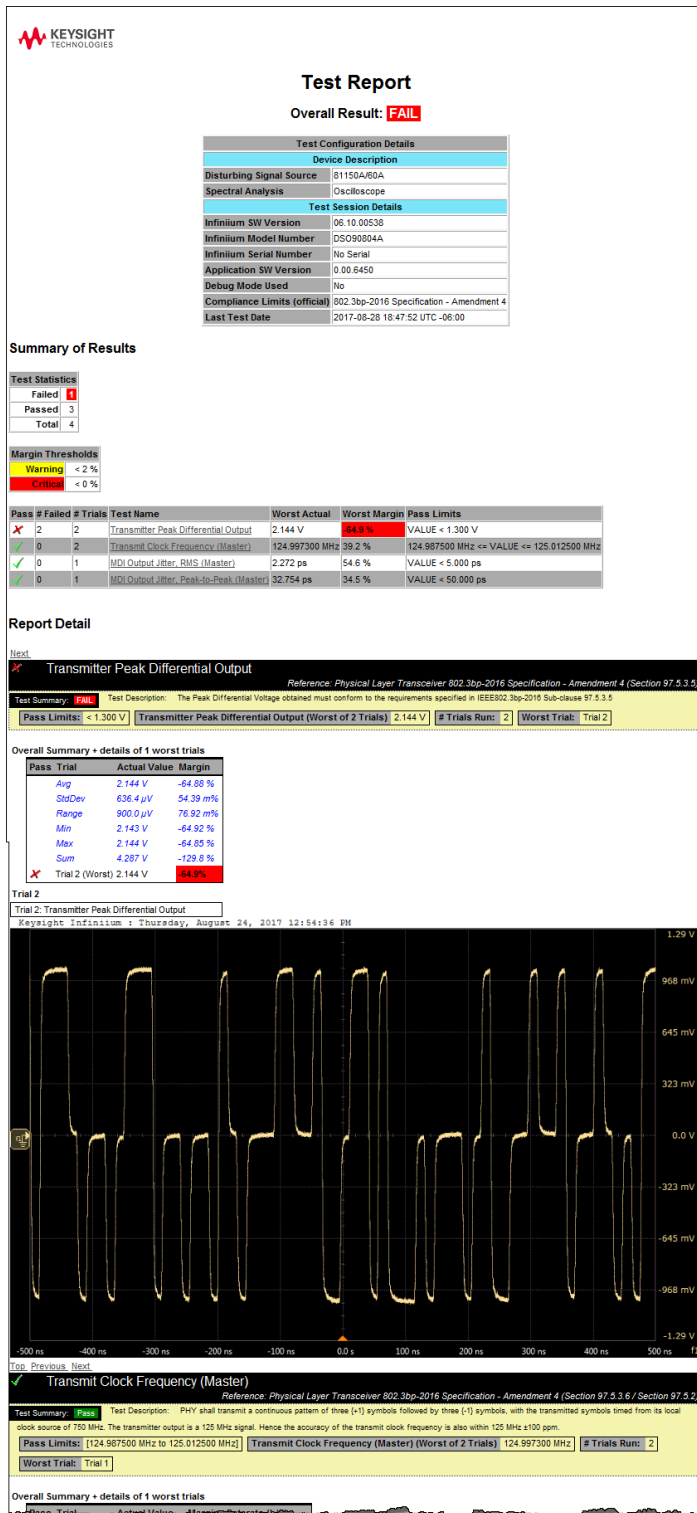


Figure 8. The test software HTML report documents your tests and indicates the pass/fail status, test specification range, measured values, and margin. Additional details are available for each test, including the test limits, test description, and test results, including waveforms, if appropriate.

Minimum Requirements: Instruments and Accessories

The AE6910T/AE6920T is software that is installed directly onto a Keysight Infiniium class oscilloscope. Additional hardware is required depending on the specification. The table below captures the minimum requirements of the specifications and lists the corresponding equipment that Keysight offers for that measurement type.

Test requirement	Min Instrument requirement	Supported Keysight models
Basic compliance tests	500 MHz oscilloscope, 2 channels (10BASE-T1S)	Infiniium S-series, EXR-series, MXR-series
	1 GHz oscilloscope, 2 channels (100BASE-T1)	
	2 GHz oscilloscope, 2 channels (1000BASE-T1)	
	4 GHz oscilloscope, 2 channels (2.5GBASE-T1)	
	6 GHz oscilloscope, 2 channels (5GBASE-T1)	
Transmitter distortion test	13 GHz oscilloscope, 2 channels (10GBASE-T1)	Infiniium UXR or V-series
	2-channel function generator with a minimum bandwidth of 11 MHz (100BASE-T1)	33512A/B, 33522A/B
MDI return loss and mode conversion loss tests	2-channel function generator with a minimum bandwidth of 125 MHz (1000BASE-T1)	33622A, 81150/60A
	Network analyzer (VNA) with the start and stop frequency range 1 MHz - 66 MHz (100BASE-T1), 2-port configuration and a calibration kit	P5000A/B ⁴ , P9382B ⁴ , E5071C ⁵ , E5080B ⁴ , PXI M9804A
	Network analyzer (VNA) with the start and stop frequency range 2 MHz - 600 MHz (1000BASE-T1), 2-port configuration and a calibration kit	
Network analyzer (VNA) 2-port configuration and a calibration kit with the start and stop frequency range <ul style="list-style-type: none"> • 1 MHz – 1 GHz (2.5GBASE-T1) • 1 MHz – 2 GHz (5GBASE-T1) • 1 MHz – 4 GHz (10GBASE-T1) 		

Notes:

- 802.3cg for 10BASE-T1S does not require transmitter distortion tests or MDI return loss or mode conversion loss tests.
- 802.3ch for 2.5/5/10GBASE-T1 does not require transmitter distortion tests

⁴ The P5000B/ P9382B Series VNA supports host PCs with Thunderbolt 3 interface only. Check out the Streamline series VNA configuration guide with Keysight literature number 3121-1254EN for more details.

⁵ Both E5071C & E5080B support differential measurement simulation (Sdd11 & Sdc11) with a fixture simulator option.

Ordering information accessories


Option name	Description	Used for what purpose
AE6804A	SMA cable: SMA (m) -SMA (m) x 2	
AE6802A	Adapter: BNC (m) to SMA (f) x 2 ⁶	
AE6941A	Automotive Ethernet test fixture AE6941A	
AE6942A ⁷	SMA to Molex/Mini-50 adapter board AE6942A	Basic compliance setup
AE6943A ⁷	SMA to MATEnet adapter board AE6943A	
AE6960A ⁷	SMA to H-MTD adapter board AE6960A	
AE6965A ⁷	H-MTD to 2.92 Y adapter AE6965A (jack to jack)	
		Choose 1
AE6950A ⁸	Frequency Divider Board AE6950A	Transmitter distortion test
AE6809A	BNC cable: BNC(m) to BNC(m) cable x 2	Connect to a function generator for distortion test (100/1000BASE-T1)
N7550A	RF Electronic calibration module, N7550A (ECal), DC-4 GHz, 2-Port	Calibration of a network analyzer for MDI return loss/mode conversion loss tests
N4417AK20	Cable: N-type-N (m) to 3.5 mm (m) x2	Connect to a network analyzer E5080B for MDI return loss/mode conversion loss tests
Y1740A-100	Cable 3.5 mm (m) to 3.5 mm (m)	Connect to network analyzer P5000A/B
AE6805A	SMA semi rigid cable: 2.92mm (m) – 2.92mm (m)	In place of SMA cables for 2.5/5/10GBASE-T1 tests
AE6808A	Filter for distortion test	Required with 33622A for 1000BASE-T1 transmitter distortion test
AE6809A	Cable BNC (m) to BNC (m)	Transmitter distortion test



AE6943A SMA to MATEnet



AE6942A SMA to Molex/Mini-50



AE6960A SMA to H-MTD



AE6965A-HMK H-MTD to 2.92,
jack to jack

⁶ Two BNC to SMA adapters come with each oscilloscope, 2 additional are required for decode capability.

⁷ IEEE 802.3bw does not specify a connector, users may have different means to connect D+ and D- signals to the oscilloscope. For DUTs that use Molex/Mini50, MATEnet or H-MTD connections, Keysight's adapter boards can be used with the automotive Ethernet test fixture AE6941A and/or directly with SMA cables. For MultiGbase-T1 Tx testing, AE6965A H-MTD Y adapter and a pair of SMA cable can be used instead of using the AE6960A with a H-MTD cable and a SMA cable pair.

⁸ The frequency divider board is required for the IEEE standard but there is a software algorithm available in the AE6910T/AE6920T if your Tx CLK is either not pinned out or you want a minimum configuration.

Configuration guidelines

Notes	Description	Part number	Test data rate			
			10BASE-T1S	100BASE-T1	1000BASE-T1	2.5, 5, 10 GBASE-T1
Required Choose 1	Automotive Ethernet Transmitter Application 10M-5G	AE6910T	x	x	x	Up to 5 Gbps
	Automotive Ethernet Transmitter Application 10M-10G	AE6920T	x	x	x	x
Optional	Automotive Ethernet Protocol Trigger & Decode 100/1000M	D9120AUTP		x	x	
Optional ⁹	Frequency divider board	AE6950A		x	x	
Required ¹⁰	Pulse Amplitude Modulation PAM-N Analysis Software for Infiniium MXR	D9110PAMA				x
Required ¹⁰	Pulse Amplitude Modulation PAM-N Analysis Software for Infiniium UXR, V-series	D9120PAMA				x
Required	Automotive Ethernet compliance test fixture	AE6941A		x	x	
Adapter of choice, Qty 2 ¹¹	SMA to Molex/Mini-50 adapter board	AE6942A		x	x	
	SMA to MATEnet adapter board	AE6943A		x	x	
	SMA to H-MTD adapter board	AE6960A		x	x	x
	SMA to H-MTD	AE6965A				x
Qty 2 ¹² , choose 1	SMA cable SMA (m) – SMA (m)	AE6804A		x	x	x
	SMA semi-rigid cable (use for multigig tests)	AE6805A				x
Qty 2 ¹³	BNC to SMA adapter	AE6802A		x	x	x
Qty 2 depending on VNA	Cable, type-N (m) to 3.5 mm (m) ¹⁴ for use with E5080B	N4417AK20		x	x	x
	Cable 3.5 mm (m) to 3.5 mm (m) for use with USB VNA	Y1740A-100		x	x	x
Optional	Low Pass Filter, use with 33622A 1000BASE-T1 distortion test	AE6808A			x	
Qty 2	Cable BNC (m) to BNC (m)cable	AE6809A		x	x	x
Optional	ECal 2 ports and connectors used to calibrate VNA	N7550A		x	x	x
Required ¹⁵	MXR-Series oscilloscope 2 GHz, 4 analog, 16 digital channels	MXR204A	x	x	x	
	UXR-Series oscilloscope 13 GHz, 4 Channels	UXR0134A		x	x	x
Distortion test, choose 1	33622A Waveform/ Function Generator, 2-channel, 120 Hz ¹⁶	33622A		x	x	
	81160A Pulse Function Arbitrary Noise Generator, 2 channels, 500 MHz sine waveform output	81160A		x	x	
MDI return loss,/mode conversion loss Choose 1	E5080B Vector network analyzer, 2-port test set, 9 kHz to 4.5 GHz without bias tees	E5080B opt 240,181,182		x	x	x
	Vector network analyzer USB 2-port, 9 kHz to 4.5 GHz	P5000A-200		x	x	x
	Vector network analyzer Thunderbolt 2-port, 9 kHz to 4.5 GHz	P5000B-200		x	x	x
	Vector Network analyzer Thunderbolt 2-port 9 kHz to 4.5 GHz	P9370B		x	x	x

⁹ A frequency divider board is still required for the IEEE standard however there is a software algorithm available in the AE6910T/AE6920T if Tx CLK is either not pinned out or are looking for a minimum configuration.

¹⁰ PAM-n analysis option is required to run the linearity SNDR test.

¹¹ Order 2 available adapter boards of your choice for compliance, order 2 additional for protocol decoding.

¹² 2 SMA cables for compliance are required and 2 additional are required for decode capability.

¹³ Two BNC to SMA adapters come with each oscilloscope, 2 additional are required for decode capability.

¹⁴ Alternatively, an SMA to N-type adapter could be used such as the 1250 -1250.

¹⁵ An oscilloscope is required minimum bandwidth is recommended on page 14.

¹⁶ Order AE6900T-108 filter for distortion test on 1000BASE-T1 DUTs.

Example order

Full compliance of 1000BASE-T1

Quantity	Part number to order	Description
1	AE6910T	Automotive Ethernet Tx compliance test software 10M – 5G
1	AE6941A	Automotive Ethernet test fixture
2	AE6942A	Adapter board of choice
	AE6943A	
	AE6960A	
	AE6804A	
2	AE6804A	SMA cable
2	AE6809A	BNC (m) to BNC (m) cable, used for disturbing test
1	MXR204A	MXR 2 GHz oscilloscope
1	33622A	Function generator used for transmitter distortion tests
1	AE6808A	Filter used with 33622A for 1GBASE-T1 distortion test
1	P5000B VNA with opt 200	Used for MDI return loss measurements
1	N7550A	Ecal Used to calibrate ENA
2	Y1740-100	3.5 mm (m) to 3.5 mm (m) cable to connect to ENA

Full compliance of 10GBASE-T1

Quantity	Stand alone	Description
1	AE6920T	Automotive Ethernet Tx compliance test software 10M – 10G
1	D9120PAMA	Pulse Amplitude Modulation PAM-N Analysis Software for UXR-Series Oscilloscopes
2	AE6960A or AE6965A-HMK	H-MTD Adapter
2	AE6805A	SMA semi-rigid cable
1	UXR0134A	UXR 13 GHz oscilloscope
1	E5080B opt 240,181,182	Vector network analyzer with option TDR, 4-port test set, 9 kHz to 4.5 GHz without bias tees
1	N7550A Ecal	Used to calibrate ENA
2	N4417AK20	Cable: N-type-N (m) to 3.5 mm (m) connects to ENA

Please note the following:

Recommended hardware instrument firmware versions

Keysight Infiniium Series oscilloscopes with operating software revision

- 11.05 for MXR
- 6.55 for S/V/Z-Series
- 10.25 UXR

For oscilloscopes with earlier revisions, upgrade software is available

- [MXR-Series](#)
- [S/V/Z-Series](#)
- [UXR-Series](#)

Other www.keysight.com/find/scope-apps-sw

Keysight E5080B ENA analyzer with firmware revision A.14.10.03 or higher.

For N9010B with earlier revisions, upgrade software is available here: [E5080B Firmware](#)

Keysight P5000 ENA with firmware revision A.14.10.03

For P5000 with earlier revisions, upgrade software is available here [P5000 Firmware](#)

For additional information please go to: <http://www.keysight.com/find/AE6900T>

Keysight enables innovators to push the boundaries of engineering by quickly solving design, emulation, and test challenges to create the best product experiences. Start your innovation journey at www.keysight.com.



This information is subject to change without notice. © Keysight Technologies, 2020 - 2023, Published in USA, March 1, 2023, 5992-2672EN