




RS-232/UART Protocol Triggering and Decode for Infiniium 9000A and 9000 H-Series Oscilloscopes

Data sheet

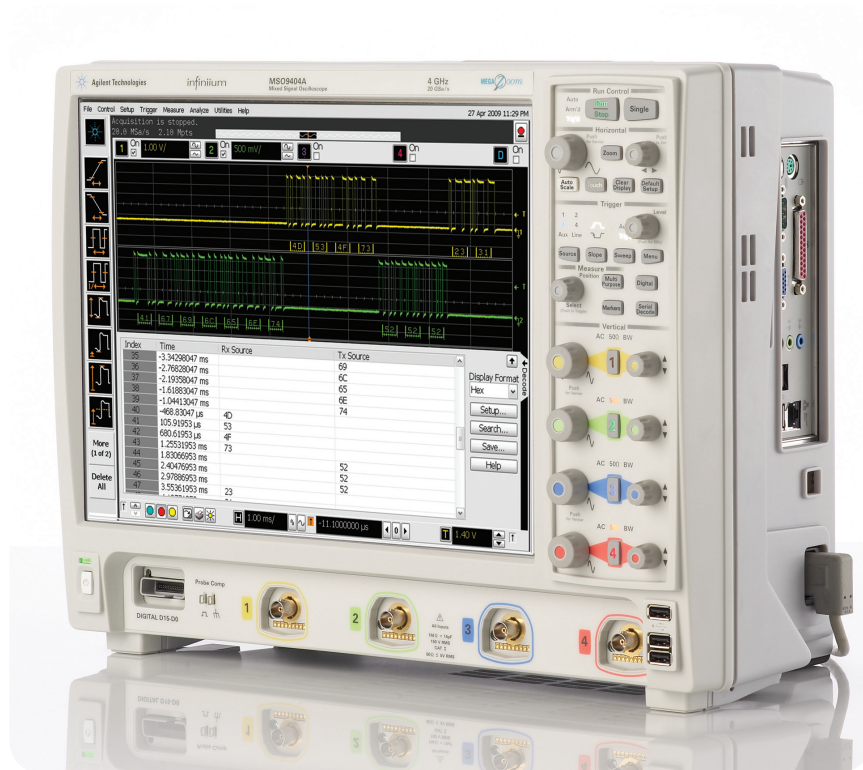

This application is available in the following license variations.

- Order N5462B for a user-installed license
- Order Option 001 for a factory-installed license with new 9000A and 9000 H-Series oscilloscopes
- Order N5435A Option 031 for a server-based license



Easily debug and test designs that include RS-232/UART using your Infiniium 9000A and 9000 H-Series oscilloscopes

Lower-speed serial bus interfaces such as RS-232 and other UART (universal asynchronous receive and transmit) interfaces are widely used today in electronic designs. In many designs these serial buses tend to provide content-rich points for debug and test. However, since these protocols transfer bits serially, using a traditional oscilloscope has limitations. Manually converting captured 1's and 0's to protocol requires significant effort, can't be done in real-time, and includes potential for human error. In addition, traditional scope triggers are not sufficient for specifying protocol-level conditions.


Extend your scope capability with Agilent's RS-232/UART Triggering and Decode application. This application makes it easy to debug and test designs that include RS-232/UART protocols using your Infiniium 9000A and 9000 H-Series oscilloscopes.

- Set up your scope to show RS-232/UART protocol decode in less than 30 seconds.
- Get access to a rich set of integrated protocol-level triggers.
- Save time and eliminate errors by viewing packets at the protocol level.
- Use time-correlated views to quickly troubleshoot serial protocol problems back to their timing or signal integrity root cause.




Easy to find

Turn decode on/off via the "Serial Decode" button on the front of the instrument or in the "Setup" menu. View decode embedded on the waveform display or in the protocol viewer listing window. (See pages 4-5).

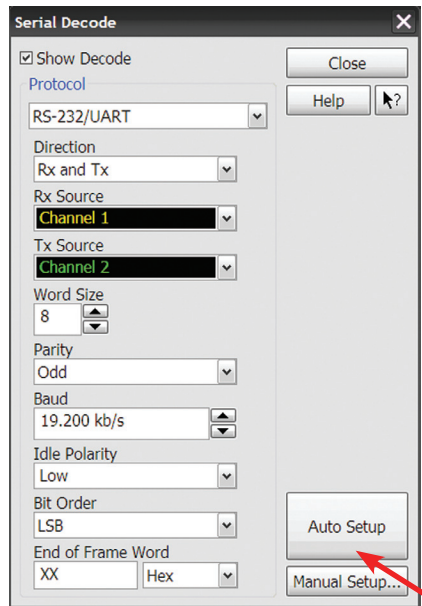

30 Second RS-232/UART Setup

Configure your oscilloscope to display protocol decode in under 30 seconds. Use "Auto Setup" to automatically configure sample rate, memory depth and threshold and trigger levels.

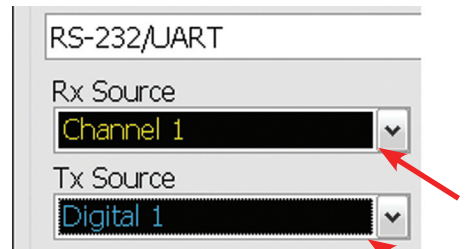


Support for both analog and digital channels

Acquire serial buses using any combination of scope or digital channels. Using digital channels on MSO models preserves analog channels for viewing other time-correlated signals.

RS-232/UART setup and triggering


Get access to a rich set of integrated protocol level triggers. The application includes a suite of configurable protocol-level trigger conditions specific to RS-232/UART. When serial triggering is selected, the application enables special real-time triggering hardware inside the scope.

Hardware-based triggering ensures that the scope never misses a trigger event when armed. This hardware takes signals acquired using either scope or digital channels and reconstructs protocol frames. It then inspects these protocol frames against specified protocol-level trigger conditions and triggers when the condition is met.

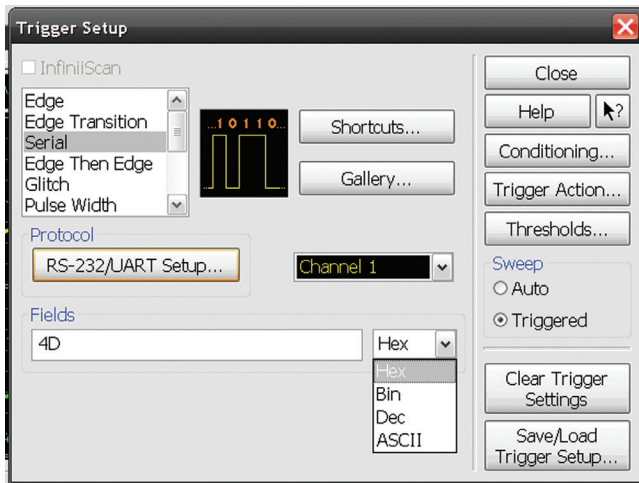


RS-232 Trigger Setup

Quickly access protocol triggering via the scope's trigger menu. Specify RS-232 trigger in HEX, binary decimal, or ASCII up to 27 words.

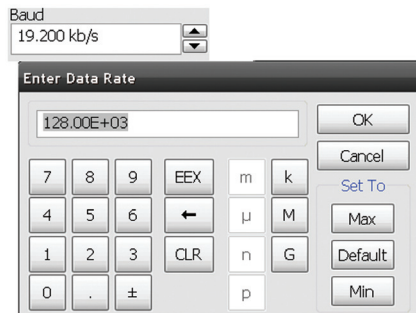


Baud rate settings

Enter any baud rate between 1,200 kb/s and 10 Mb/s, or click on up/down arrows to go to one of many pre-defined common baud rates.

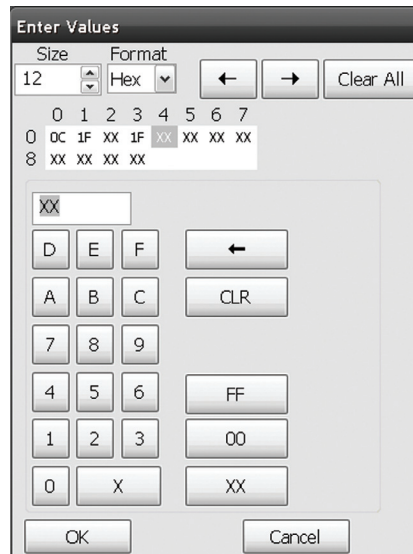

Payload editor



Choose trigger length between one to 27 words and use the payload editor to specify data values word by word.

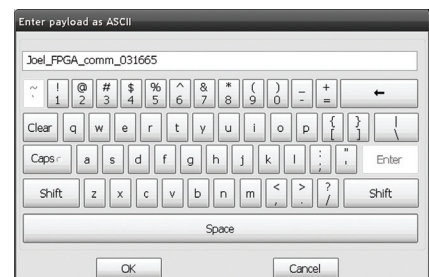

Set trigger

Enter trigger condition in HEX, binary, decimal or ASCII.

RS-232/UART protocol decode and searching

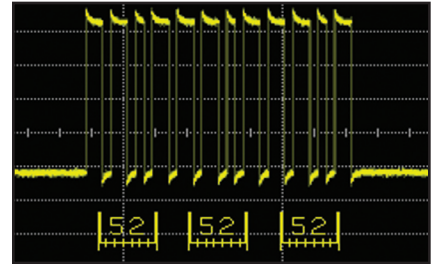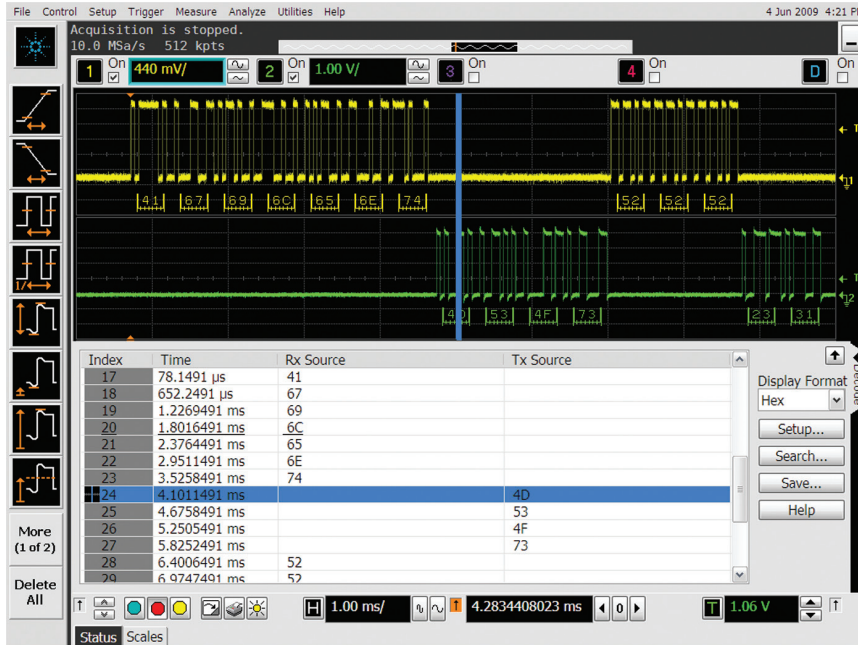


RS-232 decode embedded in waveform area

Utilize the oscilloscope waveform area to display decode information. Minor ticks indicate clock transitions and major ticks show the beginning and end of each word in the serial packet.


RS-232 protocol decode with precise time-correlation between waveforms and listing

Agilent's protocol viewer includes correlation between the waveforms and the selected packet. The selected packet, highlighted blue row in the listing, is time-correlated with the blue line in the waveform display. Move the blue tracking marker in time through waveforms and the blue bar will automatically track in the packets window. Or, scroll through the packet viewer and highlight a specific packet. The time-correlation tracking marker will move to the associated point in the waveform.

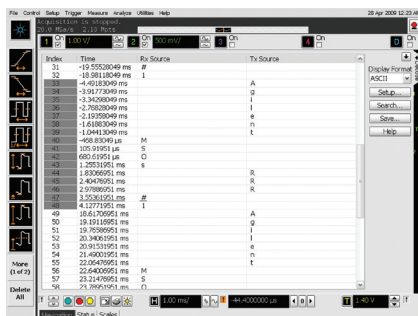


Full screen RS-232 listing

Fill the entire display with compact protocol information using the full screen listing. The protocol viewer window shows the index number, time stamp value, and data content for each serial packet in the list. Scroll through all decoded serial packets to find events of interest or errors in the transmission. Data in the listing window can be saved to a .csv or .txt file for off-line analysis or documentation.

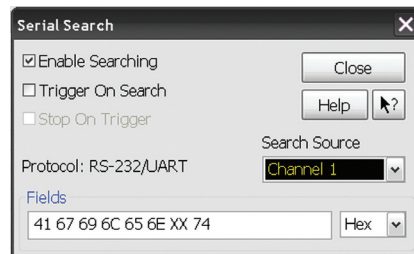

Post-acquisition searching


Search acquired protocol listings using a menu that is identical to the trigger menu.

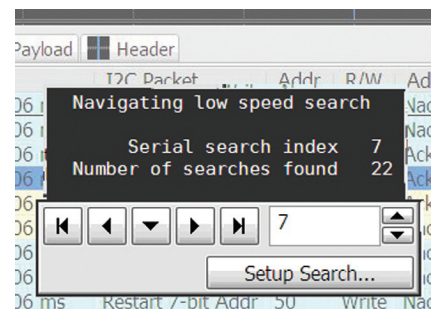


Quickly find occurrences

Quickly move to next occurrence of a specified event.


RS-232/UART protocol decode

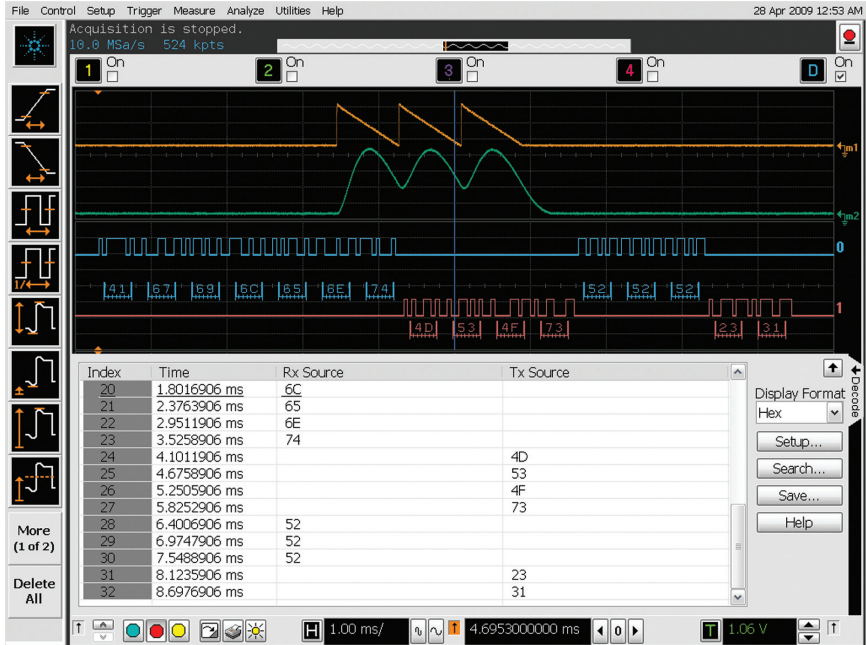

Use digital channels on MSO models to preserve analog channels for simultaneously viewing other signals..

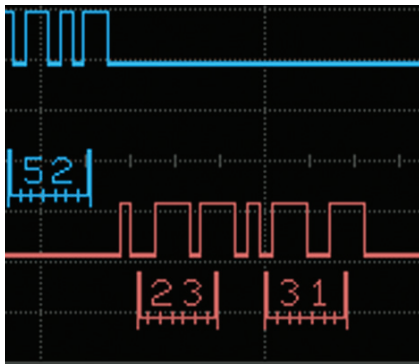

See RS-232 decode next to digital waveforms.

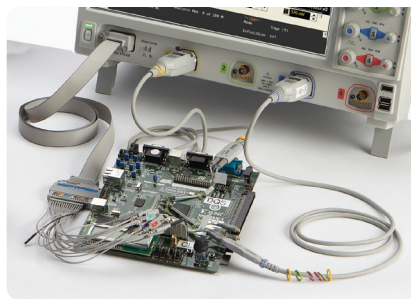

Use digital or analog for RS-232/UART triggering and decode.

Analog Samples/Segment Segmented Memory

Automatic
 Manual

512.000 kpts # of Segments 1024

Segments acquired 1024
Time tag 440.92739910 s

1024

Play Play Rate: 100 ms

Capture seconds to days of serial protocol. The scope fills memory as each acquisition sees it's trigger condition. Segmented memory uses time tags to track time between segment acquisitions.

RS-232/UART specifications and characteristics

UART protocols supported	RS-232 RS-422 up to 10 Mbps, differential probing recommended. RS-485 up to 10 Mbps, differential probing recommended. Other UART interfaces which admit to user-specified parameters available in the application. The application relies on probing and trigger/measurement thresholds to properly condition the signal for triggering and decode.
Tx and Rx source	Analog channels 1, 2, 3, or 4 MSO models can additionally use digital channels D0 to D15 Any waveform memory
Auto setup	Automatically configures trigger levels, measurement thresholds, memory depth, sample rate, trigger and holdoff for proper decode and triggering.
Decode word size	User-selectable: 5, 6, 7, 8, or 9 bits Parity: odd, even, none
Decode bit order	User-selectable: LSB or MSB
Supported baud rates	User selectable: 1.2 kb/s up to 10 Mb/s
Idle Polarity	User selectable: low or high
Triggering	User selectable: transmit or receive User selectable data length: 1 to 13 words (each word takes 2 trigger symbols) Word size selectable from 5 to 9 bits Polarity error Enter trigger in HEX, binary, decimal or ASCII Operators include =, not =, >, < and OR on each 8-bit word boundary


Ordering information

This application is compatible with all 9000A and 9000 H-Series oscilloscope models.

Software applications	Factory-installed node-locked license for new scope purchases	User-installed node-locked licenser	Server-based license (N5435A option)
RS-232/UART triggering and decode	001	N5462B	031
RS-232, I ² C/SPI triggering and decode	018	N8800B	

Related literature

Publication title	Publication type	Publication number
Infiniium 9000 Series	Data Sheet	5990-3746EN
Infiniium 9000 H-Series	Data Sheet	5991-1520EN

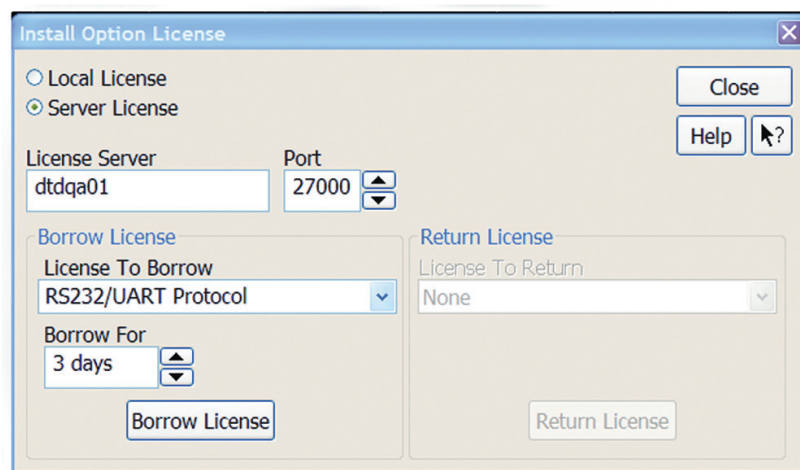

Sharing the application across multiple instruments? Server-based licensing allows users to borrow an application license for a fixed time period.



myAgilent

www.agilent.com/find/myagilent

A personalized view into the information most relevant to you.



www.axistandard.org

AdvancedTCA® Extensions for Instrumentation and Test (AXIe) is an open standard that extends the AdvancedTCA for general purpose and semiconductor test. Agilent is a founding member of the AXIe consortium.



www.lxistandard.org

LAN eXtensions for Instruments puts the power of Ethernet and the Web inside your test systems. Agilent is a founding member of the LXI consortium.

Agilent Channel Partners

www.agilent.com/find/channelpartners

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.



Agilent Advantage Services is committed to your success throughout your equipment's lifetime. To keep you competitive, we continually invest in tools and processes that speed up calibration and repair and reduce your cost of ownership. You can also use Infoline Web Services to manage equipment and services more effectively. By sharing our measurement and service expertise, we help you create the products that change our world.

www.agilent.com/find/advantageservices



www.agilent.com/quality

www.agilent.com

www.agilent.com/find/9000_RS-232

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

www.agilent.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201


For other unlisted countries:

www.agilent.com/find/contactus

Revised: October 11, 2012

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2012, 2013
Published in USA, January 11, 2013
5990-3923EN

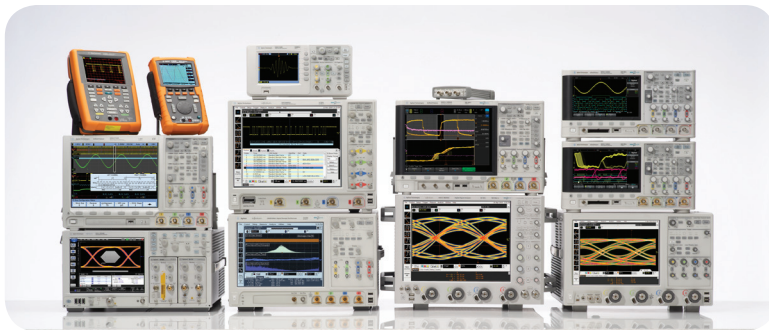

Agilent Technologies Oscilloscopes

Multiple form factors from 20 MHz to > 90 GHz | Industry leading specs | Powerful applications



Agilent Technologies