


Keysight Technologies

Remote Language Compatibility (RLC) X-Series Measurement App, Multi-Touch UI N9061EMOE

Technical Overview and Demo Guide

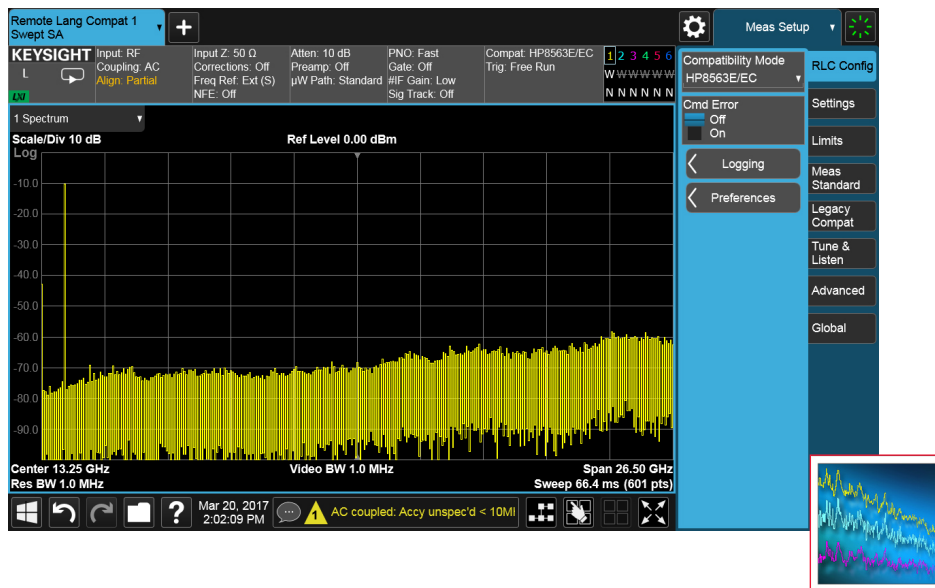

- Emulates the HP/Keysight 856xE/EC and 8566/68 remote programming language
- Reduce ATE system cost with X-Series analyzers
- Run legacy programming codes using newer SCPI-based instruments without code modification

RLC Measurement Application Provides a Migration Path for Legacy ATE Systems

As some or all of the instruments in your ATE system racks become obsolete, this measurement application will help you minimize disruption to test program sets, while still meeting the required specifications. The RLC measurement application enables you to upgrade your legacy Keysight signal analyzers, traditionally used in ATE systems to the newer X-Series signal analyzers. Keysight's X-Series signal analyzers offer remote language compatibility (RLC) with the legacy HP/Keysight 856xE/EC spectrum analyzers and the 8566/68 spectrum analyzers. This measurement application provides as many as 164 supported programming commands from 856xE/EC for the most frequently used spectrum analysis functions in ATE systems.

Like all other modern signal/spectrum analyzers, the X-Series signal analyzers use SCPI commands for remote programming. Therefore, a bridge between the legacy 856xE/EC or 8566/68 remote language and the SCPI language that Keysight X-Series uses becomes necessary when migrating the 856xE/EC to the X-Series analyzer in your ATE system. The X-Series RLC application N9061EM0E provides that bridge. It enables an X-Series analyzer to run most customers' 856xE/EC or 8566/68 programming codes without modification.

X-Series measurement applications

X-Series measurement applications increase the capability and functionality of Keysight Technologies, Inc. signal analyzers to speed time to insight. They provide essential measurements for specific tasks in general-purpose, cellular communications, wireless connectivity applications, covering established standards or modulation types. Applications are supported on both benchtop and modular, with the only difference being the level of performance achieved by the hardware you select.

X-Series measurement applications can help you:

- Gain more insight into device performance with intuitive display and graphs for your application. Select from our library of over 25 different measurement applications.
- Ensure that your design meets the latest standard. Updates are made to the X-Series measurement applications as standards evolve.
- Apply the same measurement science across multiple hardware platforms for consistent measurement results over your design cycle from R&D to production.
- Choose the license structure that meets your business needs. We provide a range of license types (node-locked, transportable, floating or USB portable) and license terms (perpetual or time-based).



Download your next insight

Keysight software is downloadable expertise. From first simulation through first customer shipment, we deliver the tools your team needs to accelerate from data to information to actionable insight.



Start with a 30-day free trial.

www.keysight.com/find/X-Series_apps_trial

Measurement Application Demonstration Guide

How the X-Series RLC application works

Figure 2 shows a simplified working block diagram for the X-Series RLC application, specifically for the N9061EM0E-1FP. The X-Series signal analyzer, using the SCPI commands for remote user interface (RUI), is unable to understand the legacy remote program commands. Likewise, the instrument-specific, legacy remote program will not recognize the responses returned from X-Series signal analyzers in the form of SCPI commands.

The N9061EM0E X-Series RLC application provides an emulation process that enables the user's legacy program and X-Series signal analyzer to understand each other. As shown in the simplified block diagram below, the RLC application installed on the X-Series signal analyzer, emulates the behaviors of the legacy spectrum analyzer (such as the 856xE/EC or 8566/68). As a result, the user's legacy program considers the X-Series signal analyzer to be a legacy spectrum analyzer and controls the X-Series signal analyzer just the way it did before the migration.

It is important to point out that the emulation processes, as shown in the block diagram, are bidirectional. The purpose of an RLC application is to enable the X-Series signal analyzer to emulate the legacy analyzer. Therefore, not only does the RLC application make the X-Series understand the legacy commands for correct implementations, but it also makes the responses from the X-Series signal analyzer, such as measurement results and query results, understandable to the legacy remote program.

Depending on use cases, some legacy commands may not technically be possible for the emulation due to the substantial differences in the architecture and implementation between the legacy and X-Series analyzers. In these instances, the legacy commands that can't be emulated are logged to a command error log. This error log helps users understand which legacy commands are not emulated by the RLC application, and an appropriate workaround may be required.

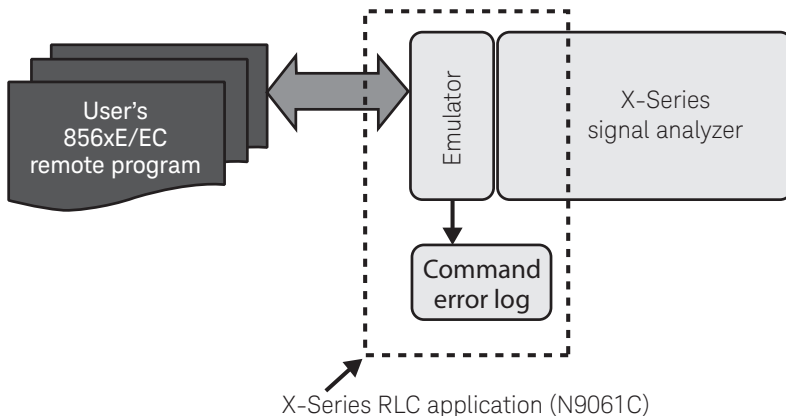


Figure 2. A simplified working block-diagram for X-Series RLC application

Starting the RLC application and selecting the appropriate legacy model to emulate

After the RLC application has been activated, the Remote Language Compatibility soft key is added to the Mode menu that allows the user to switch into an RLC application (see Figure 3). The specific instrument to be emulated is selected under the Mode Setup menu (shown in Figure 4).

The X-Series RLC application can be accessed in two ways: 1) from the front-panel user interface (FPUI), or 2) via remote user interface (RUI). In the following demo procedure for FPUI, keystrokes surrounded by [] indicate front-panel hard keys, whereas those surrounded by { } indicate soft keys on the display of the X-Series signal analyzers to be a legacy spectrum analyzer and controls the X-Series signal analyzer just the way it did before the migration.

1) FPUI access:

X-Series: [MODE], {Remote Language Compatibility}; [Mode Setup], {HP8560 series}, {HP856xE/EC} where x = 0 to 5 (for example, if the 8563EC is to emulate, then select {HP8563E/EC})

While all the 856xE and 856xEC share a common set of remote commands, each model may respond to the commands quite differently. For example, when responding to a **FS** (Full Span) command, an 8560EC sets its frequency span to 2.9 GHz, whereas an 8563EC sets its span to 26.5 GHz.

2) RUI access:

INSTrument:SElect
SYSTem:LANGUage

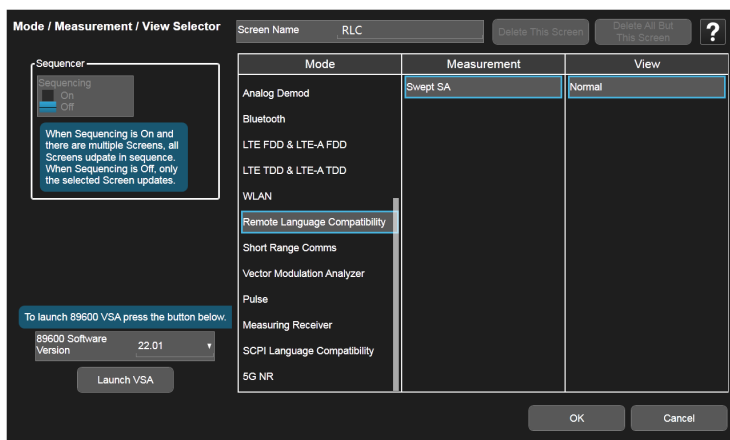


Figure 3. RLC is accessed under the Mode/Meas menu, just like other applications

Note: This section is written according to N9061A. for N9061EM0E, please find all of the settings under Meas Setup.

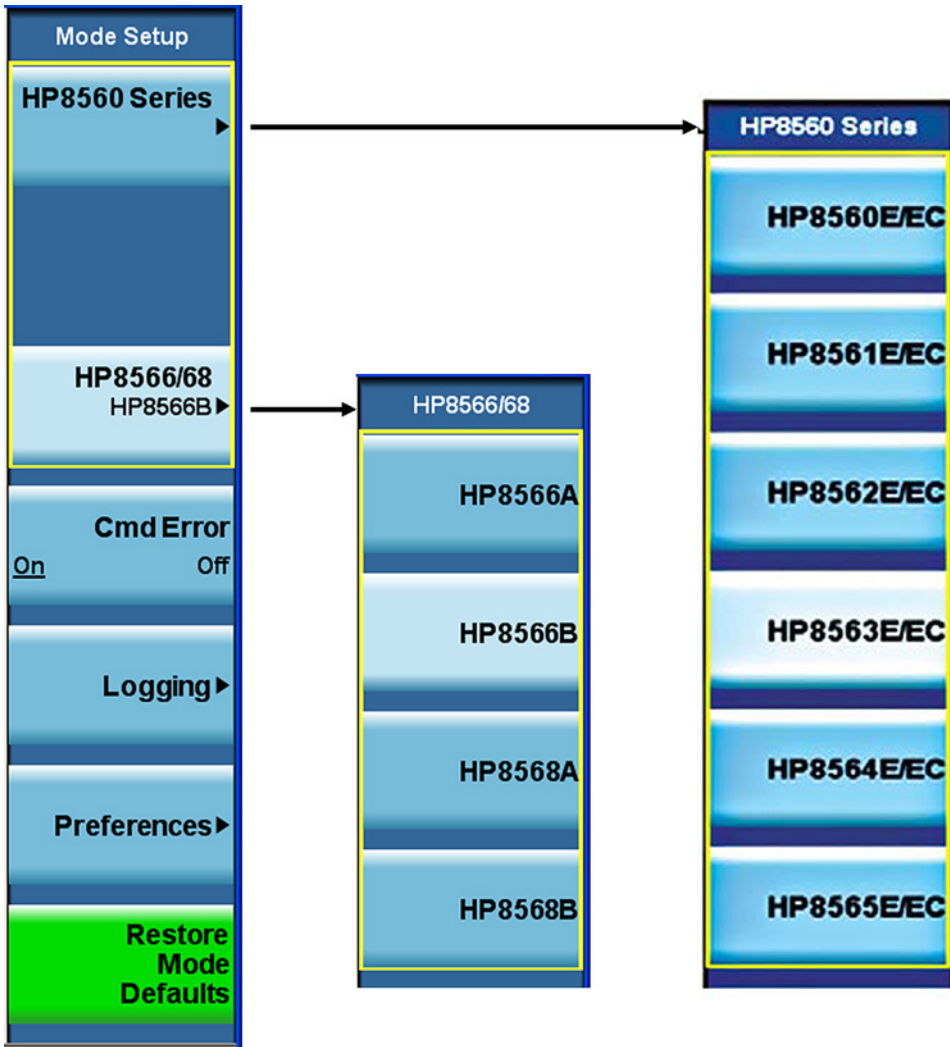


Figure 4. Mode Setup menu when selecting the legacy model number to emulate

Troubleshooting when the legacy command is not supported or has syntactic errors

Rather than hiding the unsupported legacy commands, the X-Series RLC application allows you to display the CMD ERR error messages, which will appear in the Message bar as an advisory message. It shows the error format as: **CMD ERR, <string>**. This will occur upon receipt of a recognized legacy command that is not supported by the RLC application, or if either the command syntax or any of its parameters are incorrectly formed.

By toggling the **CMD Error** soft key, you can enable or disable the display of the error message.

Furthermore, the Logging menu allows the user to scroll the log window (Previous Page/ Next Page), to refresh and clear the RLC command error log (Refresh/Clear Log)—see Figure 5. The logging menu is only accessible from the FPUI.

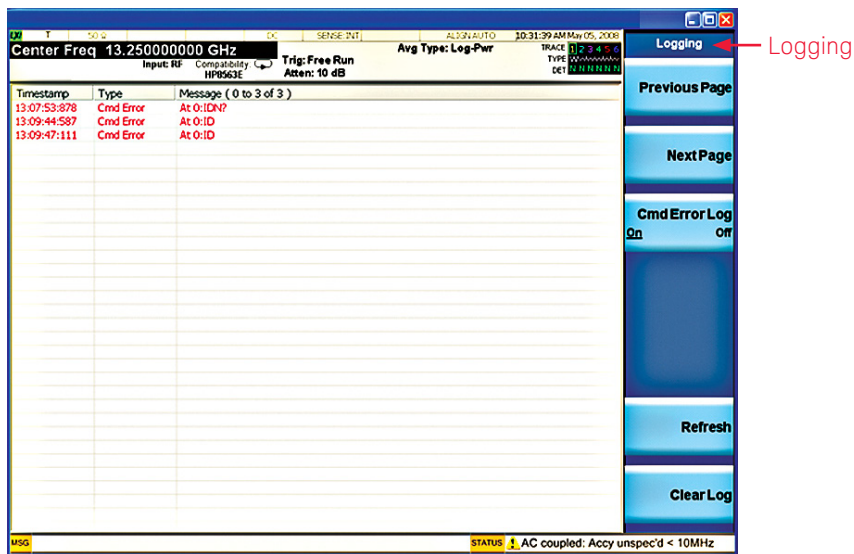


Figure 5. The Logging menu

Selecting preferences for your emulation

Preferences allow the user to change the emulation behavior to gain usability, speed, or measurement accuracy. However, the default value for each parameter in the Preference menu is the closest emulation of legacy behavior.

In RLC mode, each preference is a configurable feature. They can be selected either via the FPUI or RUI. Preference settings are persistent. If they are changed by the user, they are unaffected by mode switching, language switching, mode preset, or even power on. They are only preset to their default state using the Restore Mode Defaults key in the Mode Setup menu via FPUI, or using the commands, INST:DEF or SYST:PRES:PERS.

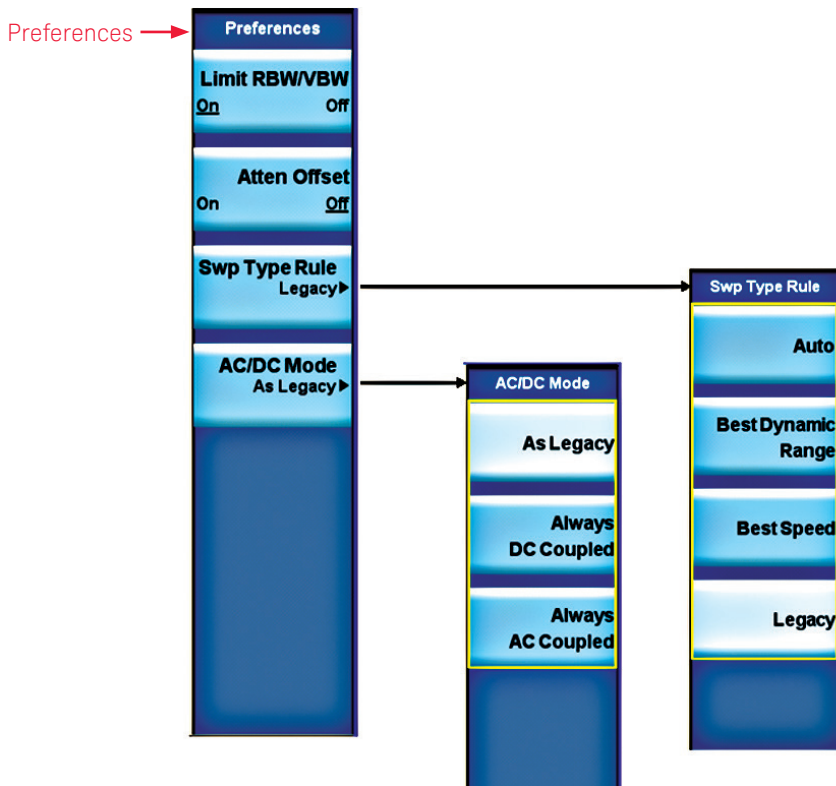


Figure 6. Setting preferences for the emulation behavior via the Preferences menu

Let's look at two examples for the preferences setting:

- 1) **Limit RBW/VBW**
- 2) **Sweep type rules**

Limit RBW/VBW can be used for limiting the valid resolution bandwidth (RBW) and video bandwidth (VBW) values to those appropriate for the currently selected remote language. In the case of the 856xE/EC emulation, setting the RBW/VBW to **ON** limits the RBW and VBW values to what the 856xE/EC can have. Setting it to OFF causes the RBW/VBW filters to use the X-Series range of values. To activate this feature:

- 1) **FPUI Access:**
[Mode Setup], {Preferences}, {Limit RBW/VBW}
- 2) **RUI Access:**
[:SENSe]:RLC:BAWdwidth:LIMit ON|OFF|1|0

Sweep type rules determines when the instrument uses FFT vs. Swept mode. The FFT mode offers substantially faster measurements in some cases. The 856xE/EC family switches between the FFT and swept mode based on the RBW setting—FFT mode when $RBW \leq 100$ Hz, and Swept mode when $RBW \geq 300$ Hz. By contrast, in the X-Series signal analyzers, users can select between **Best Dynamic Range** (Swept) and **Best Speed** (FFT) to fit their measurement applications. Once the **Legacy** is selected, the sweep mode will be determined by the RBW selected. To activate this feature:

- 1) **FPUI Access:**
[Mode Setup], {Preferences}, {Sweep type rules}
- 2) **RUI Access:**
[:SENSe]:RLC:SWEEp:RULEs SPEEd|DRANge|LEGACY

For a list of supported commands for the 856xE/EC and 8566/68, refer to the N9061A Remote Language Capability User's and Programmer's Reference at <http://cp.literature.keysight.com/litweb/pdf/N9020-90091.pdf>

Ordering Information

Flexible licensing and configuration

- **Perpetual:** License can be used in perpetuity.
- **Time-based:** License is time limited to a defined period, such as 12-months.
- **Node-locked:** Allows you to use the license on one specified instrument/computer.
- **Transportable:** Allows you to use the license on one instrument/computer at a time. This license may be transferred to another instrument/computer using Keysight's online tool.
- **Floating:** Allows you to access the license on networked instruments/computers from a server, one at a time. For concurrent access, multiple licenses may be purchased.
- **USB portable:** Allows you to move the license from one instrument/computer to another by end-user only with certified USB dongle, purchased separately.
- **Software support subscription:** Allows the license holder access to Keysight technical support and all software upgrades

You Can Upgrade!

All of our X-Series application options are license-key upgradeable.



Remote language compatibility measurement application (N9061EM0E)

Model	Software License Type	Support Contract	Support Subscription (12-month) ²
N9061EM0E-1FP	Node-locked perpetual	R-Y5C-001-A ²	R-Y6C-001-L ²
N9061EM0E-1FL	Node-locked 12-month	R-Y4C-001-L ¹	Included
N9061EM0E-1TP	Transportable perpetual	R-Y5C-004-D ²	R-Y6C-004-L ²
N9061EM0E-1TL	Transportable 12-month	R-Y4C-004-L ¹	Included
N9061EM0E-1NP	Floating perpetual	R-Y5C-002-B ²	R-Y6C-002-L ²
N9061EM0E-1NL	Floating 12-month	R-Y4C-002-L ¹	Included
N9061EM0E-1UP	USB portable perpetual	R-Y5C-005-E ²	R-Y6C-005-L ²
N9061EM0E-1UL	USB portable 12-month	R-Y4C-005-L ¹	Included

Try Before You Buy!

Evaluate a full-featured version of our X-Series measurement application with our **FREE** trial. Redeem one 30-day trial license of each measurement application online at: www.keysight.com/find/X-Series_apps_trial

Hardware Configurations

To learn more about compatible platforms and required configurations, please visit: www.keysight.com/find/X-Series_apps_platform

Software Models & Options

To learn more about X-Series measurement application licensing, model numbers and options, please visit: www.keysight.com/find/X-Series_apps_model

One month software support subscription extensions³

Model	Description
R-Y6C-501 ³	1-month of software support subscription for node-locked license
R-Y6C-502 ³	1-month of software support subscription for floating license
R-Y6C-504 ³	1-month of software support subscription for transportable license
R-Y6C-505 ³	1-month of software support subscription for USB portable license

1. All time-based X-Series measurement application licenses includes a 12-month support contract which also includes the 12-month software support subscription as same duration.
2. Support contract must bundle software support subscription for all perpetual licenses in the first year. All software upgrades and Keysight support are provided for software licenses with valid support subscription.
3. After the first year, software support subscription may be extended with annual or monthly software support subscription extension.

Hardware Configuration

For optimizing measurements on the remote language compatibility measurement applications, we require Keysight X-Series multi-touch firmware version 19.54 or higher.

Supported instruments include:

- UXA N9040B
- PXA N9030B
- MXA N9020B
- EXA N9010B

N90x0B X-Series signal analyzer

Capability	Instrument Option	Benefit
Analysis bandwidth	10 or 25 MHz as default or higher	Required: Wider analysis bandwidth options such as 25/40/85/125/160/255/510 MHz or 1 GHz can be selected depending on the specified signal analyzer model
Precision frequency reference	-PFR	Recommended: For enhanced frequency accuracy and repeatability for lower measurement uncertainty
Electronic attenuator	-EA3	Recommended: Fast and reliable attenuation changes ideal for manufacturing without the wear associated with mechanical attenuators up to 3.6 GHz in 1 dB steps
Pre-amplifier	3.6 GHz (-P03) or higher	Recommended: For maximizing the measurement sensitivity
Fine resolution step attenuator	-FSA	Recommended: Useful for maximizing useable dynamic range to see signals
Analog baseband I/Q inputs	-BBA on PXA and MXA only	Optional: To extend measurements at baseband if required by device under test

For a complete list of specifications, refer to the appropriate specifications guide:

- UXA: www.keysight.com/find/uxa_specifications
 PXA: www.keysight.com/find/pxa_specifications
 MXA: www.keysight.com/find/mxa_specifications
 EXA: www.keysight.com/find/exa_specifications

Related Literature

N9062A & W9062A SCPI Language Compatibility User Guide,
 Literature Number N9062-90001

Web

Remote language compatibility X-Series measurement app, multi-touch UI product webpage
www.keysight.com/find/N9061E


X-Series applications:
www.keysight.com/find/X-Series_Apps

X-Series signal analyzers:
www.keysight.com/find/X-Series

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

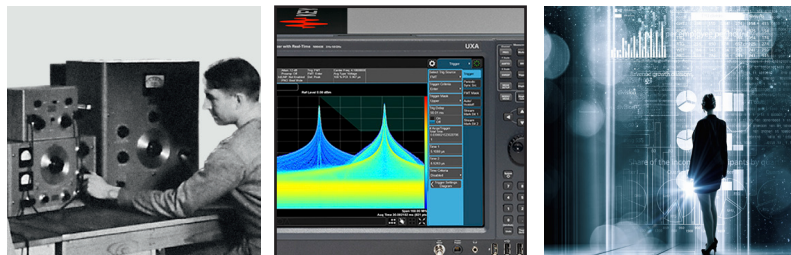

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:
www.keysight.com/find/contactus
 (BP-9-7-17)

DEKRA Certified
 ISO 9001 Quality Management System

www.keysight.com/go/quality
 Keysight Technologies, Inc.
 DEKRA Certified ISO 9001:2015
 Quality Management System

This information is subject to change without notice.
 © Keysight Technologies, 2017 - 2018
 Published in USA, April 24, 2018
 5992-2850EN
www.keysight.com

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

www.keysight.com/find/x-series_apps

www.keysight.com/find/n9061e

