

**Anritsu** envision : ensure

# PIM Hunter™


## Passive Intermodulation Probe

### 2000-1884-R

Used to pinpoint external PIM (outside an antenna system), PIM Hunter is a specialized antenna to identify IM products from 600 MHz to 2700 MHz.

PIM Hunter operates with the MS2720T Spectrum Master™ or the MT8220T BTS Master™ in burst detect sweep mode and with a bandpass filter. PIM Hunter can also be used with the Spectrum Master™ MS2712E/MS2713E, Cell Master™ MT8212E/MT8213E and Site Master™ S332E/S362E with custom settings and a bandpass filter.

PIM Master™ is required to generate the primary test tones that result in the IM products for the PIM Hunter to locate.

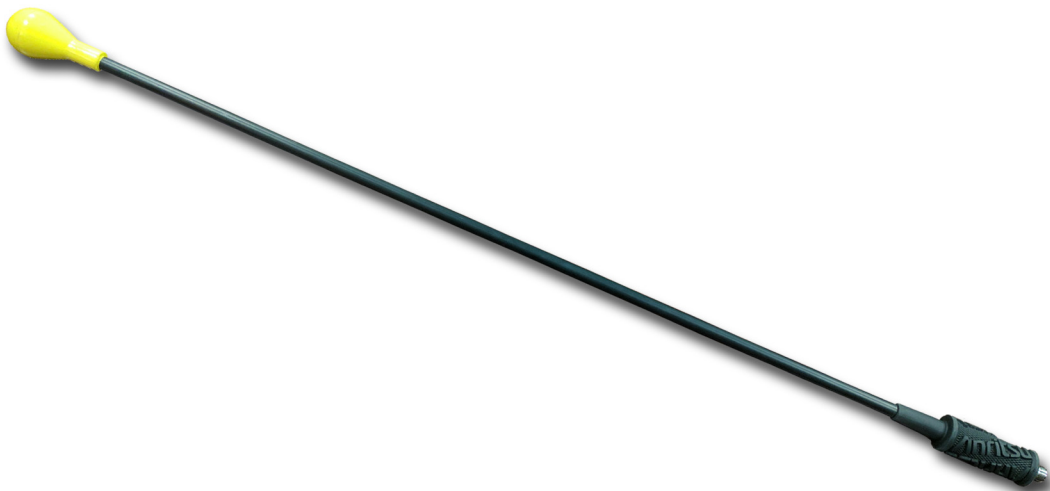

## Specifications

Probe Tip Diameter	1.86 inch (±0.05 inch)
Probe Length	35.0 inch (±0.5 inch)
Frequency Range	600 MHz to 2700 MHz
Radiated PIM, 2x 20W	PIM Probe will not generate IM3 > -90 dBm when the probe tip is placed 6 inches in front of a single dipole element antenna. PIM is measured as reverse IM at the antenna test port. (In practice, the PIM probe should not be placed closer than 1 wavelength to the front side of a directional panel antenna. In this condition, the band-pass filter may not have sufficient rejection to prevent erroneous measurements.)
Coupling Variation vs. Probe Orientation	Signal variation is 5 dB or less (typical) when probe is rotated 90° with respect to a vertically oriented diode being radiated by PIM test tones. (Measurement is conducted with tip of probe located 1 inch from diode.)
RF Connector	Type N, female
Rod Material	Filament wound, epoxy tube
Handle	Times Microwave TuffGrip® rubber handle
ROHS	Compliant
Contents	PIM Hunter probe and carrying case

## Regulatory Compliance

European Union	CISPR 11/EN 55011, IEC/EN 61000-4-2/3/4/5/6/8/11 Safety EN 61010-1:2010 RoHS Directive 2011/65/EU
Australia and New Zealand	RCM AS/NZS 4417:2012
South Korea	KCC-REM-A21-0004

## Bandpass Filters (sold separately)

The Anritsu bandpass filters listed below are designed to be used with the 2000-1844-R PIM Hunter™ and MA2700A InterferenceHunter™ systems, and can be used in a variety of applications as a general purpose bandpass filter. The bands offered cover common cellular uplink frequencies. Refer to the bandpass filters technical data sheet, PN: 11410-00719, for more information.



Part Number	Description
2000-1798-R	Port Extender, DC to 6 GHz
2000-1734-R	699 MHz to 715 MHz, N(m) and N(f), 50 Ω
2000-1735-R	776 MHz to 788 MHz, N(m) and N(f), 50 Ω
2000-1736-R	815 MHz to 850 MHz, N(m) and N(f), 50 Ω
2000-1737-R	1711 MHz to 1756 MHz, N(m) and N(f), 50 Ω
2000-1738-R	1850 MHz to 1910 MHz, N(m) and N(f), 50 Ω
2000-1739-R	880 MHz to 915 MHz, type N(m) and N(f), 50 Ω
2000-1740-R	1710 MHz to 1785 MHz, type N(m) and N(f), 50 Ω
2000-1741-R	1920 MHz to 1980 MHz, type N(m) and N(f), 50 Ω
2000-1742-R	832 MHz to 862 MHz, type N(m) and N(f), 50 Ω
2000-1743-R	2500 MHz to 2570 MHz, type N(m) and N(f), 50 Ω
2000-1799-R	2305 MHz to 2320 MHz, type N(m) and N(f), 50 Ω
2000-1911-R	703 MHz to 748 MHz, type N(m) and N(f), 50 Ω
2000-1912-R	788 MHz to 798 MHz, type N(m) and N(f), 50 Ω
2000-1925-R	663 MHz to 698 MHz, type N(m) and N(f), 50 Ω
2000-1926-R	776 MHz to 806 MHz, type N(m) and N(f), 50 Ω

## Training at Anritsu

Anritsu has designed courses to help you stay up to date with technologies important to your job. For available training courses, visit: [www.anritsu.com/training](http://www.anritsu.com/training)



### • United States

#### **Anritsu Company**

450 Century Parkway, Suite 190, Allen,  
TX 75013 U.S.A.  
Toll Free: +1-800-267-4878  
Phone: +1-972-644-1777

### • Canada

#### **Anritsu Electronics Ltd.**

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

### • Brazil

#### **Anritsu Eletronica Ltda.**

Praça Amadeu Amaral, 27 - 1 Andar  
01327-010 - Bela Vista - Sao Paulo - SP  
Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3288-6940

### • Mexico

#### **Anritsu Company, S.A. de C.V.**

Blvd Miguel de Cervantes Saavedra #169 Piso 1,  
Col. Granada  
Mexico, Ciudad de Mexico, 11520, MEXICO  
Phone: +52-55-4169-7104

### • United Kingdom

#### **Anritsu EMEA L td.**

200 Capability Green, Luton, Bedfordshire, LU1 3LU,  
U.K.  
Phone: +44-1582-433200  
Fax: +44-1582-731303

### • France

#### **Anritsu S.A.**

12 avenue du Québec, Bâtiment Iris 1- Silic 612,  
81829 VILLEBON SUR YVETTE, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

### • Germany

#### **Anritsu GmbH**

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49-89-442308-0  
Fax: +49-89-442308-55

### • Italy

#### **Anritsu S.r.l.**

Via Elio Vittorini 129, 00144 Roma, Italy  
Phone: +39-6-509-9711  
Fax: +39-6-502-2425

List Revision Date: 20180621

### • Sweden

#### **Anritsu AB**

Isafjordsgatan 32C, 164 40 KISTA, Sweden  
Phone: +46-8-534-707-00

### • Finland

#### **Anritsu AB**

Teknobulevardi 3-5, FI-01530 VANTAA, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

### • Denmark

#### **Anritsu A/S**

Torveporten 2, 2500 Valby, Denmark  
Phone: +45-7211-2200  
Fax: +45-7211-2210

### • Russia

#### **Anritsu EMEA Ltd.**

##### **Representation Office in Russia**

Tverskaya str. 16/2, bld. 1, 7th floor.  
Moscow, 125009, Russia  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

### • Spain

#### **Anritsu EMEA Ltd.**

##### **Representation Office in Spain**

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 5  
28046, Madrid, Spain  
Phone: +34-915-726-761  
Fax: +34-915-726-621

### • United Arab Emirates

#### **Anritsu EMEA Ltd.**

##### **Dubai Liaison Office**

902, Aurora Tower,  
P O Box: 500311- Dubai Internet City  
Dubai, United Arab Emirates  
Phone: +971-4-3758479  
Fax: +971-4-4249036

### • India

#### **Anritsu India Private Limited**

6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,  
Doddanekundi, Outer Ring Road, Bengaluru - 560048,  
India  
Phone: +91-80-6728-1300  
Fax: +91-80-6728-1301

### • Singapore

#### **Anritsu Pte. Ltd.**

11 Chang Charn Road, #04-01, Shriro House  
Singapore 159640  
Phone: +65-6282-2400  
Fax: +65-6282-2533

### • P.R. China (Shanghai)

#### **Anritsu (China) Co., Ltd.**

Room 2701-2705, Tower A,  
New Caohejing International Business Center  
No. 391 Gui Ping Road Shanghai, 200233, P.R. China  
Phone: +86-21-6237-0898  
Fax: +86-21-6237-0899

### • P.R. China (Hong Kong)

#### **Anritsu Company Ltd.**

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

### • Japan

#### **Anritsu Corporation**

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016  
Japan  
Phone: +81-46-296-6509  
Fax: +81-46-225-8352

### • Korea

#### **Anritsu Corporation, Ltd.**

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,  
Gyeonggi-do, 13494 Korea  
Phone: +82-31-696-7750  
Fax: +82-31-696-7751

### • Australia

#### **Anritsu Pty. Ltd.**

Unit 20, 21-35 Ricketts Road,  
Mount Waverley, Victoria 3149, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

### • Taiwan

#### **Anritsu Company Inc.**

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817