



## 250W1000B

- 250 Watts CW
- 80MHz-1000MHz



### Features

The Model 250W1000B is a portable, self-contained, air-cooled, broadband, completely solid-state amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. Push-pull circuitry is utilized in all high power stages in the interest of lowering distortion and improving stability.

The Model 250W1000B, when used with a sweep generator, will provide a minimum of 250 watts of RF power.

The Model 250W1000B is equipped with a Digital Control Panel (DCP) which provides both local and remote control of the

amplifier. The DCP uses a color LCD touch screen and a single rotary knob to offer status reporting and control capability. The display provides operational presentation of Forward Power and Reflected Power plus amplifier status. Special features include a gain control, internal automatic level control (ALC) with front panel control of the ALC threshold, forward and reflective RF sample ports for precise power measurements and RF output level protec-


tion. Protection is provided by DC current level sensing of all output stages.

All amplifier control functions and status indications are available remotely in GPIB/IEEE-488 and RS-232 hardwire and fiber optic, USB and Ethernet. The buss interface connector is located on the back panel and positive control of local or remote operation is assured by a keylock on the front panel of the amplifier.

Housed in a stylish, contemporary bench top enclosure, the Model 250W1000B provides readily available RF power for typical applications such as RF susceptibility testing, antenna and component testing, watt meter calibration, and as a driver for frequency multipliers and higher power amplifiers. A safety interlock can be implemented via a rear panel connector.

The export classification for this equipment is EAR99. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

250W1000B

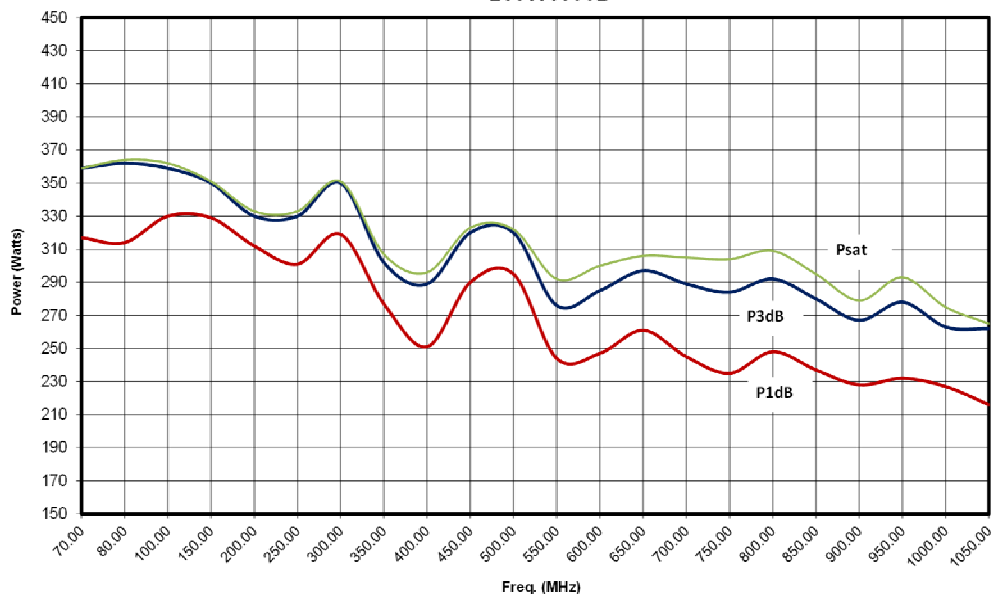

AR RF/Microwave  
Instrumentation  
160 School House Rd  
Souderton, PA 18964  
215-723-8181

For an applications engineer call: 800.933.8181

www.arworld.us



# 250W1000B

- 250 Watts CW
- 80MHz–1000MHz

## Specifications


**RATED OUTPUT POWER:** 250 watts minimum  
**INPUT FOR RATED OUTPUT:** 1.0 mW Max  
**POWER OUTPUT @ 3dB COMPRESSION:**  
 Nominal: 300 watts, Minimum: 250 watts  
**POWER OUTPUT @ 1dB COMPRESSION:**  
 Nominal: 250 watts, Minimum: 200 watts  
**FLATNESS:** ±1.5 dB maximum, ±1.0 dB typical  
**FREQUENCY RESPONSE:** 80-1000 MHz instantaneously  
**GAIN (at maximum setting):** 54 dB minimum  
**GAIN ADJUSTMENT (Continuous Range):** 25 dB minimum (4096 steps remote)  
**INPUT IMPEDANCE:** 50 ohms, VSWR 1.5:1 maximum; 1.3:1 typical  
**OUTPUT IMPEDANCE:** 50 ohms nominal  
**MISMATCH TOLERANCE:** 100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.  
**MODULATION CAPABILITY:** Faithfully reproduces AM, FM, or Pulse modulation appearing on input signal.

**HARMONIC DISTORTION:** Minus 20 dBc maximum at 200 watts, -20dBc typical @ 250 watts  
**THIRD ORDER INTERCEPT POINT:** 62 dBm typical  
**NOISE FIGURE:** 8 dB maximum, 6 dB typical  
**PRIMARY POWER (user must specify):**  
 120-240 VAC, 50/60Hz, single phase, 1000 watts maximum  
**CONNECTORS:**  
 RF See Model Configurations  
 Forward Sample: BNC female, front (-46 dBc)  
 Reverse sample: BNC female, front (-46 dBc)  
 Remote Interfaces:  
 IEEE-488 24 pin female  
 RS-232 9 pin Subminiature D (female)  
 Fiber Optic ST Conn Tx and Rx RS-232  
 USB 2.0 Type B  
 Ethernet RJ-45  
**SAFETY INTERLOCK:** 15 pin Subminiature D  
**COOLING:** Forced air (self contained fans)  
**EXPORT CLASSIFICATION:** EAR99

## Model Configurations

| MODEL NUMBER | RF INPUT   | RF OUTPUT       | WEIGHT          | SIZE (W x H x D)                        |
|--------------|--|-----------------|-----------------|---|
| 250W1000B    | N female, front  | N female, front | 40kg<br>(88 lb) | 50.3 x 24.9 x 61cm<br>19.8 x 9.8 x 24in |
| 250W1000BM1  | N female, rear   | N female, rear  | 40kg<br>(88 lb) | 50.3 x 24.9 x 61cm<br>19.8 x 9.8 x 24in |
| 250W1000BM2  | Same as 250W1000B with enclosure removed for rack mounting   |                 | 30kg<br>(66 lb) | 48.3 x 22.2 x 61cm<br>19 x 8.75 x 24in  |
| 250W1000BM3  | Same as 250W1000BM1 with enclosure removed for rack mounting |                 | 30kg<br>(66 lb) | 48.3 x 22.2 x 61cm<br>19 x 8.75 x 24in  |

## Graphs

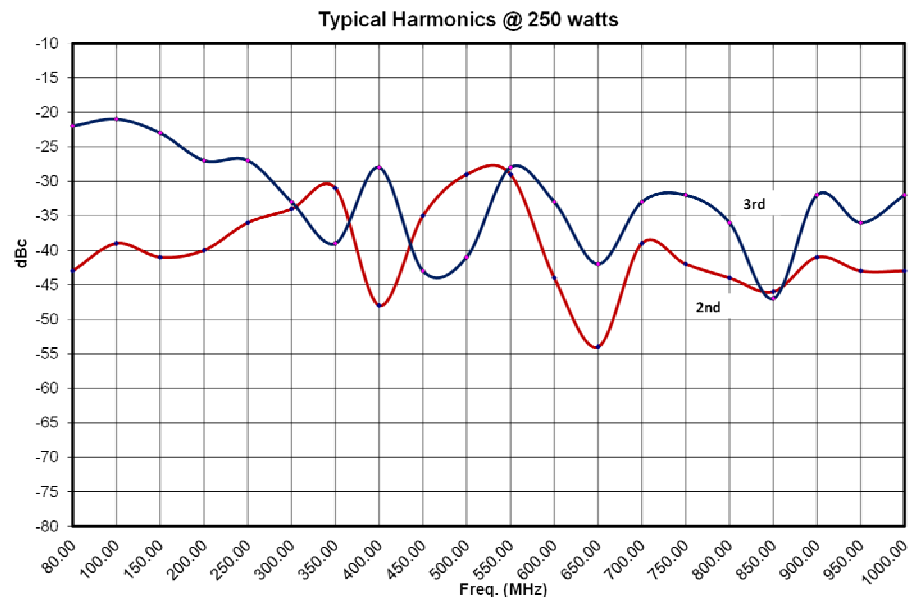

### 250W1000B

- 250 Watts CW
- 80MHz-1000MHz

