

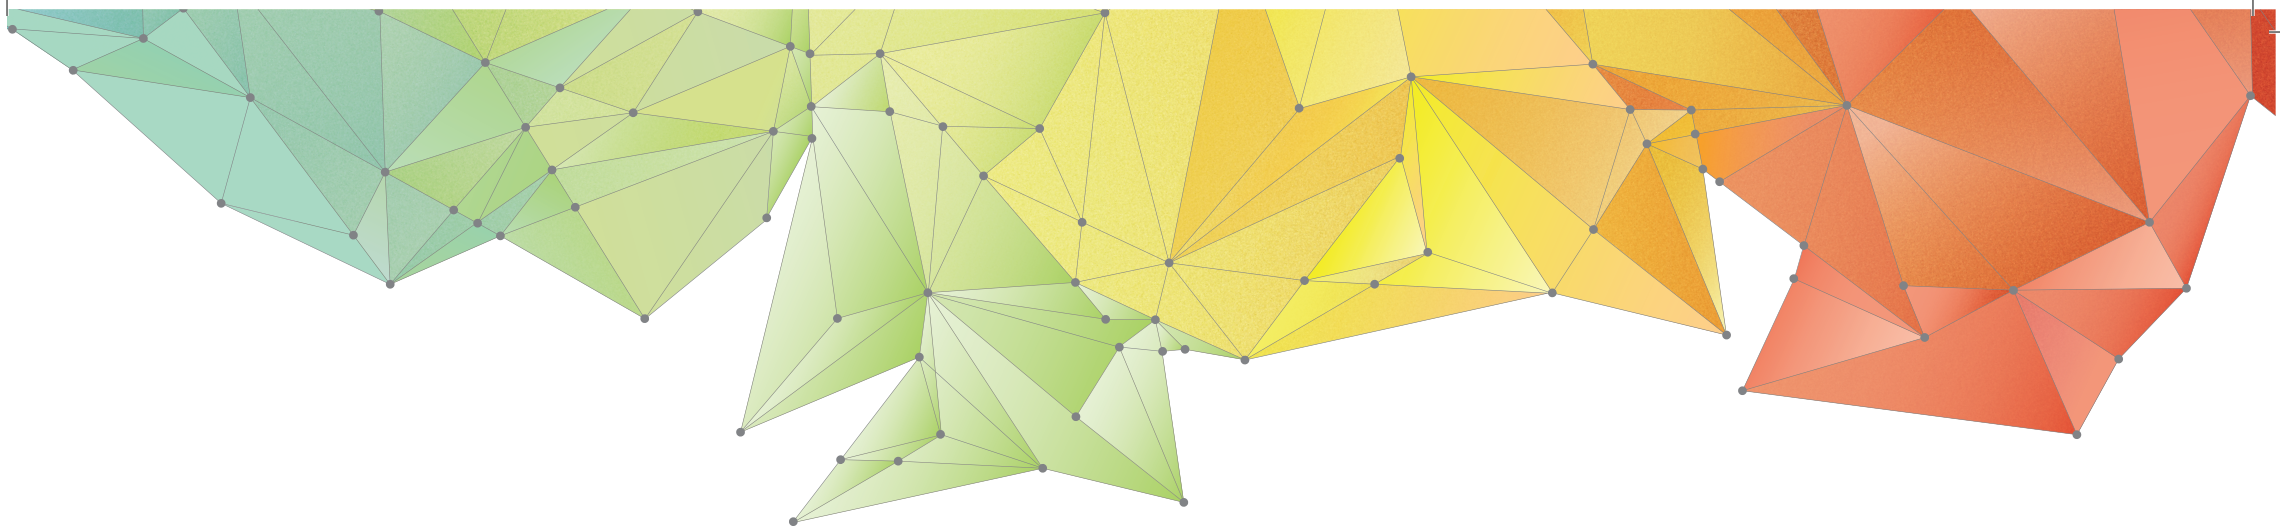




GTS NX

GeoTechnical analysis System New eXperience




Integrated Solver Optimized for the next generation 64-bit platform

Finite Element Solutions for Geotechnical Engineering


MIDAS

Why GTS NX


New subway complex, United States ▼

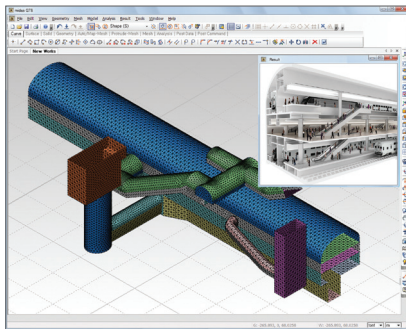


Odeon Tower, Monaco ▼

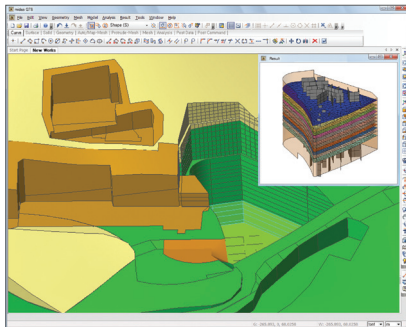


Sichuan Subway Station, China ▼

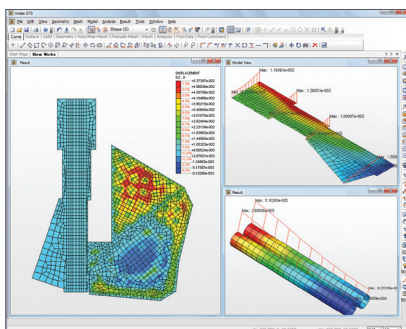



Shaft construction on the existing tunnel, United Kingdom ▼

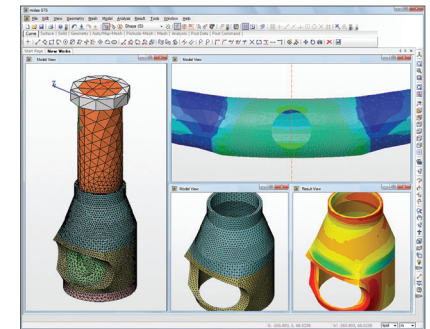

Dubai Tower, Qatar ▼

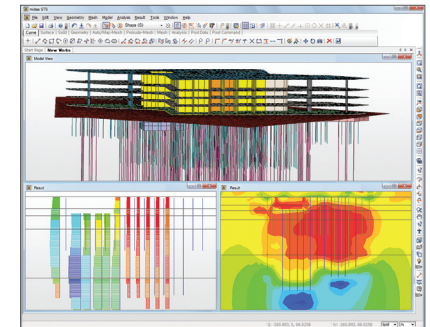

Buhang Dam, Korea ▼

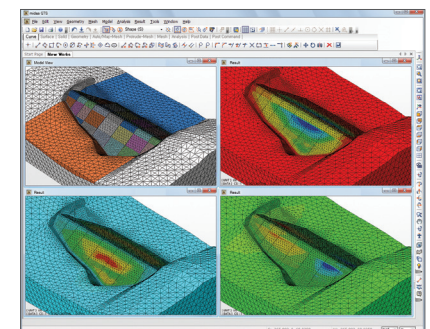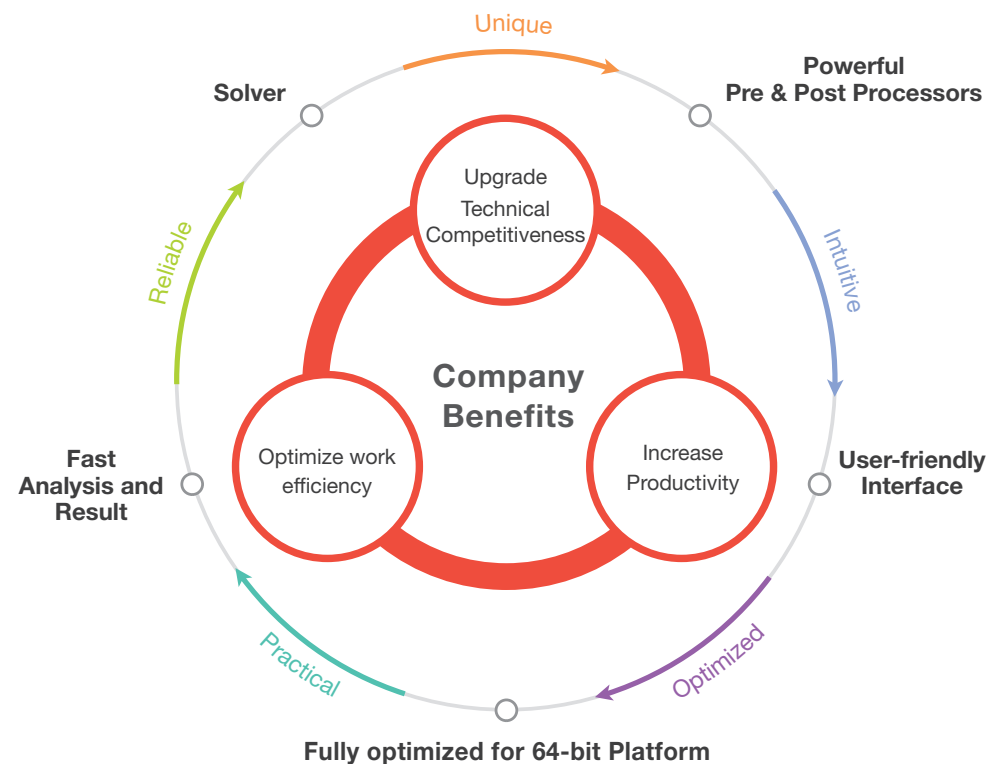

GTS NX is a next generation geotechnical analysis software that features the newest development in cutting-edge computer graphics and analysis technology. **GTS NX** fully supports the latest **64-bit OS Graphic user interface**. The intuitive interface will enable new users to easily integrate the software in their work process. The fast analysis speed, outstanding graphics, and output capabilities will provide users with a new and advanced level of geotechnical design.

Analysis Method

Geotechnical Analysis “New Experience”

GTS NX can simulate in-situ conditions by considering material nonlinearity and initial ground stresses. GTS NX supports all analysis types including static, dynamic, seepage, stress-seepage coupled, consolidation, construction stage and slope stability analysis.

In dynamic analysis, nonlinear time history analysis considering water level and self weight is supported. Any ground behavior that is related to ground water flow (seepage / stress / consolidation) can be simulated through fully coupled stress-seepage analysis. Through the fully integrated FE Solver, GTS NX provides highly reliable results for complex geotechnical analysis and design.



Framework

User-friendly Interface


GTS NX provides a user-friendly GUI (graphic user interface) through the use of a state-of-the-art graphics engine

1. Multi - Windows

Multi-Window GUI enables you to develop multiple model files simultaneously. You can view and modify the same model while the analysis is being run. Multiple analysis result items can be also viewed and compared simultaneously.

2. Ribbon menu for convenient tool organization

The menu has been designed to accommodate the modeling workflow. Similar functions and commands are intuitively grouped together for easier recognition. Command description, tips and diagrams explicitly guide you through the work process in the corresponding input windows.

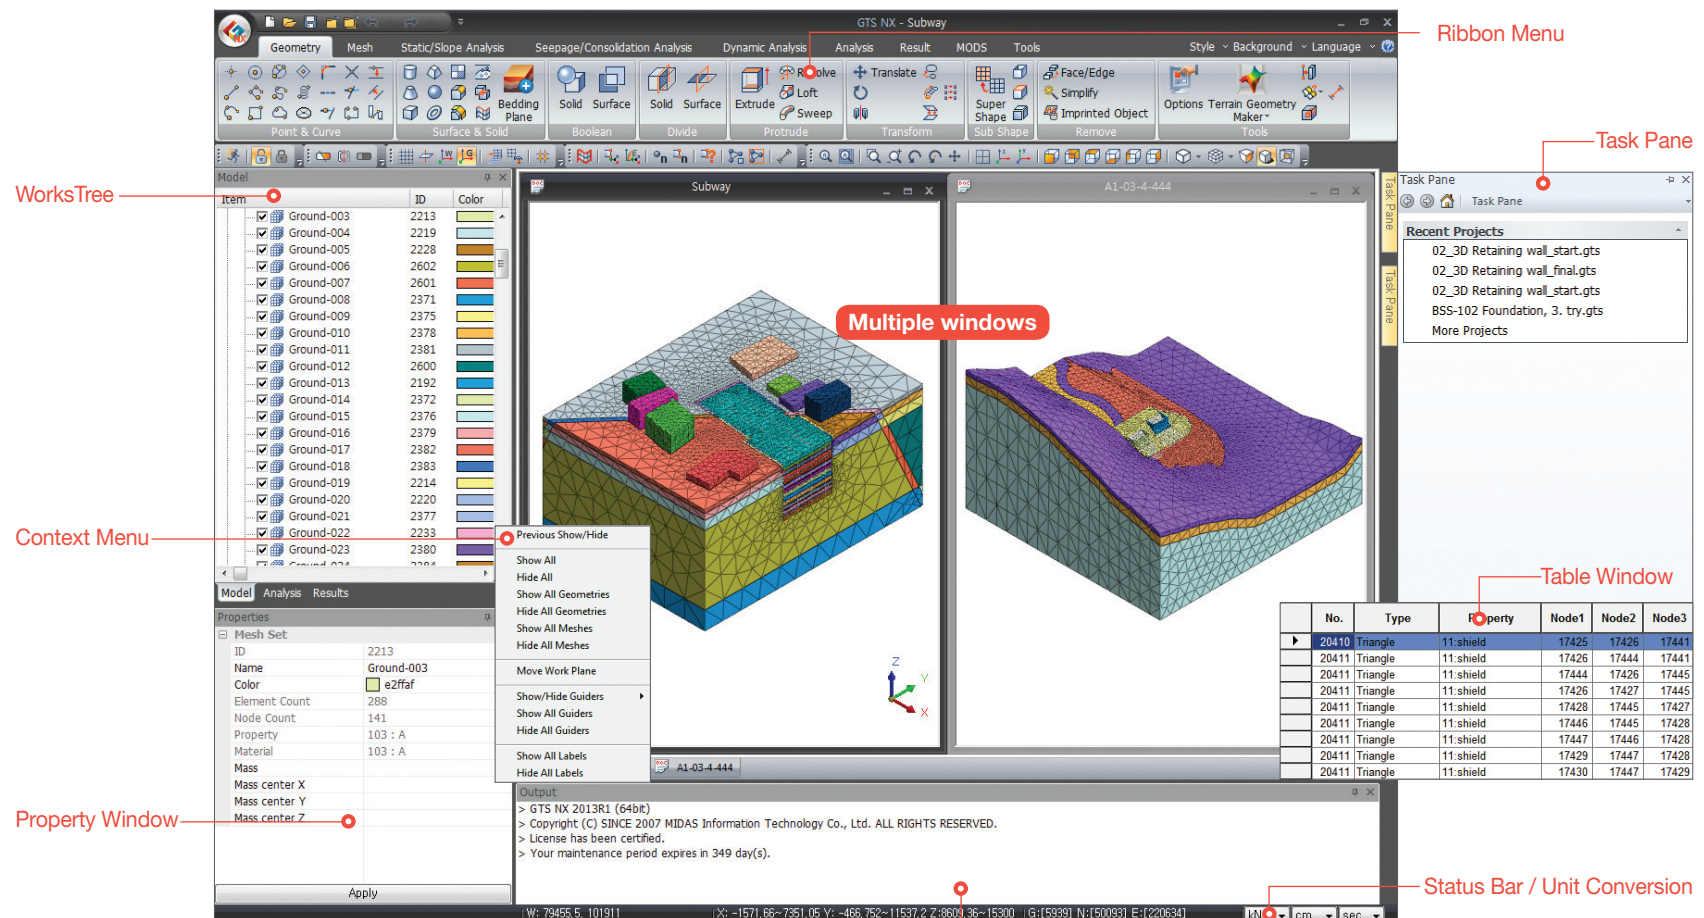

Geometry Modeling

CAD based modeling

Users can quickly become proficient with modeling in GTS NX – a tribute to CAD based 2D and 3D modeling commands.

Point, Line

Line, arc, circle (oval), polyline, rectangle, extend curve, trim curve

Face, Solid


Cylinder, cone, box, wedge, sphere, torus, plate, chamfer, offset

Boolean Operation


Fuse, cut, common

Divide, Protrude, Transform


Divide by surface, extrude, revolve, loft, sweep, mirror, scale, project

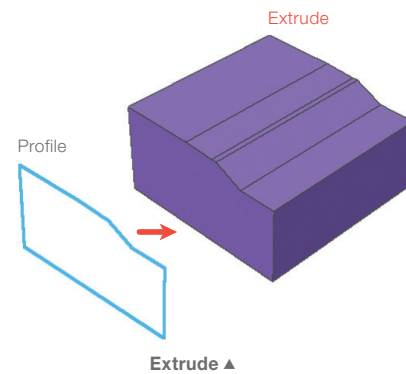


Extrude ▲

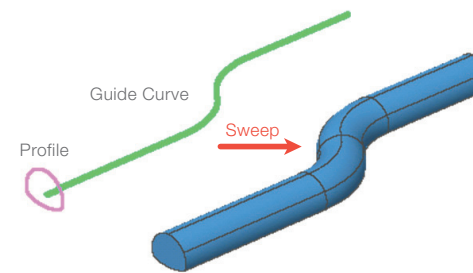


Sweep (Extrude along a guided curve) ▲

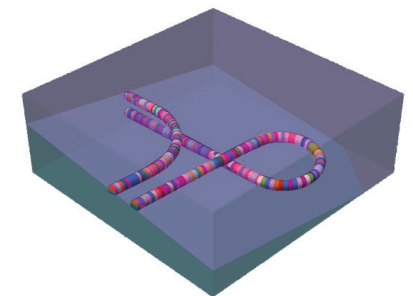


Model created by extruding and sweeping ▲

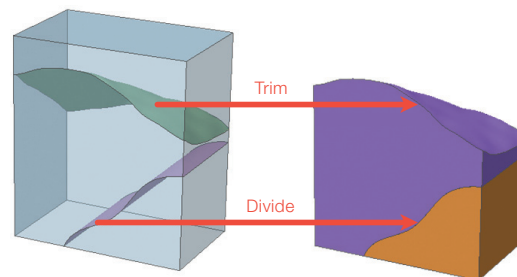

Trim / Divide ▲

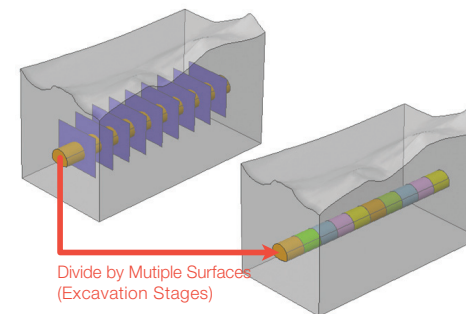

Divided (define excavation stages) ▲

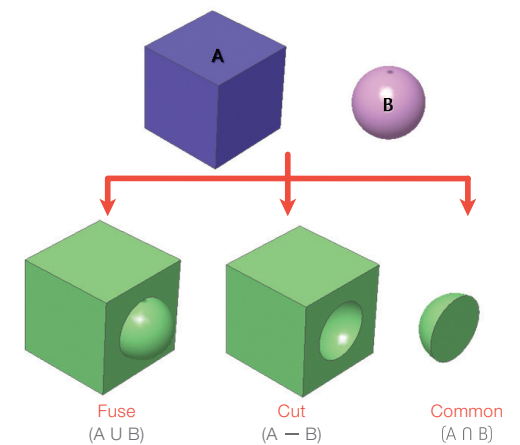

Boolean Operation ▲

Geometry Modeling

Terrain Geometry Auto-Generation

Use digital maps and boring data to generate 3D models that more closely resemble in-situ conditions and will consequently yield more realistic results. Modeling 3D surface contours and soil strata can be either cumbersome or impractical in other software, but GTS NX only takes a few steps.



TGM

Complex 3D ground surfaces can be created by selecting the target range in a digital topographic map.

Bedding Plane Wizard


By inputting boring data on the plane surface, 3D strata can be automatically generated for the ground model.

TGM (Terrain Geometry Maker)

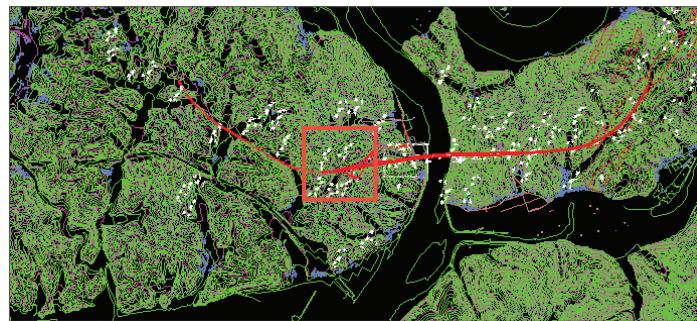
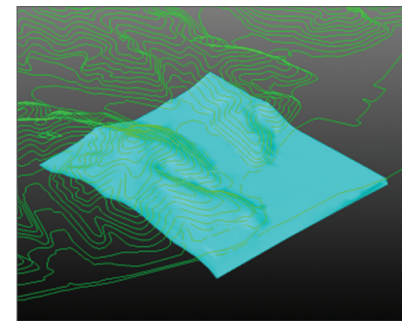


3D ground surface and contour lines

3D Stratum Wizard

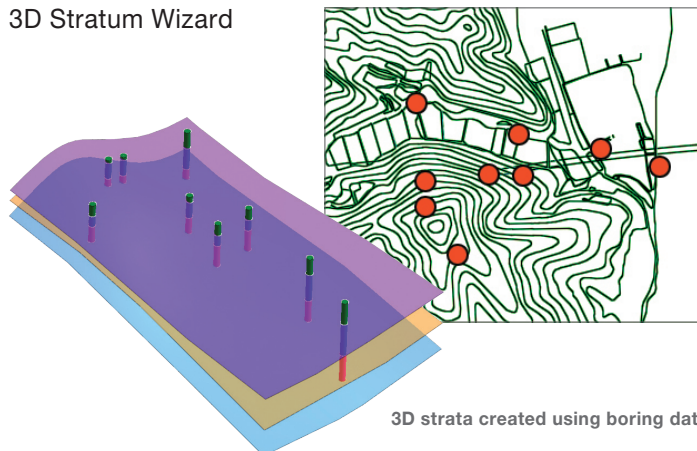

3D strata created using boring data

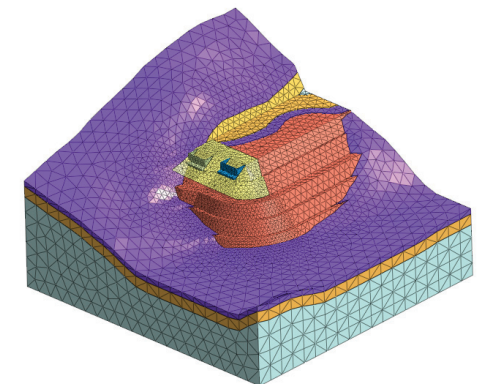

TGM and strata creation

Geometry Modeling

Geometry Modeling Automation

GTS NX automatically generates geometries such as shared faces and imprints. These functions ensure nodal connectivity between all adjacent mesh sets, thus ensuring reliable analysis of soil-structure and soil-soil interaction.

Modeling mistakes can also be automatically detected and corrected to prevent analysis from executing with failure warnings.

Shared face auto-generation


Shared faces between adjacent solids can be generated automatically. This makes it easier to ensure nodal connectivity of adjacent mesh sets.

Imprint auto-generation


The auto-imprint function allows lines and nodes to penetrate through 3D geometry [Solid].

Modeling error detection and correction

Irregular faces, lines that may cause analysis errors can be automatically detected and deleted. Erroneously overlapped geometries such as small faces and edges will also be detected and deleted.

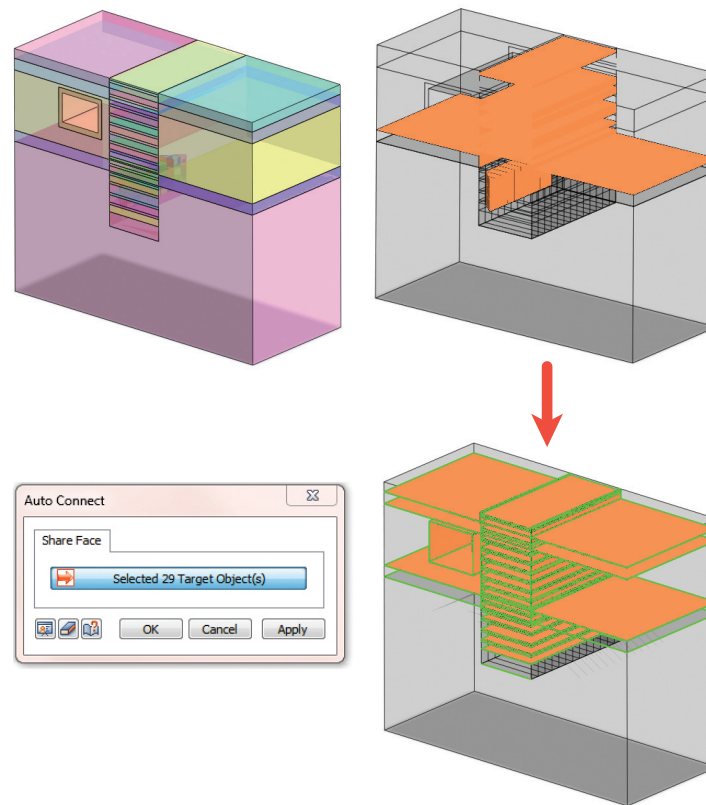

Shared face auto-generation ▲

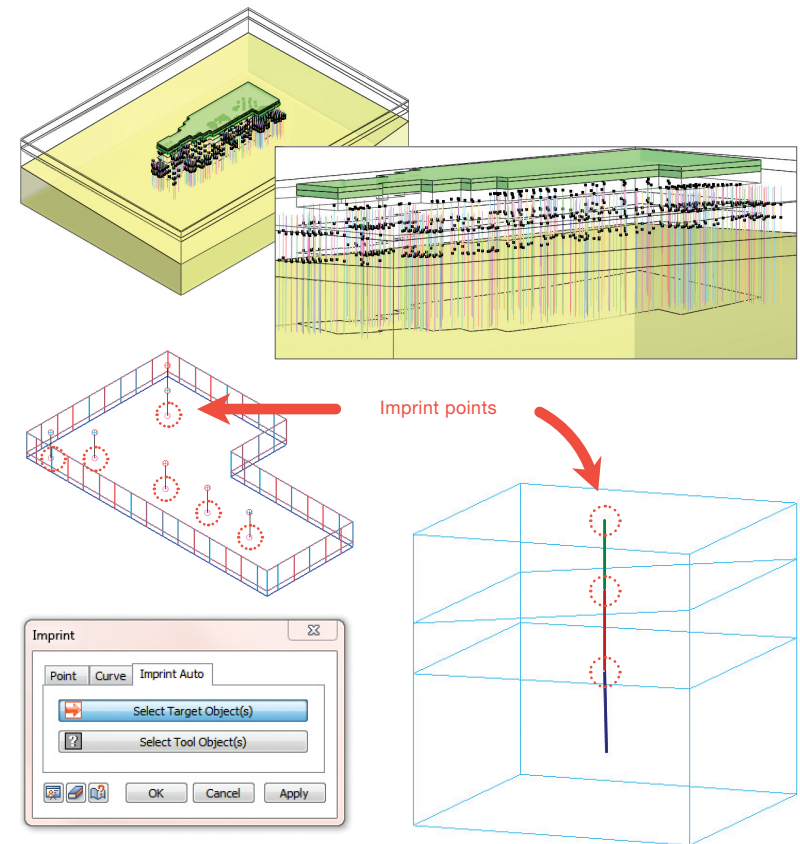

Auto-imprint ▲

Geometry Modeling

CAD Compatibility / Interface with other MIDAS Software

GTS NX imports model information from other MIDAS software (Gen, Civil & SoilWorks). The CAD interface transfers project data for expanded analysis requiring soil-structure interaction and detailed 3D investigation such as bridge pier and tall building foundations.

2D ground structure models can be also transferred to GTS NX for 3D analysis of ground engineering problems such as tunnel systems with connecting galleries.

2D / 3D CAD compatibility

*.dwg, *.dxf, parasolid
CAD Interface option
(CATIA V4, 5, Pro/E, Solidworks, STEP, IGES, ACIS, Inventor, Unigraphics)

SoilWorks Interface


Any cross section

Neutral Format File

*.FPN

Gen, Civil Interface

Geometry and element information
Structure cross section
Frame → solid conversion

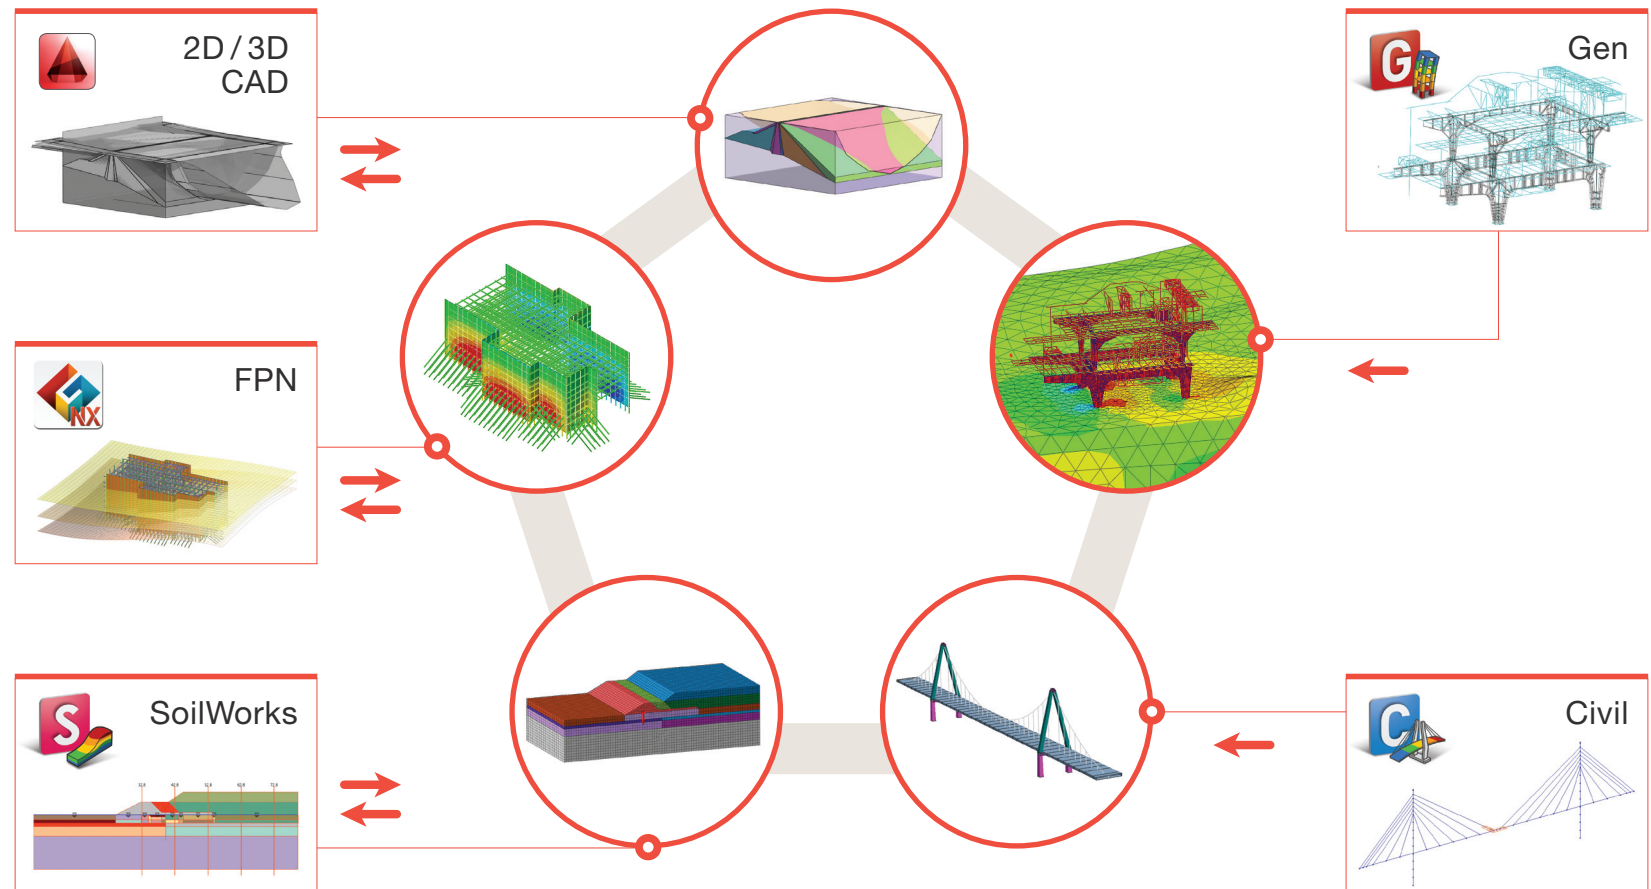

Mesh Generation

Optimized mesh generation of various element types

User friendly modeling functions generate complex geometries and mesh sets of various types with ease. Such capabilities enable engineers to quickly generate high quality mesh even with limited or no experience in finite element modeling.

Surface Auto-Mesher

Loop, Grid, Delaunay (triangle, quadrangle)

Solid Auto-Mesher

Tetrahedral, Hexahedral, Hybrid (hexahedral centered)

2D → 3D Element Auto-Generation



Protrude Mesh (2D → 3D)

Extrude, Revolve, Sweep, Project, Offset, Fill

Extract Mesh (3D → 2D)

Interface, pile, and structural element generation

Element generation considers interior edges and points

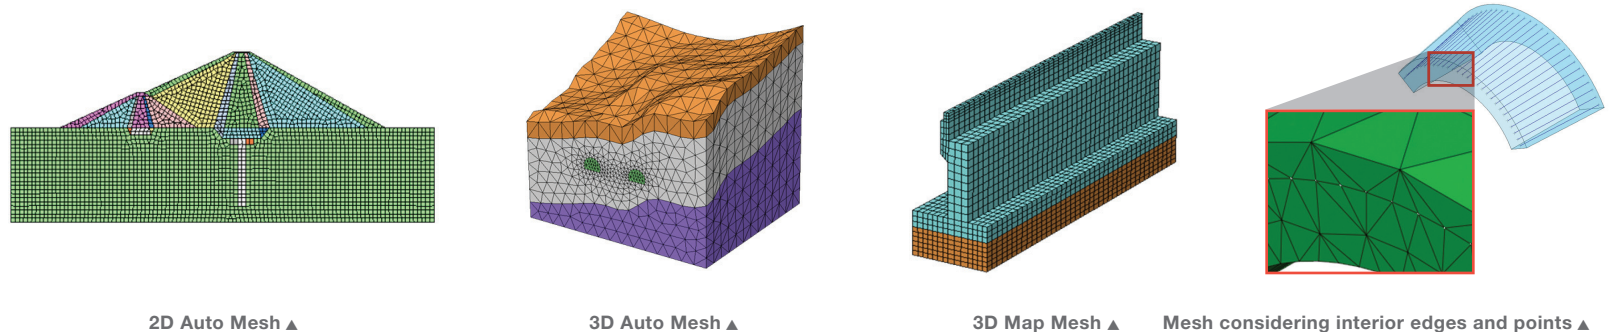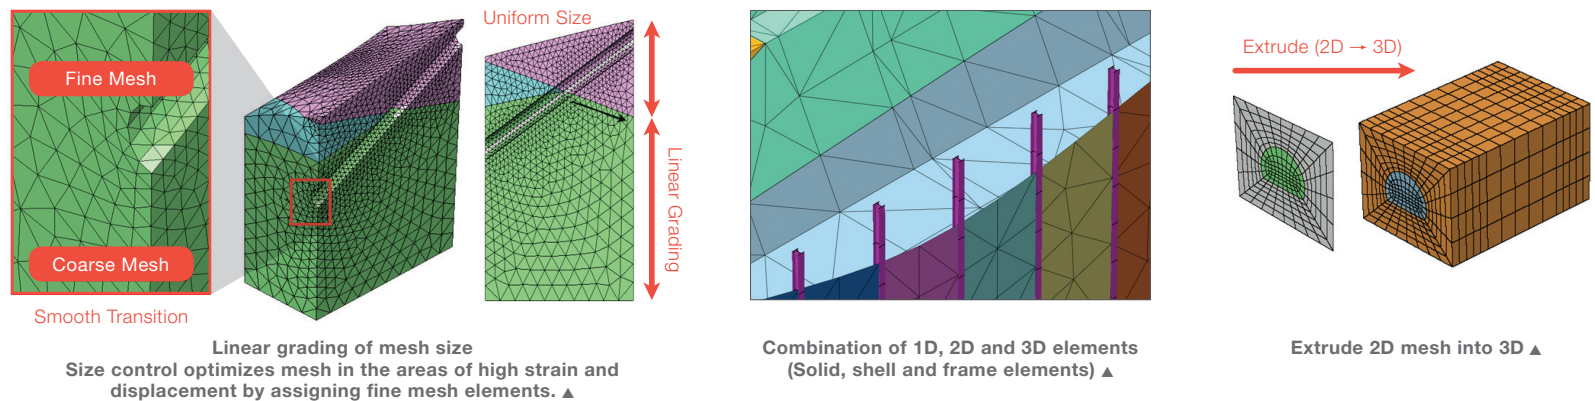

Mesh Generation

Quality Assurance & Checking Controls

Mesh quality can be automatically checked and managed. This allows the generation of high quality mesh with minimum effort even for complex ground structural models resulting in optimal analysis time and producing reliable and comprehensive results.

Hybrid Mesher

To provide more reliable analysis results, GTS NX can automatically generate hexahedral centered hybrid mesh. Hexahedral elements are the most stable for stress and displacement results.

Bonded Contacts Auto-generation

Adjacent elements without shared nodes can be detected and contacts can be applied automatically



Mesh Check

Non-manifold edge
Free face
Clamped element
Overlapped element


Mesh Quality Check

Aspect ratio, skew angle, twist angle, taper, Jacobian ratio, element length
(Maximum, Minimum), poor mesh sets definition



Hybrid Element Composition

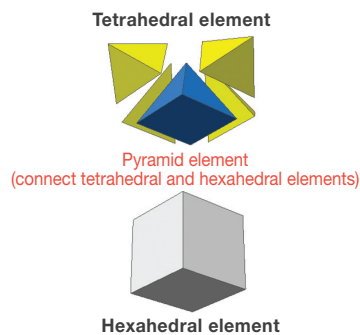


● Hexahedral elements
● Pyramid element
● Tetrahedral elements
● Triangular prism elements

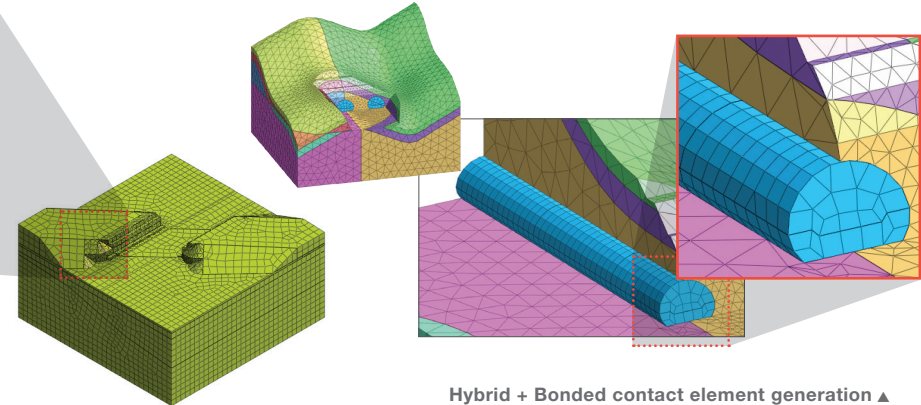

Hybrid + Bonded contact element generation ▲

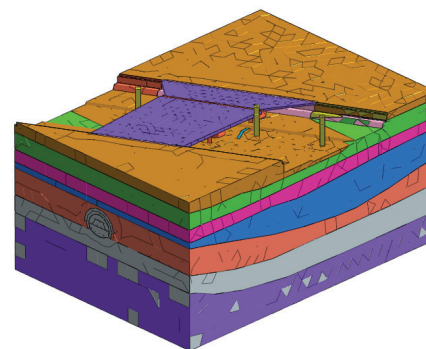

Mesh quality check ▲

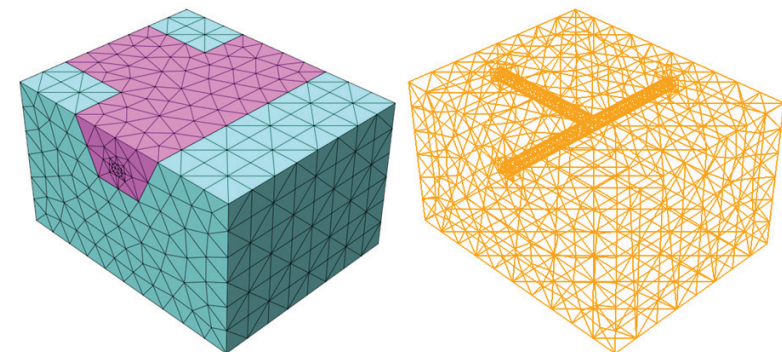

Mesh check (Free Face) ▲

Element Library

Element library

The GTS NX element library includes various elements for structural and ground modeling. These elements are conveniently classified based on application purposes. Ground, structures, various links, springs and interfaces can be selected and modeled from the extensive element library.

Continuum Elements for ground


- Solid Element
- Plane Strain Element
- Axisymmetric Element

Structural Elements

- Truss Element
- Embedded Truss Element
- Beam Element
- Plane Stress Element
- Shell Element

Applicable Elements

- Interface Element
- Shell Interface Element
- Pile / Pile Tip Bearing Element
- Geo-grid Element (1D / 2D)
- Gauging Shell Element
- Point Spring / Face Spring Element
- Matrix Spring Element
- Elastic Link Element
- Rigid Link Element
- Interpolation Element

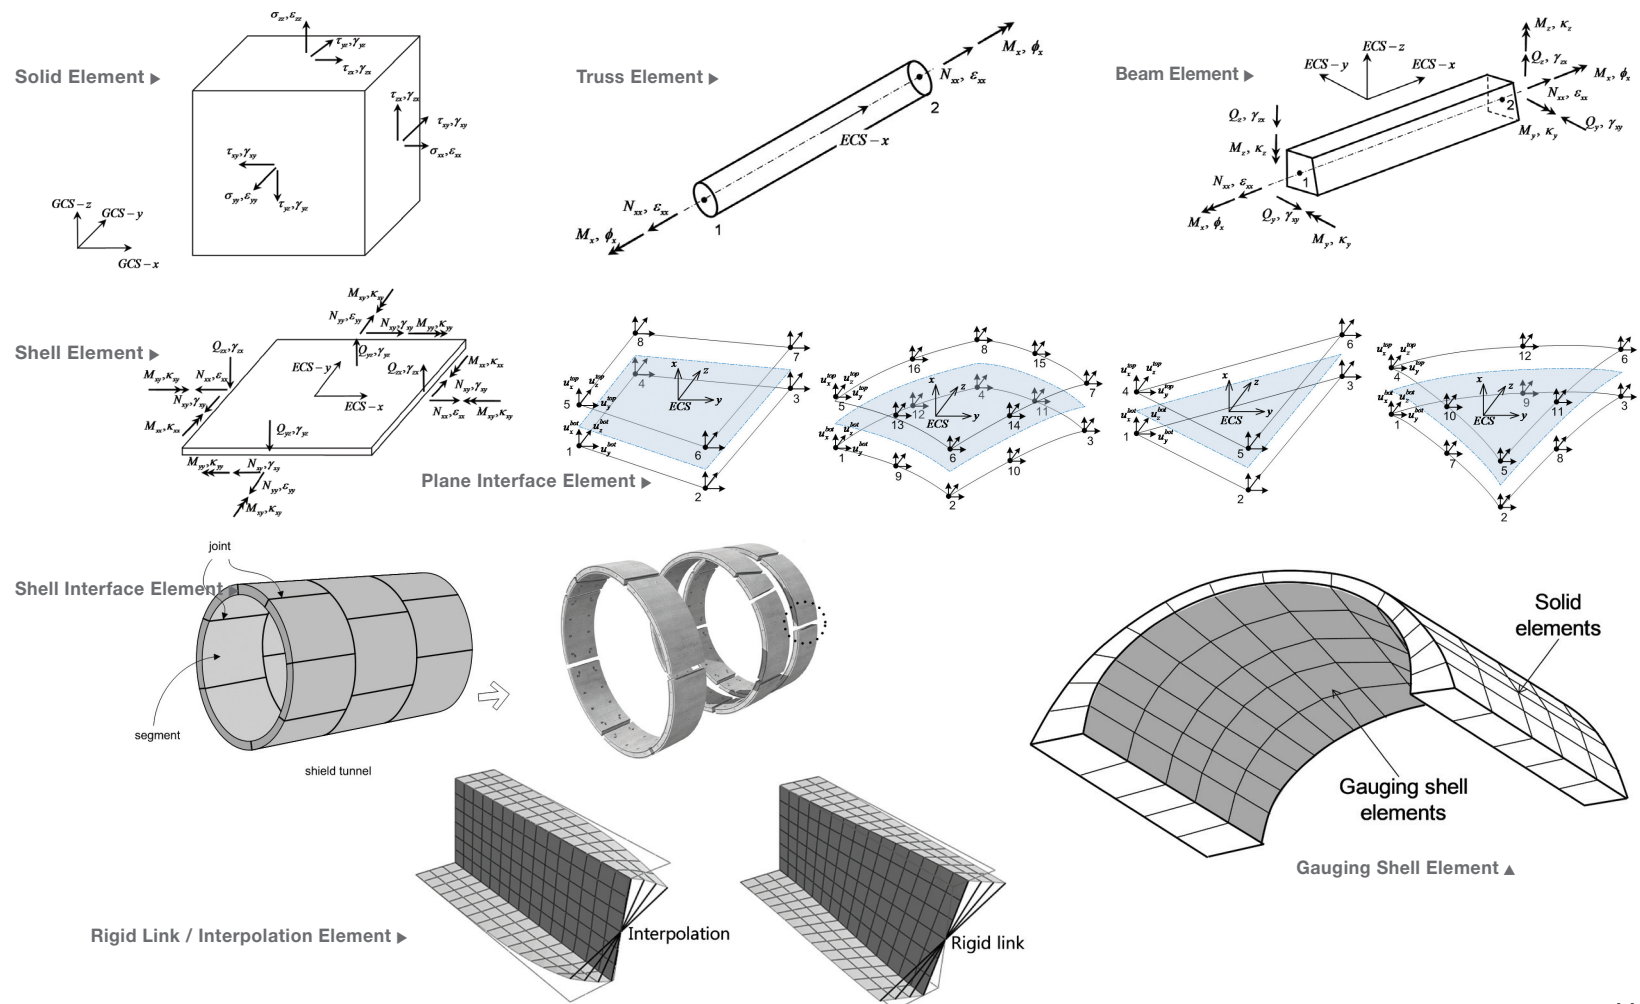

Material Models & Structural Properties

Comprehensive database of material models to simulate the behavior of various ground types

GTS NX provides various linear / nonlinear material models to simulate ground behavior under different loading and water level conditions.

Material models are generally classified into elastic, plastic, drained, undrained, and seepage categories. Material / equivalent linearity and nonlinearity of elements can be simulated through internal functions.

Elastic Materials




Plastic Materials

Undrained Materials

Functions

Elastic Materials

- Linear Elastic Isotropic
- Linear Elastic
- Transversely Isotropic
- Interface Elastic
- Nonlinear Elastic (1D)
- Jardine
- D-Min
- Hyperbolic (Duncan-Chang)

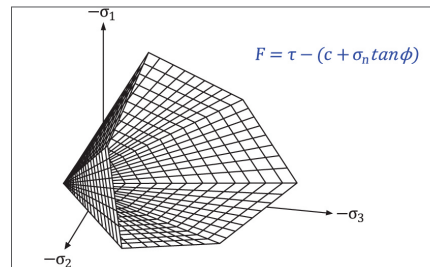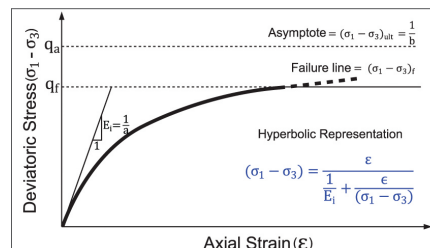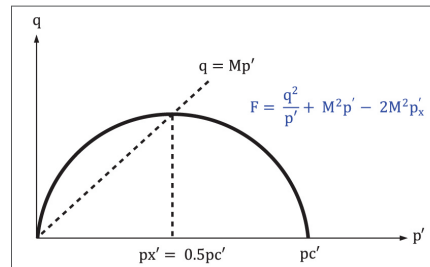


Plastic Materials

- von Mises
- Tresca
- Mohr-Coulomb
- Drucker-Prager
- Strain-Softening
- Modified Cam Clay
- Jointed Rock
- Modified Mohr Coulomb
- Hoek Brown
- Inverse Rankine
- Coulomb Friction (Interface)
- Janssen

Undrained Materials


- Effective Stiffness / Effective Strength
- Effective Stiffness / Undrained Strength
- Undrained Stiffness / Undrained Strength

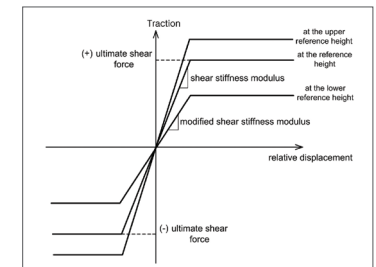



Functions

- General non-spatial functions (pile / pile tip bearing nonlinear function)
- Nonlinear elastic functions (truss / point spring / elastic link)
- Unsaturated property functions (Gardner, Frontal, Van Genuchten)
- Strain compatibility functions (2D equivalent linear)

Pile bearing ▲

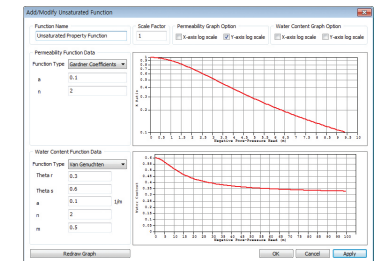

Unsaturated property (Individual) ▲

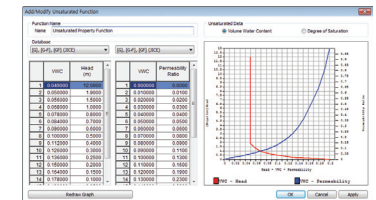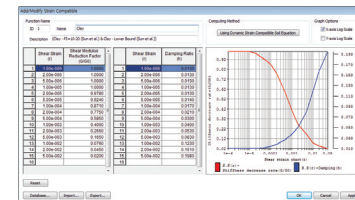

Strain compatibility ▲

Unsaturated property (Relation) ▲

Load conditions Generation and Application

Structural Loads

Force (concentrated load / pressure)
Gravity
Prescribed displacement
Temperature load

Static / Dynamic Loads

Loads in Construction Stages

Load distribution factor

Nonlinearity of Load


In geometric nonlinear analysis, the direction of loads can change with the deformation of the structure. (Follower Load)

Load assignment reflecting field conditions


GTS NX can simulate various in-situ loading conditions. The dynamic function database includes a variety of code-based response spectra and time history functions. Customized functions for vibration, blast and seismic loading can be also generated.

Static Loads


- Self weight
- Concentrated load
- Moment load
- Prescribed displacement
- Pressure load
- Water pressure (auto-consideration option)
- Beam linear load
- Beam element load
- Temperature load
- Prestress load
- Initial equilibrium load
- Combined load

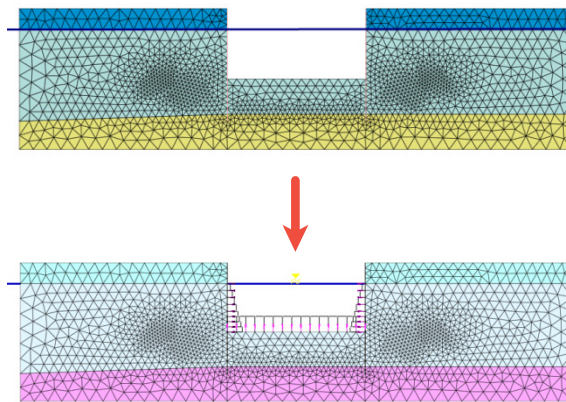

Water pressure automatic application during underwater excavation ▲

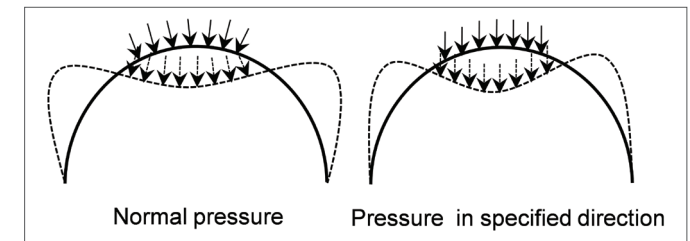


Follower Load- nonlinear load ▲

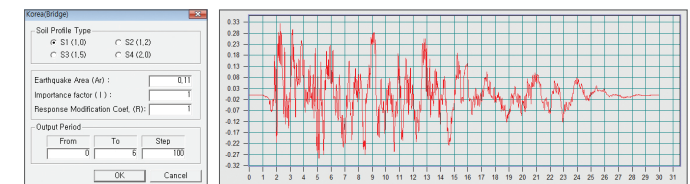


Seismic data automatic generation ▲

Dynamic Loads

- Response spectrum
- Ground acceleration
- Time history static load
- Dynamic nodal load
- Dynamic surface load
- Load – mass conversion
- Railway dynamic load table

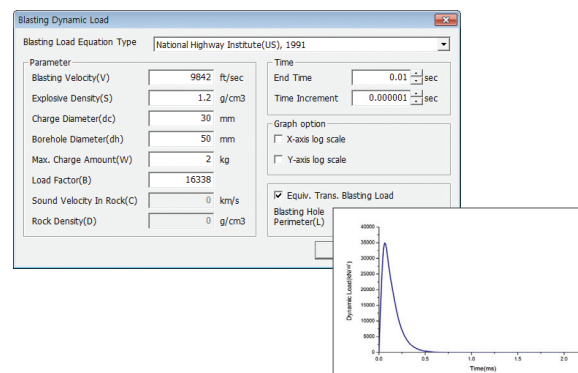

Dynamic blast load automatic generation ▲

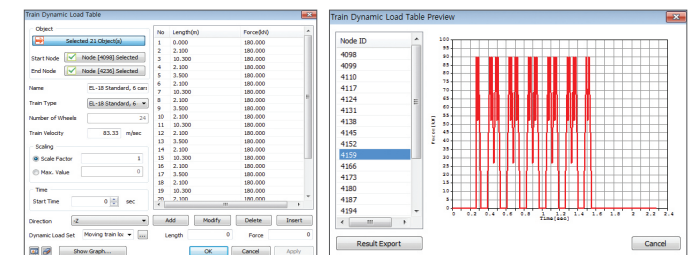

Train moving load automatic generation ▲

Boundary Conditions

Different boundary conditions can be generated to simulate in-situ conditions

GTS NX provides various boundary conditions for all analysis types. Essential boundary conditions for analysis can be defined automatically. By defining the water level surface, the pore water pressure can be considered in stress analysis. Time dependent water levels can be defined to simulate rapid draw down as well as a gradual rise in water level due to rainfall.

The Change Property function can simulate a change in material properties over time. This function is useful for simulating the hardening of concrete as well as excavation projects in which soil layers are replaced by structural elements. Boundary conditions for 2D equivalent linear analysis and linear / nonlinear dynamic analysis can be generated automatically as well.

Constraint

Automatic definition of constraint for ground
Fixed / pinned / rotation

Slope Stability Analysis


Slip circular surface
Slip polygonal surface

Seepage / Consolidation Analysis



Nodal head / Nodal flux / Surface flux /
Review / Drained condition / Non-consolidation

Dynamic Analysis


Elastic boundary / Viscous boundary
Damper consideration in free ground /
Transmitting Boundary

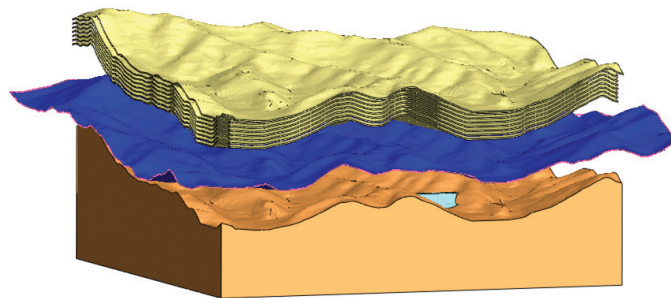


3D water level generation ▲

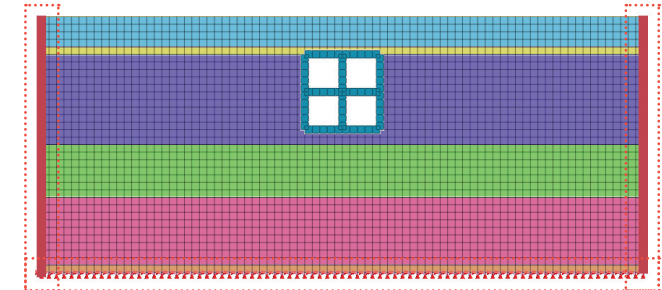


Dynamic analysis (soil structure interaction) boundary generation ▲

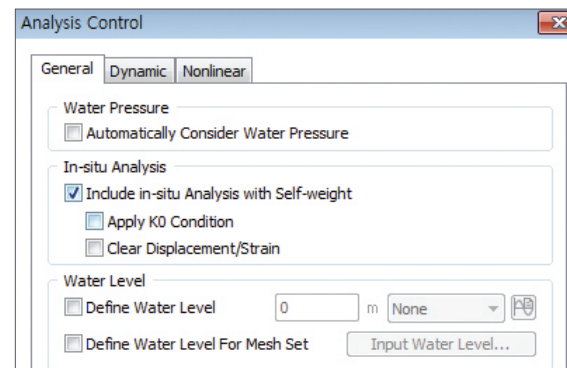

In-situ analysis with Self weight considering k0 ▲



Slip circular surface boundary for stress analysis (SAM) ▲

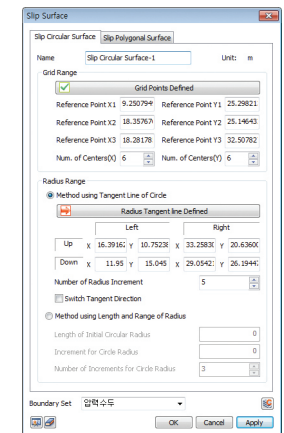

Results Output and report

Contour – Continuous / Fringe

Vector, Diagram

Deformed / Undeformed

Multi-Step Iso Surface

Iso Value Surface

Flow Net

Failure Surface of Slope

Time History Graph


Real-Time Animation

3D → 2D Result Wizard


Extract results on any 2D cross section from
3D results without extra calculation

Excellent result displays supported by a new and powerful graphics engine


Through its advanced graphic processing engine, GTS NX provides a variety of output methods for users to visualize and extract their analysis results. The extensive output options present results in an elegant and comprehensible form.




Various contour and edge types ▲

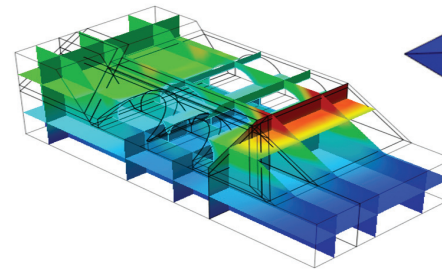


Clipping plane output ▲

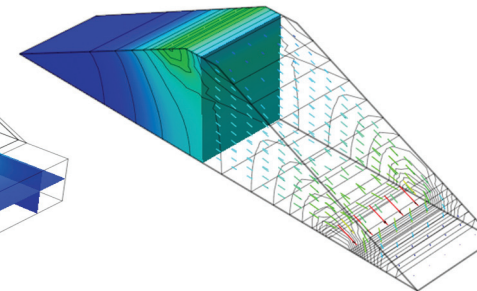


Hybrid plot (Combination of vector and
contour plot on clipping plane) ▲

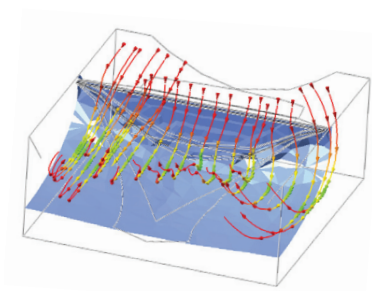

Real-time animation output for 3D flow ▲

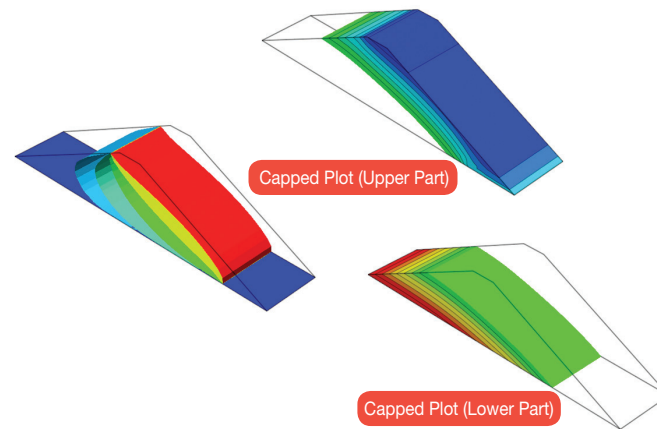

Iso – surface output ▲

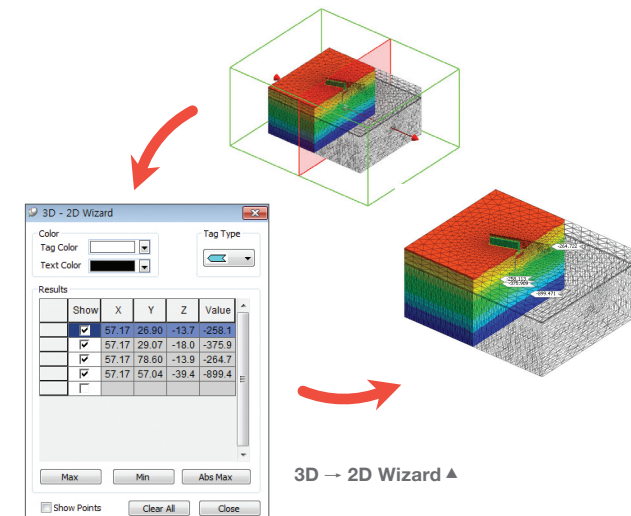

3D → 2D Wizard ▲

Results output and Report

Results output and report for practical design

The results output functions allow users to combine different results and selectively extract only the pertinent results. The 3D PDF report generator exports 3D model and analysis results directly into a PDF file.

The report generation creates aesthetic and comprehensive reports in a fraction of the time that it would take through manually copying and pasting spreadsheets and images.

Cutting Diagram on any line and plane


Extract Result / Probe Result

3D PDF Output

3D model / analysis results can be checked and operated in a PDF file


Graph / Table / Result Image Automatic save

Text File Results Output

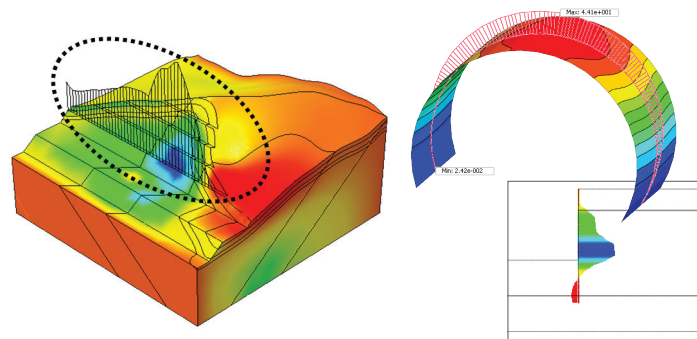


Result distribution / change diagram on any line ▲

Member / cutting-plane diagram ▲

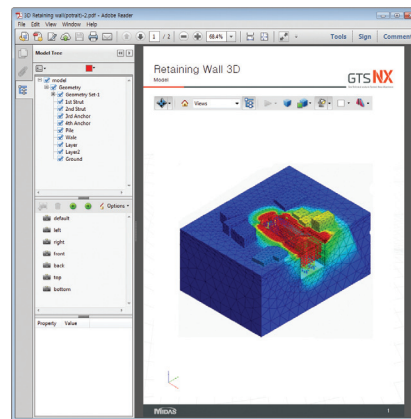

3D PDF Report ▲

Text Output ▲

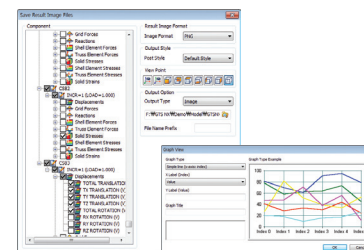


Result image automatic save ▲

Displacement / Velocity / acceleration – decibel conversion
Decibel Reference Levels (ISO R 1683)

	Quantity	Definition	Ref. level
Amplitude Ratio	Vibratory Acc. Level	$L_a = 20 \log_{10} (a/a_0)$ dB	$a_0 = 10^{-6} \text{ m/s}^2$
	Vibratory Vel. Level	$L_v = 20 \log_{10} (v/v_0)$ dB	$v_0 = 10^{-9} \text{ m/s}$
	Vibratory Dis. Level	$L_d = 20 \log_{10} (d/d_0)$ dB	$d_0 = 10^{-12} \text{ m}$

Convert to Decibel ▲

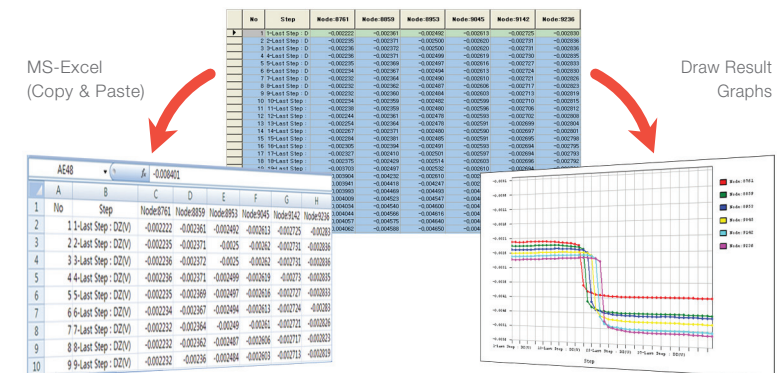

Result value table (copy and paste to MS-EXCEL) and graph ▲

Application Areas

| Tunnel |

Road Tunnel

Portal, Cross passage, Refuge area (Emergency zones), Ventilation shaft, Electrical room, Fault fractured zone, Adjacent structures

Railway / Subway Tunnel

Fitting (T, Y-type), Shield TBM, Machine Room, TRcM / CAM, Station


Steel Pipe Roof

Steel Strut, Full face / Bench cut, Ring cut, CD cut, Open cut, 2 Arch, 3 Arch


Total Solutions for Geotechnical Analysis

GTS NX is proven numerical modeling software used by many international geotechnical firms. Selected practical applications of the software are shown below.


The Tunnel Wizard can model tunnels having standard pattern and define excavation methods such as full face cut, bench cut and direction (one, both). For each case, load relaxation can be considered by applying load distribution factor (LDF)

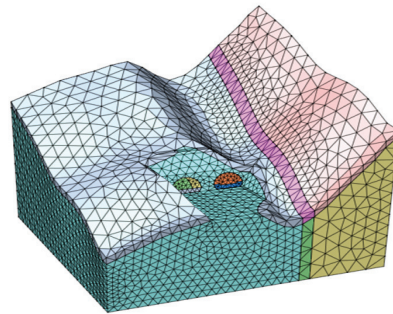


Portal With Fault fractured zone ▲

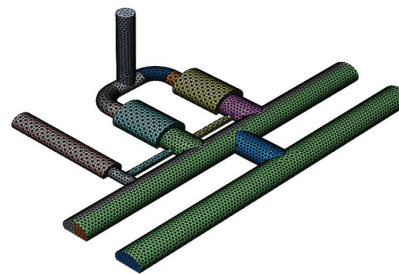


Ventilation shaft (Vertical / Horizontal) ▲




Shield TBM ▲

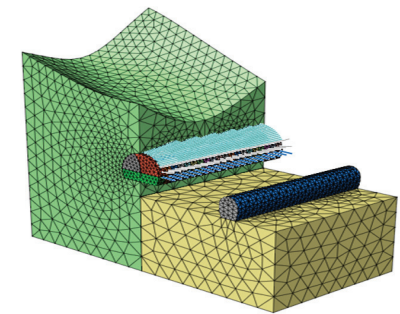


Steel pipe reinforced grouting (Pipe Roof) ▲

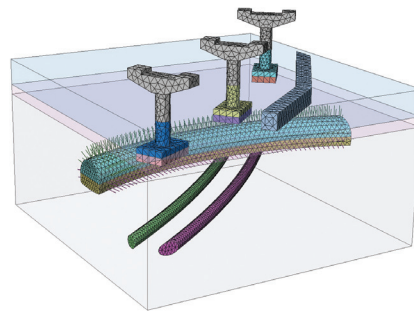

Adjacent structures ▲

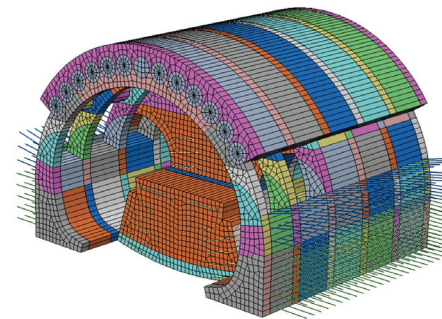

TRcM / CAM (Subway tunnel) ▲

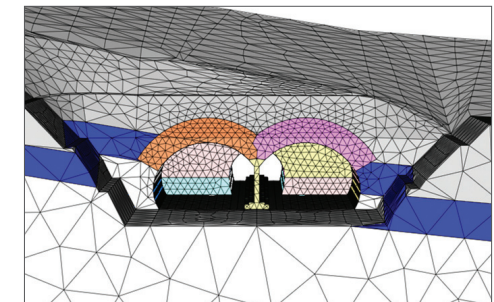

2-Arch Tunnel (NATM Method) ▲

Application Areas

| Slope Stability |

Strength Reduction Method Analysis (SRM)

- 2D / 3D SRM Analysis
- SRM Analysis by construction stages
- SRM considering rainfall
- Nonlinear Dynamic Analysis + SRM Analysis

Stress Analysis Method (SAM)

- Potential Sliding surface + SRM Analysis
- Consideration of rainfall / staged analysis


Evaluation of slope reinforcement

- Nail, Rock bolt, stabilizing piles, retaining wall
- Evaluation of reinforcement stability in slopes reinforced by structural members

Total Solutions for Geotechnical Analysis

GTS NX not only analyzes 2D / 3D slope stability according to Strength Reduction Method (SRM) but also calculates the slope safety factor according to Limit Equilibrium Method using potential sliding surfaces. Analysis result in each calculation step can be obtained, so the progressive failure behavior of the slope can be analyzed.

Stress analysis and seepage analysis considering cutting stages can be coupled to investigate slope stability in short / long term. Especially by coupling with nonlinear time history analysis results, earthquake resistance of a slope can be assessed.

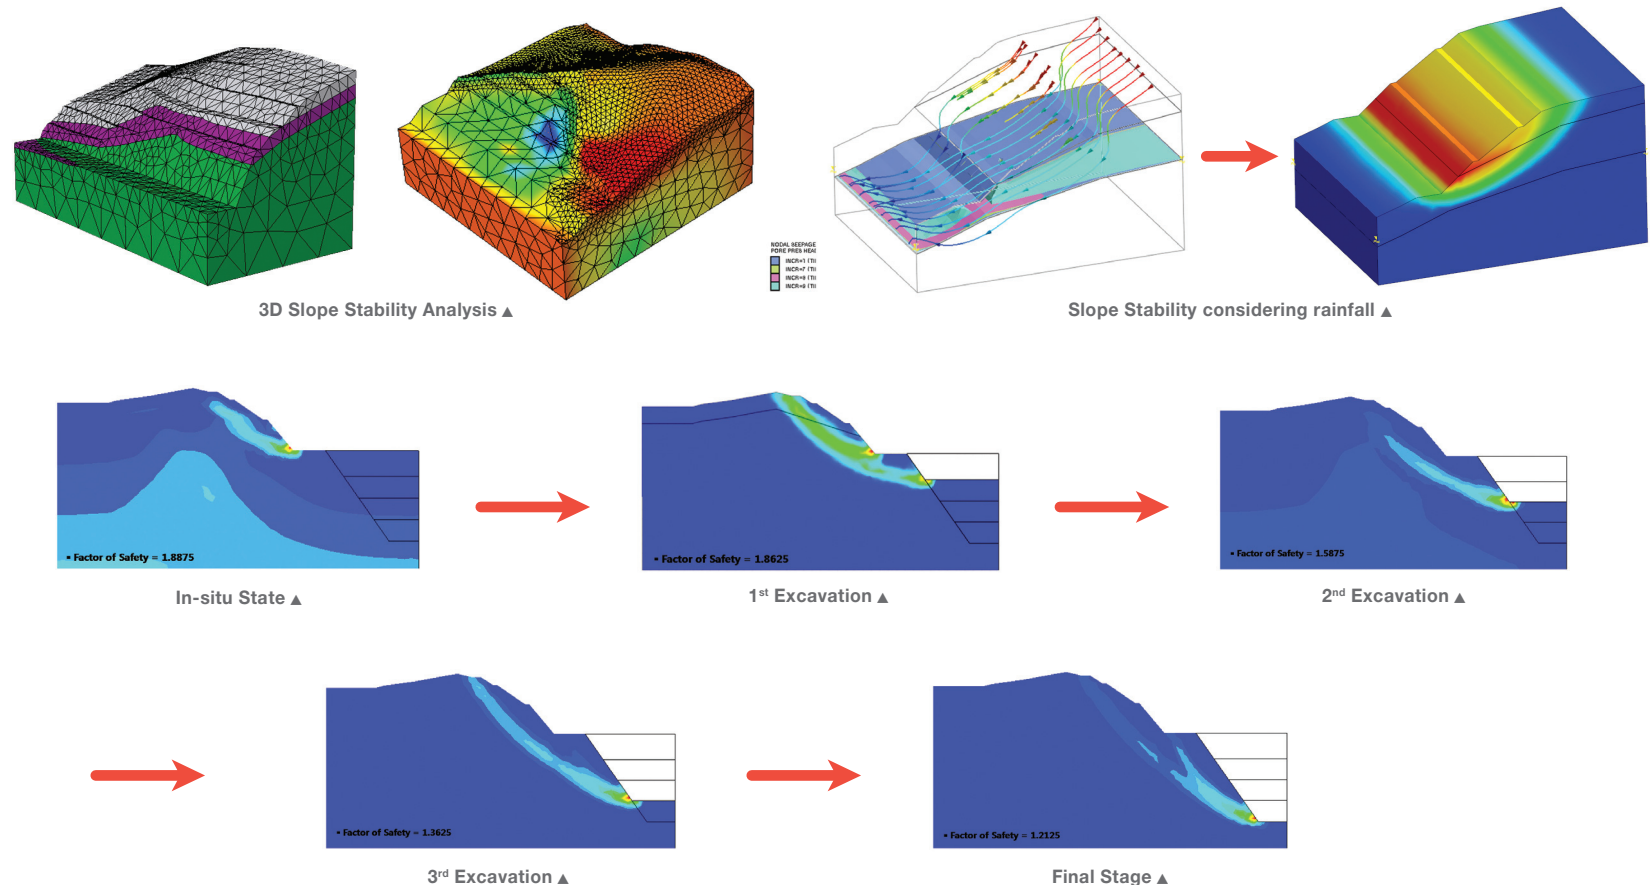

Application Areas

| Foundations |

| Excavation / Retaining wall |


Total Solutions for Geotechnical Analysis

Foundations

GTS NX analyzes abutment stability subjected to lateral pressure and differential settlements. Bearing capacities of piles can be parametrically verified for different materials and construction methods.


Shallow foundation: Direct foundation, Mechanic (Vibration) foundation

Deep foundation (Pier / Abutment): Pile (Steel Pipe, PHC, Drilled Shaft (RCD), Driven Pile), Well foundation, Caisson, Raft foundation

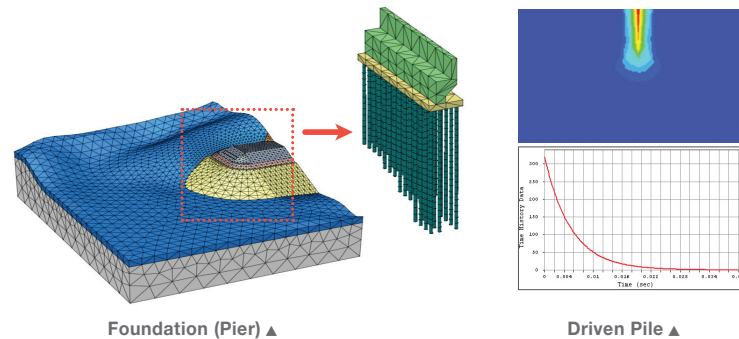

Foundation (Pier) ▲

Driven Pile ▲

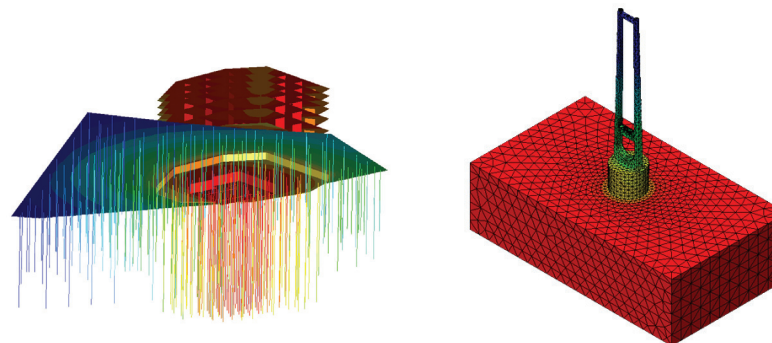

Deep Piled Raft Foundation ▲

Well Foundation ▲


Excavation and Temporary Structures

GTS NX simulates installation of retention walls for excavation of ground structures such as subway stations, tall building foundations. Temporary structures can be incorporated in excavation stages, which include piles, walers, struts, anchors and tie-backs. Changes in earth pressure and ground water level and complex strata can be also accommodated in conjunction with existing adjacent ground structures such as tunnels, subways, foundations and utility chambers.

Retaining wall: H-Pile + slurry wall, Sheet Pile, CIP, SCW, D-Wall


Strut: Steel Strut, Earth Anchor, Rock Bolt, Soil Nail, Tie Rod, Raker

Stability analysis for adjacent structures

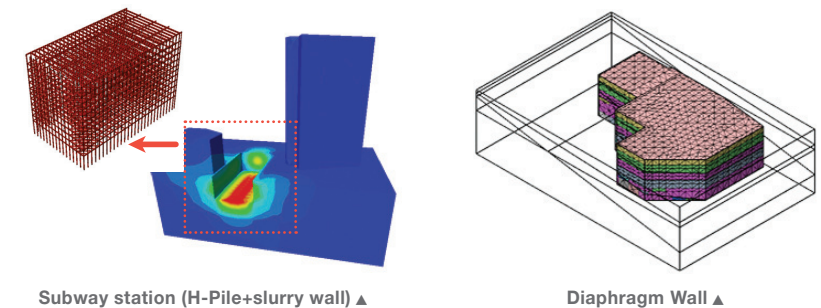

Subway station (H-Pile+slurry wall) ▲

Diaphragm Wall ▲

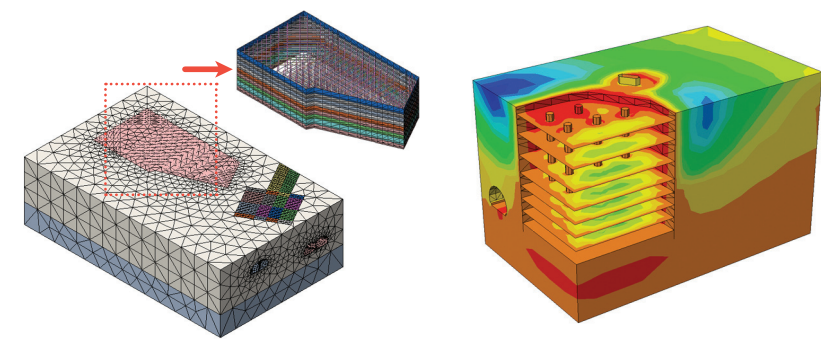

Ground shoring for excavation for a tall building foundation ▲

Stress distribution of subway line and ventilation shaft by staged excavation ▲

Application Areas

| Soft Soil / Embankment |

| Hydraulic /
Underground Structure |


Total Solutions for Geotechnical Analysis

Soft Soil / Embankment

GTS NX calculates dissipation of excessive pore water pressure and consolidation settlement through staged consolidation analysis. Fully coupled seepage analysis reflects changes in excessive pore water pressure and water level in real time.

Soft soil: SCP-reinforced, Dewatering method (PBD, PSD, SD), Suction drain

Embankment: Revetment and quay wall, Dock, Breakwater

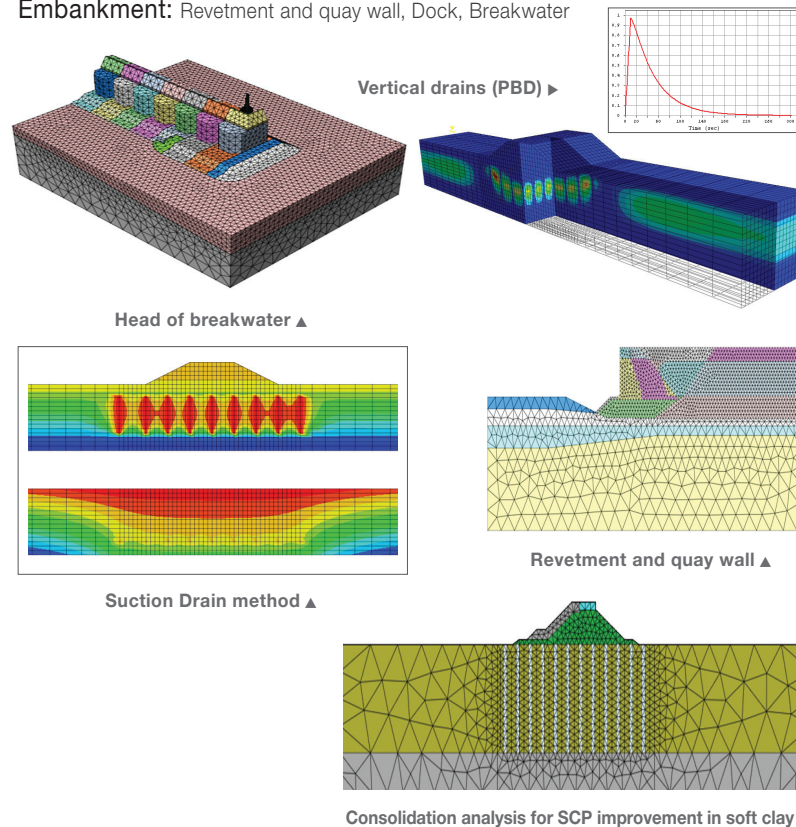


Hydraulic / Underground Structures

Steady state and transient seepage analysis for dams, embankments, tunnels, etc. can be performed. Seepage in an unsaturated area can be also analyzed by applying Darcy's Law. GTS NX inherently handles ground – structure interaction with water and ground water related problems.

Hydraulic structures: Earth Dam, CFRD, Levee, Water way tunnel (pipe & culvert)


Underground Structures: Box, Underground driveway

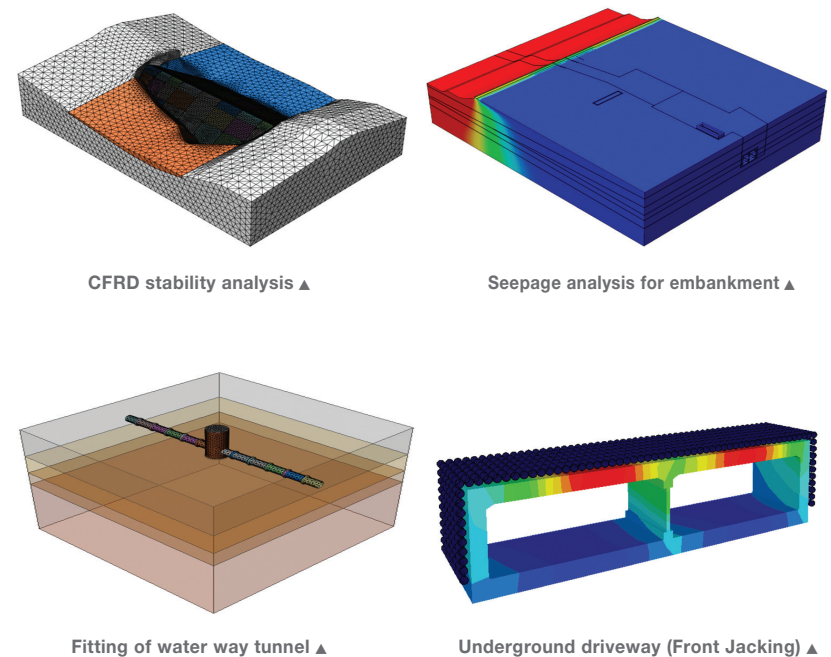

About MIDAS IT


“MIDAS IT is taking flight with endless passion and devotion to provide technological solutions worldwide”

MIDAS Information Technology Co., Ltd. develops and supplies mechanical / civil / structural / geotechnical engineering software and provides professional engineering consulting and e-Biz total solutions. The company began its operation since 1989, and currently employs 530 developers and engineers with extensive experience. MIDAS IT also has corporate offices in US, UK, China, Japan, India and Russia. There are also global network partners in over 30 countries supplying our engineering technology. MIDAS IT has grown into a world class company.

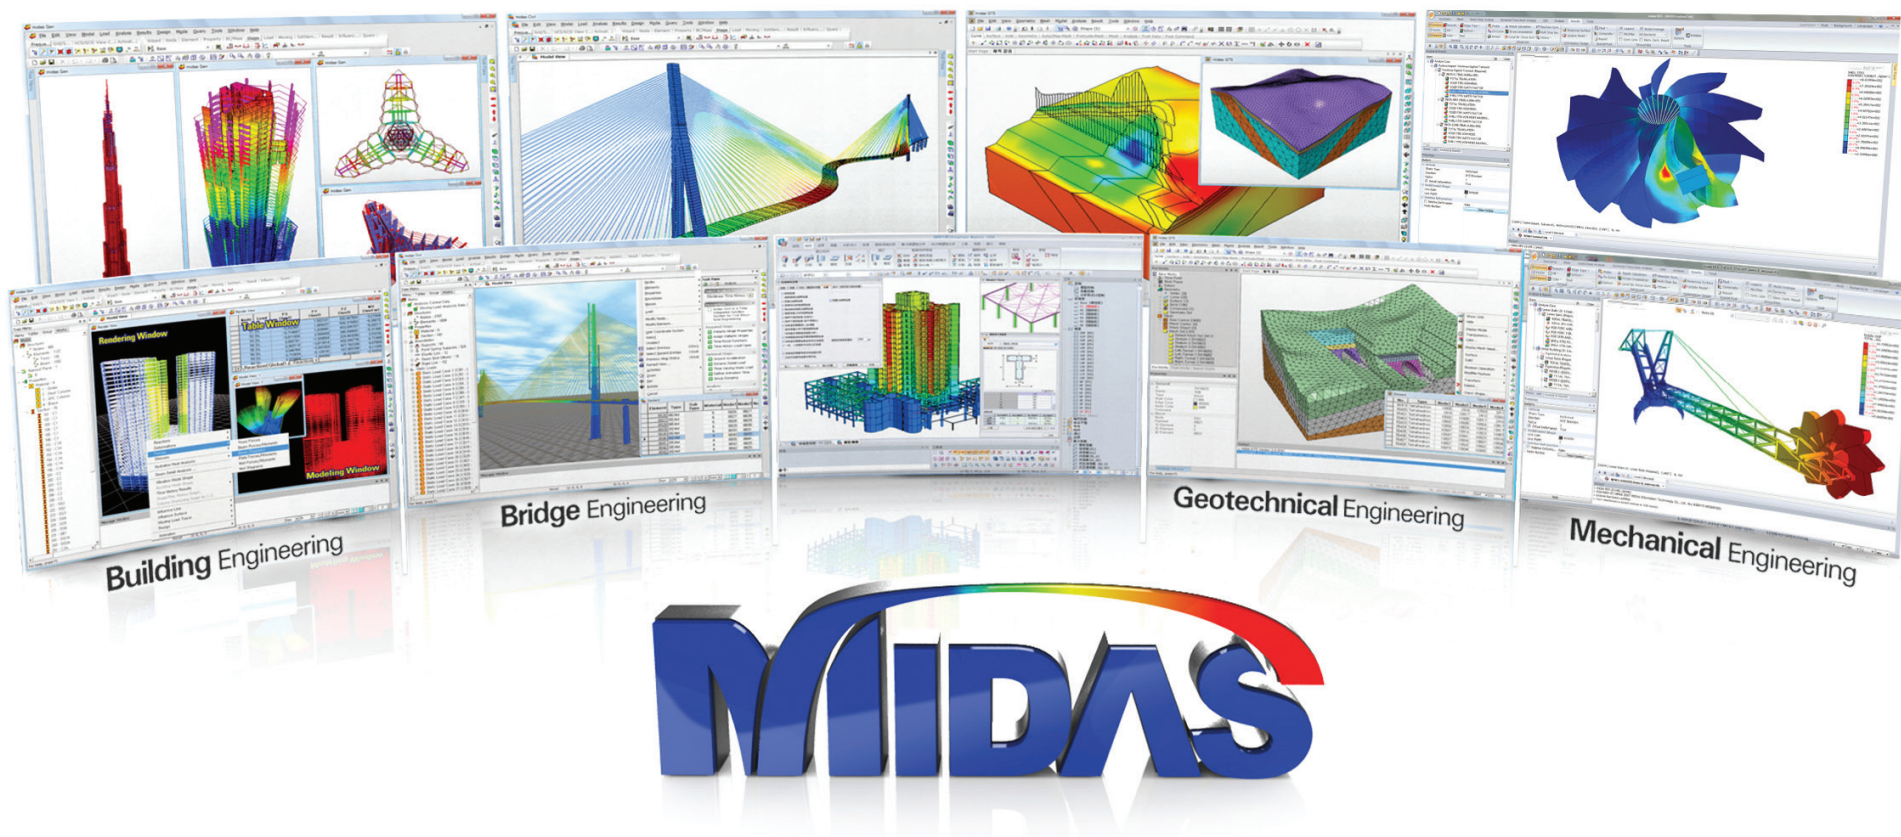


Introduction to MIDAS Family Programs

MIDAS Program Applications




Burj Khalifa (UAE)

- World's tallest building to date
- Height: 840m, 168 floors



Beijing Olympic Main Stadium (China)

- Area: 78,000 sq. m.
- Allowed Seating Capacity: 91,000 people



Russky Island Bridge (Russia)

- World's longest cable stayed bridge
- Main span: 1,104m


“MIDAS Family Programs are advanced CAE (Computer Aided Engineering) solutions that have been and are being developed using the latest technology”

GTS NX

GeoTechnical analysis System

SoilWorks

Geotechnical Solutions for practical Design

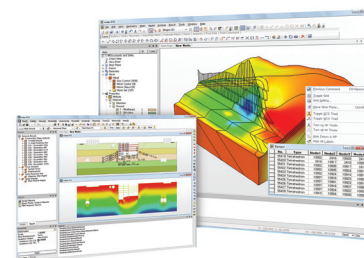


midas Civil

Integrated Solution System for Bridge and Civil Structures

midas FEA

Advanced Nonlinear and Detailed Analysis System

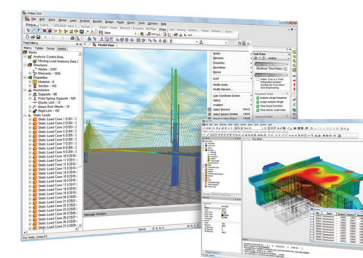

midas Gen


Integrated System for building and General Structures

midas DShop

Auto-Drawing Module to generate Structural drawings and Bill of Materials

midas Design+

Structural engineer's tools


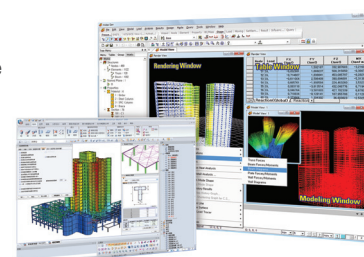


midas NFX

Total Solutions for Mechanical Engineering in structural mechanics and CFD

midas FX+

General Pre & Post Processor for Finite Element Analysis

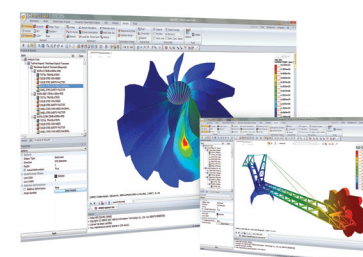

GTS NX

Integrated Solver Optimized for the next generation 64 - bit platform
Finite Element Solutions for Geotechnical Engineering



Copyright © Since 1989 MIDAS Information Technology Co., Ltd. All rights reserved.
www.MidasUser.com

<http://www.midasGTSNX.com>