

## New Launch Edition

February 2021

### NEW GENERATION

#### IFS – Under Canopy & Garage Light

- 40 W & 60 W
- Color temperatures: 4000K, 5000K
- Lumen output: 5 129 - 8 147 lm
- 120-277 V OR 120-347 V
- IP65
- Dimmable



### NEW GENERATION

#### WPS GEN4 – Classic Wall Pack

- Single or wattage selectable
- 3 CCT select (30K/ 40K/ 50K) or single CCT (40K or 50K)
- Lumen output: 3 625 – 17 885 lm
- Integrated photocell included on selected models
- 120-277 V or 120-347 V
- Accessories: Backplate, glareshield, wireguard




#### WCI-L – Mini Wall Pack

- 3 CCT select (40K/ 45K/ 50K)\* or 3000K
- Lumen output (lm) 1 725 - 2 926
- 120-277 V
- IP65
- Integrated photocell




\* Only 3 CCT version is DLC certified

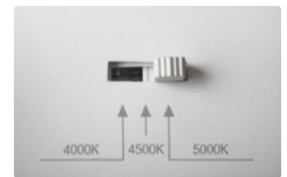

#### CLDK – LED Ceiling Disk Light

- 4" & 6"
- 5 CCT select (27K/ 30K/ 35K/ 40K/ 50K)
- Lumen output: 580 - 1 000 lm
- Wet location
- Dimmable

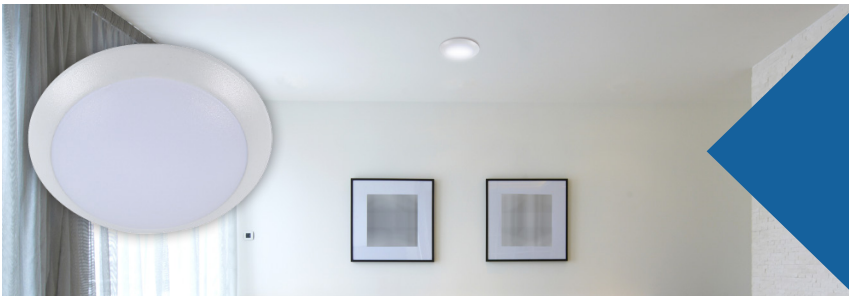



## New Launch Edition

February 2021

### VTL4-L – Vapor Tight

- 4' LED vapor tight comes standard with stainless steel latches
- Polycarbonate frosted lens
- 3 CCT select (35K/ 40K/ 50K)
- Lumen output: 5 450 - 8 560 lm
- NEMA 4X and NSF certified
- 120-277 V or 120-347 V



### L3PNB – LED Backlit Panel

- 1'x4', 2'x2', 2'x4'
- 3 CCT select (35K/ 40K/ 50K) or single CCT (40K)
- Lumen output: 2 400 – 5600 lm
- 120-347 V



### NEW GENERATION

### L2WMG – LED Linkable Wraparound

- Luminaire sold with 12" linkable cable connector
- Row mount up to 8 units
- 4000 K
- Lumen output: 5 420 lm
- Available in 4'
- Dimmable luminaire
- 120-277 V

