



Future-Proof Smart Home Solution

Install the swappable technology once, offer easy upgrades forever.



Complete smart home capability in something as simple as an outlet



**Swidget Wall Switch +
Wi-Fi Control +
Temperature/Humidity
Sensor**

See the temp in any room of your home, connect with other devices to control it from anywhere.



**Swidget Outlet +
Wi-Fi Control +
USB Charger**

Quick charge your phone and set lamp to cycle on/off when out of town.



How It Works



1. INSTALL
Swidget Outlet



2. CHOOSE
Your Function




3. SNAP IN
An Insert



4. DOWNLOAD
The Free App



5. CONTROL
Your Smart Home

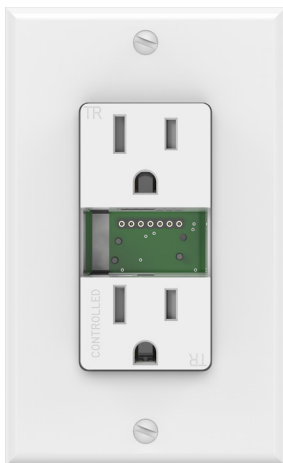

Duplex Receptacle

Input Power Rating:

125VAC, 15A

DC Output: 5VDC@2A

Load Ratings:

Resistive: 1800W

Horsepower Rating: 0.5Hp

Inductive: 8A@125VAC

(PF 0.4)

Operating Temperature:

-10 to +40C

NEMA: 5-15R

Tamper Resistant Shutters

Color: White

Indoor Installation Only

Listed: c ETL us

UL1310, UL498

CSA C22.2 #42, #223



Split Duplex Receptacle

Input Power Rating:

125VAC, 15A

DC Output: 5VDC@2A

Load Ratings:

Resistive: 1800W

Horsepower Rating: 0.5Hp

Inductive: 8A@125VAC (PF 0.4)

Operating Temperature:

-10 to +40C

NEMA: 5-15R

Tamper Resistant Shutters

Color: White

Indoor Installation Only

Listed: c ETL us

UL1310, UL498

CSA C22.2 #42, #223



Wall Switch

Input Power Rating:

125VAC, 2.5A

DC Output: 5VDC@2A

Type: 1P/3P

Operating Temperature:

-10 to +40C

Lamp Load:

LED: 250W

INC/HAL: 600W

NEMA: NEMA SSL 7A

Compliant

Horsepower: 0.3Hp

Color: White

Listed: c ETL us (Dec 2019)

UL508, UL1310

CSA C22.2 #223



Dimmer Switch

Input Power Rating:

125VAC, 2.5A

DC Output: 5VDC@2A

Type: Dimmer

Operating Temperature:

-10 to +40C

Lamp Load:

LED: 150W

INC/HAL: 300W

NEMA: NEMA SSL 7A

Compliant

Color: White

Listed: c ETL us (Dec 2019)

UL1472, UL1310


CSA C22.2 #184.1, #223

Not all outlets are
created equal



Monitor Power Accurately




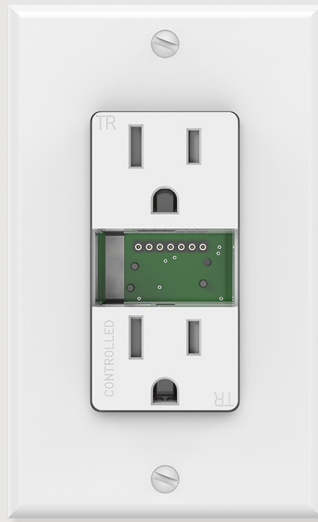

Swappable Future-
Proof Solutions

Universal Compatibility





Power Control Insert


Platform: Wi-Fi, Z-Wave
Voltage: 5V +/- 5%
Power Control/Monitoring



USB Charger Insert

Platform: Wi-Fi, Z-Wave
Voltage: 5V +/- 5%
Max Current: 2.0A
USB 2.0, 3.0


**BC1.2 Compliant
Power Control/Monitoring**
(Excluding Basic)

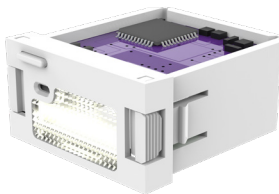

Guide Light Insert

Platform: Wi-Fi, Z-Wave
Color: Warm White
LED: 1900mcd@20mA
Light Sensor Trigger

Power Control/Monitoring
(Excluding Basic)




Power Out Light Insert


Platform: Wi-Fi, Z-Wave
Charge time:
20% - 5min, 80% - 1hr
Run time: 1hr max

LED: 1900mcd@20mA
Power Control/Monitoring
(Excluding Basic)


COMING SOON

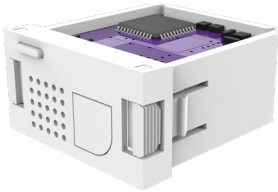


Temp/Humi Sensor




Air Quality Sensor

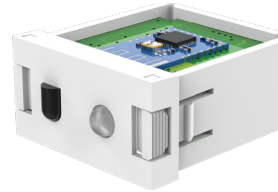


IR/Remote Control




Aromatherapy

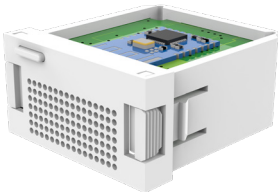


Bluetooth Speaker

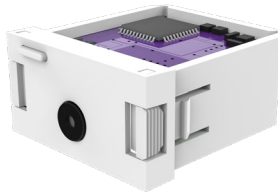

Video Camera

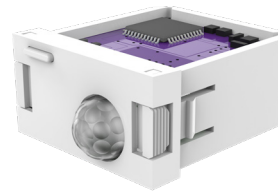

Motion Sensor



Built-in Google/Alexa



Control your home from your phone.

Your smart home at your finger tips with the Swidget App.



Increase efficiency and convenience.

Connect your Wi-Fi enabled Swidget Insert to the Swidget App.




Calibrate the device.

Plug in the devices you want to monitor and calibrate the devices properly to get the best data.



Control your environment from anywhere.

Forget to turn off the lights or iron? No problem. Turn appliances On or Off on the go with a tap of the app, or set a schedule to make your appliances work for you.



Make your life more flexible.

Know what's happening in your home when you're away by setting notifications to be sent to your phone. Did the power go out? Do you need to check the freezer? Did someone open your garage? Know everything.







swidget.com | Sales: 1-833-303-3433 | sales@swidget.com

© Swidget Corp. 2019