



# Xylan<sup>®</sup> Plus

Reliable long-life non-stick coating

Consumer Cookware

PTFE | Spray

## A versatile, economical coating system




### A two-coat system that delivers cost-effective performance

Providing non-stick properties at a competitive application cost, PPG XYLAN<sup>®</sup> Plus coatings work across a wide variety of applications, presenting high value for entry-level cookware.

### A global partner with local presence

With over 135 years of innovation, PPG protects and enhances more surfaces in more ways than any other company. Our global expertise ensures eye-catching color, a range of durability options and formulations that meet the strict food-contact compliance your region demands, while our local presence provides the expert service and resources you need.

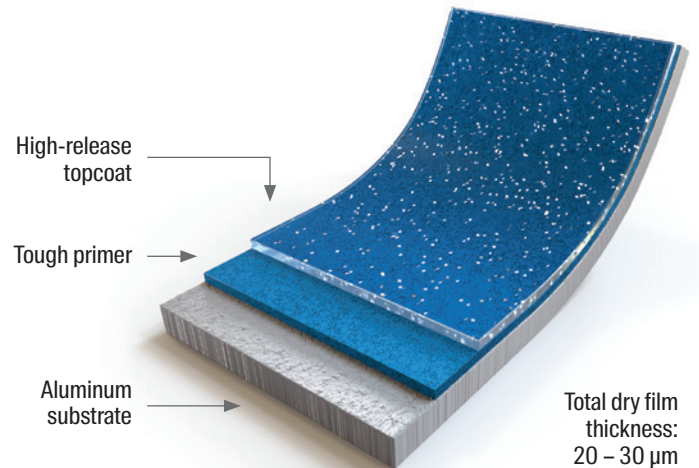

#### Good overall durability

Entry-level durability with good release performance  
Wide application parameters



#### Customer benefits

Good non-stick release  
Dishwasher safe  
Oven safe up to 260° C or 500° F  
Easy cleaning



#### Food-contact compliance

Specifically formulated without PFOA to comply with food contact regulations in major markets



# PPG Xylan® Plus

Product Characteristics	
Chemistry	PTFE
Color	Available in a variety of colors, including spatter
Continuous Use Temperature	260° C / 500° F
Cure Temperature	380° - 415° C / 715° - 780° F
Substrates	Rolled, forged, cast and hard anodized aluminum

Performance Properties	
Dry Film Thickness (WTM 114A)	20 - 30 µm
Wet Reciprocating Abrasion Test (WTM 135G)	500 - 8,000 cycles
High-Friction Scratch Test (WTM 137C)	3 - 4
Life Cycle Release Test (WTM 165N)	1,000 - 8,000 cycles

### Use and care recommendations

- Low and medium heat should be used when cooking to help preserve the non-stick surface. Do not overheat and always be sure that oil, water or food materials are in the cookware prior to heating it.
- Cookware should not be used as a food storage container, which could result in staining the non-stick surface.
- Always allow cookware to cool before immersing in water.
- If the non-stick performance declines, it may be from residue built up on the surface or from residue formed from misuse. A deep cleaning of the non-stick surface can help restore performance. This may include soaking overnight in hot, soapy water and then thoroughly washing the surface the next morning.

Product Series Codes	
<b>Asia-Pacific</b>	
8294	Primer
8253	Topcoat
<b>Europe, Middle East and Africa</b>	
8255	Primer
8257	Topcoat

Relative Coating Performance	
Best: High Performance	ETERNA®
	ECLIPSE® HB
	ECLIPSE®
Better: Balanced	QUANTANIUM®
	FUSION® HR
Good: Economical	FUSION®
	<b>XYLAN® PLUS</b>
	SKANDIA® EXTREME

This document contains general information only and should not be construed as creating any warranties, express or implied. Please contact a PPG representative for additional information.

The PPG Logo is a registered trademark and We protect and beautify the world is a trademark of PPG Industries Ohio, Inc. Eclipse, Eterna, Fusion, Quantanium, Quantum, Skandia and Xylan are registered trademarks of the PPG Group of Companies. The IN Logo is a registered trademark of LinkedIn Corporation. ©2021 PPG Industries, Inc. All rights reserved. 04/21

