

Create Slip Resistant Stairs

SafeStep™ Fiberglass Reinforced Plastic

Easy to install • Virtually indestructible • Excellent slip resistance even when wet



SafeStep™ Step Edges

Heavy duty preformed anti-slip step edges providing a protective cover for damaged, worn or slippery step edges.

Size	Part No.	Size	Part No.
32"X2.75"X1.25"	271818	48"X2.75"X1.25"	271820
36"X2.75"X1.25"	271819	59"X2.75"X1.25"	271821



SafeStep™ Step Covers

Heavy duty preformed anti-slip step covers providing a corrosion resistant surface for damaged, worn or slippery steps.

Size	Part No.	Size	Part No.
32"X10"	271792	36"X13.5"	271799
36"X10"	271795	48"X13.5"	271800
48"X10"	271796	59"X13.5"	271801
59"X10"	271797	47.25"X47.25"	271816
32"X13.5"	271798		



SafeStep™ Sheetting

Heavy duty anti-slip sheetting provides a protective cover for damaged, worn or slippery floors.

Size	Part No.	Size	Part No.
47"X47" (Black)	271810	47"X96" (Black)	271813
47"X47" (Yellow)	271811	47"X96" (Yellow)	271814
	271812	47"X96" (Gray)	271815



Mark Off Hazardous Areas

Concrete Saver® 5600 System Acrylic Urethane Floor Paint

- Paint and go with minimal surface preparation
- Low odor, water-based formula for easy clean-up
- Excellent high gloss coverage

	Part No.		Part No.
Safety Yellow	251286	Safety Red	261115
Safety Blue	261117	White	251289
Safety Green	261118	Silver Gray	251291
Safety Orange	261116		



Fast & Reliable Solutions for Prevention of Slips, Trips & Falls

70%

70% of all slips, trips, and falls occur on level walking surfaces.

15%

15% of all accidental deaths are a result of slips, trips, or falls.

668
FATALITIES

4,383 fatal work injuries were reported in 2012. Of the cases, 668 were fatal associated with falls.

\$70 Billion

\$70 billion of workers' compensation and medical costs are associated with occupational fall incidents.


Safety flooring programs can help...

- ✓ Reduce employee injury and illness
- ✓ Increase employee satisfaction
- ✓ Improve safe work practices
- ✓ Reduce absenteeism
- ✓ Reduce workers' compensation costs
- ✓ Increase productivity



Schedule a walkthrough to explore flooring options tailored to your facility

CONTACT US

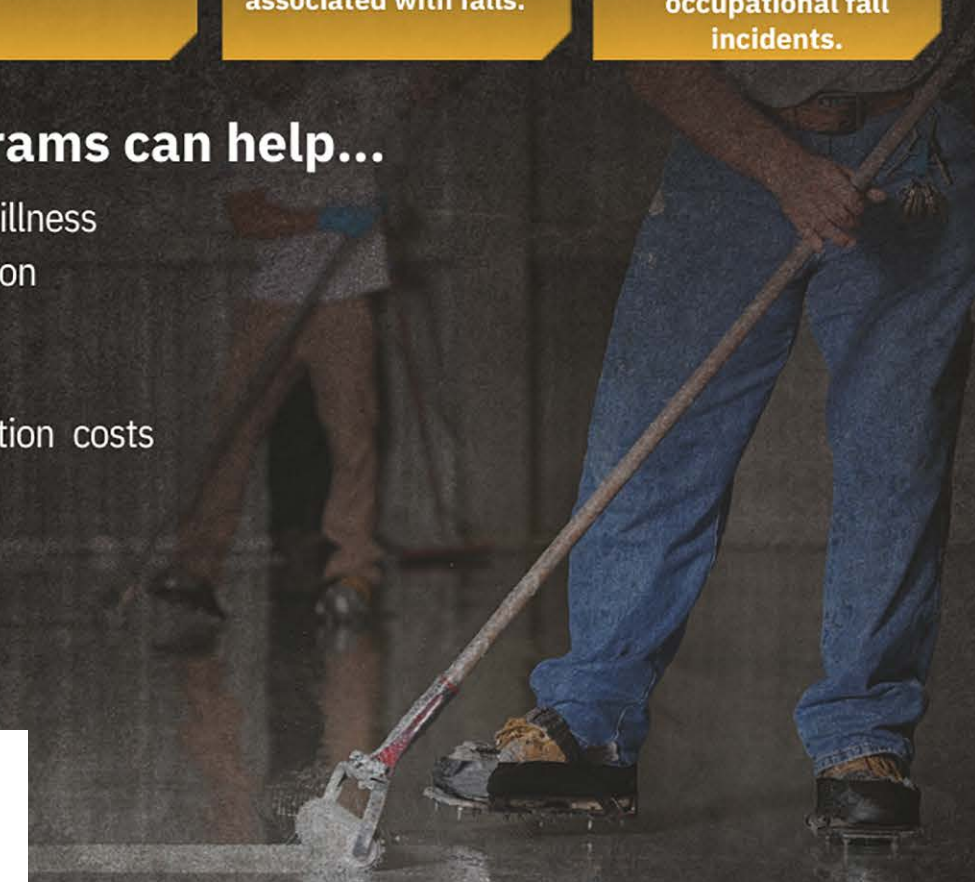

Improve your safe work practices and help reduce on-the-job injuries with anti-slip floor coatings for all types of environments.

Simple floor maintenance doesn't have to be a big production. Easy to apply, long lasting and durable, Rust-Oleum Concrete Saver™ products patch, repair and protect floors to help keep your facility safe inside and out.



Common causes of slips, trips & falls

- Walkway surface substances and spills; including oil, water, and/or other liquids
- Weather-related conditions like rain, snow and ice
- Walkway surfaces that are in disrepair
- Sheen/smooth walkway surfaces that do not allow for adequate footwear-traction

Critical slip & fall areas

- OSHA or ADA Regulated Areas
- Wash-Down Areas
- Forklift, Loading Docks.
- Material Handling Areas Steps and Ramps
- Structures, Catwalks, and Platforms
- Past Slip and Fall Areas.

Repair Damaged Concrete

Concrete Saver Patch and Repair Products



InstaPatch® Rapid Curing Concrete Repair

- Pourable formula cures in 15 minutes or less.
- Virtually no odor.
- Color changes from black to gray to know when it's fully cured.
- Can be applied in temperatures as low as -5 F.

	Part No.
Gray – 1 gal. kit	276981
Tile Red – 1 gal. kit	284595



TurboKrete® Concrete Patching Compound

- Trowel applied epoxy for severely damaged concrete.
- Up to 4X stronger than concrete.
- Accepts light traffic in less than 4 hours.
- Easy mix kit includes base, activator and aggregate.

	Part No.
0.30 CU FT	5494323
0.15 CU FT	253479



Rust-Oleum's line of anti-slip safety solutions are designed to keep everyone sure-footed.



Schedule a walkthrough to explore flooring options tailored to your facility

CONTACT US

Create Slip Resistant Floors

Concrete Saver® Anti-Slip Floor Coatings



AS5600 System Anti-Slip Floor and Deck Coating

- Single component acrylic coating creates an anti-slip surface for pedestrian grade floors.
- For mild industrial/commercial environments.
- Texture (12–15 mil Dry Film Thickness);
- coefficient of friction = dry: 1:30; wet: 0.90
- Easy to apply; accepts heavy traffic in 24 hours.

	Part No.
Safety	261175
Yellow Black	261176
Gray	261177



AS6000 System Anti-Slip Low Profile Epoxy

- Two-component kit includes base and activator.
- For barefoot grade anti-slip floors.
- Texture (10–15 mil Dry Film Thickness);
- coefficient of friction = dry: 0.78; wet: 0.86
- Easy to apply; can accept traffic in 48 hours.

	Part No.
Silver Gray	AS6082425
Navy Gray	AS6086425



AS6500 System Anti-Slip 100% Solids Epoxy

- Two component kit includes base and activator.
- For severe industrial settings & heavy vehicle traffic. Glossy, highly ridged texture(26–40mil Dry Film Thickness) ;coefficient of friction = dry: 1.10; wet: 1.00
- Easy to apply; can accept traffic in 72 hours.

	Part No.
Silver Gray	AS6582425
Navy Gray	AS6586425

