




FLOORING SOLUTIONS

FOR EVERY ENVIRONMENT

P R O D U C T G U I D E

**CHANGE
THE WAY
YOU SEE
THINGS**

**TAP INTO
THE POTENTIAL**

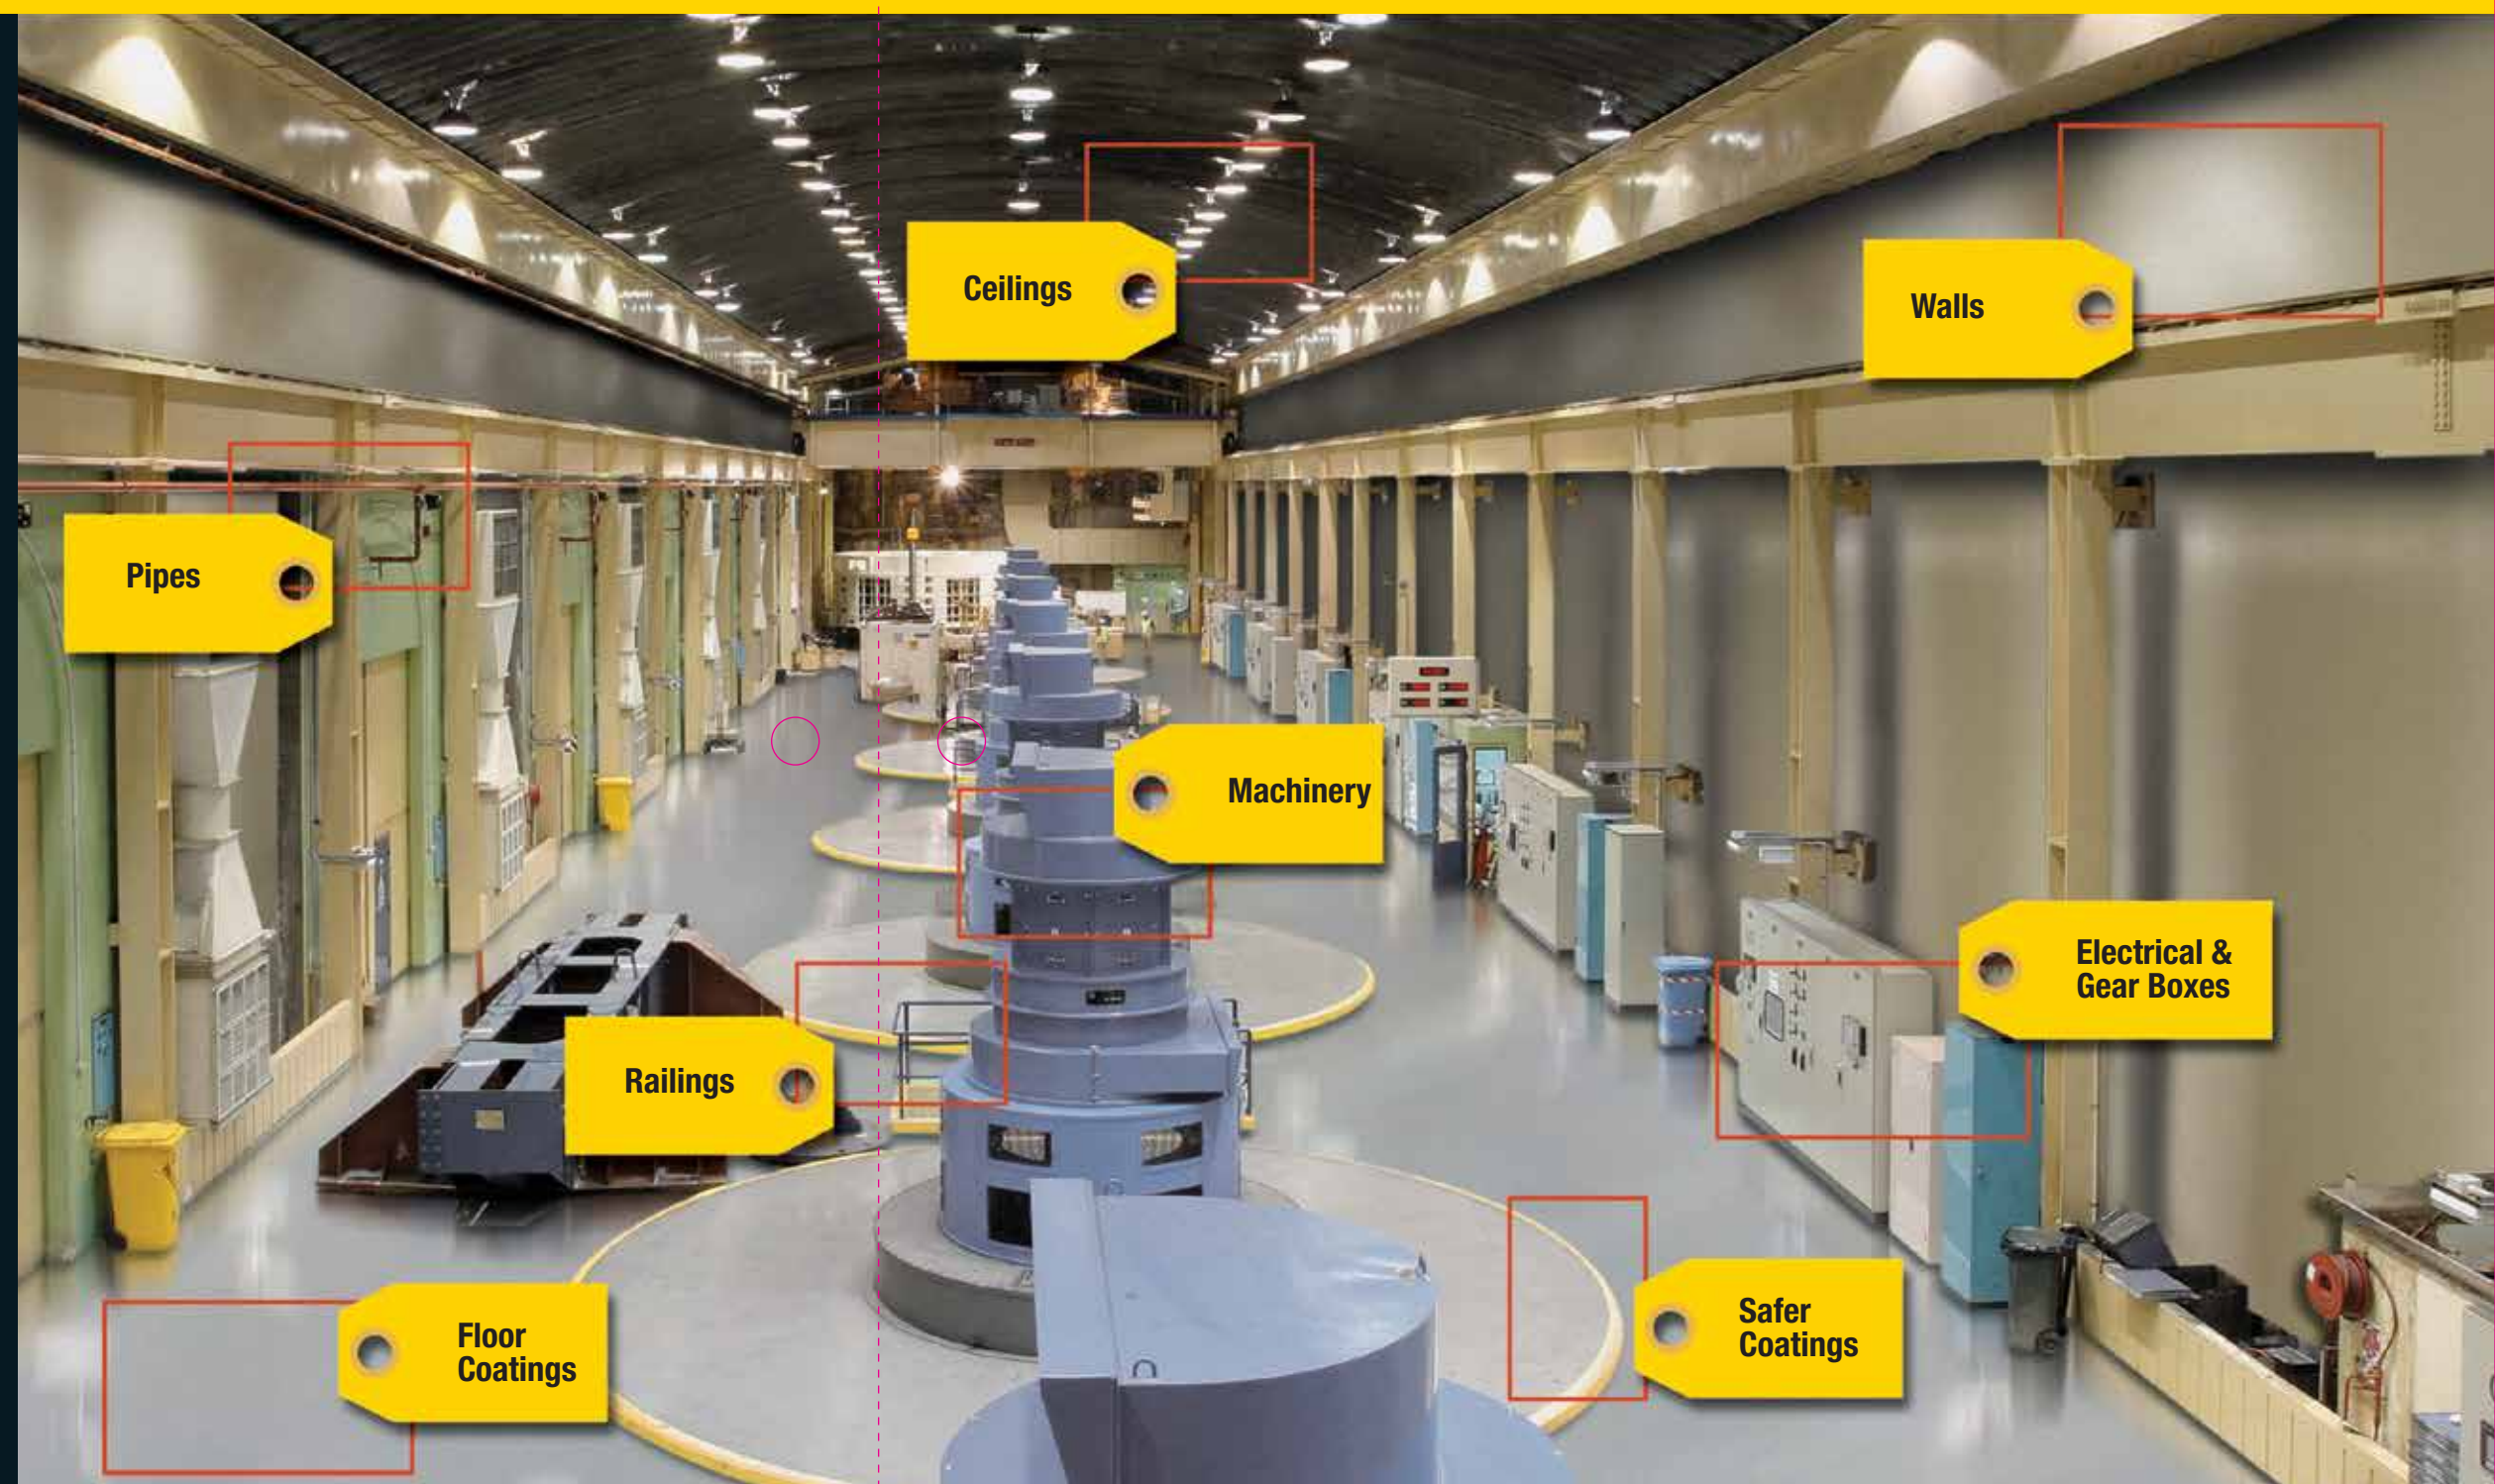

QUALITY PRODUCTS ARE JUST THE BEGINNING

Since 1921...

Rust-Oleum Corporation was founded on the principle of producing the highest quality labour saving coatings; and for nearly 100 years, Rust-Oleum has been the trusted name for superior solutions that promises long-lasting protection and superior coverage. Today, Rust-Oleum Corporation, backed by the resources of its parent company, RPM International Inc., is a worldwide leader in protective paints, coatings and value added products for both the home and industry.

Products That Work As Hard As You Do®

Rust-Oleum Industrial Brands is dedicated specifically to meeting the diverse needs of the industrial and commercial markets and provide solutions to problems caused by rust, heat, abrasion, chemicals and corrosive environments. This Product Guide showcases our distinct brands of protective paints, floor coatings and cleaners.



Products accompanied by this symbol carry a
TWO-YEAR RUST-PROOF GUARANTEE with maximum corrosion protection.

• TRUSTED QUALITY SINCE 1921 •

RUST-OLEUM®

INDUSTRIAL COATINGS

PRODUCT GUIDE CONTENTS

CONCRETE PREP, PATCH & REPAIR

Rust-Oleum's expertise in surface protection doesn't stop at metal. Our complete selection of concrete prep, patch and repair products are formulated to deliver contractor-grade protection and are easy to apply using in-house maintenance crews. Our concrete repair products cure fast to minimize downtime and provide lasting durability for long-term protection.

SYSTEM	DESCRIPTION	PAGE
TurboKrete®	Concrete Patching Compound	10
TurboKrete®	All-Purpose Epoxy Repair	10
Joint Sealant	Flexible Joint Sealant	10
5499 System	Concrete Patching Compound	11
InstaPatch®	Concrete Repair System	11
Putty Patch™	Cement-Based Patching	11
Pourable Patch	Pourable Concrete Patching Compound	12
108 System	Cleaning & Etching Solution	12
S6511 System	Penetrating Prime & Seal Primer	12
ECO Prime™	Fast-Curing Polyurea Primer	13
Hard Surface Primer	Water-Based Epoxy Primer	13
Vapour Barrier	Water-Based Topside	15
Vapour Barrier	100% Solids Topside	15

FLOOR COATINGS

Rust-Oleum's diverse product offering provides a cost effective, durable solution for every industry and every environment. Our range of products include Concrete Saver and Sierra Performance brands for application using in-house crews, to Concrete Protection Systems coatings and toppings for professional contractors. Whatever the floor coating project, Rust-Oleum has the right solution for you.

SYSTEM	DESCRIPTION	PAGE
5600 System	Acrylic Urethane Floor Paint	18
6000 System	Water-Based Epoxy	18
9100 System	Dtm Epoxy Mastic	19
6200 System	Fast-Cure Epoxy Floor Coating	20
6600 System	Heavy Duty Maintenance Floor Coating	20
6500 System	High Traffic Floor Coating	21
6700 System	Extended Pot Life Epoxy	21
5500 System	Acrylic Dustproofer Floor Sealer	22
6711 System	Clear Water-Based Polyurethane	22
EasyClear®	Epoxy Maintenance Floor Coating	22
AS5600 System	Anti-Slip Floor And Deck Coating	23
AS5400 System	Anti-Slip One-Step Epoxy	23
AS6000 System	Anti-Slip Low Profile Epoxy	24
AS9100 System	Anti-Slip High Performance Epoxy	24
AS6500 System	Anti-Slip 100% Solids Epoxy	25
SafeStep®	Step Covers	25
SafeStep®	Step Edge	26
SafeStep®	Sheeting	26
FastKote®	Polyurea Floor Coating	27
FastKote®	Uv Stable Polyurea Floor Coating	27
MEDICI®	Decorative Polyurea Floor Coating	28
FinishKote 80	High Solids Polyaspartic Floor Coating	28
FinishKote 100	High Solids Polyaspartic Floor Coating	29
BuildKote	Polyurea Floor Coating Primer	29
Heavy Metal	Decorative Floor Coating	30
200 Anti-Skid	Floor Coating Additive	30
Ultrawear®	Additive	30
Durability Additive	Durability, Longevity & Anti-Slip	30
Decorative Vinyl Chips	Decorative Finish	30
Rust-Oleum Mixers & Rollers	Mixers & Rollers	30
Technical Data		31



Schedule a walkthrough
to explore flooring options
tailored to your facility

CONTACT US

Contact your Rust-Oleum Sales Representative for additional information or technical data on any of the product lines featured in this catalogue. For immediate technical information, visit www.rustoleum.com/industrial.

INDUSTRIAL COATINGS SELECTION GUIDE

METAL/STEEL APPLICATIONS					
FEATURES		RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
SEVERE	Direct-To-Metal; high build; excellent adhesion and hiding; low temp. cure; ultimate protection of metal.	9800 System – DTM Urethane Mastic	17	Self-priming	SP1+SP3
	Thin film; ultimate colour and gloss retention; extremely durable against abrasion; low temp. cure.	9700 System – 250 VOC Acrylic Polyester Urethane	17	V9100 System – Low VOC DTM Epoxy Mastic	SP1+SP3
	Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.	9100 System – DTM Epoxy Mastic	14	Self-priming	SP1+SP3
	Low odour; applies to damp surfaces; excellent resistance to chemicals, abrasion and corrosion; high gloss finish.	5300 System – Water-Based Epoxy	16	5300 System – Water-Based Epoxy Primer	Mod.: SP1+SP3 Sev.: SP1+SP6
MODERATE	Low VOC, low HAPs, low solvent-odour; excellent corrosion, chemical and stain resistance	S60 System – Water-Based Epoxy Maintenance Coating	50	S70 System – Water-Based Epoxy Primer	Mod.: SP1+SP3 Sev.: SP1+SP6
	A single-component, high-build, water-based acrylic elastomeric suitable for use with only minimal surface preparation.	Noxyde®	13	Self-priming	SP1+ SP3 or WJ-4 5KPSI
	Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.	3800 System – DTM Acrylic Enamel	12	3800 System – DTM Acrylic Enamel Primer or self-priming	SP1+SP3
	Low solvent odour, low VOC, low HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.	MetalMax® DTM Acrylic Urethane	49	Self-priming, or S70 Epoxy Primer in extreme situations	SP1+SP3
MILD	VOC <340 g/l; protects metal from rust and corrosion; superior colour and gloss retention; excellent hiding.	V7400 System – 340 VOC DTM Alkyd Enamel	11	V7400 System – 340 VOC Alkyd Enamel Primer or self-priming	SP1+SP3
	Low solvent odour, low VOC, low HAP; attractive and durable; extremely versatile topcoat; interior or exterior use.	Beyond™ Multi-Purpose Acrylic Enamel	48	MetalMax® Primer DTM Acrylic Urethane	SP1+SP3
	Resists corrosion, mould, mildew and repeated washing, disinfectants and cleaning compounds.	8400 & V8400 System – Food & Beverage Alkyd Enamel	22	V8400 System – Food & Beverage Alkyd Enamel Primer	SP1+SP3
	Direct-To-Metal; low odour; withstands mild chemical fumes and spills.	5200 System – DTM Acrylic	41	5200 System – DTM Acrylic Primer	SP1+SP3
	VOC <100 g/l; good hiding and smooth coverage; withstands mild chemical fumes and spills.	C740 System – 100 VOC DTM Alkyd Enamel	39	CV740 System – 100 VOC Alkyd Enamel Primer or self-priming	SP1+SP3

GALVANIZED/ALUMINUM APPLICATIONS					
FEATURES		RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
SEVERE	Thin film; ultimate colour and gloss retention; extremely durable against abrasion; low temp. cure.	9700 System – 250 VOC Acrylic Polyester Urethane	17	V9100 System – Low VOC DTM Epoxy Mastic	SP1+SP3
	Low odour; applies to damp surfaces; excellent resistance to chemicals, abrasion and corrosion; high gloss finish.	5300 System – Water-Based Epoxy	16	5300 System – Water-Based Epoxy Primer	SP1+SP3
MODERATE	Direct-To-Metal; superior resistance to blistering and water spotting; applies in low temp./high humidity.	3800 System – DTM Acrylic Enamel	12	3800 System – DTM Acrylic Enamel Primer	SP1+SP3
	Low solvent odour, low VOC, low HAP; Direct-To-Metal; high performance; corrosion & humidity resistant.	MetalMax® DTM Acrylic Enamel	49	Self-priming, or S70 Epoxy Primer in extreme situations	SP1+SP3
	Low solvent odour, low VOC, low HAP; attractive and durable; extremely versatile product; interior or exterior use.	Beyond™ Acrylic Enamel	48	MetalMax® Primer	SP1+SP3
	Good hiding and smooth coverage; withstands mild chemical fumes and spills.	C740 System – 100 VOC DTM Alkyd Enamel	39	5200 System – DTM Acrylic Primer	SP1+SP3
MILD	Direct-To-Metal; low odour; withstands mild chemical fumes and spills.	5200 System – DTM Acrylic	41	5200 System – DTM Acrylic Primer	SP1+SP3
	95% pure zinc in dry film; maximum corrosion resistance; excellent adhesion.	7000 System – Cold Galvanizing Compound	21	Self-priming	SP1+SP3

CONCRETE/MASONRY APPLICATIONS					
SEVERE	SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 61.				
	High build; excellent adhesion and hiding; low temp. cure.	9800 System – DTM Urethane Mastic	17	9100 System DTM Epoxy Mastic	Chemical clean or abrasive blast
	Superior long-term solvent, chemical and abrasion resistance.	9100 System – DTM Epoxy Mastic	14	Self-priming	Chemical clean or abrasive blast
	No solvent odour, zero VOC, zero HAP; excellent corrosion, chemical and stain resistance.	S60 System – Epoxy Maintenance Coating	50	Self-priming	Chemical clean or abrasive blast
	Low odour; applies to damp surfaces; excellent resistance to chemicals and abrasion; high gloss finish.	5300 System – Water-Based Epoxy	16	Self-priming	Chemical clean or abrasive blast
	Resists blistering; low temp./high humidity application.	3800 System – DTM Acrylic Enamel	12	Self-priming	Chemical clean
	Low odour; withstands mild chemical fumes.	5200 System – DTM Acrylic	41	Self-priming	Chemical and hand tool or power tool clean

* Minimum surface preparation required.

See Technical Data Sheets for detailed product information.

MILD ENVIRONMENTS	MODERATE ENVIRONMENTS	SEVERE ENVIRONMENTS
Outdoor weathering, mild industrial fumes and normal humidity with mould and mildew conditions.	Frequent fumes and spills of mild chemicals, occasional product spills, occasional chemical cleaning. Intermittent high humidity, moisture, mould and mildew conditions.	Frequent fumes and spills of strong chemicals (acids, alkalis and solvents), high humidity and moisture conditions. Frequent product spills and frequent chemical cleaning.

FLOORING APPLICATIONS					
FEATURES		RECOMMENDED PRODUCT	PAGE	PRIMER	SURFACE PREPARATION*
CONCRETE					
SEVERE	SEE CONCRETE PROTECTION SYSTEMS STARTING ON PAGE 61.				
	2-3 times tougher than concrete; superior abrasion, impact and chemical resistance.	6700 System – Extended Pot Life Epoxy	65	Self-priming or S6511 Penetrating Prime & Seal™ Primer	Chemical clean and abrasive blast or acid etch
	Superior long-term solvent, chemical and abrasion resistance; resists light to moderate wheeled traffic.	FastKote® – Polyurea Floor Coating	71	Build Kote Self-priming or Polyurea Floor Coating Primer	Chemical clean and abrasive blast or acid etch
	2-3 times tougher than concrete; superior abrasion, impact and chemical resistance.	FastKote® UV – UV Stable Polyurea Floor Coating	71	Self-priming or VS6511 Penetrating Prime & Seal™ Primer	Chemical clean and abrasive blast or acid etch
	Superior long-term solvent, chemical and abrasion resistance; resists light to moderate wheeled traffic.	9100 System – DTM Epoxy Mastic	63	Self-priming	Chemical clean and abrasive blast or acid etch
	Resists heavy foot traffic and lightweight rubber tire vehicle traffic; withstands intermittent mild chemical spills.	6000 System – Water-Based Epoxy	62	Self-priming	Chemical clean and abrasive blast or acid etch
	For interior/exterior concrete and wood floors; protects against light traffic, weather and staining.	6711 System – Clear Water-Based Polyurethane	66	Self-priming	Chemical clean and abrasive blast or acid etch
	For interior concrete floors. Protects new or old concrete or previously coated floors.	EasyClear® – Epoxy Maintenance Floor Coating	66	Self-priming	Chemical clean and abrasive blast or acid etch
	Low odour, resists lightweight rubber wheel traffic, mild stains, mildew and eliminates dusting.	5600 System – Acrylic Urethane Floor Paint	62	Self-priming	Clean/degrease and hand tool or power tool clean
	Low odour, UV resistant, satin finish; resists light traffic, mild stains and eliminates dusting.	5500 System – Acrylic Dustproof Floor Sealer	66	Self-priming	Clean/degrease and hand tool or power tool clean
STEEL DECK					
SEV.	Direct-To-Metal; superior long-term solvent, chemical and abrasion resistance; maximum corrosion protection.	9100 System – DTM Epoxy Mastic	63	Self-priming	SP1+SP3
ANTI-SLIP					
SEVERE	For continuous vehicle and equipment traffic; strong chemical exposure.	AS6500 System – Anti-Slip 100% Solids Epoxy	69	Self-priming	SP1 and abrasive blast or acid etch
	For heavy vehicle and equipment traffic; strong chemical exposure.	AS9100 System – Anti-Slip High Performance Epoxy	68	Self-priming	SP1 and abrasive blast or acid etch
	For heavy foot traffic and/or light vehicle traffic.	AS5400 System – Anti-Slip One-Step Epoxy	67	Self-priming	SP1 and abrasive blast or acid etch
	For barefoot and light recreational pedestrian traffic; low odour.	AS6000 System – Anti-Slip Low-Profile Epoxy	68	Self-priming	SP1 and abrasive blast or acid etch
	For mild industrial environments; fast dry, low odour	AS5600 System – Anti-Slip Low–Medium Profile Acrylic	67	Self-priming	SP1 and abrasive blast or acid etch

WATER-IMMERSION ENVIRONMENTS					
SEVERE	Apply above 15°C (60°F). Not recommended for potable water tanks. Use with 9102402.	9100 System – DTM Epoxy Mastic	14	Self-priming	SP1+SP10
	Protects against severe abrasion, strong chemicals and non-potable water immersion.	C9578 System – Coal Tar Epoxy	16	Self-priming	SP1+SP10
	Tank of 3,000 gallons minimum.	9200 System – for Potable Water	15	Self-priming	SP1+SP10

WALLS, DOORWAYS, TRIM					
MODERATE	No solvent odour, zero VOC, zero HAP; high durability epoxy for use in extreme areas.	S60 System – Epoxy Maintenance Coating	50	Sierra Acrylic Primer	SP1+SP3
	No solvent odour, zero VOC, zero HAP; attractive; durable; extremely versatile; interior or exterior use.	Beyond™ Acrylic Enamel	48	Self-priming or Sierra Acrylic Primer	SP1+SP3

* Minimum surface preparation required.

INDUSTRIAL COATINGS CHEMICAL & CORROSION RESISTANCE

● EXCELLENT RESISTANCE

The colour and film integrity of the coating is generally unaffected by exposure to this condition. Long-term protection can be expected.

▲ GOOD RESISTANCE

The film integrity of the coating is generally unaffected by exposure to this condition. Colour and gloss may be slightly affected with longer exposure; however, long-term protection can be expected.

◆ FAIR RESISTANCE

The film integrity of the coating is generally unaffected by exposure to this condition, however colour and gloss will be affected with longer exposure.

■ NOT RECOMMENDED

Film integrity and colour are affected by exposure to this condition, greatly reducing protection.

CHEMICAL & CORROSION RESISTANCE GUIDE																				
This chart represents the general chemical resistance of Rust-Oleum finish coats. For more details, call the Rust-Oleum Technical Service Department at 847-816-2248.	CORROSIVE CONDITIONS						FUMES, SPILLAGE & SPRAYS											IMMERSION CONTINUOUS WET HEAT RESISTANCE 125°F (52°C)		
	GENERAL WEATHERING	INDUSTRIAL FUMES	SALT ATMOSPHERE	MOULD, MILDEW, FUNGUS	LIGHT-MODERATE ABRASION	HEAVY ABRASION	DRY HEAT	WATER	SALT & BRINES	MILD ALKALI, SOAPS & DETERGENTS	STRONG ALKALI & CAUSTICS	MILD, DILUTE ACIDS	STRONG, CONCENTRATED ACIDS	FOOD ACIDS	GREASES, OILS & FATS	GASOLINE & SOLVENTS	CUTTING OILS, COOLANT & HYDRAULIC FLUID	FRESH WATER	SALT WATER & BRINE	SEWAGE
HIGH PERFORMANCE																				
V7400 System – DTM 340 VOC Alkyd Enamel	▲	●	●	■	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
V8400 System – Food & Beverage Alkyd Enamel	▲	●	●	●	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
V7400 System – 340 VOC DTM Alkyd Enamel ¹	▲	●	●	■	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
3800 System – DTM Acrylic Enamel	●	●	●	●	▲	■	93°C 200°F	▲	●	▲	■	▲	■	▲	●	■	▲	■	■	■
9100 System – DTM Epoxy Mastic	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	●	▲	●	●	●	● ²	● ²	● ²
5300 System – Water-Based Epoxy	◆	●	●	●	●	▲	149°C 300°F	●	●	●	●	●	■	▲	●	●	●	■	■	■
C9578 System – Coal Tar Epoxy	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	▲	●	●	●	●	●	●	●
9200 System – Potable low temp water coating	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	▲	●	●	●	●	●	●	●
9700 System – 250 VOC Acrylic Polyester Urethane	●	●	●	●	●	●	149°C 300°F	●	●	●	●	●	●	●	●	●	▲	■	■	■
7000 System – Cold Galvanizing Compound	●	●	●	■	▲	■	177°C 350°F	▲	▲	▲	■	■	■	▲	●	▲	▲	■	■	■
INDUSTRIAL CHOICE®																				
5200 System – DTM Acrylic	●	▲	●	●	▲	■	93°C 200°F	▲	▲	▲	■	▲	■	▲	●	■	●	■	■	■


1 For high gloss finishes only. 2 Use with 9102402 Immersion Activator. 3 Long-term exposure to acids may cause some discoloration.

CHEMICAL & CORROSION RESISTANCE GUIDE																				
This chart represents the general chemical resistance of Rust-Oleum finish coats. For more details, call the Rust-Oleum Technical Service Department at 847-816-2248.	CORROSIVE CONDITIONS							FUMES, SPILLAGE & SPRAYS										IMMERSION CONTINUOUS WET HEAT RESISTANCE (52°C) 125°F		
	GENERAL WEATHERING	INDUSTRIAL FUMES	SALT ATMOSPHERE	MOLD, MILDEW, FUNGUS	LIGHT-MODERATE ABRASION	HEAVY ABRASION	DRY HEAT	WATER	SALT & BRINES	MILD ALKALI, SOAPS & DETERGENTS	STRONG ALKALI & CAUSTICS	MILD, DILUTE ACIDS	STRONG, CONCENTRATED ACIDS	FOOD ACIDS	GREASES, OILS & FATS	GASOLINE & SOLVENTS	CUTTING OILS, COOLANT & HYDRAULIC FLUID	FRESH WATER	SALT WATER & BRINE	SEWAGE
COMMERCIAL																				
CV740 System – 100 VOC DTM Alkyd Enamel	▲	●	●	■	▲	■	100°C 212°F	▲	▲	▲	■	▲	■	▲	●	▲	▲	■	■	■
MATHYS®																				
Noxyde®	●	●	●	●	●	▲	107°C 225°F	●	●	▲	◆	▲	▲	▲	◆	◆	◆	■	■	■
SIERRA PERFORMANCE™																				
Beyond™ Acrylic Enamel	●	●	●	●	●	■	—	▲	▲	●	■	▲	■	▲	▲	■	■	■	■	■
MetalMax® DTM Acrylic Enamel	●	●	●	●	●	■	—	●	●	●	▲	▲	▲	▲	▲	▲	▲	■	■	■
S60 System – Epoxy Maintenance Coating	▲	●	●	●	●	▲	—	●	●	●	▲	●	▲	●	●	▲	▲	■	■	■
CONCRETE SAVER®																				
AS6000 System – Anti-Slip Low-Profile Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	■	●	▲	▲	▲	▲	■	■
AS5400 System – Anti-Slip One-Step Epoxy	▲	●	▲	▲	●	●	—	●	●	●	●	●	■	●	●	●	●	■	■	■
AS9100 System – Anti-Slip High Performance Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	▲	▲	▲	▲	▲	■	■	■
AS6500 System – Anti-Slip 100% Solids Epoxy	◆	●	●	▲	●	●	—	●	●	●	●	●	▲	▲	▲	▲	▲	■	■	■
5500 System – Acrylic Dustproofer Floor Sealer	●	▲	●	●	▲	■	93°C 200°F	●	▲	▲	■	▲	■	◆	▲	■	■	■	■	■
5600 System – Acrylic Urethane Floor Paint	●	▲	●	●	▲	■	93°C 200°F	▲	▲	▲	■	▲	■	▲	●	■	◆	■	■	■
6000 System – Water-Based Epoxy	◆	●	●	▲	●	▲	—	●	●	●	●	●	■	●	●	●	●	■	■	■
EasyClear® – Epoxy Maintenance Floor Coating	◆	●	●	●	●	●	149°C 300°F	●	●	●	●	●	▲	●	●	●	●	▲	▲	▲
6500 System – 100% Solids Epoxy	▲	●	●	●	●	●	—	●	●	●	●	●	▲	●	●	●	●	■	■	■
6600 System – Heavy Duty Maint. Floor Coating	▲	●	●	●	●	●	—	●	●	●	●	●	▲	●	●	●	●	■	■	■
6700 System – Extended Pot Life Epoxy	▲	●	●	●	●	●	—	●	●	●	●	●	▲	●	●	●	●	■	■	■
6711 System – Clear Water-Based Polyurethane	▲	▲	▲	▲	●	■	—	●	●	●	▲	▲	▲	▲	●	▲	▲	■	■	■
TurboKrete® Concrete Patching Compound	▲	●	●	●	●	●	93°C 200°F	●	●	●	●	▲	◆	●	●	▲	●	●	●	▲



Schedule a walkthrough
to explore flooring options
tailored to your facility

CONTACT US

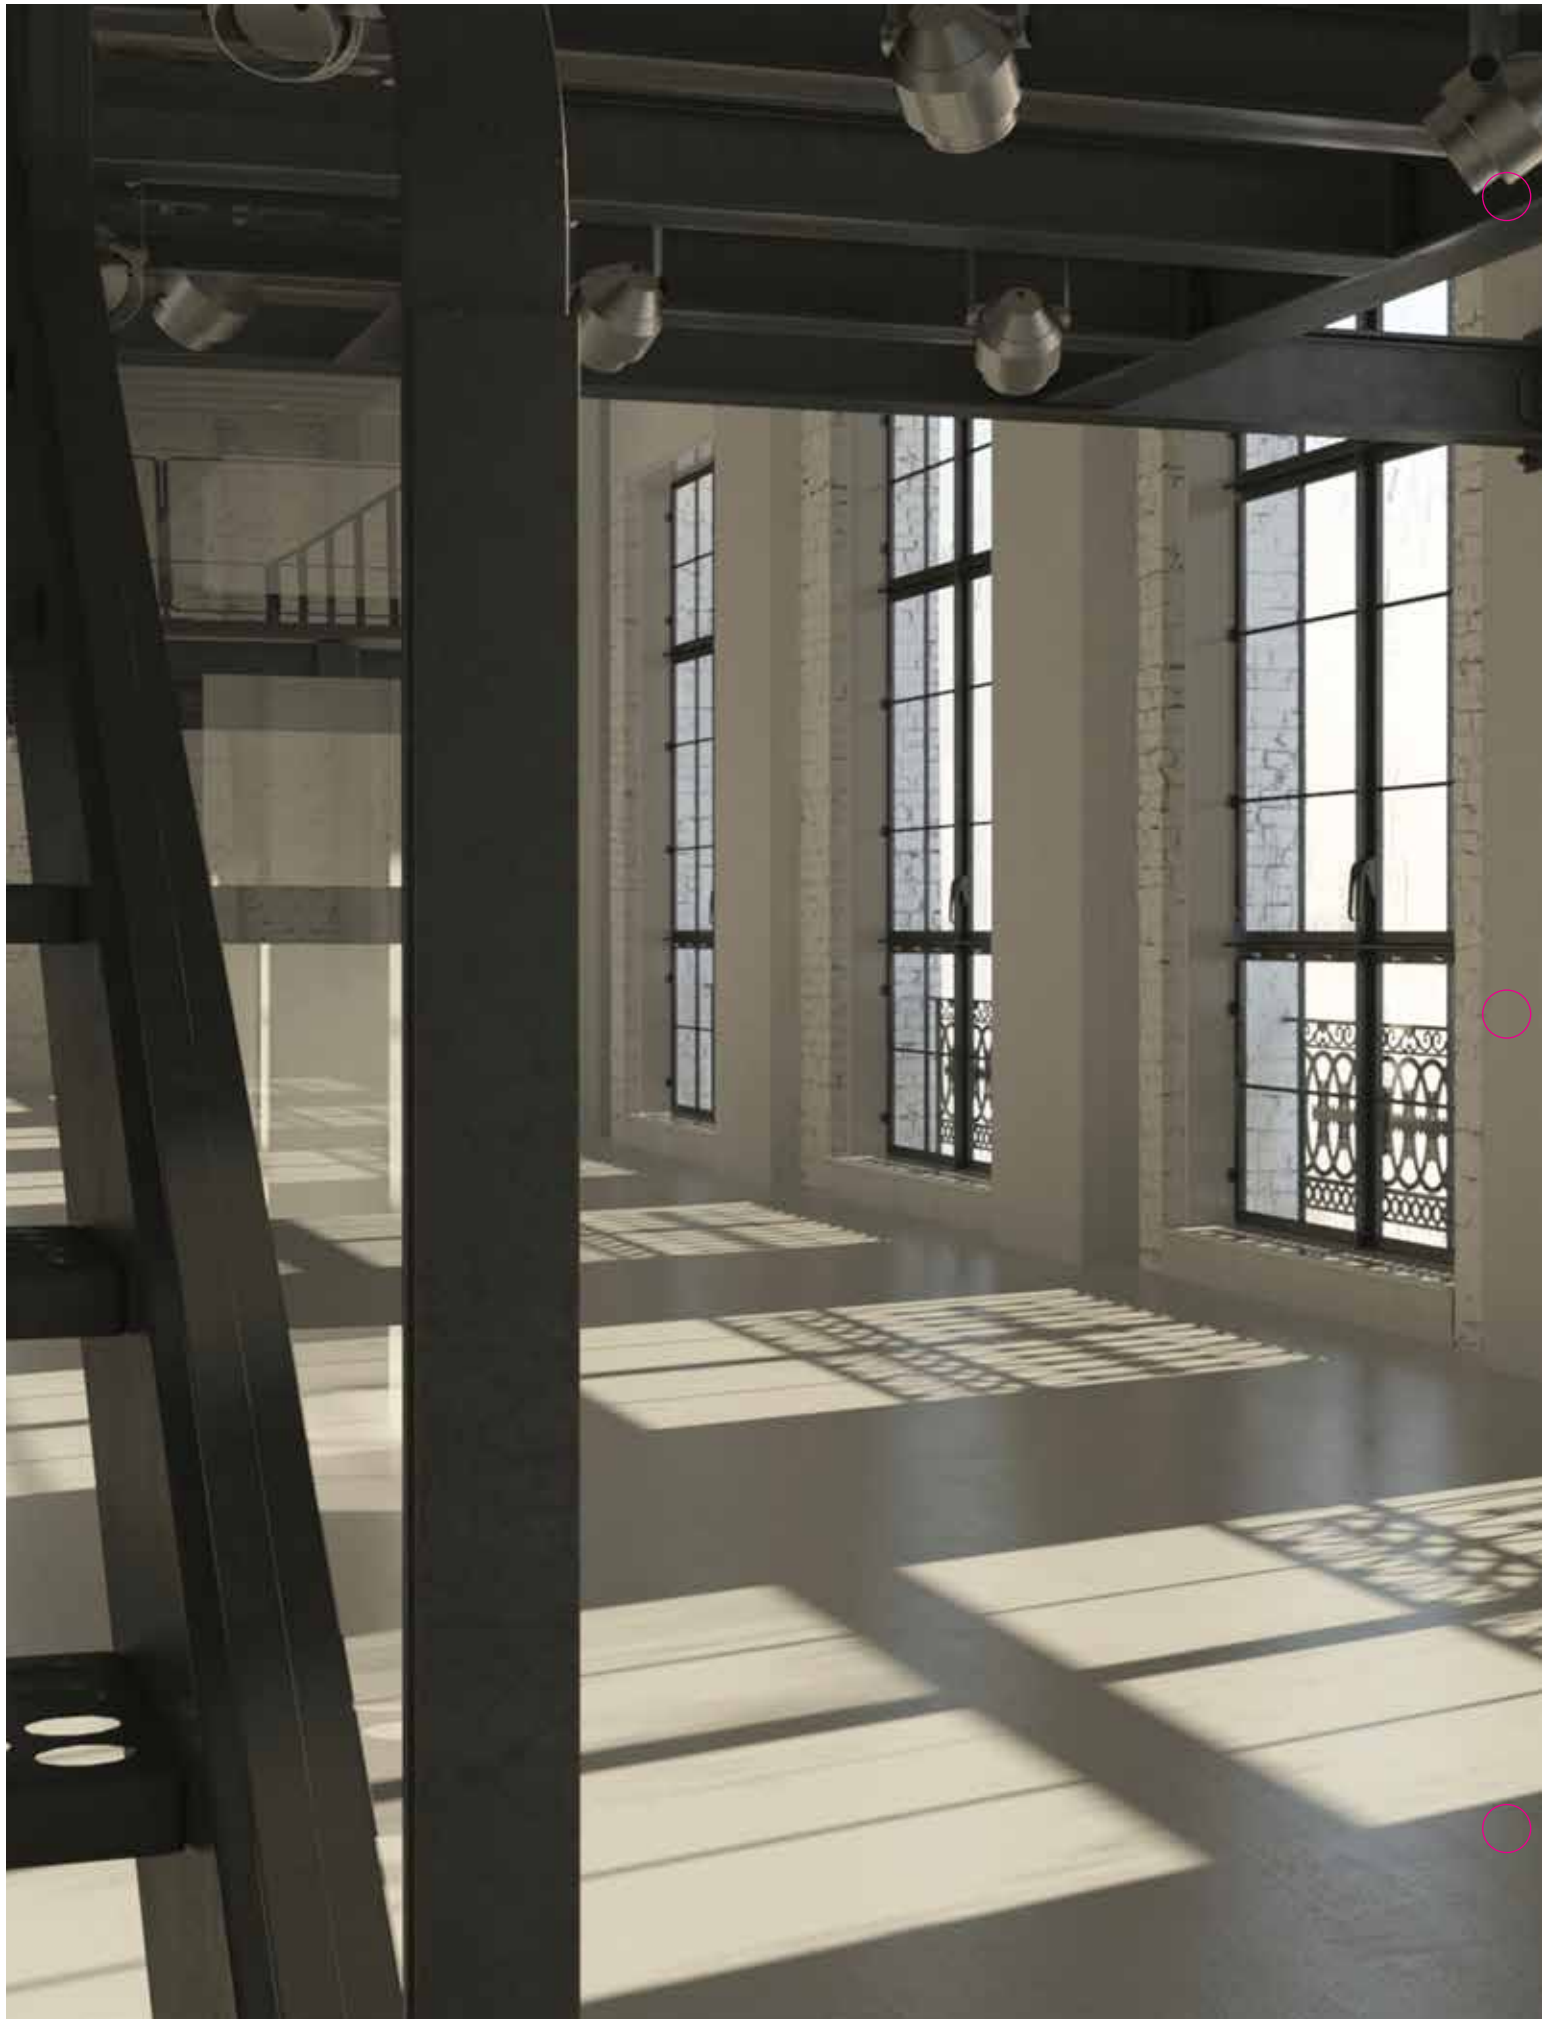

Concrete Prep, Patch & Repair

Rust-Oleum's expertise in surface protection doesn't stop at metal. Our complete selection of concrete prep, patch and repair products are formulated to deliver contractor-grade protection and are easy to apply using in-house maintenance crews. Our concrete repair products cure fast to minimize downtime and provide lasting durability for long-term protection.





FOR USE ON:

- Spalled or damaged concrete floors
- Curbs, ramps and walkways
- Decks and traffic routes

TURBOKRETE® CONCRETE PATCHING COMPOUND

High performance, 100% solids epoxy patch kit repairs damaged concrete, fills deep holes, and protects against abrasion, impact and most chemicals.


- **Restores damaged curbs and severely spalled floors**
- 3-4 times stronger than concrete
- Easy-mix, trowel — applied fast-cure formula
- Dries quickly — return to service in 1½-4 hours for light traffic and 6-8 hours for heavy traffic
- For indoor and outdoor use

SIZE (2 gallon)

■ 253479 Light Grey kit (.15 cu. ft.)

SIZE (3.5 gallon)

■ 5494323 Light Grey kit (.30 cu. ft.)



FOR USE ON:

- Interior and exterior concrete
- Spalls and leaks on vertical, horizontal or overhead surfaces
- Also great as an adhesive

TURBOKRETE® ALL-PURPOSE EPOXY REPAIR

The ultimate 100% solids non-sag epoxy repair.


- **Easy-to-use — convenient 2K cartridge**
- Superior non-sag formula excellent for bridging horizontal or vertical cracks, even under water
- Twice as strong as concrete
- Works on concrete, masonry, brick, steel and more
- Low odour, low VOC
- For indoor or outdoor use

CARTRIDGE (9 oz.)

■ 257395 Light Grey

COMPANION PRODUCTS

- 257397 Replacement Static Mixers (pack of 3)
- 261292 Heavy-Duty Caulk Gun

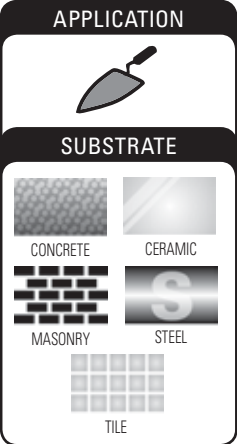

FOR USE ON:

- Control joints, saw cuts and interior expansion joints

FLEXIBLE JOINT SEALANT

High performance two component polyurea designed for floor joints. Self-leveling fast-cure formula with over 80% elongation can withstand 10-15% movement in the floor.


- **Cures in 90 minutes**
- Can be applied down to -40°C (-40°F)
- For indoor or outdoor use

CARTRIDGE

266733 22 oz.
261998 9 oz.

COMPANION PRODUCTS

- 257397 Replacement Static Mixers (pack of 3)
- 261292 Heavy-Duty Caulk Gun for 9 oz.



FOR USE ON:

- Cracked or damaged concrete floors


5499 SYSTEM CONCRETE PATCHING COMPOUND

100% solids epoxy patch kit specially formulated for repairing small holes or pores.

- **Works on concrete, wood, fiberglass and brick with no priming**
- Up to 1 hour working time
- Virtually odour-free
- For indoor or outdoor use
- 3 times stronger than concrete

AVAILABLE PRODUCTS

5499499 2 Gallon Kit (Base and Activator)



FOR USE ON:

- Interior and exterior horizontal concrete cracks
- Spalls and pitting in mild to severe industrial environments
- Warehousing
- Food and beverage
- Manufacturing


INSTAPATCH®

InstaPatch is an ultra rapid curing concrete repair system. Two-component 100% solids polyurea repair compound. Dries fast for quick return to service.

- **Low viscosity, rapid-cure rigid patching**
- Cures in 15 minutes or less
- Can be poured into cracks or formed into a slurry and trowel applied
- Can be applied down to -20°C (-5°F)
- Low odour

AVAILABLE PRODUCTS

- 276981 Grey 1 Gallon Kit
- 284595 Tile Red 1 Gallon Kit
- 288395 Grey 16 oz Kit
- 288391 Tile Red 16 oz Kit



FOR USE ON:

- Driveways
- Walkways
- Stairs
- Walls


PUTTY PATCH™

Putty Patch™ is a fast-setting general purpose cement-based patching material. A proprietary blend of Portland cements, aggregates and additives that achieves initial set in 10-15 minutes and final set in 20-25 minutes.

- **Can be moulded, shaped and shaved**
- Stronger than concrete
- Easy-to-use; well suited for interior or exterior applications
- Ideal for vertical and overhead repairs
- Repairs concrete cracks and holes up to 18 cm (7") deep in one application

AVAILABLE PRODUCTS

■ 291995 Grey 3 lb. pkg.



Schedule a walkthrough to explore flooring options tailored to your facility

CONTACT US



FOR USE ON:

- Concrete


POURABLE CONCRETE PATCHING COMPOUND

Makes repairing large holes and spalls easier than ever before. It has a fibre reinforced, easy-to-mix, pourable material for quick repairs to level concrete surfaces.

- **Just add to water, mix and pour**
- Fast-drying — Foot traffic in 30 minutes and vehicle traffic in 2 hours
- Sets at low temperatures (down to 4°C [40°F])
- Can be applied from feather edge up to 4 inches in a single application
- Suitable for interior and exterior applications
- Odourless, non-toxic, non-hazardous formula

AVAILABLE PRODUCTS

291070 Grey (18.9 L)



FOR USE ON:

- Unfinished concrete floors


108 CLEANING & ETCHING SOLUTION

Dual action solution — cleans and etches.


- **Helps dissolve grease, dirt and oil; then etches concrete for improved coating adhesion**
- Covers approximately 400 sq. ft. of concrete with just one pre-mixed, ready-to-use gallon

AVAILABLE PRODUCTS

108402 Cleaning & Etching Solution



Covers: 37.6 m²
(400 ft²) per 3.78 L

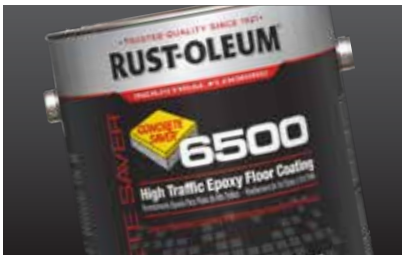

FOR USE ON:

- New, old, bare or previously coated concrete floors
- Warehouses
- Labs and more


S6511 SYSTEM PENETRATING PRIME & SEAL PRIMER

This clear, high-solids primer penetrates deeply to seal pinholes and cracks, improve adhesion and form an extra layer of protection.

- **Increases the performance of top-coats**
- Reduces the risk of bubbles and outgassing in topcoat
- Penetrates bare concrete to secure a strong bond between the concrete and top coat
- Improves resistance to abrasion, impact and chemical spills

AVAILABLE PRODUCTS

S6511413 Base (0.6 gallons in a 1 gallon container)
S6502410 Activator (0.6 gallons in a 1 gallon container)



Covers: 16.7-24.2 m²
(180-260 ft²) per 3.78 L



FOR USE ON:

- New or old bare concrete floors


ECO PRIME™

ECO Prime is a 100% solids fast-curing polyurea primer for use on concrete floors in industrial and commercial facilities.

- **Use with Rust-Oleum's polyurea products for the ultimate floor in 24 hours**
- Topcoat in 1-4 hours
- Excellent coverage — 2 gallon kit covers up to 130 m² (1400 ft²)
- Penetrates and seals for long-lasting protection
- Convenient kit packaging

AVAILABLE PRODUCTS

281631 2 Gallon



Covers: 46.5-65 m²
(500-700 ft²) per 3.78 L



FOR USE ON:

- Interior concrete or tile floors in mild to moderate industrial and commercial environments


HARD SURFACE PRIMER

Hard Surface Primer is a two component, water-based epoxy primer designed to improve the adhesion of paints and coatings to difficult substrates.

- **Minimal prep for hard to coat surfaces like; sealed and hard troweled concrete, VCT and ceramic tile**
- Add longevity to line striping
- Topcoat window (8 hours to 7 days without sanding)
- Zero VOC
- Compatible with most Rust-Oleum coatings

AVAILABLE PRODUCTS

313973 120 fl. oz. kit



Covers: 23.2-32.5 m²
(250-350 ft²) per 3.78 L



Schedule a walkthrough
to explore flooring options
tailored to your facility





WATER-BASED TOPSIDE VAPOUR BARRIER

Water-based TVB is a two-component epoxy primer for concrete floors.

- *Excellent adhesion to moisture laden slabs and can be used to remedy concrete floors with high moisture levels before the application of the finish coating*
- Water-based TVB is ph resistant and capable of holding back up to 12 lbs. of MVT (Moisture Vapour Transmission) with a two coat application
- TVB Water-based Topside Vapour Barrier can be applied to damp or green concrete

This is a two-component system. Order base and activator separately.

WATER-BASED

277494 Part A Resin (54 fl oz in a one gallon container)

278268 Part B Activator (74 fl oz in a one gallon pail)

Water-Based Covers: 250 sq. ft./gal

100% SOLIDS TOPSIDE VAPOUR BARRIER

TVB 100% Solids Topside Vapor Barrier is a two component, 100% solids epoxy primer for concrete floors designed for floors with the most severe MVT (Moisture Vapor Transmission) problems.

- *Excellent adhesion to moisture laden slabs and can be used to remedy concrete floors with high moisture levels before the application of the finish coating*
- pH resistant and capable of holding back up to 25 lbs. of MVT in a single application*
- Use under coatings, wood flooring, carpeting or anywhere there is a MVT problem

**Must be applied over a properly prepared shot blasted floor*

This is a two-component system. Order base and activator separately.

100% SOLIDS

278269 Base (3 gallons in a 5 gallon pail)

277500 Activator (2-1 gallon pouches in a carton)

100% Solids Covers: 80-100 sq. ft./gal

CONCRETE PREP, PATCH & REPAIR TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Concrete Saver Floor Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 21°C (70°F)–27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F)–27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (°C/°F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (°C/°F)	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY							
	MILS	MICRONS	MILS	MICRONS		ft. ² /gal.	m ² /l	ft. ² /gal.	m ² /l														
TurboKrete Concrete Patching Compound	—	—	—	—	100	.15-30 cu. ft.	—	—	—	—	—	2-4	15-8	—	—	—	160402	—	½	—	N/A	85°C 185°F	7-32°C 45-90°F
TurboKrete All-Purpose Epoxy Repair	—	—	—	—	—	*	—	—	—	2	—	2	2	—	—	—	—	1:1	—	—	—	—	—
Flexible Joint Sealant	—	—	—	—	—	**	—	—	—	45 min	—	90 min	90 min	—	—	—	—	1:1	—	—	—	—	—
5499 System – Concrete Patching Compound	—	—	—	—	94	12.5	.3	—	—	2-3	—	16	16-72	—	—	—	160402	1:1	5/6	60°C 140°F	N/A	60°C 140°F	10-38°C 50-100°F
InstaPatch® Concrete Repair System	—	—	—	—	—	230 lin. ft.	—	—	—	5 min	—	—	30 min	—	—	—	—	—	—	—	—	—	—
108 Cleaning & Etching Solution	—	—	—	—	—	400	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—
S6511 System – Penetrating Prime & Seal Primer	6-9	—	5.5-8	—	89	180-260	44-64	1430	35.1	6-8	—	8-24	—	—	—	—	—	1.5:1	1/2	—	250	—	—
ECO Prime Polyurea Primer	—	—	—	—	100	500-700	—	—	—	1-2	—	1-12	—	—	—	—	—	—	—	—	10	—	—
100% Solids – Topside Vapour Barrier	16	400	16	400	100	80-100	—	—	—	—	—	12-14	—	—	—	—	—	3:2	20-30 min	—	0	—	10-38°C 50-100°F
Water-Based – Topside Vapour Barrier	6.4	160	—	—	50	250	—	—	—	—	—	5-8	—	—	—	—	—	1:1.2	1 hr	—	0	—	15.5-26.6°C 60-80°F

*Practical Coverage - 10.56 linear ft., 1/2" deep x 1/4" wide

**Practical Coverage - 13.3 feet, 1/4" joint x 1" deep



Floor Coatings

Rust-Oleum's diverse product offering provides a cost effective, durable solution for every industry and every environment. Our range of products include Concrete Saver and Sierra Performance brands for application using in-house crews, to Concrete Protection Systems coatings and toppings for professional contractors. Whatever the floor coating project, Rust-Oleum has the right solution for you.





FOR USE ON:

- Interior and exterior concrete floors
- Walkways
- Decks and patios in mild industrial and commercial environments exposed to heavy and light rubber wheeled traffic

5600 SYSTEM
ACRYLIC URETHANE
FLOOR PAINT

Spruce up your floor with low odour, roll and go floor paint.

- **Protects concrete floors from dusting, water damage and staining**
- Provides a mildew resistant coating
- Use for improved aesthetics, 5S, safety and organization markings and for easy maintenance
- Convenient, ready-to-use with no measuring or mixing
- Excellent coverage over new and previously coated surfaces
- Accepts next day foot traffic

COLOURS

	261117	Safety Blue		251286	Safety Yellow
	261118	Safety Green		251289	White
	261116	Safety Orange		251291	Silver Grey
	261115	Safety Red			

APPLICATION

SUBSTRATE

VOC g/l

VOC <100

COMPLIANT
NATIONWIDE

Covers: 15.8-37.2 m²
(170-400 ft²) per 3.78 L



FOR USE ON:

- Steel beams, structural steel and towers
- Concrete floors and conveyors
- Industrial equipment and storage tanks
- Sewage treatment basins
- Non-potable water storage facilities
- Steel handrails

9100 SYSTEM DTM
EPOXY MASTIC

This versatile epoxy coating quickly creates a tough, durable, protective surface. Just one coat of Rust-Oleum High Performance 9100 System DTM Epoxy Mastic is equal to multiple coats of competitive epoxy. Multiple activator options for unique applications.

- **Direct-to-metal (DTM) self priming formula—adheres to a variety of substrates**
- Superior long-term resistance to solvents, chemicals, abrasion and impact
- Convenient 1:1 mixing ratio — no measuring required
- Two-year rust-proof guarantee — maximum corrosion protection

STANDARD ACTIVATOR

- For air and surface temperatures of 10-38°C (50-100°F)

IMMERSION ACTIVATOR

- For fresh or salt water immersion of steel or concrete where water temperatures do not exceed 52°C (125°F)
- Great for use in floor coating applications
- Produces slightly lower gloss than standard activator
- Not for use in potable water tanks

LOW TEMPERATURE ACTIVATOR

- For air and surface temperatures of 5-15°C (40-60°F)

FAST-CURE ACTIVATOR

- Faster cure to minimize downtime
- Recoat in 4 hours at 21°C (70°F) and 50% RH
- For air and surface temperature of 10-38°C (50-100°F)
- Produces slightly lower gloss than standard activator

This is a two-component system. Order base and activator separately.

COLOURS (3.79 L)

	9171402	Dunes Tan
	9122402	Marlin Blue
	9165402	Regal Red
	9186402	Navy Grey
	9182402	Silver Grey
	9115402	Aluminum
	9179402	Black
	9192402	White

SAFETY COLOURS (3.79 L)

	9125402	Safety Blue
	9133402	Safety Green
	9144402	Safety Yellow
	204006	Safety Red
	204005	Safety Orange
	297081	Safety Orange (5 gallon)

TINT BASES (2.84 L)

	9105405	Red
	9106405	Yellow
	9107405	Masstone
	9108421	Deep
	9109408	Light

ACTIVATORS

205015	Standard (<250 g/l)
214430*	Immersion (<250 g/l)
9103402	Low Temp. (<250 g/l)
214432	Fast Cure (<250 g/l)
331254	Satin Activator (<250 g/l)
9101402	Standard (<340 g/l)
9102402*	Immersion (<340 g/l)
9104402*	Fast Cure (<340 g/l)

* Not for use with Tint Bases

APPLICATION

SUBSTRATE

VOC g/l

VOC <340

VOC <250

Covers: 11.62-20.9 m²
(125-225 ft²) per 3.78 L



FOR USE ON:

- Floor coating for mild to moderate industrial environments
- Clean rooms, laboratories and schools
- Cafeterias and hospitals

6000 SYSTEM
WATER-BASED EPOXY

Low VOC, two-component water-based epoxy for industrial floors that features high gloss and is easy to clean.

- **Extended pot life for longer working time**
- Protects against heavy foot traffic and lightweight rubber-wheeled traffic
- Handles occasional mild chemicals, steam, hot water, humidity and moisture
- Cleans with soap and water

COLOURS

	6068408	Tile Red	6001604	Activator
	6086408	Navy Grey		
	6082408	Silver Grey		
	6010408	Clear		

APPLICATION

SUBSTRATE

VOC g/l

VOC <250

Covers: 18.5-32.5 m²
(200-350 ft²) per 3.78 L

Prime with Rust-Oleum
5381405 Grey Primer



Schedule a walkthrough
to explore flooring options
tailored to your facility

CONTACT US



FOR USE ON:

- Warehousing and storage facilities
- Garages, showrooms and manufacturing

6200 SYSTEM
FAST-CURE EPOXY
FLOOR COATING

High performance, two-component easy maintenance flooring for mild to moderate environments.

- **Fast-curing formulation gets you back in service fast (4 hour recoat, 5 hour light traffic)**
- Excellent two-component chemical and abrasion protection — long-lasting protection against dusting, staining and wear
- Convenient ready-to-mix industrial flooring kit
- Ideal for interior and exterior concrete floors in industrial and commercial environments like warehouses, showrooms, manufacturing, garages and storage facilities

Base and activator included in two-component kit.

KITS

- 251763 Silver Grey
- 251765 Dunes Tan

APPLICATION

SUBSTRATE

STEEL CONCRETE

VOC g/l

VOC <250

Covers: 16.2-32.5 m²
(175-350 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

6500 SYSTEM HIGH
TRAFFIC FLOOR COATING

100% solids, two-component high-build epoxy provides heavy-duty protection for industrial floors.

- **Protects against heavy foot and rubber wheel traffic, occasional chemical spills, splashes, power washes, abrasion and impact**
- Low odour ideal for use in confined, low ventilation areas
- Easy to maintain high gloss finish
- Dries quickly — return to service in 10 hr. for light traffic/ 72 hr. heavy traffic

Base and activator ordered separately.

COLOURS

- S6571413 Dunes Tan
- S6568413 Tile Red
- S6586413 Navy Grey
- S6582413 Silver Grey
- S6510413 Clear

PRIMERS

- S6511413 Penetrating Prime and Seal Primer Base

241099 TurboPrime™ Low VOC Primer Base
- PRIMER ACTIVATORS
- S6502410 Penetrating Prime and Seal Primer Activator

241200 TurboPrime™ Low VOC Primer Activator
- ACTIVATOR
- S6501410 Activator
- APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE
- Covers: 9.3 m²
(100 ft²) per 3.78 L
-
- FOR USE ON:
- Warehousing and showrooms
 - Laboratories and clean rooms
 - Aircraft hangers and mechanical areas
 - Storage facilities
 - Topcoat in heavy-duty areas
- 6600 SYSTEM HEAVY
DUTY MAINTENANCE
FLOOR COATING
- High performance, two-component heavy duty flooring for industrial and commercial environments.
- **Protects against heavy foot and rubber wheel traffic, occasional chemical spills, splashes, abrasion and impact**
 - Excellent in conditions where traditional 100% solids epoxies fail due to outgassing of the concrete, rising temperatures, direct sunlight
 - Low viscosity formula allows for easier application and more consistent finish
 - Self-priming makes for quicker application time
- Base and activator ordered separately.
- COLOURS
- 282113 Dunes Tan

282112 Navy Grey

282111 Silver Grey

282109 Super Light Grey

282110 Light Grey

282107 Clear
- ACTIVATOR
- 282115 Activator
- APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

COMPLIANT NATIONWIDE
- Covers: 9.3 m²
(100 ft²) per 3.78 L
-
- FOR USE ON:
- Warehousing and showrooms
 - Laboratories and clean rooms
 - Aircraft hangers and mechanical areas
 - Storage facilities
 - Topcoat in heavy-duty areas
- 6700 SYSTEM EXTENDED
POT LIFE EPOXY
- Uses a unique chemistry, that results in a coating with great flexibility, working times and self-leveling properties. This two-component epoxy is applied in one easy step — no primer required. As a result of the low odour, this coating can be applied indoors with minimal disruption.
- **100% solids epoxy that anyone can apply**
 - 60 minute pot life, 2x longer than standard 100% solids epoxies
 - Great self-leveling properties allows for roller application or squeegee/back-roll application
 - Low odour, low VOCs; great for new, old, bare or previously coated concrete floors
 - Fast return to service- can accept vehicle traffic in 36-48 hours
- Base and activator included in two-component kit.
- TWO-COMPONENT KIT
- 301675 Silver Grey

301676 Dunes Tan

301677 Clear

301678 Navy Grey

301679 Super Light Grey

301680 Light Grey
- BASE & ACTIVATOR SOLD SEPARATELY
- 332241 Silver Grey (2 gallons)

332245 Dunes Tan (2 gallons)

332242 Navy Grey (2 gallons)

332243 Super Light Grey (2 gallons)

332244 Light Grey (2 gallons)

333691 Color Part B (1 gallon)

332243 Clear (1.875 gallons)

333691 Clear Part B (1.125 gallons)
-
- Schedule a walkthrough
to explore flooring options
tailored to your facility
- CONTACT US
- 20
- FLOOR COATINGS
- CONCRETE SAVER®
- FLOOR COATINGS
- 21



- FOR USE ON:**
- Warehouses
 - Walkways
 - Over stained and painted concrete
 - Decks and patios

**5500 SYSTEM
ACRYLIC DUSTPROOFER
FLOOR SEALER**

- Roll and go concrete dustproofer/sealer.
- *Use direct to concrete or as a clear topcoat for an easier to clean and maintain surface*
 - Ideal for interior and exterior concrete floors, walkways, decks and patios in mild industrial and commercial environments
 - Convenient, ready-to-use with no measuring or mixing
 - Seals out water and mild chemicals — prevents dusting
 - Excellent coverage over new and previously coated surfaces
 - Fast-drying (recoat in one hour, traffic in 12 hours)

COLOURS

☐ 251282 Clear

APPLICATION

SUBSTRATE

CONCRETE WOOD

VOC g/l

VOC <100

COMPLIANT NATIONWIDE

Covers: 13.9-37.1 m²
(150-400 ft²) per 3.78 L



- FOR USE ON:**
- Wood or concrete floors
 - Office areas and warehousing
 - Gymnasiums
 - Glossy topcoat over anti-slip coatings

**6711 SYSTEM
CLEAR WATER-BASED
POLYURETHANE**

- Clear, water-based polyurethane for protection of wood floors.
- *Easy-to-use, single component clear gloss topcoat or sealer*
 - Protects against light traffic, weather and staining
 - For indoor and outdoor use
 - VOC compliant and low odour for use in most regulated areas

COLOURS

☐ 6711402 Clear

APPLICATION

SUBSTRATE

WOOD

VOC g/l

VOC <250

Covers: 37.1-74.3 m²
(400-800 ft²) per 3.78 L



- FOR USE ON:**
- Interior concrete floors in mild to moderate industrial and commercial environments
 - Warehouses, showrooms and garages
 - Manufacturing and storage facilities

**EASYCLEAR®
EPOXY MAINTENANCE
FLOOR COATING**

- High performance, two-component easy maintenance flooring for mild to moderate environments.
- *Convenient, ready-to-mix industrial flooring kit*
 - Excellent protection over new or old concrete or previously coated floors
 - Easy roller application
 - High gloss finish

Base and activator included in two-component kit.

KIT

☐ 256673 120 fl. oz.

APPLICATION

SUBSTRATE

CONCRETE

VOC g/l


VOC <50

COMPLIANT NATIONWIDE


Covers: 23.2-37.1 m²
(250-400 ft²) per 3.78 L

ANTI-SLIP

Preventing slips, trips and falls has never been easier than with Concrete Saver Anti-Slip Floor Coatings. From pedestrian foot traffic in locker rooms to heavy vehicle traffic in warehouses, Concrete Saver products are the easy answer for a safer facility. The coatings are easy to apply with in-house crews and result in a long-lasting durable finish that will protect your floors and the people that walk on them for years to come.

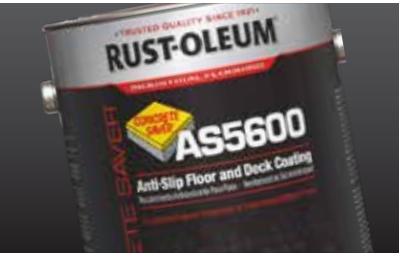

- FOR USE ON:**
- Interior and exterior concrete floors
 - Walkways
 - Decks and patios in mild industrial and commercial environments exposed to heavy pedestrian and light rubber wheeled cart traffic



COATING PROFILE

**AS5600 SYSTEM ANTI-SLIP
FLOOR AND DECK COATING**

- A fast-drying, tough anti-slip coating to brighten up your floors.
- *Ready-to-use with no messy measuring or mixing*
 - Acrylic formula provides a flexible, low to medium profile, excellent for concrete, asphalt, wood or metal
 - Low odour: can be applied during work hours
 - Fast-drying: can accept foot traffic in as little as 4 hours
 - Coefficient of Friction — Dry 1.30, Wet 0.90

COLOURS

- ☒ 261175 Safety Yellow
- ☒ 261176 Black
- ☒ 261177 Navy Grey

APPLICATION

SUBSTRATE

CONCRETE STEEL WOOD

VOC g/l


VOC <100

COMPLIANT NATIONWIDE

Covers: 5.5-6.5 m²
(60-70 ft²) per 3.78 L



- FOR USE ON:**
- Aisles, decks and walkways
 - Stairs and machine operating areas
 - Entrances and exits



COATING PROFILE

**AS5400 SYSTEM ANTI-SLIP
ONE-STEP EPOXY**

- Labour-saving, anti-slip epoxy protects pedestrian grade floors in one step.
- *Easy-to-use, single component for fast application*
 - Ridged profile handles heavy foot traffic and/or light vehicle traffic
 - Can be resealed for multi-use areas subjected to mild chemicals, occasional steam and chemical cleaning
 - For indoor and outdoor use
 - Dries quickly — return to service in 24 hr. for heavy traffic
 - Coefficient of friction — Dry: 1.17, Wet: 1.00

COLOURS

- ☒ AS5471402 Dunes Tan
- ☒ AS5468402 Tile Red
- ☒ AS5486402 Navy Grey
- ☒ AS5482402 Silver Grey
- ☒ AS5479402 Black

SAFETY COLOURS

- ☒ AS5444402 Safety Yellow

*Some colours available in 5 gallons

APPLICATION

SUBSTRATE

STEEL† CONCRETE WOOD

VOC g/l

VOC <340

Covers: 4.6 m²
(50 ft²) per 3.78 L


† When primed with 9100 System



Schedule a walkthrough
to explore flooring options
tailored to your facility


CONTACT US

ANTI-SLIP

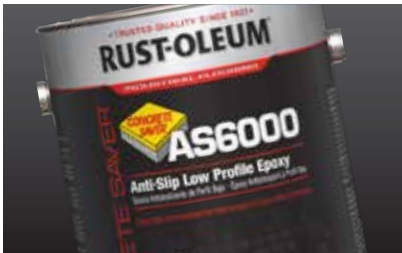

FOR USE ON:

- Barefoot recreational areas
- Locker rooms, hotel pools and restrooms
- Showers, laundries and walkways



COATING PROFILE

AS6000 SYSTEM ANTI-SLIP LOW PROFILE EPOXY

Low VOC, two-component water-based anti-slip floor epoxy acts as a safeguard on barefoot grade floors.

- **Use anywhere extra protection is needed from slips and falls in barefoot and wet recreational environments**
- For indoor and outdoor use
- Dries quickly — return to service in 24 hr. for light traffic/ 48 hr. heavy traffic
- Coefficient of friction — Dry: 0.78, Wet: 0.86

Available in two-component (1 gallon activated) kit of base and activator.

COLOURS

- AS6086425 Navy Grey
- AS6082425 Silver Grey

APPLICATION

SUBSTRATE


CONCRETE STEEL

VOC g/l

VOC <100


COMPLIANT NATIONWIDE

Covers: 7.4-9.2 m² (80-100 ft²) per 3.78 L

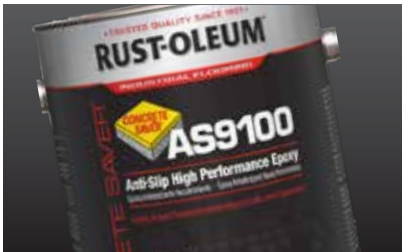

FOR USE ON:

- Floor coating for vehicle routes
- Forklift traffic and ramps
- Walkways and loading docks



COATING PROFILE

AS9100 SYSTEM ANTI-SLIP HIGH PERFORMANCE EPOXY

Low VOC, two-component extreme profile anti-slip epoxy offers maximum protection for vehicle grade floors.

- **Protects against chemicals and abrasion in heavy traffic environments**
- Highly ridged profile endures heavy wear, frequent power cleaning and constant high humidity
- For indoor and outdoor use
- Dries quickly — return to service in 12 hr. for light traffic/ 72 hr. heavy traffic
- Coefficient of friction — Dry: 1.05, Wet: 1.05

Available in two-component (1 gallon activated) kit of base and activator.

COLOURS

- AS9171425 Dunes Tan
- AS9168425 Tile Red
- AS9186425 Navy Grey
- AS9182425 Silver Grey

SAFETY COLOURS

- AS9144425 Safety Yellow

APPLICATION


SUBSTRATE

CONCRETE STEEL†

VOC g/l


VOC <250

Covers: 3.7-5.5 m² (40-60 ft²) per 3.78 L
† When primed with 9100 System – DTM Epoxy Mastic

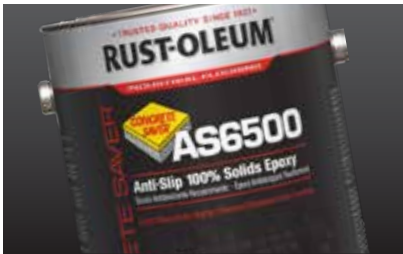

FOR USE ON:

- Floor coating for food processing
- Preparation areas and wash areas
- Where regular power cleaning and high humidity is common



COATING PROFILE

AS6500 SYSTEM ANTI-SLIP 100% SOLIDS EPOXY

Extra heavy-duty, two-component 100% solids epoxy maintains the anti-slip, chemical and abrasion resistance required in food processing where regular power cleaning and high humidity is common.

- **Protects against chemicals and abrasion in heavy traffic environments**
- Low odour ideal for use in confined, low ventilation areas
- For indoor and outdoor use
- Dries quickly — return to service in 12 hr. for light traffic/ 72 hr. heavy traffic
- Coefficient of friction — Dry: 1.1, Wet: 1.0

Available in two-component kit of base and activator.

COLOURS

- AS6586425 Navy Grey
- AS6582425 Silver Grey

APPLICATION

SUBSTRATE

CONCRETE STEEL†

VOC g/l


VOC <100

COMPLIANT NATIONWIDE

Covers: 2.3-3.2 m² (25-35 ft²) per 3.78 L

† When primed with 9100 System – DTM Epoxy Mastic

FIBERGLASS REINFORCED PLASTIC

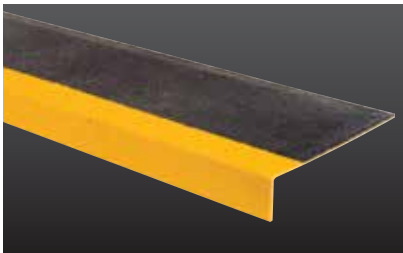

FOR USE ON:

- Interior/exterior concrete, metal or wood stairs

SAFESTEP® STEP COVERS

Heavy duty preformed anti-slip step covers provide a corrosion resistant surface for damaged, worn or slippery steps. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):


- 271792 32" x 10" Black/Yellow Coarse Grit
- 271795 36" x 10" Black/Yellow Coarse Grit
- 271796 48" x 10" Black/Yellow Coarse Grit
- 271797 59" x 10" Black/Yellow Coarse Grit
- 271798 32" x 13.5" Black/Yellow Coarse Grit
- 271799 36" x 13.5" Black/Yellow Coarse Grit
- 271800 48" x 13.5" Black/Yellow Coarse Grit
- 271801 59" x 13.5" Black/Yellow Coarse Grit
- 292460 32" x 10" Black/Yellow Medium Grit
- 292461 36" x 10" Black/Yellow Medium Grit
- 292463 48" x 13.5" Black/Yellow Medium Grit



Schedule a walkthrough to explore flooring options tailored to your facility

CONTACT US

FIBERGLASS REINFORCED PLASTIC

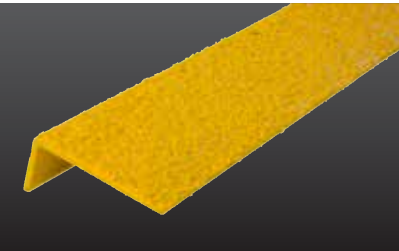

FOR USE ON:


- Interior/exterior concrete, metal or wood stairs

SAFESTEP® STEP EDGE

Heavy-duty, high visibility, slip-resistant step edges. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):

271818	32" x 2.75" x 1.25"	Yellow	Coarse Grit
271819	36" x 2.75" x 1.25"	Yellow	Coarse Grit
271820	48" x 2.75" x 1.25"	Yellow	Coarse Grit
271821	59" x 2.75" x 1.25"	Yellow	Coarse Grit
292482	32" x 2.75" x 1.25"	Yellow	Medium Grit
292483	36" x 2.75" x 1.25"	Yellow	Medium Grit
292484	48" x 2.75" x 1.25"	Yellow	Medium Grit

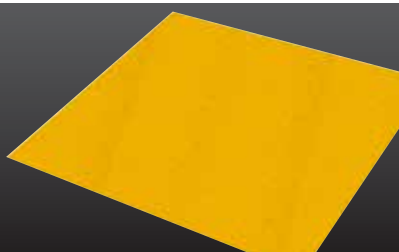

FOR USE ON:

- Interior/exterior concrete, metal or wood walkway, ramps and landings

SAFESTEP® SHEETING

Heavy-duty sheets with a tough anti-slip surface. Highly versatile and long-lasting fibreglass sheets for ramps, walkways, etc. (Glued and screw fixed).

AVAILABLE SIZES (width & depth):

271810	47" x 47"	Black	Coarse Grit
271811	47" x 47"	Safety Yellow	Coarse Grit
271814	47" x 96"	Safety Yellow	Coarse Grit
271815	47" x 96"	Gray	Coarse Grit
292178	47" x 96"	Black	Medium Grit

AVAILABLE SIZES (width & depth):

Landing Cover

271816	47.25" x 47.25"	Black/Yellow	Coarse Grit
--------	-----------------	--------------	-------------

Ladder Rung Cover

295380	12" x 1"	Safety Yellow	Medium Grit
--------	----------	---------------	-------------

FLOOR IN 24



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

FASTKOTE® POLYUREA FLOOR COATING

Easy-to-apply, fast-curing, long-lasting floor coating. This high-gloss floor coating is designed for industrial and commercial settings with heavy foot traffic, rubber-wheeled vehicles and occasional chemical spills.

• Fast-curing protective floor coating

- Excellent chemical and abrasion resistance
- Easy roller application
- Fast dry times
 - Light traffic in 4-6 hours
 - Vehicle traffic in 24 hours

COLOURS

277498	Safety Yellow	277497	Super Light Grey
277495	Grey	280972	Clear
277496	Tan	285122	Black



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 37.1 m²
(400 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

FASTKOTE® UV STABLE POLYUREA FLOOR COATING

Easy-to-apply, fast-curing, long-lasting floor coating. This high-gloss floor coating is designed for industrial and commercial settings with heavy foot traffic, rubber-wheeled vehicles where UV stability is important.

• Excellent chemical and abrasion resistance with UV stability

- Easy roller application
- Fast dry times
 - Light traffic in 4-6 hours
 - Vehicle traffic in 24 hours

COLOURS

278270	Safety Yellow	278494	Super Light Grey
278478	Grey	277499	Clear
278493	Tan	280971	Black



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 37.1 m²
(400 ft²) per 3.78 L



Schedule a walkthrough
to explore flooring options
tailored to your facility

CONTACT US

FLOOR IN 24



FOR USE ON:


- Commerical application
- Restaurant
- Showrooms

MEDICI® DECORATIVE POLYUREA FLOOR COATING

High gloss, UV stable polyurea floor coating for use in industrial and commercial environments. Unique faux stain finishes are created using the Medici coating, tray and roller system. Medici combines two different finish colours in a simultaneous roller application to obtain a faux stain finish. The high solids content and excellent abrasion resistance makes it the perfect choice for a durable, decorative floor.

- **100% UV stable decorative finish**
- Fast dry coating accepts light traffic in 4-6 hours; full vehicle traffic in 24 hours
- Durable polyurea formula protects against chemicals and abrasion
- Easy roller application creates a consistent finish unlike other concrete stains

COLOURS

- | | |
|---|---|
|  280947 Terra Cotta |  280939 Brown Slate |
|  280938 Sierra Sunset |  280950 Stone |



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 31.7 m²
(400 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

FINISHKOTE 80 HIGH SOLIDS POLYASPARTIC FLOOR COATING

A UV stable, fast dry coating that provides excellent UV, chemical and abrasion resistance in a wide range of temperatures making it an excellent choice for both interior and exterior applications.

- **Can be applied by spray or roller at temperatures between -19-49°C (-20-120°F) and in high humidity**
- Fast dry coating can be top coated in 4-6 hours
- Provides excellent adhesion to concrete, epoxies, urethanes and polyureas
- Dries to a high gloss, professional finish

AVAILABLE PRODUCTS

- 283567** Part A - 2 Gallon
283616 Part B - 2 Gallon



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 23.2-32.5 m²
(250-350 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

FINISHKOTE 100 HIGH SOLIDS POLYASPARTIC FLOOR COATING

A 100% solids polyaspartic floor coating that provides excellent UV, chemical and abrasion resistance in a wide range of temperatures making it an excellent choice for both interior and exterior applications.

- **Squeegee/backroll application at temperatures between -19-49°C (-20-120°F) and in high humidity**
- Fast dry coating can be top coated in 4-6 hours
- Provides excellent adhesion to concrete, epoxies, urethanes and polyureas
- Dries to a high gloss, professional finish
- Can be applied clear or tinted with Polyurea Universal Tints

AVAILABLE PRODUCTS

- 283618** Part A - 2 Gallon
283643 Part B - 3 Gallon



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 9.2-18.5 m²
(100-200 ft²) per 3.78 L



FOR USE ON:

- Warehousing and showrooms
- Laboratories and clean rooms
- Aircraft hangers and mechanical areas
- Storage facilities

BUILDKOTE POLYUREA FLOOR COATING PRIMER

Provides exceptional adhesion and withstands a wide range of temperatures and climate conditions. BuildKote has an extended open time making it a great choice for broadcast systems.

- **Can be applied by spray or roller at temperatures between -19-49°C (-20-120°F) and in high humidity**
- Fast dry coating can be top coated in 2-4 hours
- Provides excellent adhesion to concrete, fiberglass, wood, epoxy, urethanes and polyurethanes
- Can be applied clear or tinted with Polyurea Universal Tints
- Can also be applied to vertical surfaces as a primer or stand-alone coating

AVAILABLE PRODUCTS

- 283193** Part A - 1 Gallon
283191 Part B - 2 Gallon



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 7.4-18.5 m²
(80-200 ft²) per 3.78 L



Schedule a walkthrough
to explore flooring options
tailored to your facility

CONTACT US

FLOOR IN 24



FOR USE ON:

- Commerical application
- Restaurant
- Showrooms

HEAVY METAL
DECORATIVE
FLOOR COATING

A high gloss, floor coating that uses pearlescent additives for a distinctive iridescent finish perfect for restaurants, showrooms, lobbies or any other space that needs a decorative and durable floor.

- *Easy-to-apply with long working time – 45 minute pot life*

- Fast dry coating accepts traffic in less than 24 hours
- Durable formula protects against chemicals and abrasion
- Use FastKote Polurea Black as a base coat for a more dramatic effect

AVAILABLE PRODUCTS

- 280952** Part A - 2 Gallon
280954 Part B - 1 Gallon

COLOURS

- 280927** Blue Sky
- 280928** Silver Bullet
- 280929** Copper Pot
- 280926** Earth Brown



APPLICATION

SUBSTRATE

CONCRETE

VOC g/l

VOC <100

Covers: 8.3-9.2 m²
(90-100 ft²) per 3.78 L

COMPANION PRODUCTS

200 ANTI-SKID FLOOR
COATING ADDITIVE

Specially refined aggregate provides increased skid resistance

- Formulated for use with our 6000 System Water-Based Epoxy or 6500 System 100% Solids Epoxy
- Can be added directly to the liquid coating or broadcast over the final finish

AVAILABLE PRODUCTS

- 200504** Anti-Skid Floor Coating Additive

ULTRAWEAR® ADDITIVE

Use with industrial floor coatings to achieve greater durability and an anti-slip surface

- Blend one bag per gallon

AVAILABLE PRODUCTS

- 213898** UltraWear Additive

DURABILITY ADDITIVE

Increase the durability, longevity and anti-slip properties of Rust-Oleum fast flooring products

- Easy and convenient — mix one bag into one gallon FastKote Polyurea Floor Coating or FastKote UV Polyurea Floor Coating
- Fine blend of aluminum oxide

AVAILABLE PRODUCTS

- 280945** Durability Additive

DECORATIVE VINYL CHIPS

Use with most systems for a decorative finish

- Available in 1 lb. bags

AVAILABLE PRODUCTS

- 205220** Black/White
205178 Blue/White
205177 Black/White/Blue
205179 Black/White/Grey

Visit Rustoleum.com/industrial for available colours.

RUST-OLEUM MIXERS
& ROLLERS

- 6695023** Jiffler Mixer
6697005 9" Phenolic "No Nap" Roller Cover

FLOOR COATINGS TECHNICAL DATA

The data contained in this chart is presented for the comparison of basic physical characteristics of Concrete Saver Floor Coatings. For more detailed information, see Rust-Oleum technical data sheets for individual products.	RECOMMENDED FILM THICKNESS				PERCENT VOLUME SOLIDS	COVERAGE				DRY TIME HRS. AT 21°C (70°F) – 27°C (80°F) & 50% HUMIDITY				THINNING AS NEEDED			CLEAN-UP	MIX RATIO / ACTIVATOR NO.	POT LIFE HRS. AT 21°C (70°F) – 27°C (80°F) & 50% HUMIDITY	DRY HEAT RESISTANCE (°C/°F)	VOC LEVEL (g/l) VOLATILE ORGANIC COMPOUND	FLASH POINT (°C/°F)	APPLICATION TEMPERATURE RANGE
	WET		DRY			PRACTICAL ASSUMES 15% MATERIAL LOSS		THEORETICAL AT 1 MIL DFT.		TACK-FREE	HANDLE	RECOAT	TRAFFIC	BRUSH / ROLLER	AIRLESS SPRAY	AIR-ATOMIZED SPRAY							
	MILS	MICRONS	MILS	MICRONS		ft²/gal.	m²/l	ft²/gal.	m²/l														
5600 System– Acrylic Urethane Floor Paint	5-8	125-200	1.5-2.0	37.5-50	25-30	170-400	4.2-6.6	400-480	9.8-11.8	1-2	—	4-6	24	—	—	—	Soap/Water	—	—	—	<100	>93°C (200°F)	10-32°C (50-90°F)
6000 System– Water-Based Epoxy	4-6.5	100-162.5	1.5-2.5	37.5-62.5	33-37	200-350	4.9-8.6	500-600	12.3-14.8	—	—	1-2	16-72	—	—	—	Soap/Water	7:1 6001604	6-8	—	<250	96°C (205°F)	15-38°C (60-100°F)
S60 Water-Based Epoxy Floor Coating	7-10	175-250	3.5-5	87.5-125	50	135-195	3.3-4.8	800	19.7	30 min.	—	1-2	24	Water	Water	Water	Soap/Water	2:1	2	—	0	>93°C (200°F)	10-32°C (50-90°F)
9100 System DTM Epoxy Mastic (with 9101402 Activator)	6.5-10.5	162.5-262.5	5-8	125-200	78-81	125-225	3.1-5.5	1250-1300	30.8-32.0	6-8	6-12	16-72	—	—	—	160402 10%	160402	1:1 70°F	2-41	149°C (300°F)	<340	43°C (110°F)	10-38°C (50-100°F)
6200 System – Fast-Cure Epoxy Floor Coating	3.5-8.0	87.5-200	2.5-5.5	62.5-137.5	69	300-350	7.4-8.6	—	—	—	—	4	5	—	—	—	160402	1:1	2-4	149°C (300°F)	<250	B:26°C A:-9°C	10-38°C (50-100°F)
6600 System– Heavy Duty Maintenance Floor Coating	16	400	16	400	100	100	2.5	1604	39.5	—	—	10-24	10-72	—	—	—	160402	2:1 1.6:1	½	—	<100	>100°C (212°F)	16-32°C (60-90°F)
6500 System– High Traffic Floor Coating	16	400	16	400	100	100	2.5	1604	39.5	—	—	10-24	10-72	—	—	—	160402	1.6:1	½	—	<100	>100°C (212°F)	16-32°C (60-90°F)
5500 System– Acrylic Dustproofer Floor Sealer	—	—	—	—	—	150-400	—	—	—	—	—	3	12	—	—	—	Soap/Water	—	—	—	<100	>93°C (200°F)	10-38°C (50-100°F)
6711 System– Clear Water-Based Polyurethane	2-3.5	50-87.5	.5-1.0	12.5-25	29	400-800	9.8-19.7	465	11.4	¼	—	½	24	—	—	Water up to 5%	190402 Soap/Water	—	—	—	<250	>93°C (200°F)	10-38°C (50-100°F)
EasyClear Epoxy Maintenance Floor Coating	3.0-7.0	75-175	2.0-5.0	50-125	76	400	9.8	1,221	30.0	—	—	10-24	10-96	—	—	—	160402	2:1	1.5	—	<100	B:0°C A:112°C	15.5-29°C (60-85°F)
AS5600 System– Floor and Deck Coating	20-23	500-575	12-15	300-375	62-64	60-70	1.5-1.7	—	—	—	—	—	24	—	—	—	Soap/Water	—	—	—	<50	>93°C (200°F)	10-38°C (50-100°F)
AS5400 System– 1-Step Epoxy Floor Coating	30-35	750-875	17-20	425-500	60-62	50	1:23	—	—	—	—	12	24	—	—	—	160402	—	—	—	<340	27°C (81°F)	10-38°C (50-100°F)
AS6000 System– Low Profile Epoxy Floor Coating	16-20	400-500	10-15	250-375	65-75	80-100	1.9-2.4	—	—	—	—	—	48	—	—	—	Soap/Water	3.7:1 AS60	1	—	<70	>93°C (200°F)	10-38°C (50-100°F)
AS9100 System– High Performance Epoxy Floor Coating	27-40	675-1000	17-25	425-625	62	40-60	1-1.5	—	—	—	—	—	72	—	—	—	160402	9.6:1 AS91	4	—	<250	27°C (81°F)	10-38°C (50-100°F)
AS6500 System– 100% Solids Epoxy Floor Coating	27-40	675-1000	26-40	650-1000	96-100	25-35	0.6-0.9	—	—	—	—	—	48	—	—	—	160402	4.1:1 AS65	1	—	<30	>93°C (200°F)	10-38°C (50-100°F)
FastKote®	4	100	3.4	100	100	400	37.16	—	—	1-2	3-6	2-12	24	—	—	—	Acetone	—	18	—	<10	—	10-32°C (50-90°F)
FastKote® UV	4	100	3.2	80	100	400	37.16	—	—	1-2	3-6	4-12	24	—	—	—	Acetone	—	18	—	0	—	10-32°C (50-90°F)
EcoPrime	2-3	50-75	2-3	50-75	100	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

Schedule a walkthrough to explore flooring options tailored to your facility

CONTACT US





Schedule a walkthrough
to explore flooring options
tailored to your facility

CONTACT US

Custom Rust-Oleum® Industrial Tint Program

“At Rust-Oleum we are about surface solutions and opportunities. We pride ourselves on maintaining the high performance and durability of our Industrial lines. Rust-Oleum has tinting capabilities which creates endless colour options without sacrificing the performance of the products. From standard colours to custom tints — **Rust-Oleum has the solution for you!”**

 **RUST-OLEUM**
CANADA

CONCORD ON L4K 4T8