

R&S® TSMA6 AUTONOMOUS MOBILE NETWORK SCANNER



Drive and walk testing with maximum flexibility



Product Brochure
Version 10.00

ROHDE & SCHWARZ

Make ideas real



AT A GLANCE

The compact R&S®TSM A6 autonomous mobile network scanner is an integrated solution for efficient drive and walk testing. It offers maximum performance, autonomy and connectivity with an integrated high-performance PC and a mobile network scanner to comply with the latest requirements for state-of-the-art mobile network testing.

In-building and urban hot spot traffic is growing tremendously, and with it mobile network testing requirements. A typical measurement setup no longer consists of a network scanner and a mobile phone. It is now a high-performance setup of scanners and smartphones/devices processing a huge amount of measurement data to obtain deep real-time network insights and analyze user experience. Accurate scanner based RF measurements and device based user experience analysis complement each other, creating a perfectly aligned ecosystem.

The R&S®TSM A6 combines the technology of the R&S®TSM E6 multitechnology network scanner with a high-performance Intel CPU based PC. The system can run Windows PC based drive test software, which supports multiple external devices such as smartphones connected via USB.

With its ultrabroadband frontend, the integrated scanner measures all supported technologies from 350 MHz to 6 GHz simultaneously. The future-proof architecture and in-field upgradeability for both hardware and software allow up to 4x4 MIMO measurements and pave the way for 5G.

Weighing only 1360 g and with a sophisticated design and optional hot-swappable batteries, the test and measurement equipment can be stowed in a carrying bag, making it the ideal companion for remote or unattended operation during drive and walk test campaigns.



R&S®TSM A6 with R&S®TSM A6-BP battery pack.

KEY FACTS

- ▶ No limitations in 3GPP (e.g. 5G NR, LTE, WCDMA, GSM, NB-IoT) frequency bands up to 6 GHz, including a multi-GNSS receiver for uninterrupted location tracking
- ▶ More than ten technologies simultaneously in one scanner
- ▶ Supports R&S®TSME30DC and R&S®TSME44DC downconverters for mmWave measurements
- ▶ Compact and lightweight design with customized mechanical concept for cascading multiple scanners
- ▶ Maximum connectivity, with support for additional scanner hardware, Windows based PCs, Android based UEs and tablets using wireless and wired connections
- ▶ Integrated high-performance Intel i7 CPU based PC

BENEFITS

High-performance, multifunctional platform

- ▶ Simultaneous measurements with no limitations in 3GPP frequency bands and technologies with SIB/L3 decoding support
- ▶ Cascading and upward/downward compatibility for a maximum degree of freedom
- ▶ Proof of upgradeability: 5G NR measurements on the R&S®TSMA6
- ▶ Maximum connectivity for challenging measurement campaigns
- ▶ Portable solution to simplify measurement campaigns
- ▶ [page 4](#)

Advanced measurements for deep network insights during measurement campaigns

- ▶ Power spectrum measurement up to 6 GHz for spectrum clearance
- ▶ NB-IoT/Cat NB1 measurements
- ▶ LTE-M measurements
- ▶ Reduced setup time to increase efficiency of drive and walk tests
- ▶ LTE subband measurements
- ▶ Position estimation of base stations
- ▶ [page 10](#)

Wide range of applications in the mobile network testing landscape

- ▶ Controlling and monitoring measurements with smartphones and tablets
- ▶ Running Windows based measurement software on the high-performance integrated PC
- ▶ Open interface and use as OEM
- ▶ [page 12](#)

HIGH-PERFORMANCE, MULTIFUNCTIONAL PLATFORM

Simultaneous measurements with no limitations in 3GPP frequency bands and technologies with SIB/L3 decoding support

The core of the R&S®TSMA6 consists of very fast signal processing with proven algorithms on a high-performance PC and a receiver frontend that seamlessly supports the frequency range from 350 MHz to 6 GHz. Decades of Rohde&Schwarz RF experience allows both to be combined in an extremely compact autonomous scanner. Fully user-configurable and simultaneous measurement tasks cover all major wireless communications standards and offer deep RF and network insights with SIB/layer 3 (SIB/L3) decoding support and advanced measurements in LTE such as allocation analysis. With well-established LTE-Advanced network features such as carrier aggregation, it is designed for high measurement speeds – even in a multicarrier, multitechnology configuration.

Multitechnology measurements are mandatory for 5G NR non-standalone networks. Since information necessary to access the 5G NR carrier is transmitted on LTE, the R&S®TSMA6 is able to decode the latest Rel. 15 SIB messages for LTE-5G NR dual connectivity and to perform these measurements simultaneously with high speed.

The R&S®TSMA6 not only supports measurements based on specific channels and signals, it also decodes L3/MIB-SIB broadcast information from base stations. This feature makes it possible to determine the configuration of the wireless communications network in detail and to easily detect errors. L3/MIB-SIB broadcast information is supported for all major 3GPP technologies.

Examples of simultaneous use of multiple frequencies in different bands for each technology

	North America					Europe		
GSM	850 MHz	1900 MHz				900 MHz	1800 MHz	–
WCDMA	850 MHz	1900 MHz	2100 MHz/ AWS			900 MHz	2100 MHz	–
LTE-FDD, LTE-M	600/700 MHz	850 MHz	1900 MHz	2100 MHz/ AWS	LTE-LAA: 5300 MHz	700/800 MHz	1800 MHz	2100 MHz/ 2600 MHz
LTE-TDD	2500 MHz	3400 MHz				2500 MHz	3400 MHz	–
NB-IoT/Cat NB1	700/800/900/1800/1900/2100 MHz					700/800/900/1800/1900/2100 MHz		
Spectrum	UL and DL frequencies					UL and DL frequencies		
5G NR	sub6 GHz/FR1 (native) mmWave/FR2, 24 GHz to 30 GHz (requires R&S®TSME30DC) or 24 GHz to 44 GHz (requires R&S®TSME44DC)							

Technology support at a glance

	Technologies supported	MIB, SIB decoding
GSM	•	•
WCDMA	•	•
CDMA2000®	•	•
1xEV-DO (Rel. 0/Rev. A/Rev. B)	•	•
WiMAX™ IEEE 802.16e	•	•
TD-LTE	•	•
LTE-FDD	•	•
LTE-M	•	•
NB-IoT/Cat NB1	•	•
TETRA, TETRA DMO	•	•
TD-SCDMA	•	•
RF power scan	•	–
CW channel power RSSI scan	•	–
5G NR (FR1, FR2)	•	operation mode detection (NSA, SA), MIB, SIB1, OSI (SIB2 to SIB9); if broadcasted


Cascading and upward/downward compatibility for a maximum degree of freedom

Each investment in measurement tools should be long-term, ensuring maximum investment protection. The R&S®TSMA6 achieves this by offering upward and downward compatibility for hardware and software. The synchronization interface has been designed to interact with a predecessor R&S®TSME, with an R&S®TSME6 for MIMO measurements or to control the R&S®TSME30DC/TSME44DC downconverter for measuring above 6 GHz for 5G NR applications. The result is a future-proof product that offers users maximum degree of freedom. For details, see the R&S®TSME30DC/R&S®TSME44DC product brochure (PD 3607.9608.12).

A simple software upgrade allows the R&S®TSMA6 to perform 5G NR measurements and achieve upward compatibility. Software options for existing technologies, for example TETRA, GSM, WCDMA, LTE, LTE-M and NB-IoT, ensure downward compatibility.

Multiple units can be conveniently cascaded thanks to a customized mechanical concept. A click-in mechanism creates a vibration-proof stack of seamlessly and mechanically connected R&S®TSMA6 scanners.

R&S®TSMA6 with battery pack, R&S®TSME6 and R&S®TSME30DC/TSME44DC on top.

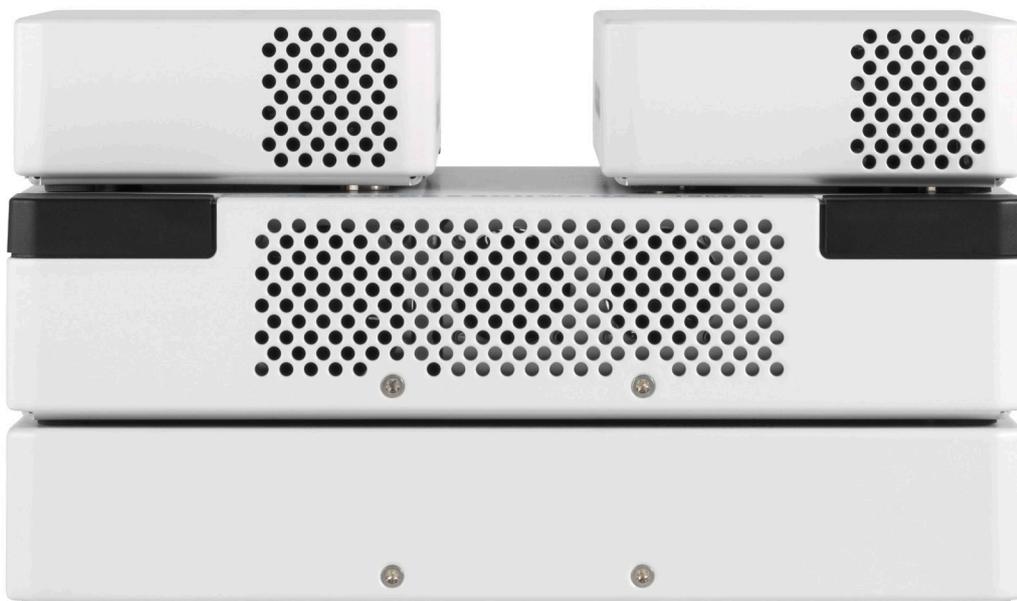

Proof of upgradeability: 5G NR measurements on the R&S®TSMAG


5G NR is expected to become the leading radio access technology in mobile networks in the next years. New use cases such as ultra high speed internet access, massive numbers of connected devices and low latency connections require a completely new radio interface compared to LTE. This leads to a very flexible physical layer that can be adapted to different use cases to enhance network availability and maximize quality of service – from low latency to ultra high data rate applications. One example for flexibility is the position of synchronization signal blocks (SSB). SSBs do not necessarily have to be in the center of the 5G NR carrier. It is almost impossible to detect them manually without having detailed information about the network configuration. The automatic channel detection (ACD) feature finds the frequency and transmission case of 5G NR SSBs without any user input except the frequency range where the algorithm should search for 5G NR SSBs.

A special network configuration in the frequency domain is called dynamic spectrum sharing between 5G NR and LTE. It helps operators rapidly deploy 5G NR and use their spectrum even more efficiently. This puts additional requirements on receivers. The R&S®TSMAG6 is ready to identify and accurately measure such carriers.

Another essential building block of the 5G NR physical layer is the use of beamforming technology. It is the key to overcoming the issue of higher path loss due to operating at higher frequencies. Beamforming is even used for synchronization signals that UEs traditionally use to synchronize with the network. In 5G NR, synchronization signals are also used for channel quality estimations, which are the basis for establishing effective data transmissions.

The R&S®TSMAG6-K50 option enables the R&S®TSMAG6 to measure 5G NR synchronization signal blocks on both sub6 GHz and mmWave spectra with an R&S®TSME30DC (24 GHz to 30 GHz) or R&S®TSME44DC (24 GHz to 44 GHz) downconverter. 5G NR SSB measurements help verify 5G NR coverage and the effect of beamforming, which is a very complex technology involving several components. Each SSB can be transmitted on different beams (depending on the network configuration), which can be measured by the scanner. The scanner is also able to read the MIB content of each SSB and SIB1 to SIB9, if broadcasted by the network. With different SSBs and beams, the scanner results become three dimensional – power and signal-to-noise and interference measurements for each PCI and SSB/beam index deliver a complete set of data to verify the transmission of each SSB/beam. 5G NR SSB measurements are supported for all SSB subcarrier spacings and transmission cases defined for sub6 GHz bands. R&S®ROMES4 provides new views and signals, giving a clear overview of different PCIs and SSBs for all evaluation tasks during measurement and replay.

R&S®ROMES4 drive test software supports the R&S®TSMAG6.

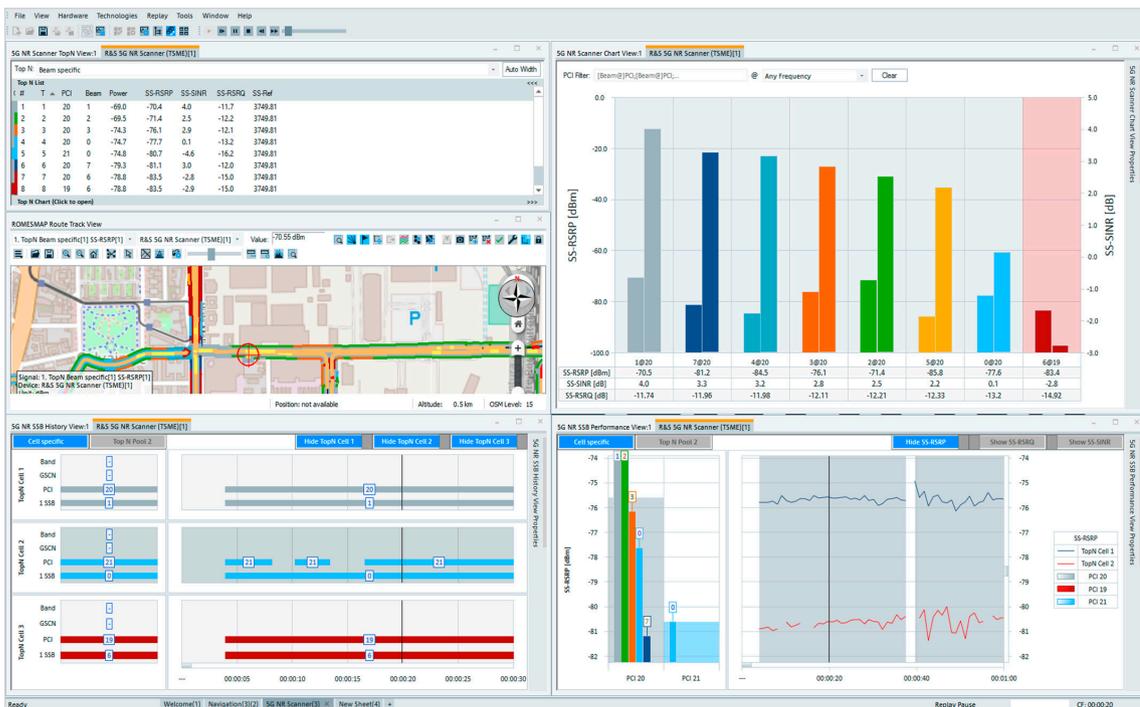


Advanced 5G NR measurements

Network synchronization in the time domain becomes even more important with the introduction of 5G NR in TDD mode. Perfectly synchronized networks in the time domain show better performance because they do not suffer from overlapping uplink and downlink time slots. The R&S®TSMA6 is able to measure the time of arrival offset between the PPS pulse (or the internal receiver clock) and the received 5G NR and LTE synchronization signal blocks (SSB) to determine the quality of network synchronization.

While the time of arrival offset between the PPS pulse and the SSB is a relative value, some measurements require the absolute time of arrival of the 5G NR SSB. Absolute times of arrival are mandatory to measure the time alignment error of a specific site. The entire signal chain including the baseband, signal processing, cables, and antenna elements with phase shifters and filters can add significant time delays until the signal is broadcasted over the air. The receiver can provide absolute and calibrated time of arrival values (UTC time), allowing these delays to be detected and optimized. Time alignment error measurements require an extremely precise time base and stationary measurements to avoid multipath propagation and Doppler shift. Any deviation of a network's time base will lead to a frequency drift. The precise SSB center frequency is therefore measured to detect drifting cells in the frequency domain.

Electromagnetic field strength (EMF) measurements are the basis to prove that the electromagnetic radiation is below the thresholds defined by the regulator. With the usage of new frequency bands and technical features such as beamforming in 5G NR, EMF measurements become even more important. The R&S®TSMA6 controlled by an QualiPoc Android device is able to perform EMF measurements on 5G NR synchronization blocks for further country-specific extrapolation and total EMF calculation.

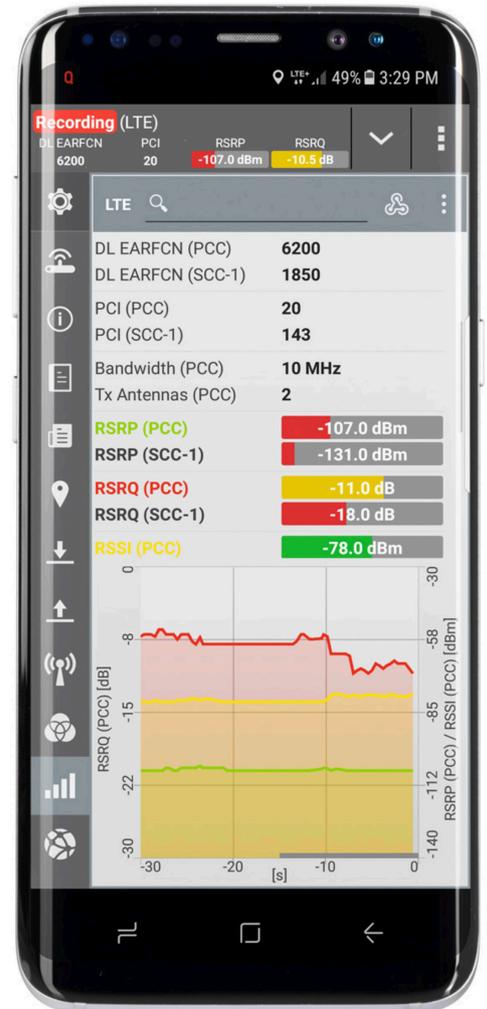

The Android based QualiPoc application running on a smartphone controls the R&S®TSMA6.

Maximum connectivity for challenging measurement campaigns

Data collection in current measurement campaigns is not limited to a single data source. Multitechnology, multi-scanner measurements (MIMO) and user equipment based measurement data complement each other, yielding a full set of data for deep RF insights and KPIs for user experience measurements such as video quality. Seven USB ports (4 × USB 3.0, 1 × USB-C, 2 × USB 2.0) enable the connection of additional data sources such as smartphones, IoT chipsets and additional frontends, for example for 4x4 MIMO measurements. The R&S®TSMA6 can accept all other wired connections from a PC, such as HDMI™ or an Ethernet port for network access. The scanner also has a dedicated LAN port for a second scanner frontend (R&S®TSME6).

Wireless connections such as Wi-Fi and Bluetooth® allow portable devices to set up, control and run measurement campaigns on the R&S®TSMA6 via remote desktop with access to Windows based software running on the R&S®TSMA6 and the Android based QualiPoc application running on a smartphone. Controlling the R&S®TSMA6 from a mobile device offers maximum efficiency and convenience for the user and the measurement process.

R&S®TSMA6 rear view with connectors.



Portable solution to simplify measurement campaigns

Getting the equipment ready and handling the equipment during the measurement has a considerable impact on the length of the measurement campaign. The goal is to seamlessly collect all data as quickly as possible.

For precise and uninterrupted location tracking even in critical and dense urban and in-vehicle environments, the R&S®TSMA6 includes a multi-GNSS receiver with exceptionally high sensitivity for position fixing and position tracking that supports all major satellite navigation systems. Using up to three satellite systems in parallel for precise location tracking, the multi-GNSS chip uses the results from the integrated gyro/acceleration sensor to bridge gaps in satellite based data, for example when going through road tunnels in a vehicle (requires a specific mounting solution).

The R&S®TSMA6 can optionally be equipped with the R&S®TSMA6-BP battery pack to allow mobile operation. The battery pack is attached to the scanner's housing via a vibration-proof mechanical connection and has two easily accessible, rechargeable and hot-swappable batteries. The R&S®TSMA6 is always ready for operation and no separate charger is required since the batteries can be charged directly in the instrument. Charging takes place automatically when the R&S®TSMA6 is connected to a power supply, e.g. in a vehicle or an external power supply.

The optional R&S®TSMA6-ZCB2 carrying bag offers convenience when performing measurements. The bag has room for the R&S®TSMA6 with a battery pack, two spare batteries, a mobile phone or tablet, a one-port (R&S®TSME-Z10) or two-port antenna (R&S®TSME-Z11) and a R&S®TSME6 for 2x2 MIMO measurements or a R&S®TSME30DC/TSME44DC and an mmWave antenna mounting kit. The battery pack is easily accessible so its charge level can be checked at any time and batteries can be quickly replaced during operation.

R&S®TSMA6-BP battery pack.



R&S®TSMA6-ZCB2 carrying bag shown here with an R&S®TSMA6, a battery pack and a tablet.

ADVANCED MEASUREMENTS FOR DEEP NETWORK INSIGHTS DURING MEASUREMENT CAMPAIGNS

Power spectrum measurement up to 6 GHz for spectrum clearance

To overcome capacity problems in mobile networks, additional spectra will be acquired. According to the latest frequency plans, the spectrum from 3.2 GHz to 6 GHz will be used for additional LTE carriers as well as for the fifth generation of mobile networks, which is ready to become the main technology and is expected to grow significantly during the next few years. To ensure the best quality of services after a commercial network rollout, spectrum measurements during the early engineering phase must ensure that the new spectrum is free of interference. Especially when it comes to overlapping spectra with Wi-Fi, which is heavily occupied by Wi-Fi access points, a general picture of the spectrum occupancy is needed in order to detect the noise floor and identify critical areas for network rollout regarding the signal to interference and noise ratio (SINR).

NB-IoT/Cat NB1 measurements

The R&S®TSMA6-K34 option enables the R&S®TSMA6 to measure in NB-IoT/Cat NB1 networks. NB-IoT/Cat NB1 is a 3GPP standard for connecting a huge number of devices, such as smart meters, to the internet of things (IoT). While traditional LTE standards mainly enhance throughput and network capacity, NB-IoT/Cat NB1 focuses on low power consumption for IoT devices and maximum availability of the connection, especially indoors.

Indoor measurements require lightweight and ultracompact scanners with low power consumption. For coverage validation, troubleshooting and optimization, the R&S®TSMA6 measures signal power and quality and the power to interference and noise ratio on each available physical cell ID based on synchronization and reference signals.

To efficiently integrate the NB-IoT carrier into the available spectrum, the standard provides three operating modes. The R&S®TSMA6 supports all three modes. The most spectrum-efficient mode is the LTE in-band operating mode, where the NB-IoT carrier uses the spectrum of one LTE physical resource block (PRB). The guard band and standalone operating modes allow NB-IoT deployments independent of the LTE spectrum.

NB-IoT measurements can be run simultaneously with measurements on other technologies such as GSM, LTE and (W)CDMA (with the appropriate R&S®TSMA6 options). For optimization or when troubleshooting, the impact of NB-IoT spectrum on the adjacent GSM/LTE/(W)CDMA spectrum and vice versa can be validated.

LTE-M measurements

LTE-M is another 3GPP standard for connecting things to the internet. LTE-M addresses different use cases than NB-IoT, for instance voice (VoLTE) and mobility. It also provides higher data rates. LTE-M is based on legacy LTE and reuses some of the cell-specific signals. Like NB-IoT, LTE-M uses smart mechanisms to enlarge the link budget. One of these mechanisms is frequency hopping to overcome fading and areas of bad SINR (resulting from LTE traffic and other interference) across the LTE spectrum. This is achieved by dividing the LTE carrier into several LTE-M narrowbands that can handle LTE-M traffic in a manner that suits the RF environment. The R&S®TSMA6 supports LTE-M measurements that deliver RF parameters (SINR, RSRP, RSRQ and RSSI) on each of these LTE-M narrowbands via a PCI interface to identify, for example, the best narrowband for LTE-M data transmission. In R&S®ROMES4, it is also possible to compare all narrowbands at a glance to evaluate the RF environment in the surrounding narrowbands. With fading and interference from LTE traffic and other pilot signals, the RF parameter differences between the narrowbands can be quite remarkable. It is also possible to compare scanner based and module based results to verify if the LTE-M module uses the best narrowband for data transmission.

Reduced setup time to increase efficiency of drive and walk tests

Setting up the measurement campaign is the most time-consuming process that has to be accomplished before capturing valuable field data during drive and walk tests. To reduce costs and setup time, the R&S®TSMA6 provides a helpful channel configuration feature for major 3GPP standards such as 5G NR, NB-IoT, LTE, LTE-M, WCDMA, GSM and CDMA2000®/1xEV-DO. In combination with the R&S®ROMES4ACD or R&S®TSMA6-K40 automatic channel detection option, the R&S®TSMA6 automatically detects active channels in a specified 3GPP band or frequency range. The results obtained during the automatic channel detection process can be directly added to the workspace, even during the measurement campaign. In shared spectrum networks, technologies, frequency bands and carrier bandwidths are no longer static. For example, LTE can be deployed in a spectrum traditionally used for GSM or WCDMA. During drive and walk tests in such networks, frequent bandwidth and channel changes can regularly occur in urban or rural environments depending on the rollout strategy. To speed up the detection process or release signal processing capacity for other parallel measurement tasks, users can enhance the automatic channel detection feature with an optional spectrum scan.

Without the R&S®ROMES4ACD option, automatic channel detection is provided by the R&S®TSMA6-K40 option via the open Windows API virtual communications (ViCom) interface, which currently supports 5G NR, NB-IoT, LTE, WCDMA and CDMA2000®/1xEV-DO.

LTE subband measurements

Passive scanner measurements are no longer limited to measuring on specific signals or channels or decoding SIB/layer 3 information. Using intelligent and optimized signal processing algorithms, the R&S®TSMA6 is able to offer deep network insights that go beyond pure RF parameters.

Dedicated measurements on reference signals of each LTE resource block give the complete picture of broadband carriers. They also provide insights into fading effects, wideband and narrowband interference and in-band operation of advanced IoT technologies. These technologies occupy LTE resource blocks such as LTE-M or NB-IoT/Cat NB1 and might affect neighboring subbands. To estimate the upper limit of data throughput based on the current RF conditions for each resource block, the scanner delivers an estimated throughput value, which is visualized by R&S®ROMES4 for each data layer in MIMO measurement setups.

Position estimation of base stations

During a drive test, R&S®ROMES4 uses the measurement and location data delivered by the R&S®TSMA6 to estimate the geographic position of the base stations. This calculation is fast and accurate. 5G NR, GSM, WCDMA, LTE, NB-IoT, CDMA2000®/1xEVDO and TETRA networks are supported in parallel. This unique feature enables users to quickly generate a base station list for export or graphic display.

WIDE RANGE OF APPLICATIONS IN THE MOBILE NETWORK TESTING LANDSCAPE

Controlling and monitoring measurements with smartphones and tablets

During a measurement campaign, the R&S®TSMA6 records the current RF environment while the Android based QualiPoc application carries out extensive service tests on smartphones, including evaluation of voice and video quality. QualiPoc Android clearly displays the measurement values recorded by the scanner on a monitor. Coupled with the R&S®TSMA6, QualiPoc delivers all the required measurement data. User-friendly operation enables complicated tasks such as optimization in multi-story buildings to be performed precisely and efficiently.

Running Windows based measurement software on the high-performance integrated PC

The R&S®TSMA6 features a fully functional computer running Windows 10 IoT Enterprise. Any drive test software that supports the R&S®TSME6 can be installed. External storage media containing software to be installed can be connected via USB.

No cables or accessories are required for mobile use. The software running on the scanner can be controlled via WLAN from a tablet with any Windows Remote Desktop application. The app is available for iPad, Android and Windows tablets.


Test phones can also be connected for voice and data tests since the drive test software runs on the R&S®TSMA6 computer. This makes the R&S®TSMA6 scanner a compact, fully functional mobile measuring system. In addition to mobile operation, the R&S®TSMA6 can be used as a fixed probe in this configuration. Remote access is provided via an IP network. Multiple devices can be integrated into such a system.

Open interface and use as OEM

Many manufacturers have firmly integrated Rohde&Schwarz scanners into their drive test toolchain. The outstanding signal processing capabilities and the user-friendly Windows API virtual communications (ViCom) interface with sample code make it very easy for users to get the most out of every Rohde&Schwarz drive test scanner.

The API delivers all the data that the scanner can measure. It measures cell performance and quality parameters at high speed and collects the GSM, WCDMA, LTE (FDD/TDD), LTE-M, 5G NR, NB-IoT, TD-SCDMA, CDMA2000®, 1xEV-DO and WiMAX™ system information transmitted via the air interface. TETRA networks are exclusively measured using R&S®ROMES4. In addition to cell measurements, in-depth spectrum analysis can be performed simultaneously in all bands. GPS information and scanner status are also transmitted via the interface.

Measurement software runs under Windows on the R&S®TSMA6

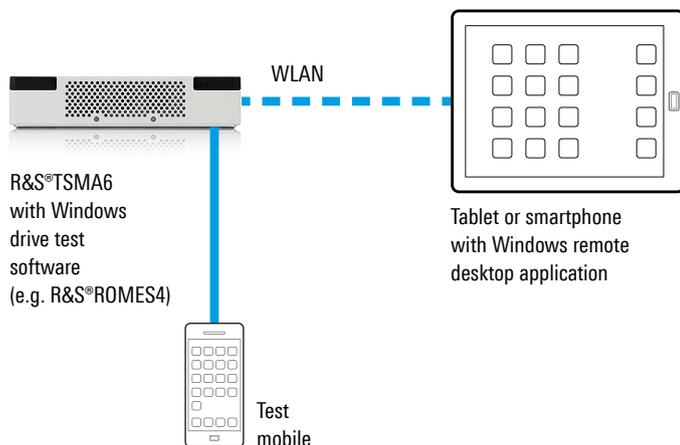

SPECIFICATIONS

Specifications		
RF characteristics		
Frequency range		350 MHz to 6 GHz
Level measurement uncertainty	350 MHz to 3 GHz	< 1 dB
	3 GHz to 6 GHz	< 1.5 dB
Maximum operating measurement range input level		-10 dBm (nom.)
Maximum extended measurement range input level	in extended range mode: not 100% compliant with measured values	+10 dBm (nom.)
Maximum safe permissible input level		+20 dBm/10 V DC
Noise figure	900 MHz	5 dB (meas.)
	2100 MHz	5 dB (meas.)
	3500 MHz	6 dB (meas.)
	5100 MHz	7 dB (meas.)
Intermodulation-free dynamic range	900 MHz	-2 dB (meas.)
	2100 MHz	-2 dBm (meas.)
	3500 MHz	-9 dBm (meas.)
	5100 MHz	-14 dBm (meas.)
RF receive paths		1
VSWR (preselection on/off)	$350 \text{ MHz} \leq f \leq 1.6 \text{ GHz}$	< 2.7/2.0 (meas.)
	$1.6 \text{ GHz} \leq f \leq 2.45 \text{ GHz}$	< 2.6/1.7 (meas.)
	$2.45 \text{ GHz} \leq f \leq 3.6 \text{ GHz}$	< 3.0/2.3 (meas.)
	$3.6 \text{ GHz} \leq f \leq 6.0 \text{ GHz}$	< 3.4/2.6 (meas.)
LTE/LTE-M characteristics		
Frequency bands supported		no restrictions
Measurement modes	automatic detection of carrier bandwidth	LTE-FDD, LTE-TDD, LTE-M
Measurement speed (LTE/LTE-M)	automatic detection of all 504 physical cell IDs with SIB decoding active/two adjacent channels	max. 330 Hz/25 Hz (meas.)
Physical decoding accuracy		
Sensitivity for initial physical cell ID decoding	SYNC signal power (LTE)	-128 dBm (meas.)
	RSRP (LTE/LTE-M)	-147 dBm/-132 dBm (meas.)
Sensitivity after successful physical cell ID decoding	SYNC signal power (LTE)	-130 dBm (meas.)
	RSRP (LTE/LTE-M)	-149 dBm/-132 dBm (meas.)
WB RS SINR dynamic range		-20 dB to +42 dB (meas.)
SYNC SINR dynamic range		-20 dB to +42 dB (meas.)
PCI false detection (ghost code)		< 10 ⁻⁸
NB-IoT/Cat NB1 characteristics		
Frequency bands supported		no restrictions
NB-IoT/Cat NB1 measurement modes		<ul style="list-style-type: none"> ▶ standalone ▶ guard band ▶ in-band
Sensitivity for physical cell ID decoding (initial decoding)	SYNC signal power (NSSS power)	-132 dBm (meas.)
	reference signal power (NRSRP)	-143 dBm (meas.)
Sensitivity for physical cell ID decoding (after successful decoding)	SYNC signal power (NSSS power)	-135 dBm (meas.)
	reference signal power (NRSRP)	-146 dBm (meas.)
SYNC CINR dynamic range	SYNC signals (NSSS CINR)	-15 dB to +30 dB (meas.)
	reference signals (NRS CINR)	-15 dB to +30 dB (meas.)
Demodulation threshold	sync signal power (NSSS power)	-120 dBm (meas.)
Measurement speed		5 Hz (single channel) (meas.)
PCI false detection (ghost code)		< 10 ⁻⁸

Specifications

5G NR characteristics

Frequency bands supported		FR1, sub6 GHz, FR2 (24 GHz to 30 GHz)
SSB subcarrier spacings supported		15 kHz, 30 kHz, 120 kHz, 240 kHz
SSB periodicities supported		5 ms, 10 ms, 20 ms, 40 ms, 80 ms, 160 ms
SSB sensitivity (single PCI)	SS-RSRP (10 ms periodicity, 30 kHz subcarrier spacing)	-150 dBm (meas.)
	SS-RSRP (40 ms periodicity, 30 kHz subcarrier spacing)	-142.5 dBm (meas.)
	SS-RSRP (5 ms periodicity, 15 kHz subcarrier spacing)	-156 dBm (meas.)
	SS-RSRP (20 ms periodicity, 15 kHz subcarrier spacing)	-149 dBm (meas.)
SSB index detection threshold (single PCI)	SS-RSRP (10 ms periodicity, 30 kHz subcarrier spacing)	-145 dBm (meas.)
	SS-RSRP (40 ms periodicity, 30 kHz subcarrier spacing)	-140 dBm (meas.)
	SS-RSRP (5 ms periodicity, 15 kHz subcarrier spacing)	-153 dBm (meas.)
	SS-RSRP (20 ms periodicity, 15 kHz subcarrier spacing)	-146 dBm (meas.)
	SS-RSRP (20 ms periodicity, 120 kHz subcarrier spacing)	-136 dBm (meas.)
SINR dynamic range	SS-RSRP (20 ms periodicity, 240 kHz subcarrier spacing)	-130 dBm (meas.)
	20 ms periodicity, 30 kHz subcarrier spacing	-19 dB to +40 dB
Measurement speed (single PCI)	20 ms periodicity, 240 kHz subcarrier spacing	-15 dB to +40 dB
	20 ms periodicity, 30 kHz subcarrier spacing	49 Hz (meas.)
	40 ms periodicity, 30 kHz subcarrier spacing	26 Hz (meas.)
	20 ms periodicity, 120 kHz subcarrier spacing	49 Hz (meas.)
Minimum MIB demodulation threshold	80 ms periodicity, 120 kHz subcarrier spacing	14 Hz (meas.)
	SS-RSRP	-144 dBm
Minimum SIB demodulation threshold	SS-SINR	-21 dB (meas.)
	SS-RSRP	-123 dBm
Time base accuracy (for time alignment measurements)	SS-SINR	-5 dB (meas. relative to AWGN)
	depending on quality of GNSS signal	5 ns to 30 ns (meas.)

WCDMA characteristics

Frequency bands supported		no restrictions
Number of RF carrier frequencies		max. 32
Measurement speed	high speed/high dynamic mode, automatic detection of all 512 scrambling codes	300 Hz/80 Hz with BCH demodulation (meas.)
Scrambling code detection sensitivity	Sensitivity for initial SC detection	high speed/high dynamic mode
	Sensitivity after successful SC detection	high speed/high dynamic mode
Scrambling code false detection (ghost code)		-119 dBm/-127 dBm (meas.)
		-124 dBm/-132 dBm (meas.)
Dynamic range E_c/I_0 for initial detection	high speed/high dynamic mode	< 10^{-9}
Dynamic range E_c/I_0 after successful detection	high speed/high dynamic mode	-20 dB/-26 dB (meas.)
Min. BCH demodulation threshold E_c/I_0	high speed/high dynamic mode	-23 dB/-31 dB (meas.)
		> -14 dB/-20 dB (meas.)

GSM characteristics

Frequency bands supported		no restrictions
Measurement modes	in parallel	DB/TCH/SCH code power, TCH total in-band power, timeslot power, GSM spectrum, BCH demodulation for all system information types
Measurement speed	with SI decoding active	720 channels/s (meas.)
Sensitivity	detection/BSIC decoding/BCH decoding	-124 dBm/-122 dBm/-117 dBm (meas.)
BSIC decoding dynamic range	Sensitivity for initial BSIC detection	$C/I > -2$ dB (meas.)
	Sensitivity after successful BSIC detection	$C/I > -24$ dB (meas.)
BCCH decoding dynamic range		$C/I > 0$ dB (meas.)

Specifications

CDMA2000® characteristics

Frequency bands supported		no restrictions
Number of RF carrier frequencies		max. 32
Measurement speed	automatic detection of all 512 PN codes	max. 70 Hz, with BCH demodulation (meas.)
PN detection sensitivity (initial decoding)	RSCP without/with demodulation	-130 dBm/-125 dBm (meas.)

1xEV-DO characteristics (Rel. 0/Rev. A/Rev. B)

Frequency bands supported		no restrictions
Number of RF carrier frequencies		max. 32
Measurement speed		max. 20 Hz, with BCH demodulation (meas.)
PN detection sensitivity (initial decoding)	RSCP with demodulation	-122 dBm (meas.)

TD-SCDMA characteristics

Frequency bands supported		no restrictions
Number of RF carrier frequencies		max. 32
Measurement speed	high speed	40 Hz, with BCH demodulation (meas.)
	high sensitivity	15 Hz, with BCH demodulation (meas.)
Automatic detection		all 128 scrambling codes
Scrambling code detection sensitivity		
Sensitivity for initial BTS detection (DwPTS)	high speed/high sensitivity	-119 dBm/-118 dBm RSCP (meas.)
Sensitivity for initial SC detection (midamble)	high speed/high sensitivity	-119 dBm/-119 dBm RSCP (meas.)
Sensitivity after successful BTS detection	high speed/high sensitivity	-120 dBm/-121 dBm (meas.)

TETRA characteristics

Measurement type		RF parameters, constellation diagram/EVM measurements
TETRA bands supported		350 MHz to 6 GHz
Number of RF carrier frequencies	within a 10 MHz downlink band	max. 400
Channel resolution		25 kHz (QPSK)
Measurement speed		max. 8000 channels/s, 20/s for a 10 MHz block (meas.)
Sensitivity (RSSI)	RSSI measurements	-128 dBm (meas.)
	TETRA BSCH decoding (BSCH decoding for channels with SNR > 8 dB)	-121 dBm (meas.)
	BER measurements	-121 dBm (meas.)

WiMAX™ characteristics

Frequency bands supported		no restrictions
Measurement speed	automatic detection of all 114 preamble indices	9 channels/s (meas.)
Preamble decoding accuracy	frame duration: 5 ms, FFT size: 1024, bandwidth: 10 MHz/2.657 GHz	±1 dB (-20 dBm to -110 dBm) (meas.)
Sensitivity for initial preamble decoding	RSSI	-105 dBm (meas.)
Sensitivity after successful preamble decoding	RSSI	-129 dBm (meas.)
SINR dynamic range		-22 dB to +26 dB (meas.)

RF power scan

Frequency range		350 MHz to 6 GHz
Frequency resolution		140 Hz to 1.438 MHz
Sensitivity	22.46 kHz (RMS) frequency resolution, at 900 MHz	-126 dBm (meas.)
	140 Hz RBW, RMS, at 900 MHz	-147 dBm (meas.)
Scan speed	180 kHz resolution, 100 MHz span, 20 MHz bandwidth, FFT size: 128	312 Hz (meas.)
	11.23 kHz resolution, 10 MHz span, 10 MHz bandwidth, FFT size: 1024	950 Hz (meas.)
	140 Hz resolution, 1 MHz span, 1 MHz bandwidth, FFT size: 8192	130 Hz (meas.)
RSSI scan speed	20 MHz span, 20 MHz bandwidth, FFT size: 1024	99 GSM channels: max. 950 Hz (94 050 channels/s) (meas.)
	20 MHz span, 20 MHz bandwidth, FFT size: 256	4 WCDMA channels: max. 950 Hz (3800 channels/s) (meas.)
	20 MHz span, 20 MHz bandwidth, FFT size: 256	1 LTE channel (100 RB): max. 950 Hz (950 channels/s) (meas.)

Specifications		
Maximum number of frequency ranges		20
Detectors		max., min., RMS, auto
CW scanning		
Sensitivity channel power RSSI scan	200 kHz channel (GSM)	-119 dBm (meas.)
	5 MHz channel (UMTS)	-104 dBm (meas.)
	20 MHz channel (LTE)	-98 dBm (meas.)
Scan rate	200 kHz channel (GSM)	2450 Hz (254 000 channels/s) (meas.)
	5 MHz channel (UMTS)	13 100 Hz (52 400 channels/s) (meas.)
	20 MHz channel (LTE)	12 995 Hz (12 995 channels/s) (meas.)
Integrated PC		
Processor		Intel® Core™ i7-7567U, dual core, 3.5 GHz (Turbo Boost: 4.0 GHz), 4 Mbyte cache
Memory	standard hardware configuration R&S®TSMAG-BST	8 Gbyte DDR4 RAM
	extended hardware configuration R&S®TSMAG-B1T	16 Gbyte DDR4 RAM
Graphics		Intel® Iris™ Plus Graphics 650
Hard disk	standard hardware configuration R&S®TSMAG-BST	256 Gbyte (M.2, form factor 2280)
	extended hardware configuration R&S®TSMAG-B1T	1 Tbyte (M.2, form factor 2280)
Operating system		Windows 10 IoT Enterprise x64
Connectivity		
Scanner link		integrated (1 × Gigabit Ethernet)
LAN		2 × Gigabit Ethernet
USB		1 × USB-C 3.1 (multiport, Thunderbolt, display port, standard USB-C 3.1), 4 × USB 3.0, 2 × USB 2.0
WLAN		IEEE802.11b, g, n, IEEE802.11ac (access point limited to 2.4 GHz)
Bluetooth®		Bluetooth® 4.1
Video		1 × HDMI™ 2.0, 1 × USB-C 3.1
GPS	antenna supply	active 3 V, max. 25 mA, SMA female
RF		SMA female
User interface		WebGUI (via LAN or integrated Wi-Fi hotspot); LEDs: 2 × scanner, 1 × firmware based/from microcontroller (power-on, error, warning), 1 × controlled by measurement software
GPS/GLONASS receiver		
Type	max. three in parallel, combinations depend on software implementation	multi-GNSS: GPS, GLONASS, BeiDou, Galileo
Sensitivity (GPS, Galileo, GLONASS)	cold start	-148 dBm
	tracking/reacquisition	-160 dBm
Acquisition (GPS, Galileo, GLONASS)	cold start/hot start	26 s/< 1 s
Channels		50
General data		
Environmental conditions		
Temperature range	operating	0°C to +50°C
	permissible in R&S®TSMAG-ZCB2 carrying bag	-10°C to +55°C (system boot 0°C to +55°C)
		+5°C to +40°C
	storage	-25°C to +70°C
Damp heat		+25°C/+55°C, 95% rel. humidity, noncondensing, cyclic, in line with EN 60068-2-30

Specifications

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude const., 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.9 g (RMS), 300 Hz to 500 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4, procedure I
Power rating		
Supply voltage	DC	11 V to 18 V – 0%/+ 10%
Maximum input current		7 A
Rated power	no external interface devices (USB, HDMI™)	45 W
Product conformity		
Electromagnetic compatibility	EU: in line with Radio Equipment Directive 2014/53/EU	applied harmonized standards: ETSI EN 300489-1, ETSI EN 300489-17, ETSI EN 300489-22, ETSI EN 300328, ETSI EN 301893, ETSI EN 300440, EN 55032, EN 300339, EN 50498
	international	CISPR 32, UN ECE R 10
Electrical safety	EU: in line with Radio Equipment Directive 2014/53/EU	applied harmonized standard: EN 61010-1
	international	IEC 61010-1
Restriction of the use of hazardous substances	EU: in line with 2011/65/EU (RoHS)	applied harmonized standard: EN 50581
International approvals	Korea	KC mark
Calibration interval		24 months
Dimensions and weight		
Dimensions	W × H × D	204 mm × 45 mm × 171 mm (8.15 in × 1.81 in × 6.22 in)
Weight		1360 g (3.0 lb)

R&S®T SMA6-Z1 AC power supply

Power rating		
Input voltage	at +25°C (1.6 A charge/1.6 A discharge)	100 V to 264 V AC
Input frequency		47 Hz to 63 Hz
Input current	230 V AC	0.7 A
Inrush current		70 A
Efficiency		CEC VI
Standby power		0.15 W
Output voltage		15 V DC
Output current	> 100 V AC	7 A
Load regulation		max. ±5%
Standard output connector		7-pin ODU, snap-in male
Standard output cable length		120 cm (3.9 ft)
Temperature range	operating	–10°C to +70°C
	derating 230 V AC	derated linearly from +45°C at 100% load to +70°C at 50% load
	derating 110 V AC	derated linearly from +40°C at 100% load to +60°C at 50% load
	storage	–40°C to +85°C
Product conformity		
Electromagnetic compatibility	EU: in line with Radio Equipment Directive 2014/53/EU	applied harmonized standards: ETSI EN 300489-1, ETSI EN 300489-17, ETSI EN 300489-22, ETSI EN 300328, ETSI EN 301893, ETSI EN 300440, EN 55032, EN 300339, EN 50498
	international	CISPR 32, UN ECE R 10

R&S®TSMA6-Z1 AC power supply

Electrical safety	EU: in line with Radio Equipment Directive 2014/53/EU international	applied harmonized standard: EN 61010-1 IEC 61010-1
Restriction of the use of hazardous substances	EU: in line with 2011/65/EU (RoHS)	applied harmonized standard: EN 50581
Dimensions	W × H × D	67 mm × 35 mm × 167 mm (2.64 in × 1.38 in × 6.57 in)
Weight		583 g (1.29 lb)

R&S®TSMA6-BP battery pack unit

Autonomous power path switching	DC IN path/battery path	yes
Number of battery bays	form factor: battery type	2
Type of supported batteries		R&S®MNT-BP89WH only
Hot-swap support	battery replacement without DC OUT voltage interruption (one battery has to be in bay)	yes
Charging/discharging mode	battery bay 1/bay 2	simultaneous charging, simultaneous discharging
SMB interface to host (R&S®TSMA6)		yes
Charging time for two batteries in parallel	R&S®TSMA6 switched off	typ. 4.0 h
Autonomy	two fully charged batteries in bay, typical CPU load, no external USB devices	typ. 3.5 h
User interface	in combination with the R&S®TSMA6 (one dual color LED per bay)	charging state indicator LED, acoustic battery low charge alarm
	standalone or R&S®TSMA6 switched off (one LED per bay)	charging state indicator LED

General data

Power rating		
Supply voltage		11 V to 28 V DC – 0%/+ 10%
Maximum input current		9 A
Input power	R&S®TSMA6 connected, two batteries charging	110 W
	R&S®TSMA6 powered off, two batteries charging	60 W
Standby power	R&S®TSMA6 powered off, no batteries charging	1 W
Output voltage; output power		
	docking connector (R&S®TSMA6)	
	DC IN powered	18.5 V at 65 W
	battery powered	nom. 15 V at 65 W
	Aux 1/2 connector	
	DC IN powered	18.5 V at 30 W
	battery powered	nom. 15 V at 30 W
	overall output power (R&S®TSMA6 + Aux 1 + Aux 2)	105 W
Efficiency		> 85%
Connectors		DC IN (ODU 7-pin, female), DC OUT (6-pin docking connector), DC Aux (ODU 6-pin, female)
Environmental conditions		
Temperature range	operating	–10°C to +55°C
	charging	0°C to +35°C
	in R&S®TSMA6-ZCB2 carrying bag	0°C to +25°C
	storage ¹⁾	–20°C to +60°C
Damp heat		+25°C/+55°C, 95% rel. humidity, noncondensing, cyclic, in line with EN 60068-2-30

¹⁾ Note: extended exposure to temperatures above +45°C could degrade battery performance and life.

R&S®TSMA6-BP battery pack unit

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude const., 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	random	10 Hz to 500 Hz, acceleration 1.9 g RMS
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4, procedure I
Product conformity		
Electromagnetic compatibility	EU: in line with Radio Equipment Directive 2014/53/EU	applied harmonized standards: ETSI EN300489-1, ETSI EN300489-17, ETSI EN300489-22, ETSI EN300328, ETSI EN301893, ETSI EN300440, EN55032, EN300339, EN50498
	international	CISPR 32, UN ECE R 10
Electrical safety	EU: in line with Radio Equipment Directive 2014/53/EU	applied harmonized standard: EN 61010-1
	international	IEC 61010-1
	UN transportation testing for lithium batteries	UN DOT 38.3
Restriction of the use of hazardous substances	EU: in line with 2011/65/EU (RoHS)	applied harmonized standard: EN 50581
Dimensions (W × H × D)	R&S®TSMA6-BP	204 mm × 45 mm × 171 mm (8.15 in × 1.69 in × 6.22 in)
	R&S®TSMA6-BP plus R&S®TSMA6 stacked	204 mm × 81 mm × 171 mm (8.15 in × 3.19 in × 6.22 in)
Weight	R&S®TSMA6-BP without batteries	824 g (1.82 lb)
	R&S®TSMA6-BP plus two batteries in bay	1720 g (3.79 lb)

R&S®MNT-BP89WH battery

Life expectancy	at +25°C (3.0 A charge/1.2 A discharge)	> 300 cycles, with min. 80% of initial capacity
Charging options		inside the R&S®TSMA6-BP or with separate R&S®TSMA6-BC4 charger
Electrical characteristics		
Nominal voltage		14.4 V
Initial capacity		> 5510 mAh
Maximum charge current	allowed ambient temperature: 0°C to +45°C	3 A
Maximum charge voltage		16.8 V ± 50 mV
Peak discharge current		20 A
Continuous discharge current	+10°C to +65°C	8.25 A
	-10°C to +10°C	linear degradation (0 A to 8.25 A)
Temperature range	operating	0°C to +40°C (charging), -10°C to +55°C (discharging)
	storage ¹⁾	-20°C to +50°C
Product conformity		in line with CE, UL2054, UL1642, FCC, IEC 62133, RoHS, UN38.3
Dimensions	W × H × D	77.4 mm × 22.5 mm × 150.4 mm (3.05 in × 0.89 in × 5.92 in)
Weight		446 g (0.98 lb)

R&S®TSMA6B-BP battery pack unit

Autonomous power path switching	DC IN path/battery path	yes
Number of battery bays	form factor: battery type	2
Type of supported batteries		R&S®MNT-BP99WH only
Hot-swap support	battery replacement without DC OUT voltage interruption (one battery has to be in bay)	yes
Charging/discharging mode	battery bay 1/bay 2	simultaneous charging, simultaneous discharging
SMB interface to host (R&S®TSMA6)		yes
Charging time for two batteries in parallel	R&S®TSMA6 switched off	typ. 4.0 h
Autonomy	two fully charged batteries in bay, typical CPU load, no external USB devices	typ. 3.5 h
User interface	in combination with the R&S®TSMA6 (one dual color LED per bay)	charging state indicator LED, acoustic battery low charge alarm
	standalone or R&S®TSMA6 switched off (one LED per bay)	charging state indicator LED

General data

Power rating		
Supply voltage		11 V to 28 V DC – 0%/+ 10%
Maximum input current		9 A
Input power	R&S®TSMA6 connected, two batteries charging	110 W
	R&S®TSMA6 powered off, two batteries charging	60 W
Standby power	R&S®TSMA6 powered off, no batteries charging	1 W
Output voltage; output power		
	docking connector (R&S®TSMA6)	
	DC IN powered	18.5 V at 65 W
	battery powered	15 V at 65 W (nom.)
	Aux 1/2 connector	
	DC IN powered	18.5 V at 30 W
	battery powered	15 V at 30 W (nom.)
	overall output power (R&S®TSMA6 + Aux 1 + Aux 2)	105 W
Efficiency		> 85%
Connectors		DC IN (ODU 7-pin, female), DC OUT (6-pin docking connector), DC Aux (ODU 6-pin, female)
Environmental conditions		
Temperature range	operating	–10°C to +55°C
	charging	0°C to +35°C
	in R&S®TSMA6-ZCB2 carrying bag	0°C to +25°C
	storage ¹⁾	–20°C to +60°C
Damp heat		+25°C/+55°C, 95% rel. humidity, noncondensing, cyclic, in line with EN 60068-2-30
Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude const., 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	random	10 Hz to 500 Hz, acceleration 1.9 g RMS
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4, procedure I

¹⁾ Note: extended exposure to temperatures above 45°C could degrade battery performance and life.

R&S®TSM A6B-BP battery pack unit

Product conformity		
Electromagnetic compatibility	EU: in line with Radio Equipment Directive 2014/53/EU	applied harmonized standards: ETSI EN300489-1, ETSI EN300489-17, ETSI EN300489-22, ETSI EN300328, ETSI EN301893, ETSI EN300440, EN55032, EN300339, EN50498
	international	CISPR 32, UN ECE R 10
Electrical safety	EU: in line with Radio Equipment Directive 2014/53/EU	applied harmonized standard: EN61010-1
	international	IEC61010-1
	UN transportation testing for lithium batteries	UN DOT 38.3
Restriction of the use of hazardous substances	EU: in line with 2011/65/EU (RoHS)	applied harmonized standard: EN50581
Dimensions (W × H × D)	R&S®TSM A6B-BP	204 mm × 45 mm × 171 mm (8.15 in × 1.69 in × 6.22 in)
	R&S®TSM A6B-BP plus R&S®TSM A6 stacked	204 mm × 81 mm × 171 mm (8.15 in × 3.19 in × 6.22 in)
Weight	R&S®TSM A6B-BP without batteries	674 g (1.49 lb)
	R&S®TSM A6B-BP plus two batteries in bay	1570 g (3.46 lb)

R&S®MNT-BP99WH battery

Life expectancy	at +25°C (3.0 A charge/1.2 A discharge)	> 300 cycles, with min. 63% of initial capacity
Charging options		inside the R&S®TSM A6x-BP or with separate R&S®TSM A-BC2 or R&S®TSM A6-BC4 charger
Electrical characteristics		
Nominal voltage		14.4 V
Initial capacity		> 6900 mAh
Maximum charge current	allowed ambient temperature: 0°C to +45°C	4.8 A
Maximum charge voltage		16.8 V ± 50 mV
Maximum discharge current		10 A
Peak discharge current		20 A
Continuous discharge current	-20°C to +25°C	8.5 A
	-10°C to +10°C	linear degradation (0 A to 8.25 A)
Temperature range	operating	0°C to +40°C (charging), -10°C to +55°C (discharging)
	storage ¹⁾	-20°C to +50°C
Product conformity		in line with CE, UL2054, FCC, PSE, KC, Gost, EAC, CQC, RCM, IEC62133, UN38.3, RoHS, Reach, BIS, BSMI
Dimensions	W × H × D	77.4 mm × 22.5 mm × 150.4 mm (3.05 in × 0.89 in × 5.92 in)
Weight		430 g (0.95 lb)

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

ORDERING INFORMATION

Designation	Type	Order No.
Base unit (includes accessories such as power cable, manual)		
Autonomous mobile network scanner, standard hardware configuration	R&S®TSM A6-BST	4901.0514.02
Scope of delivery: R&S®TSM A6, Ethernet patch cable, R&S®TSM E-Z7 multiband antenna, 4 collar screws, 12 V DC power cable (cigarette lighter plug), active GPS antenna, quick start guide, hinged ferrite		
Hardware options (built-in hardware)		
Battery pack, includes two batteries (R&S®MNT-BP89WH)	R&S®TSM A6-BP	4900.9001.02
Battery pack, includes two batteries (R&S®MNT-BP99WH)	R&S®TSM A6B-BP	4900.9001.20
Hardware upgrade for integrated PC: 1 Tbyte SDD and 16 Gbyte RAM	R&S®TSM A6-B1T	4901.0520.02
Software options (firmware)		
WCDMA scanning	R&S®TSM A6-K21	4901.0789.02
CDMA2000® scanning	R&S®TSM A6-K22	4901.0766.02
GSM scanning	R&S®TSM A6-K23	4901.0795.02
1xEV-DO scanning	R&S®TSM A6-K24	4901.0750.02
CW scanning	R&S®TSM A6-K25	4901.0814.02
TETRA scanning	R&S®TSM A6-K26	4901.0743.02
RF power scan	R&S®TSM A6-K27	4901.0720.02
WiMAX™ scanning	R&S®TSM A6-K28	4901.0737.02
LTE scanning	R&S®TSM A6-K29	4901.0772.02
LTE-MIMO scanning	R&S®TSM A6-K30	4901.0714.02
LTE eMBMS scanning	R&S®TSM A6-K32	4901.0643.02
NB-IoT/Cat NB1 scanning	R&S®TSM A6-K34	4901.0808.02
LTE-M scanning	R&S®TSM A6-K35	4901.0208.02
5G NR scanning	R&S®TSM A6-K50	4901.0966.02
5G NR scanning add-ons	R&S®TSM A6-K51	4901.0250.02
Automatic channel detection	R&S®TSM A6-K40	4901.0614.02
QualiPoc support	R&S®TSM A6-K61	4901.0820.02
Block I/Q data	R&S®TSM A6-K10	Please contact your local Rohde & Schwarz sales office.
Simultaneous measurement in 1 band	R&S®TSM A6-K1B	4901.0695.02
Simultaneous measurement in 2 bands	R&S®TSM A6-K2B	4901.0689.02
Simultaneous measurement in 3 bands	R&S®TSM A6-K3B	4901.0672.02
Simultaneous measurement in 4 bands	R&S®TSM A6-K4B	4901.0666.02
Simultaneous measurement in 5 bands	R&S®TSM A6-K5B	4901.0650.02
Simultaneous measurement in all bands	R&S®TSM A6-KAB	4901.0708.02
Upgrade by one additional band (in field)	R&S®TSM A6-KUB	4901.0950.02
Additional software		
R&S®ROMES4 drive test software	R&S®ROMES4	1117.6885.04
R&S®TSM E6 driver for R&S®ROMES4 drive test software	R&S®ROMES4T1E	1117.6885.82
R&S®ROMES4 option, base station position estimation	R&S®ROMES4LOC	1117.6885.32
R&S®ROMES4 driver, automatic channel detection	R&S®ROMES4ACD	1506.9869.03
ViCom R&S®TSMx scanner interface/API	R&S®VICOM	4900.7309.02
Extras		
Downconverter (24 GHz to 30 GHz)	R&S®TSM E30DC	4901.1004.02
Downconverter (24 GHz to 44 GHz)	R&S®TSM E44DC	4901.2600.02
Carrying bag	R&S®TSM A6-ZCB2	3630.7695.02
Carrying box	R&S®TSM A6-Z5	3630.7689.02
19" rack adapter for up to two R&S®TSM A6	R&S®TSM A6-Z2	4900.8940.02
AC power supply	R&S®TSM A6-Z1	4901.0550.02
4-bay charger for R&S®TSM A6-BP batteries	R&S®TSM A6-BC4	3630.7708.02
Power cable for R&S®TSM A6 battery pack	R&S®TSM A6-BPPT	4900.1730.02
Dual power cable for R&S®TSM A6 battery pack	R&S®TSM A6-BP2T	4901.0566.02
Additional lithium-ion battery pack	R&S®MNT-BP89WH	1321.3772.00
Additional lithium-ion battery pack	R&S®MNT-BP99WH	3660.9109.02

Designation	Type	Order No.
Synchronization cable for one R&S®TSM A6 and one R&S®TSM E6	R&S®TSM E6-ZC2	4900.1800.02
Synchronization cable for one R&S®TSM A6 and up to three R&S®TSM E6	R&S®TSM E6-ZC4	4900.1817.02
Synchronization port to BNC port cable	R&S®TSM E6-ZCS	4901.1540.02
Synchronization port to BNC and SMA cable	R&S®TSM E6-ZCS2	4901.1704.02
Antennas		
Antenna mount, magnetic	R&S®TSM E6-ZA1	1506.9817.02
Antenna mount, fixed	R&S®TSM E6-ZA2	1506.9823.02
Antenna mount, fixed, with integrated GPS antenna	R&S®TSM E6-ZA4	1506.9846.02
Antenna emitter, 406 MHz to 440 MHz (requires antenna mount)	R&S®TSM W-ZE2	1117.8165.00
Antenna emitter, 380 MHz to 430 MHz (requires antenna mount)	R&S®TSM W-ZE7	1519.5709.02
Antenna emitter, 698 MHz to 2700 MHz (requires antenna mount)	R&S®TSM W-ZE8	1506.9852.02
Antenna emitter, 430 MHz to 470 MHz	R&S®TSM W-ZE9	1519.5709.03
Antenna emitter, 600 MHz to 6000 MHz	R&S®TSM E6-ZE17	3666.1574.02
Ultrawideband antenna, 350 MHz to 6000 MHz	R&S®TSM E6-Z9	3590.8039.02
Single-port ultrawideband antenna, 698 MHz to 6000 MHz	R&S®TSM E6-Z10	4900.1917.02
3-port antenna, 698 MHz to 2690 MHz (MIMO) + GPS	R&S®TSM E6-Z11	4900.1923.02
2-port MIMO reference antenna, 698 MHz to 2700 MHz	R&S®TSM E6-Z12	4900.1930.02
3-port MIMO antenna, 698 MHz to 3800 MHz (MIMO) + GPS/GNSS for drive testing	R&S®TSM E6-Z13	4900.1946.02
4-port MIMO antenna, 698 MHz to 3500 MHz (2x2 MIMO) + 5150 MHz to 5850 MHz (2x2 MIMO) for drive testing	R&S®TSM E6-Z14	4900.1952.02
Single-port ultrawideband antenna, 698 MHz to 3800 MHz, with magnetic mount	R&S®TSM E6-Z15	3652.7281.02
2-port antenna, 698 MHz to 3800 MHz, with magnetic mount	R&S®TSM E6-Z15P2	3657.5770.02
Ultrawideband antenna, 615 MHz to 6000 MHz (for walk testing)	R&S®TSM E6-Z17	4900.1969.02
Basic handheld directional antenna	R&S®HE400BC	4104.6000.04
Log-periodic antenna module, 450 MHz to 8 GHz	R&S®HE400LP	4104.8402.02
N (m) to SMA (m) adapter	R&S®TSM A6-ZHE4	4900.9660.02
PC accessories		
USB 3.0 to Gbit LAN adapter	R&S®TSPC-U2L	3593.8430.02
USB-C to dual Gbit LAN adapter	R&S®TSPC-U2L2	4900.8970.02
5-port USB or AC-powered LAN switch	R&S®TSPC-LS	3624.8364.02
External DVD drive	R&S®TSPC-DVDD	3592.4053.02
10" portable monitor, HDMI™	R&S®TSPC-MMON	3592.4047.02
Compact keyboard, US, with trackball, USB	R&S®TSPC-KEYB	1508.1607.02
Surface Pro 4, remote tablet	R&S®TSPC-SF4P	3623.3981.02

Warranty		
Base unit		3 years
All other items ¹⁾		1 year
Options		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

¹⁾ For options that are installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1-year warranty.

Your local Rohde & Schwarz expert will help you determine the optimum solution for your requirements. To find your nearest Rohde & Schwarz representative, visit www.rohde-schwarz.com

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license. CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA). WiMAX Forum is a registered trademark of the WiMAX Forum. WiMAX, the WiMAX Forum logo, WiMAX Forum Certified, and the WiMAX Forum Certified logo are trademarks of the WiMAX Forum. The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

Service that adds value

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz electronics group offers innovative solutions in the following business fields: test and measurement, broadcast and media, secure communications, cybersecurity, monitoring and network testing. Founded more than 80 years ago, the independent company which is headquartered in Munich, Germany, has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Mobile network testing

The company's broad and diverse product portfolio for mobile network testing addresses every test scenario in the network lifecycle – from base station installation to network acceptance and network benchmarking, from optimization and troubleshooting to interference hunting and spectrum analysis, from IP application awareness to QoS and QoE of voice, data, video and app based services.

www.rohde-schwarz.com/mnt

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

