Electro Rent

High-Speed Digital System & Semiconductor Catalog

A Better Way to Procure Your Equipment





Table of Contents

Keep Projects Moving Forward 5

Global Resources for Mission-Critical Projects 6

Test Equipment Rental Solutions 7

Product Categories

High-Speed Digital Oscilloscopes 8

Bit Error Rate Testers 12

Sampling Oscilloscopes 14

Arbitrary Waveform Generators 16

Semiconductor Test 18

Phase Noise Analyzers 20

Optical Test 21

LCR & Impedance 22

Full Range of Services 23


AI

Keep Projects Moving Forward

High-Speed Digital & Semiconductor Testing – Built on Decades of Experience

For more than 60 years, Electro Rent has helped engineers solve complex measurement challenges. From characterizing high-speed signals to validating semiconductor designs, we provide the advanced instruments and flexible access needed to help keep critical testing moving.

Your Premier Test Equipment Partner

Electro Rent has a team of experts in test and measurement equipment and applications. We know what it takes to deliver the right configurations on time from world-leading test and measurement manufacturers.

With our global fleet of more than $1 billion in electronic test equipment from more than 200 manufacturers, our solutions help companies meet testing demands while improving operational efficiency.

Experience Our Extensive Inventory

Browse this catalog for our most popular high-speed digital and semiconductor test equipment. If you can't find what you're looking for, give us a call. We have thousands of additional models in stock, with new models being added regularly.

Global Resources for Mission-Critical Projects

Supported by our global inventory centers, we help businesses worldwide with local expertise, responsive support, and strategically located logistics hubs.

Our flexible test equipment solutions are designed to integrate seamlessly into your existing operations. We work with you to reduce the overall cost of testing by improving productivity and reducing equipment management overhead.



$1B+
inventory



95,000+
instruments



200+
manufacturers



7,000+
models available



60+
years of industry experience



20
worldwide locations

Test Equipment
Rental Solutions

Built for flexibility, our rental solutions give you fast, cost-effective access to the test equipment you need. With a broad global inventory and ongoing investment in new technologies, you can scale capacity, access current equipment, and respond to changing project requirements without the commitment of ownership.

- **FULL FLEXIBILITY**
  Upgrade, extend, or end your rental as needed
- **LOCAL PRESENCE**
  Local logistics hubs, sales and support offices
- **EXTENSIVE INVENTORY**
  Thousands of instruments in stock
- **FAST DELIVERY**
  Delivery often within 24-48 hours
- **EXPERT SUPPORT**
  Guidance from our team of specialists, supported by our OEM partners
- **NO OWNERSHIP COSTS**
  Avoid maintenance and calibration costs
- **PAY FOR USE, NOT FOR LIFE**
  Rent from as little as one week, with low-cost, long-term plans available
- **THE LATEST TECHNOLOGY**
  Our updated inventory helps you access the latest equipment

Access equipment from leading manufacturers including:

Anritsu

ANTENNEX

KEYSIGHT

ni

ROHDE&SCHWARZ
Make ideas real

Tektronix®



Keysight UXR1104B

Infiniium UXR-Series Oscilloscope; 110GHz 4CH 256GSa/s

- 110 GHz, 4 channels, 256 GSa/s real-time capture
- 10-bit ADC for ultra-low noise and high signal fidelity
- Up to 2 Gpts memory; DDC upgrade path to 2.16 GHz
- Built for mmWave, USB4, PCIe, DDR and phase-noise work

NEW



Keysight XR804KA-334

Infiniium XR8 Real-Time Oscilloscope; 4 Channels, 33 GHz

- 33 GHz 4 full bandwidth channels 12 bit ADC
- 256 GSa/s sample rate on all channels
- Up to 8 Gpts of memory Upgradable to 33 GHz



Tektronix DPO714AX

7 Series Digital Phosphor Oscilloscope; 25GHz 4CH 125GS/s

- Configured to 25 GHz, 4 channels, up to 125 GS/s
- High ENOB, low noise and low jitter signal path
- Up to 2 Gpoints record length for long captures
- TekScope UI speeds high-speed serial and RF debug



Keysight UXR0594B

Infiniium UXR-Series Oscilloscope; 59GHz 4CH 256GSa/s

- 59 GHz, 4 channels, 256 GSa/s real-time capture
- 10-bit ADC with low noise and low jitter floor
- 500 Mpts/ch standard, upgradable to 2 Gpts/ch
- 160 MHz DDC included; upgradeable to 2.16 GHz



Tektronix DPS75004SX

ATI Performance Oscilloscope System, 33/50 GHz

- 2 Channels @ 50 GHz 200 GS/s, or 4 x 33 GHz 100 GS/s
- > 25 GHz Edge Trigger
- Software Available for PCIe Gen 5/6 Debugging and Compliance Testing



Keysight XR804KA-134

Infiniium XR8 Real-Time Oscilloscope; 4 Channels, 13 GHz

- 13 GHz 4 full bandwidth channels 12 bit ADC
- 256 GSa/s sample rate on all channels
- Up to 8 Gpts of memory Upgradable to 33 GHz | industry standards




Keysight UXR0254BP

Infiniium UXR Real-Time Oscilloscope; 4 Channels, 25 GHz

- 25 GHz 4 full bandwidth channels 10 bit ADC
- 256 GSa/s sample rate on all channels
- Up to 2 Gpts of memory Upgradable to 110 GHz
- Optional calibration module for on-site self-calibration

We have thousands more instruments in our comprehensive equipment inventory.

Scan QR Code to view our full selection.

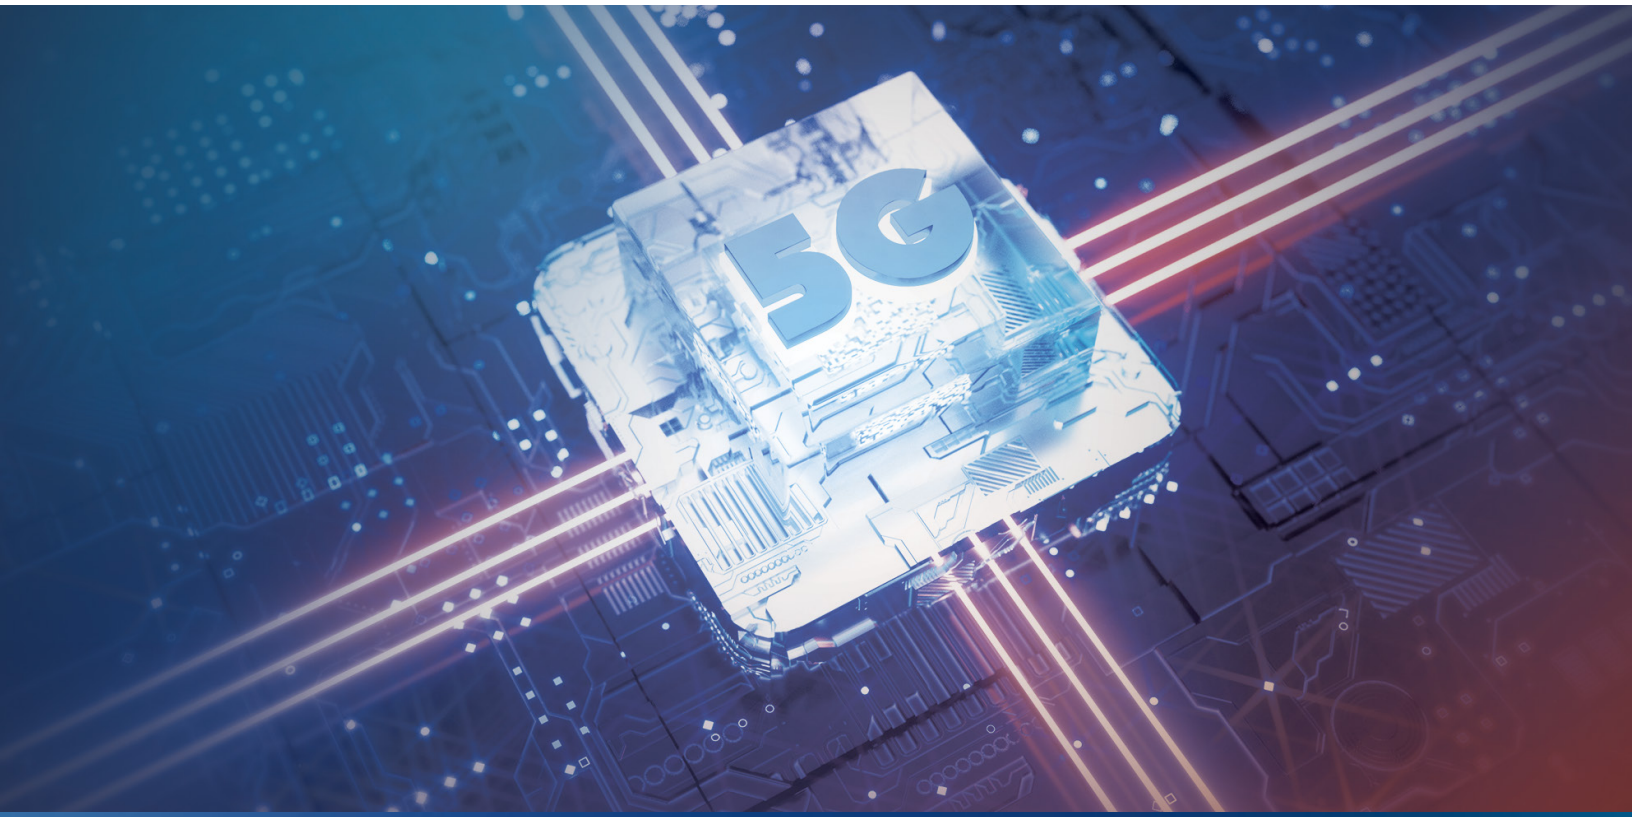



Keysight UXR0334B

Infiniium UXR Real-Time Oscilloscope; 4 Channels, 33 GHz

- Up to 2G Memory with 256 GS/s on All Channels
- Low Noise Inputs: 129 µV (rms) Noise with 10 GHz of Bandwidth
- Includes InfiniiSim Basic De-embedding, PrecisionCable, and PrecisionProbe as Standard Options
- 70% Faster Application Speeds vs UXR A



Tektronix MSO68B

Mixed Signal Oscilloscope; 8 Channel to 10 GHz

- Frequency Range: 1, 4, 6, 8, 10 GHz Models
- Low Noise Inputs: < 1.25 mV of Noise at 50 mV/div at 10 GHz
- Built-In FFT Spectrum Analysis on all Channels
- 50 GS/s on 2-Channels, 25 GS/s on 4-Channels



Keysight MXR604B

Infiniium MXR-Series Real-Time Oscilloscope; 4 Channels, to 6 GHz

- 16 GS/s on 4 Channels, 200M Record Length per Channel
- 10-Bit ADC with 16-Bits in High Resolution Mode
- Low Noise: 1mV/div 43 µV, Low Jitter: 120 fs rms
- Real Time Spectrum Analysis on 8 Scope Channels
- Faster Application Speeds vs MXR A



Rohde & Schwarz RTP164B

RTP-B Series Oscilloscope; 16GHz 4CH 40GSa/s

- 16 GHz, 4 channels, 40 GSa/s with long record length
- Real-time de-embedding with S-parameters in hardware
- Strong app support for USB3.2, DDR, MIPI and Auto Ethernet
- High-performance RTP platform in a compact form factor



Rohde & Schwarz RTO64

Digital Oscilloscope; 4 Channels, 4 GHz


- Record Length: 2 G sample @ 20 GS/s
- Digital Triggering on 16-Bit High-Definition Signals
- Real Time De-embedding with S-Parameters in Hardware



Keysight EXR608A

Infiniium EXR-Series Real-Time Oscilloscope; 8 Channels, to 6 GHz

- Sample Rate: 16 GS/s 100 Mpts Record Length Upgradeable to 400 Mpts
- 10-Bit ADC with 16-Bits in High Resolution Mode
- Upgradeable Bandwidth from Available Stock



Tektronix MSO58B

Mixed Signal Oscilloscope; 8 Channel to 2 GHz

- Frequency Range:350, 500 MHz, 1, 2 GHz Models
- 500,000 waveforms
- 6.25 GS/s on 4-Channels



Rohde & Schwarz MXO58

Digital Oscilloscope; 8 Channels

- Frequency Ranges: 100, 200,350, 500 MHz, 1, 2 GHz
- 500 Mpts Memory Standard on 8 Channels
- 12-Bit ADC for High Vertical Resolution and Digital Triggering
- 45k FFT/s on 4 Simultaneous Displays





Keysight M8050A

High-Performance BERT, 120 GBaud

- Symbol Rates from 2 to 120 GBaud
- Support for Non-Return-To-Zero (NRZ), PAM3, PAM4, PAM6, and PAM8 Line Coding
- Next Generation 800G/1.6T Ethernet, USB4v2 and other Receiver & Transmitter Conformance Standards Supported



Keysight M8040A

High-Performance BERT, 64 GBaud

- Data Rates from 2 to 64 GBaud
- Support for Non-Return-To-Zero (NRZ), PAM3, PAM4 Line Coding
- IEEE 802.3 ethernet support for 100, 200, and 400 Gigabit



Anritsu M1900A

Signal Quality Analyzer


- Data rates to 64 GBaud NRZ, PAM4
- 58 GBaud PAM4 BER Measurements Supported
- PCIe Gen1-5 Link Training Supported with Jitter Tolerance for PCIe Gen 6



Keysight M8020A

High-Performance BERT, 16 or 32 Gb/s

- Data rates from 8.5/16 Gb/s for Pattern Generator and Error Detector
- Applications Include: PCI Express, USB, MIPI M-PHYTM, SATA/SAS, DisplayPort, SD UHS-II, Fibre Channel, Thunderbolt, 10 GbE, 100 GbE (optical and electrical), SFP+, CFP2/4 transceivers, CEI.

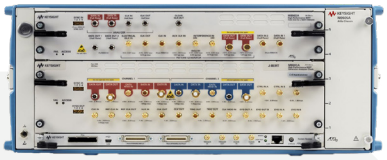

Keysight M8062A

32Gb/s BERT Front End for M8020A

- Extends Data Rate of the M8020A BERT to 32 Gb/s
- Built-In Jitter Injection and Calibrated (LFPJ, HF PJ, Clk/2, BUJ, RJ, SSC)
- Built-In Clock Recovery



Anritsu MP2110A

BERTWave Sampling Oscilloscope

- All-In-One Sampling Oscilloscope Plus BERT
- 4-Channel 25 GHz Sampling Oscilloscope Plus Clock-Recovery Unit
- Low-cost solution for Testing 10G to 800G Optical Modules
- SFP28, QSFP28, CFP2/4/8, SFP56, QSFP56, OSFP, QSFP-DD Modules Supported



Keysight M8053A

Interference Source Module, 1-slot AXIe, 65GHz


- Signal Impairment Generation up to 120GBaud
- Receiver Test for Devices with PCIe Gen 5/6, OIF CEI, SAS
- Channel Margin Test and Optical Receiver Stress Test IEEE 802.3bs, bj, by, cd, Fibre Channel



Keysight M8054A

Interference Source Module, 1-slot AXIe, 32 GHz

- Signal Impairment Generation up to 64 GBaud
- Receiver Test for Devices with PCIe Gen 4/5, OIF CEI, SAS
- Channel Margin Test and Optical Receiver Stress Test IEEE 802.3bs, bj, by, cd, Fibre Channel

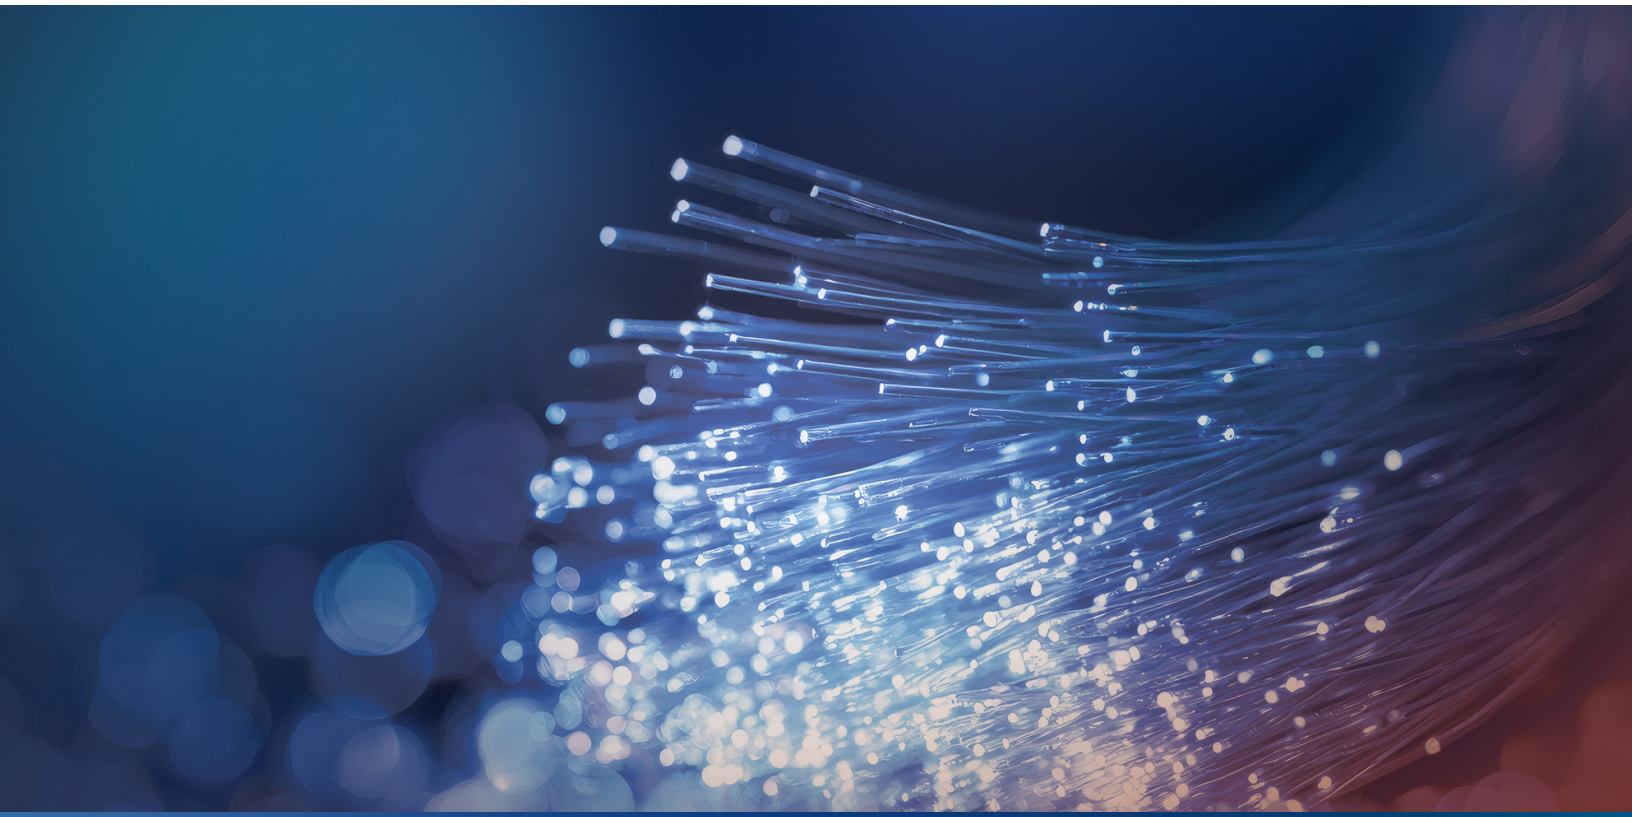

FEATURED



Keysight N1093B

Dual Optical Channel Sampling Scope; DCA-M 60GHz

- 60 GHz dual optical
- DCA-M with integrated clock recovery
- Low-noise, low-jitter, high-sensitivity optical measurements
- Supports accurate optical testing up to 120 GBd
- USB-controlled platform scales to high-volume manufacturing



Keysight N1000A DCA-X

Wide-Bandwidth Oscilloscope Mainframe

- Mainframe Supports Modules Greater than 100 GHz with up to 16 Channels
- 4-Channel 25 GHz Sampling Oscilloscope Plus Clock-Recovery Unit
- Replaces 86100C/D and Supports Legacy Modules



Keysight N1046A

Electrical Sampling Head Module for DCA-X; 4CH 100GHz

- 4-channel remote electrical sampling head for DCA-X
- 100 GHz-class performance with 1 mm inputs
- Remote head architecture minimizes path loss at the DUT
- Designed for uncompromised performance to 100 GHz and beyond



Keysight N1060A

Precision Waveform Analyzer Module; 2-Channel, 50/85 GHz

- High Bandwidth to > 90 GHz, residual jitter as low as 45 fs
- Adjustable Clock Recovery Peaking and Loop Bandwidth
- Supported Communication Data Rates from 125 MBd to 64 GBd



Anritsu MP2110A

BERTWave Sampling Oscilloscope

- All-In-One Sampling Oscilloscope Plus BERT
- 4-Channel 25 GHz Sampling Oscilloscope Plus Clock-Recovery Unit
- Low-cost solution for Testing 10G to 800G Optical Modules
- SFP28, QSFP28, CFP2/4/8, SFP56, QSFP56, OSFP, QSFP-DD Modules Supported



Keysight N1030A

Single Channel Optical Module; 65 GHz

- 1250 to 1600 nm Nominal Wavelength, Factory Calibrated 1310, 1550 nm
- Reference Receivers for 25 Gb/s Ethernet, 400GBASE-SR16, 32G Fibre Channel & More



Keysight N1040A

Dual Electrical Channel Module; 33/60 GHz

- High Bandwidth to > 60 GHz, residual jitter as low as 90 fs
- Lower Cost Module with up to 8 Channels per Mainframe



Keysight N1055A

Remote Sampling Head Module; 2/4 Port, 35/50 GHz

- Fully Integrated TDR/TDT/S-Parameter Measurement System
- Multiple S-Parameters up to 16 Simultaneous Ports
- TDR Step Times as Fast as 6 ps



Keysight N1094A

Dual Channel Oscilloscope, DCA-M; 50 GHz

- Direct Connection with USB to PC. No Mainframe Required
- 1250 nm to 1600 nm for 45 GHz Channel
- Fast Throughput with 250 kHz sample rate
- Accurate high data rate analysis with <200 fs jitter



Keysight N1076B

Electrical Clock Recovery Module

- Provides Standards-Compliant Clock Recovery Capability on Electrical NRZ and PAM4 Signals from 125 MBd up to 64 GBd
- Includes Adjustable Loop Bandwidth and Selectable Peaking



Keysight N1032A

Single Channel Optical Module; 90/120 GHz

- 120 GHz Optical Bandwidth with Jitter as Low as 90 fs
- Perfect for Analyzing 112 GBd (224 Gbps) Optical Signals
- Supports NRZ and PAM4 Applications



Keysight N1092A

Single Channel Oscilloscope, DCA-M; 45 GHz

- Direct Connection with USB to PC. No Mainframe Required
- 1250 nm to 1600 nm for 45 GHz Channel
- Fast Throughput with 250 kHz sample rate
- Accurate high data rate analysis with <200 fs jitter

FEATURED



Keysight M8199B

Arbitrary Waveform Generator; 2-Channel, 128 GSa/s

- Analog Bandwidth to 70 GHz (90 GHz @ -10 dB)
- 2 and 4-Channel Models with 128 GSa/s and 256 GSa/s
- Perfect for higher-order QAM modulation at 160 GBaud and Above



Keysight M8194A

Arbitrary Waveform Generator; 4-Channel, 120 GSa/s

- 45 GHz Bandwidth with 400G and 1 Terabit Applications
- 8-Bit Resolution with 512 kSa Waveform Memory
- Use with 81195A Optical Modulation Generator Software



Keysight M8195A

Arbitrary Waveform Generator; 4-Channel, 65 GSa/s


- 25 GHz Bandwidth for Wideband SATCOM, Radar, and Optical Applications
- Controllable from M8070A BERT Software for MIPI C-PHY and D-PHY Signals
- 16 GSa Extended Memory Capable of Generating PRBS7, PRBS10, PRBS11, PRBS15 up to PRBS31 Patterns



Keysight M8190A

Arbitrary Waveform Generator; 2-Channel, 12 GSa/s

- Analog Bandwidth of 5 GHz
- 14-Bit Resolution to 8 GSa/s, 12-Bit Resolution to 12 GSa/s
- Up to 2 GSa Arbitrary Waveform Memory with Advanced Sequencing
- 90 dBc Spurious Free Dynamic Range (SFDR) with DC and AC Amplifiers

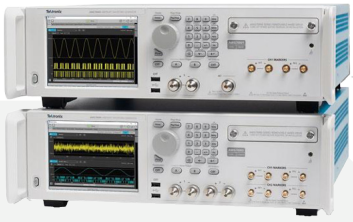

Tektronix AWG70002B

Arbitrary Waveform Generator; 2 Channel at 25 GSa/s

- 10-bit Vertical Resolution, 16 GS Waveform Memory Per Channel
- Generate Wideband RF Signals Up To 20 GHz
- Suitable for Radar with Options for Pulsed Waveforms and Impairments



Tektronix AWG5208

Arbitrary Waveform Generator; 8 Channel, 4 GHz

- 2-Port and 4-Port Versions with Configurable Test Sets
- Up to 4 Sources Available
- High Dynamic Range 147 dB with Receiver Attenuators
- Internal Pulse Modulators and Pulse Generators
- Wide Range of Software Options Available for Rental



Keysight 81160A

Pulse/Function/Arbitrary Noise Generator; 2-Channel

- Pulses to 330 MHz, Sinewaves to 500 MHz Sine, 2.5 GSa/s Arbitrary Waveforms
- Applications Include Automotive Ethernet 1G Rx Compliance
- 14-Bit Resolution with Programmable Rise/Fall Times
- High Voltage Amplifier Output (10Vpp/100 Ω)



Keysight M8197A

Multi-Channel Synchronization Module; for M8195A

- Synchronize up to 4 M8195A Modules or 16 Independent Channels
- Create Phase-Coherent I/Q Signal Pairs, MIMO and Multi-Lane Serial Applications



NI PXIe-5451

PXI Waveform Generator; 2-Channel, 145 MHz


- 16-Bit Resolution
- Advanced Synchronization and Data Streaming Capabilities
- DSP Features for Pulse Shaping, Interpolation Filters, and Oscillator Control



Keysight 81134A

Pulse Pattern Generator; 2-Channel, 3.35 GHz

- 12 MSa Memory-Based Pattern Generation
- Applications Include Jitter Generation with RZ/NRZ/R1 Data Formats
- PRBS with CCITT/ITU Formats to 2-31

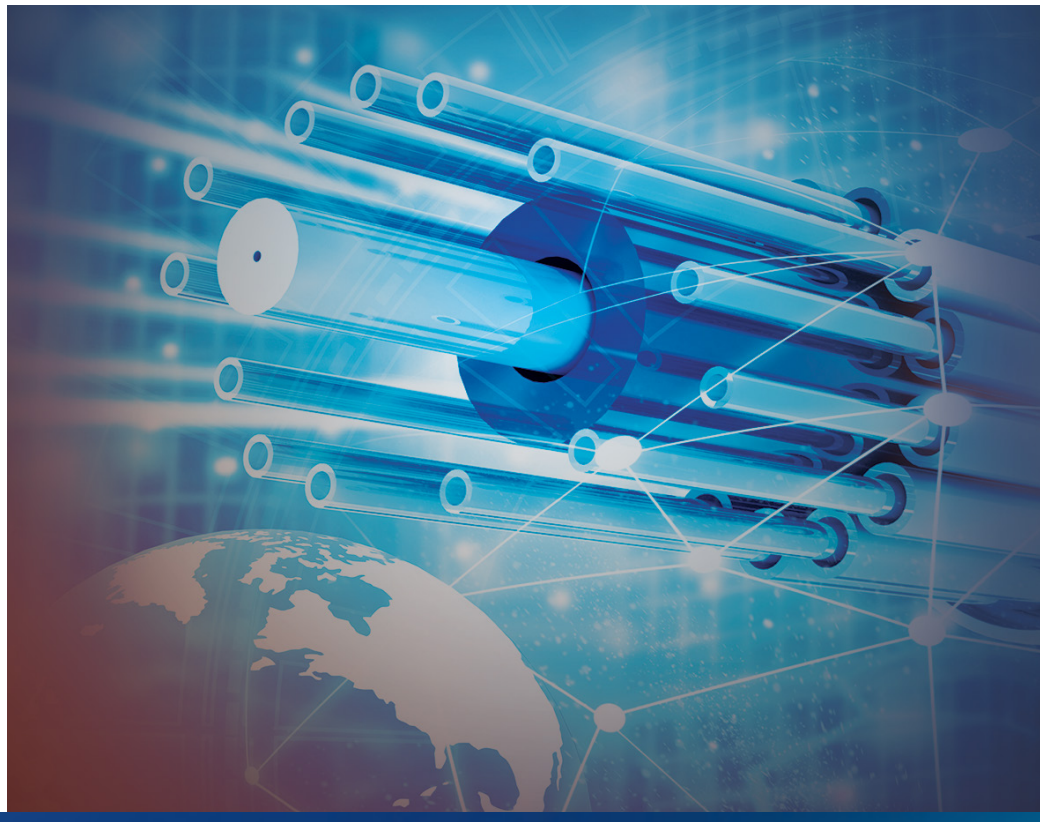



Keysight B2912B

Precision Source Measure Unit, 2-Channel

- Four-Quadrant Sourcing and Measurement Capability
- 10 fA Resolution, 210 V, 3 A DC, 10.5 A Pulse
- Digitizes 100k Measurements per Second



Keithley 2450

Graphical Digitizing SourceMeter

- Four-Quadrant Sourcing and Measurement Capability
- 200 V/1 A DC, 10 nA to 1 A
- High-Resolution Graphical Touchscreen



Rohde & Schwarz NGU411

Four-Quadrant Source Measure Unit

- -20 V to 20 V, 20 W
- 500 kS/s for Voltage and Current
- Battery Simulation Software Available
- Graphical Touchscreen



NI PXIe-4147

PXI Source Measure Unit; 4-Channel, 8 V/3 A

- 4-Quadrant, 4-Channel SMU in PXIe Format
- High-Speed Sequencer for Synchronizing with other SMUs and PXIe Instruments
- 100 fA/100 nV Resolution



Keysight E5270B

8-Slot Semiconductor Device Analyzer Mainframe

- Four different source/monitor unit (SMU) types are available to meet a variety of parametric measurement challenges
- E5280B High Power Source/Monitor Unit module (HPSMU)
- E5281B Medium Power Source/Monitor Unit module (MPSMU
- E5287A High Resolution Source/Monitor Unit module (HRSMU)
- E5288A Atto Sense and Switch Unit (ASU)



Keysight CX3324A

Device Current Waveform Analyzer; 1 GSa/s, 4-Channel

- Technology Marries Precision Scope with High-Sensitivity DMM
- High-Resolution/High-Speed Sampling @ 14-Bit 1 GSa/s or 16-Bit 75 MSa/s
- Applications Include Low-Power IoT Devices, Chipset Device Characterization, Power Delivery, and Power Rail Testing



Keysight PZ2100A

Precision Source Measure Unit Mainframe


- Four Slots for 5 SMU Module Options
- Scalable to 20 Channels
- Choose from High-Resolution SMU, High-Speed SMU, Precision SMU, High-Density SMU, and 5-Channel Precision SMU



Keithley 2651A

High Power System SourceMeter SMU

- Four-Quadrant Sourcing and Measurement Capability
- 50 A/40 V/2000 W
- Connect two units in Series or Parallel for 100 A or 80 V Operation



Keysight B1500A

Semiconductor Device Analyzer Mainframe

- Modules support IV Measurements, Capacitance Measurements, Pulsed IV and Transient IV Measurements
- B1511A Module: 100V/100mA Four-Quadrant Operation
- B1520A Module: Capacitance Measurement, AC Impedance with 1 kHz to 5 MHz Source and 25 VDC Bias




Phase Noise Analyzers



Keysight E5055A

SSA-X Signal Source Analyzer, 10 MHz to 8 GHz

- Fast Cross Correlation Measurements
- Phase Noise: -169 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Software Options Include: Pulsed Analysis, Spectrum Analysis
- Two Built-in Isolated DC Voltage Channels

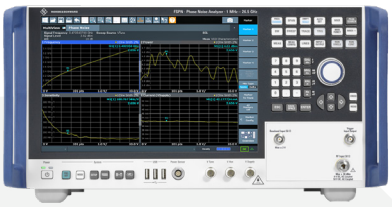

Rohde & Schwarz FSWP26

Phase Noise Analyzer; 1 MHz to 26.5 GHz


- Full-featured Phase Noise Analyzer and Spectrum Analyzer
- Phase Noise: -166 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Low Phase Noise Internal LO, Needs No External Sources
- Cross-Correlation Measurements for 25 dB Improved Sensitivity



Rohde & Schwarz FSWP50

Phase Noise Analyzer; 1 MHz to 50 GHz

- Full-featured Phase Noise Analyzer and Spectrum Analyzer
- Phase Noise: -166 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Low Phase Noise Internal LO, Needs No External Sources
- Phase Noise @ 50 GHz: -138 dBc/Hz (10 kHz Offset)

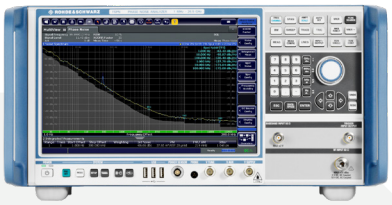

Rohde & Schwarz FSPN26

Phase Noise Analyzer and VCO Tester; 1 MHz to 26.5 GHz

- Cross-Correlation and High-Speed for VCOs, OXCOs, DROs
- Phase Noise: -163 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Offset Frequency Range: 1 µHz to 1 GHz



Keysight E5058A

SSA-X Phase Noise Analyzer

- The SSA-X Series now extends to mmWave with the addition of 26.5, 44 and 54 GHz models to the Series
- Typical enhanced low phase noise performance of -148 dBc/Hz @26.5 GHz with 10 kHz offset and -143 dBc/Hz @ 50 GHz with 10 kHz offset
- With optional VNA ports and spectrum analysis, this full-featured instrument will make significant improvements in 5G and SATCOM mmWave workflows.



Keysight N4375D

Lightwave Component Analyzer; Single-Mode, 26.5 GHz

- Guaranteed Responsivity to 26.5 GHz
- Extended Calibration Support for Advanced Test Setups
- Built-in Optical Power Meter with User-selectable Transmitter Power



Quantifi Photonics IQRX-1005-FA-EPIQ

High Performance Coherent Optical Receiver

- Dual Polarization
- Supports PSK, QAM and Custom Modulation Formats
- Single-Ended RF 1.85mm Outputs



Keysight 8163B

Lightwave Multimeter Mainframe

- Consists Of Two Slots for Hosting Power Modules, Return Loss Modules, Compact Tunable Lasers, or Fixed Laser Sources
- Includes Built-In Applications: Return Loss, Passive Component Test, Stability, and Logging



Keysight 8164B

Lightwave Measurement System Mainframe

- 1 Slot for a Tunable Laser Source
- 4 slots for Power Modules, Return Loss Modules, Compact Tunable Lasers, or Fixed Laser Sources
- Built-in Applications: Passive Component Test, Stability, Logging



Keysight 81491A

Reference Transmitter

- 33 GHz Electro-Optical Bandwidth
- Can Serve as E/O Converter
- NRZ and PAM4 Signals to 32 GBaud
- 1310 & 1550 nm Single Mode Fiber, 850 nm Multimode Fiber



Keysight 81492A

Reference Transmitter


- 40 GHz Electro-Optical Bandwidth
- Can Serve as E/O Converter
- NRZ and PAM4 Signals to 56 GBaud
- 1310 & 1550 nm Single Mode Fiber



Keysight E5061B

ENA Series Network Analyzer/ Impedance Analyzer, 100 kHz to 3 GHz

- 3 GHz Network Analyzer and Impedance Analyzer in One Unit
- Gain-Phase Test Port, 5 Hz to 30 MHz for Impedance Measurements
- Compatible with Keysight Component Measurement Fixtures



Keysight E4991B

Impedance Analyzer; 1 MHz to 3 GHz

- Built-in DC Bias to ±40 V
- Measures: |Z|, |Y|, Ls , Lp , Cs , Cp , Rs (R), Rp , X, G, B, D, Q, θz , Γy , |Γ|, Γx , y , θr



Keysight E4990A

Impedance Analyzer, 20 Hz to 120 MHz

- 25 mΩ to 40 MΩ Wide Impedance Measurement Range
- Measurement Parameters: |Z|, |Y|, θ, R, X, G, B, L, C, D, Q, Complex Z, Complex Y, Vac, Iac, Vdc, Idc
- Built-in DC bias range: 0 V to ±40 V, 0 A to ±100 mA



Keysight E4980A

Precision LCR Meter; 20 Hz to 2 MHz

- 0.05% Basic Accuracy
- Optional DC Bias to ±40 V
- Wide Range of Test Fixtures



Rohde & Schwarz LCX200

LCR Meter, 4 Hz to 500 kHz

- Frequency Extendable to 1 MHz or 10 MHz
- Test Signal Range: 100mV to 10V, with current of up to 200 mA
- Measurement Parameters: Cp, Cs, Lp, Ls, D, Q, G, Rp, Rs, Rdc, R, X, Z, Y, Θd, Θr, B, M, N



GW Instek LCR-8210

High-Frequency LCR Meter; 10 Hz to 10 MHz

- Models Available from 1 MHz to 5, 10, 20, 30 MHz
- Internal DC Bias Voltage ±12 V
- Measurement Parameters: Z, Ls/ Lp, Cs/Cp, Rs/Rp, Q, D, Y, G, X, θd/ θr, B, Rdc

Full Range of Services

01 | Rental and Leasing

Fast, flexible, and affordable access to the latest equipment.

- Options from one-week rentals to long-term leases of several years.
- Flexibility to change, extend, or upgrade
- Full account support
- Calibration and maintenance included

02 | Buy New

Purchase options when buying new is right for you.

- Excellent choice and availability from our large inventory
- Fast delivery
- Independent advice and guidance
- Ongoing local support

03 | Certified Pre-Owned

High-quality equipment for much less than the cost of buying new.

- A 23-step inspection so you can deploy quickly
- One-year warranty and 14-day return policy
- Excellent availability and fast delivery
- Calibrated and ready to use

04 | Asset Optimization

Optimize your existing equipment with our services and know-how.

- Asset tracking for field or lab
- Increase equipment sharing and utilization
- Better manage calibration and repair
- Better manage technology obsolescence and disposal



Electro Rent

RENT | BUY | OPTIMIZE

Corporate Headquarters USA
8511 Fallbrook Ave,
Suite 200, West Hills,
CA 91304, USA
+1 800 553 2255
sales@electrorent.com

Canada
210 Brunel Rd, Unit 1-2,
Mississauga, ON L4Z 1T5,
Canada
+1 800 553 2255
sales@electrorent.com

Latin America
8511 Fallbrook Ave,
Suite 200, West Hills,
CA 91304, USA
+1 800 553 2255
sales@electrorent.com