

40S6G18C

6.0 GHz - 18.0 GHz, Class A Solid State Amplifier



The Model 40S6G18C is a solid-state, Class A design, self-contained, air-cooled, broadband power amplifier designed for applications where instantaneous bandwidth, high gain and linearity are required. It will provide a minimum of 40 W across its operating bandwidth. Protection from input overdrive beyond 0 dBm is provided as well as protection from various failure conditions including over-temperature and power supply faults.


A front panel display indicates the operational status and fault conditions. All amplifier control functions, and status indications are available remotely using GPIB/IEEE-488, RS-232, fiber-optic serial, USB, or Ethernet. Interface connectors are located on the back panel. Local and remote operation is managed by a switch on the front panel.

This is a multiple purpose amplifier. The low level of spurious signals and linearity make it ideal for use as a driver in testing wireless and communication components and subsystems. By covering such a wide bandwidth, it is suitable for a variety of communication technologies such as CDMA, W-CDMA, TDMA, GSM, UWB, WiMAX etc.

The export classification for this equipment is 3A001. These commodities, technology or software are controlled for export in accordance with the U.S. Export Administration Regulations. Diversion contrary to U.S. law is prohibited.

MAIN FEATURES

- **Class A Operation**
- **Touch Screen Display**
- **100% Mismatch Tolerant**
- **Scalable Modular Construction**
- **Ethernet, USB, GPIB, Fiber-optic & RS-232 Remote Interface**
- **3 Year Warranty**
- **Applications: Radiated Immunity (ISO, IEC, MIL) Communication, CDMA, W-CDMA, TDMA, GSM, UWB**

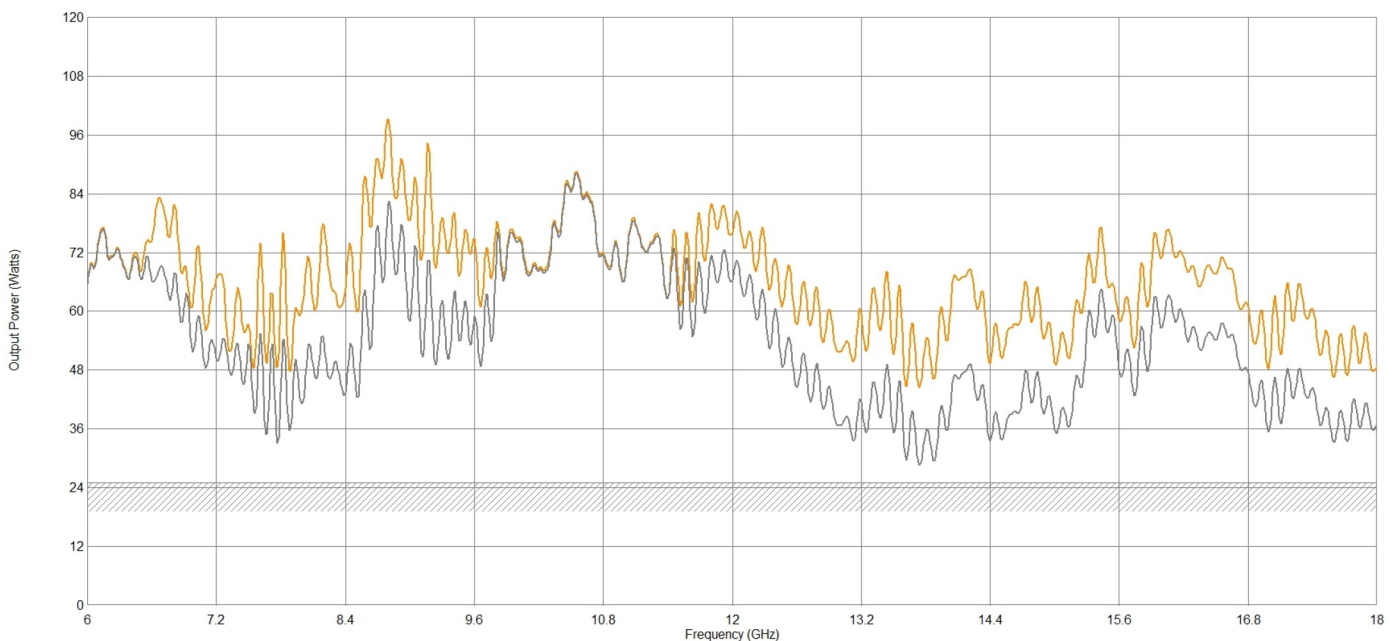

— Typical Saturated Power – Typical P1dB Power

Technical Specifications

| | |
|-------------------------------------|----------------------------------|
| Frequency Range | 6.0 - 18.0 GHz |
| Rated Output Power | 40W (min) - 60W (typ) |
| Power Output @ 1dB Compression | 25W (min) - 45W (typ) |
| Input for Rated Output | 0dBm (1mW) |
| Small Signal Gain | 51 dB |
| Gain Variation (max) ± | 3.5 dB |
| Gain Control Adjust When Below P1dB | 20 dB |
| Harmonics @ P1dB (min) | -20 dBc |
| Harmonics @ P1dB (typ) | -25 dBc |
| Spurious | -75 dBc |
| Input VSWR | 2:1 (max) |
| Output VSWR | 2.5:1 (typ) |
| Output Impedance | 50 Ohm |
| 3rd Order Intercept Point | 52 dB |
| Noise Figure | 10 dB |
| Modulation Formats | AM, FM, PM, ODFM |
| Maximum Input Power (no damage) | 10 dBm |
| Output VSWR Tolerance | Infinite any Phase (No Foldback) |
| Stability | Unconditional |

General Specifications

| | |
|---------------------------------|----------------|
| Acoustic Noise (measured @ 1 M) | 60 dBA |
| Supply Frequency | 47 to 63 (Hz) |
| Supply Voltage | 100 to 240 VAC |
| Supply Power (max) | 0.7 KVA |

Mechanical Specifications

| | |
|---------------------------------------|---|
| RF Input Connector | Type-N Female |
| RF Output Connector | Type-N Female |
| Safety Interlock | 15-Pin Subminiature D Female |
| Dimensions (With Cabinet) (W x H x D) | (4U) - 50.2 x 20.6 x 63.8 cm (19.8 x 8.1 x 25.1 in) |
| Weight (With Cabinet) | 31.75 kg (70 lbs) |
| Dimensions (No Cabinet) (W x H x D) | (4U) - 48.3 x 18.8 x 63.8 cm (19.0 x 7.0 x 25.1 in) |
| Weight (No Cabinet) | 22.7 kg (50 lb) |
| Cooling System | Forced air (self contained fans) |
| Com. Interface | IEEE-488 / RS-232 / RS-232 (fibre optic) / USB 2.0 / Ethernet |

Environmental Specifications

| | |
|-----------------------------|------------------------|
| Ambient Running Temperature | 5°C to +40°C |
| Storage Temperature | -20°C to +50°C |
| Maximum Altitude | up to 2000M |
| Shock and Vibration | Normal Truck Transport |

Regulatory Compliance (CE)

| | |
|-----------------------|----------------------|
| EMC | EN 61326-1 |
| Safety | UL 61010-1 |
| RoHS | DIRECTIVE 2011-65-EU |
| Export Classification | 3A001 |

Ordering Information

| 40S6G18C | - | - | N | - | - | N | - | | | | | | | | | | | | | |
|-----------------|----|---|--|-----------|---|---|---|---------------------------------------|---|--|--|---|-----------|--|-----------|---|--------------|----|--|--|
| Model | | | RF IN Conn Location, Type | | | RF OUT Conn Location, Type | | Enclosure No Enclosure | | | | | | | | | | | | |
| | | | <table border="1"> <tr><th colspan="2">Connector</th></tr> <tr><td>Front</td><td>F</td></tr> <tr><td>Rear</td><td>R</td></tr> </table> | Connector | | Front | F | Rear | R | | | <table border="1"> <tr><th colspan="2">Enclosure</th></tr> <tr><td>Enclosure</td><td>E</td></tr> <tr><td>No Enclosure</td><td>NE</td></tr> </table> | Enclosure | | Enclosure | E | No Enclosure | NE | | |
| Connector | | | | | | | | | | | | | | | | | | | | |
| Front | F | | | | | | | | | | | | | | | | | | | |
| Rear | R | | | | | | | | | | | | | | | | | | | |
| Enclosure | | | | | | | | | | | | | | | | | | | | |
| Enclosure | E | | | | | | | | | | | | | | | | | | | |
| No Enclosure | NE | | | | | | | | | | | | | | | | | | | |