


ISC - EXTENSION CABLE CONFIGURATION TABLE			
LENGTH	SICK ENCODER	SENSORS	VALVES
METER	RING - GN	RING - BK	RING - BU
0.50M	DPP-1503333	DPP-1503279	DPP-1503100
1.00M	DPP-1503334	DPP-1503280	DPP-1503101
1.50M	DPP-1503335	DPP-1503281	DPP-1503102
2.00M	DPP-1503336	DPP-1503282	DPP-1503103
2.50M	DPP-1503337	DPP-1503283	DPP-1503104
3.00M	DPP-1503338	DPP-1503284	DPP-1503105
3.50M	DPP-1503339	DPP-1503285	DPP-1503106
4.00M	DPP-1503340	DPP-1503286	DPP-1503107
4.50M	DPP-1503341	DPP-1503287	DPP-1503108
5.00M	DPP-1503342	DPP-1503288	DPP-1503109




NOTE ***

TORQUE TABLE	
M12	M8
0.8...1.0Nm	0.4...0.6Nm

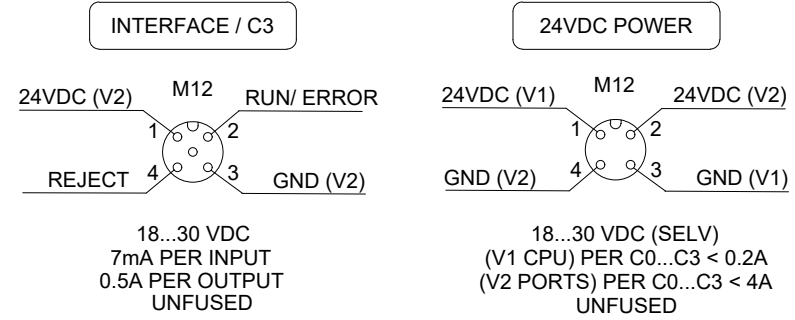

CONNECT V1 CPU & V2 PORTS EACH ON POWER SUPPLY

NOTE * ADDITIONAL CABLE LENGTHS IF NEEDED ARE PROJECT SPECIFIED, SEE REFERENCE TABLE
 NOTE ** APPLY COVERS TO GUARANTY PROTECTION RATING OF IP69K/ NEMA4X
 NOTE *** APPLY TORQUE TABLE TO ALL M12 & M8 ROUND CONNECTIONS

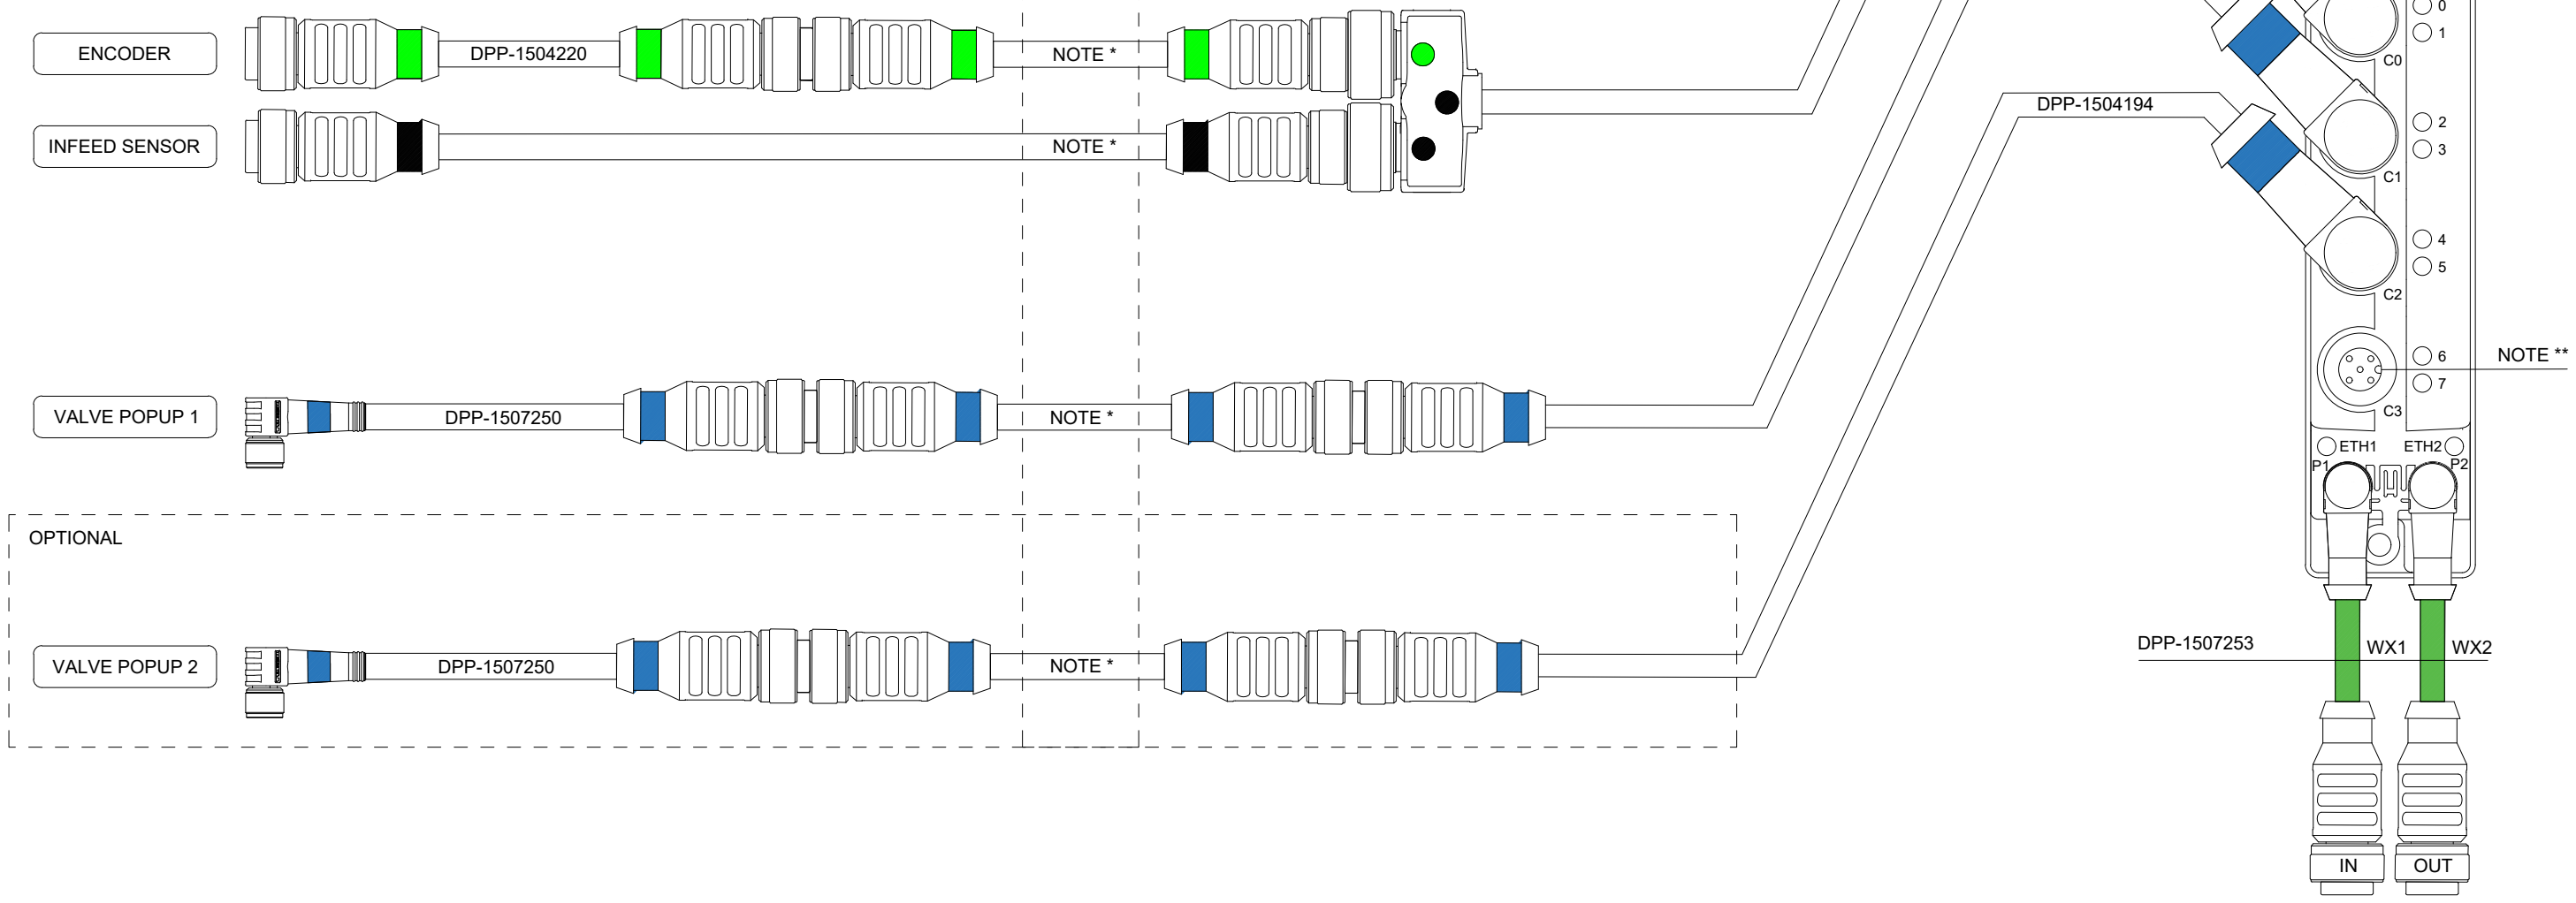

TECHNICAL SERVICE REGIONAL CONTACT
 CUSTOMERSERVICE@INTRALOX.COM

REGION	LOCAL NUMBER
USA:	800-535-8848
BRAZIL:	0800-774-4325
EUROPE:	0800-022-9757
APAC:	4008-423-469

INTERPRET DRAWING DESIGNATIONS IAW IEC 81346-2
 INTERPRET DIMENSIONS & TOLERANCES IN ACCORDANCE WITH ISO 129-1
 UNLESS OTHERWISE SPECIFIED DIMENSION ARE MILLIMETERS
 TOLERANCE: ±3mm

THIS DRAWING IS THE PROPERTY OF INTRALOX, LLC. THE DESIGNS, CONCEPTS AND FEATURES DEPICTED OR DESCRIBED HEREIN ARE THE EXCLUSIVE PROPERTY OF INTRALOX, LLC. AND MAY NOT BE USED, REPRODUCED OR TRANSFERRED WITHOUT EXPRESS WRITTEN PERMISSION FROM INTRALOX, LLC.



POWER CONSUMPTION:	0.048 VA
CONTROL VOLTAGE:	24 VDC
CONTROL CURRENT:	2 A
DRAWING SIZE:	A3

DRAWING DESCRIPTION:
ISC CAM INSTALLATION WITH 1 OR 2 POPUP'S SICK ENCODER