


PRODUCT HIGHLIGHT

SYNCHRONIZED SIDEWALLS FOR INTRALOX THERMODRIVE® BELTING

Intralox's state-of-the-art Synchronized Sidewalls provide for enhanced food safety, easier cleaning, and improved control and containment of small or fragile food products conveyed on ThermoDrive belting.

IMPROVE OPERATIONS

- Smooth-radius cove at sidewall base reduces stress while easing cleaning and increasing belt life
- Strategically designed sidewall pattern delivers consistent, minimal gap spacing to improve product control and decrease "roll back"
- Specially developed installation process simplifies installation procedure
- Usable in portioning applications

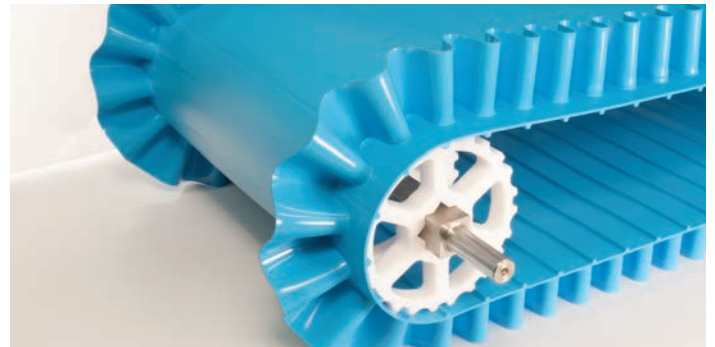

SMART DESIGN

- Easy to clean: Smooth transition radii at the base of all features (flights and sidewalls)
 - » Proprietary molding process provides superior cleaning benefits vs. traditional welding techniques
- Available sidewall heights:
 - » 1 in, 2 in, 2.3 in, 3 in, 4 in, and 6 in
- Flights and sidewalls are timed to minimize gap and better control product
 - » Maximum gap = 5 mm (0.2 in)
- Available connection methods
 - » ThermoLace™
 - » Endless
 - » In-field installation

 Intralox ThermoDrive Series 8050 and 8026 belts are ANSI 3A certified and FDA compliant

Contact Intralox Customer Service to discover how ThermoDrive belts with Synchronized Sidewalls can improve your operations.

Intralox, L.L.C. USA: Toll Free: 1-888-416-2358 • **Intralox, L.L.C. Europe:** Toll Free: +800-2253-7437
Intralox Shanghai LTD.: North Toll Free: 10800-711-0100, South Toll Free: 10800-110-0100

All country- and industry-specific toll-free phone numbers for Intralox's global locations available at www.intralox.com.