

PRODUCT HIGHLIGHT

CHEMBLOX BELTING FOR DIP TANKS


ChemBlox™ belting is the market's most fault-tolerant solution for dip tanks.

FEATURES


- Available in Series 800 Perforated Flat Top Round Hole with 11/32 in (8.7 mm) holes, and Series 800 Flush Grid
- Guaranteed inert to peracetic acid (PAA)
- Highly resistant to other sanitation and intervention chemicals
- Equipped with molded indents for stronger flighted rows
- Extremely hydrophobic compared to other plastics or metals

BENEFITS

- Significantly reduces risks of breakage and foreign material contamination
- Lasts three times as long as acetal
- Improves product release and facilitates cleaning
- Minimizes carryover of dip tank chemicals

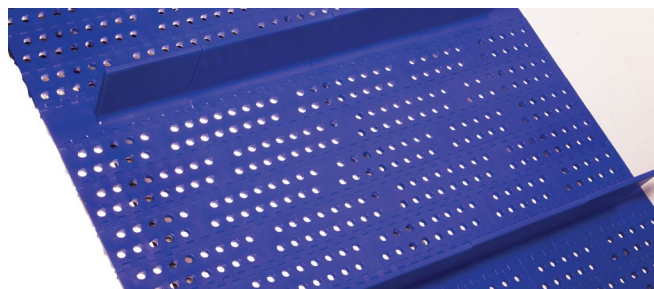

S800 Perforated Flat Top Round Hole belting features 14% open area.

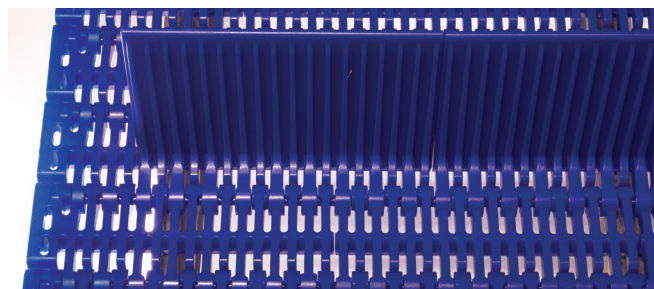

S800 Flush Grid belting features 27% open area.

Belt Data									Belt Material Compliance		
Belt Style	Belt Material	Standard Rod Material	Belt Strength		Temperature Range (continuous)		Belt Weight		FDA Compliance	EU Compliance	3A Dairy Tested
			lb/ft	kg/m	°F	°C	lb/ft²	kg/m²			
Perforated Flat Top Round Hole	CRFR	CRFR	900	1340	0 to 150 ^b	-18 to 66 ^b	2.87	14.00	21 CFR 177.2510	1935/2004EC Regulation 10-2011	Not Tested
Flush Grid	CRFR	CRFR	1000	1490	0 to 150 ^b	-18 to 66 ^b	2.83	13.82	21 CFR 177.2510	1935/2004EC Regulation 10-2011	Not Tested

Contact Intralox Customer Service for more information, and details about our three-year warranty.

Intralox, L.L.C. USA: Toll Free: 1-888-388-2358 • **Intralox, L.L.C. Europe:** Toll Free: +800-4444-4600

Intralox Shanghai LTD.: Toll Free: 4008-423-469

All country- and industry-specific toll-free phone numbers for Intralox's global locations available at www.intralox.com.