


BARDRIVE S8050 BELTING IN DURA MATERIAL: RELIABLE PERFORMANCE IN UNRELIABLE CONDITIONS

Intralox® Dura material improves ThermoDrive® technology's impact and heat resistances, while BarDrive™ Series 8050 belting enables steady, tensionless operation. BarDrive S8050 belting in Dura combines these features to deliver reliable, hygienic performance in high-temperature and heavy-load applications—no pre-tension required.

Benefits and Features

- **Dura material increases impact resistance**
- **Tensionless ThermoDrive technology improves reliability and food safety**
- **Full-width drive bar provides up to 950 lb/ft (431 kg/m) in steady pull performance**
- **Performs at temperatures ranging from 0°F to 210°F (-18°C to 100°C)**
- **Requires no pre-tension**
- **All flights and accessories also available in Dura**

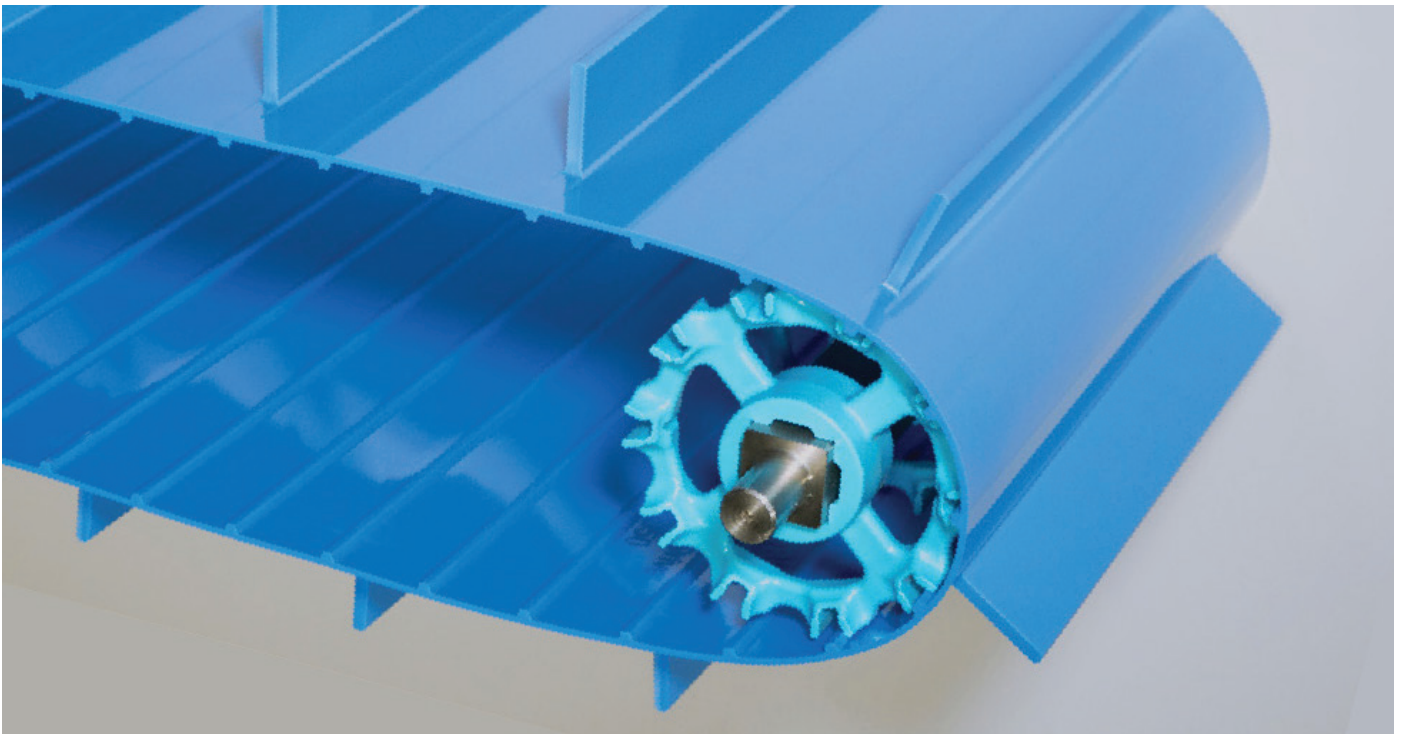

To learn more about BarDrive S8050 belting in Dura, [contact Intralox Customer Service.](#)