

Lumen

A Sonepar Company

ONTARIO

Special deals September - October 2023



AIR MILES

Valid for Electrical Contractors
ECAO and OEL members only

Promotion



MARRETTE® PRO-BLU™

Get equipped for the jobsite!



Visit our website
for complete details
and rules.

Free inside!



ABB

°STELPRO



PORTABLE CONSTRUCTION HEATER - SCH

- SAFE AND STURDY
- CONVENIENT AND EASY TO TRANSPORT
- COOL TOUCH HOUSING
- ERGONOMIC CARRYING HANDLE FOR EASY CABLE STORAGE
- SEALED AND LIFETIME LUBRICATED MOTOR (SCH4800T)
- VERSATILE: FIXED OR TEMPORARY CONNECTION WITH OPTIONAL BRACKET AVAILABLE

Red STESCH48T
Yellow STESCH4800T

Milwaukee

Safety Glasses

Clear lenses

Anti-scratch

MIL48732011

Fog free

MIL48732013



Impact Demolition Gloves

ARMORTEX® and
padded palms



Small # MIL48228750

Medium # MIL48228751

Large # MIL48228752

X-Large # MIL48228753

2X-Large # MIL48228754



Breakaway Mesh Safety Vest

With 9 pockets, hi-viz, ANSI / CSA

Yellow - L / XL # MIL48735172

Yellow - 2XL / 3XL # MIL48735173

Orange - L / XL # MIL48735176

Orange - 2XL / 3XL # MIL48735177



1-844-STELPRO | WWW.STELPRO.COM



Platinum
member





LED Projector

Die cast aluminium housing, integrated selectable photocell, bronze finish

Knuckle or yoke mount

9/19/34W, 1 500 to 5 000LM
Replaces 500W, halogen or 150W, HID
LITESXF1ALOSWW2KYDDB

22/37/56W, 3 500 to 7 500LM
Replaces 500W, halogen or 175W, HID
LITESXF2ALOSWW2KYDDB

120/347V - Yoke or slip fitter mount

53/69/100W, 8 500 to 14 000LM
Replaces 250W, HID
LITESXF3ALOSWW2UVOLTYSSD

111/124/150W, 16 000 to 20 000LM
Replaces 400W, HID
LITESXF4ALOSWW2UVOLTYSSD



LED Panel for T-Bar Ceiling

120/347V, 3 500/4 000/5 000K, dimmable 0/10V

1x4 - 19/28/35W, 2 400 to 4 280LM
LITCPX1X4ALO7SWW7UVOLT

2x2 - 19/28/37W, 2 400 to 4 500LM
LITCPX2X2ALO7SWW7UVOLT

2x4 - 28/36/50W, 3 800 to 6 500LM
LITCPX2X4ALO8SWW7UVOLT



LED High Bay Fixture

120/347V, (4 000/5 000K), 21 000/24 000/27 000LM, medium distribution, open hook with 7 ft galvanized safety cable, 6 ft cord, dimmable 0/10V, polycarbonate lens.

LITCPRBALO14UVOLTSWW9DWH

With passive infrared motion sensor
LITCPRBALO14UVOLTSWWHMS



LED Projector

120V, 4 000K, 2 750LM, bronze finish

1 25W
LITHGXLED2RH40K120DDB

2 15W/1750LM or 25W/2750LM, with photocell
LITHGXLED2RHALO40K120PED

3 25W, with motion sensor, ceiling or wall mounted
LITHGXLED2RH40K120MODDB



LED Ceiling Mount Fixture

120/277V, 4 000K, bronze

35W, 4 500LM
Replaces up to 150W, HID
LITCNYLEDP140KMVDDDB

52W, 6 600LM
Replaces up to 175W, HID
LITCNYLEDP240KMVDDDB



LED Recessed Fixture

120V, 5 CCT 2 700 to 5 000K, dimmable, regressed lens and deflector designed to reduce glare, white.

4 in - 9W, 670LM
Replaces 65W, incandescent
JUNWF4REGSWW590CRMW

6 in - 13W, 950LM
Replaces 75W, incandescent
JUNWF6REGSWW590CRMW



LED Recessed Fixture

5 CCT 2 700K to 5 000K, adjustable gimbal, dimmable, matte white

4 in - 10W, 120V, 779LM
Replaces 65W, incandescent
JUNWF4ADJSWW590CRIMW

6 in - 12W, 120V, 1 007LM
Replaces 75W, incandescent
JUNWF6ADJSWW590CRIMW




LED Recessed Fixture

120V, 5 CCT 2 700K to 5 000K

4 in - 9W, 670LM
Replaces up to 65W, incandescent
White # JUNWF4SWW590CRIMW
Black # JUNWF4SWW590CRIMB

6 in - 13W, 950LM
Replaces 75W, incandescent
White # JUNWF6SWW590CRIMW
Black # JUNWF6SWW590CRIMB

LED Recessed Fixture



LUNA SERIES

2 in - 7W, 120V, 565LM, dimmable, 40° beam, white finish
LITRA27F90WH



SKYE SERIES

120V, dimmable, white finish
4 in - 12W, 860LM, 75° beam
LITSLMB412WCCTWH
6 in - 16W, 1 400LM, 80° beam
LITSLMB616WCCTWH



LED Recessed Fixture

4 in - 8W, 120V, 5 CCT 2 700K to 5 000K, 560LM, dimmable, with 3 magnetic trims (white, black, silver), direct mount on octagonal junction box or in a existing 4 in recessed can (for retrofit purpose).
LITSLMT48W

KEENE
by @signify



LED Ceiling Mount Fixture

120 / 347V, 3 000 / 4 000 / 5 000K, die cast aluminum housing, polycarbonate lens, textured bronze finish.

28 / 40 / 60W, 3 870 to 9 130LM
KEEGCR60SCTG1SM510BZ
70 / 80 / 90W, 9 000 to 13 310LM
KEEGCR90SCTG1SM510BZ

PHILIPS



Linear LED Tube

4 ft - 10W, 100 / 277 / 347V, 1 600LM, dimmable, frosted glass

Replaces 32W, fluorescent
4 000K # PHI10T8CORE48840IF16GDIM
5 000K # PHI10T8CORE48850IF16GDIM

PHILIPS




Linear LED Tube

4 ft - 24W, 120 / 277 / 347V, made of polycarbonate
Replaces 54W, fluorescent

3 500K, 3 300LM # PHI24T5LEDHO483500IF
4 000K, 3 500LM # PHI24T5LEDHO484000IF
5 000K, 3 500LM # PHI24T5LEDHO485000IF

KEENE
by @signify



LED Wall Pack

30W, 120 / 277V, 4 000K, 3 364LM
Replaces up to 150W, HID

Gray # KEELPW16G38DGY
Bronze # KEELPW16G38BZ

Day-Brite
CFI
by @signify



for damp location

LED Strip Fixture

120 / 347V, 3 500 / 4 000 / 5 000K, dimmable 0 / 10V, frosted acrylic lens, metal housing paint white, safety cable between lens and fixture housing.

4 ft - 2 448LM
CFISDS42448L8CSTUN3DIM
8 ft - 4 998LM
CFISDS84998L8CSTUN3DIM

Day-Brite
CFI
by @signify



LED High Bay Fixture

120 / 347V, 4000 / 5000K, suspension open hook, 6 ft cord, 0 / 10V dimmable, motion sensor receptacle, polycarbonate lens, selectable lumen output.

14 000 to 21 000LM
CFIHCV1421L8CSTUN3DIM
28 000 to 33 000LM
CFIHCV2833L8CSTUN3DIM

STANPRO



LED Wall Pack

20W, 120 / 277V, 4 000K (2 522LM) / 4 500K (2 926LM) / 5 000K (2 637LM), frosted polycarbonate lens, photocell included, bronze finish.

Replaces up to 70W, HID
STAWCILS2W3CBR



LED Wraparound Surface Fixture

120 / 277V, 4 000K, frosted polycarbonate lens.

2 pi - 27W, 2 695LM, replaces 1 x 32W, T8
Interconnectable up to 15 units
STAL2WMG241G2
4 pi - 47W, 5 043LM, replaces 2 X 32W, T8
Interconnectable up to 8 units
STAL2WMG481




Suitable for damp location

LED Strip Fixture

Rocker switch, aluminium housing, frosted lens, 120° beam, interconnect up to 300W, for under-cabinet or task lighting, residential or commercial use (accessories sold separately).

12 in - 5W, 360LM
LUMLUUCFL12IN120V5W3KFR
24 in - 10W, 730LM
LUMLUUCFL24IN120V10W3KFR
36 in - 15W, 1 050LM
LUMLUUCFL36IN120V15W3KFR



Temporary LED Lighting Fixture

150W, 120V, 17 380LM, 360° beam angle, 20 ft 18/3C cord with plug, eyebolt for suspended mounting included.

STATHBDSCL150WCW



Suitable for wet location

Commercial LED Recessed Fixture

120 / 347V, 3 000 / 3 500 / 4 000K

4 in - 7 / 9 / 12W, 595 / 765 / 1 000LM
STACDU4RG2PS3Q3CW
6 in - 12 / 16 / 20W, 1 080 / 1 440 / 2 000LM
STACDU6RG2PS3Q3CW
8 in - 15 / 20 / 25W, 1 800 / 2 200 / 2 900LM
STACDU8RG2PS3Q3CW




LED Lamp

120V, 5CCT 2 700K to 5 000K, base E26, dimmable.

R20, 6.5W, 615LM
Replaces 50W incandescent
STAR2065W5CCTSTD
BR30, 8W, 650LM
Replaces 75W incandescent
STABR308W5CCTSTD
BR40, 12.5W, 1075LM
Replaces 100W incandescent
STABR40125W5CCTSTD



Fixtures with amber colored lighting to reduce light pollution

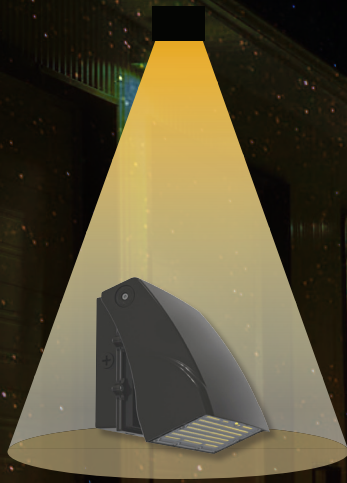

LED Adjustable Wall Pack

50 / 60 / 80W, 120 / 347V, 2,200K, 9 783LM (maximum), polycarbonate lens, photocell included, bronze finish aluminium molded housing.
Replaces up to 250W, HID

RABAWL2SLED80A50H22KBRPC



LED Wall Pack

50 / 80 / 100 / 120W, 120 / 277V, 2 200K, 12 240LM (maximum), polycarbonate lens, photocell included, grey aluminium molded housing.
Replaces up to 400W, HID


RABBL2SLED120A50B22KGRPC



LED Round Bollard

5.3 in diameter x 36 in height - 25W, 120 / 277V, 2 625LM, 2 700K, type V 360° distribution, die cast aluminium base and head, extruded aluminium post, bronze finish.

RABSMT6H36LED24B27KT5BRZ



LED Adjustable Wall Pack

100 / 120W, 120 / 347V, 2,200K, 15 273LM (maximum), polycarbonate lens, photocell included, bronze finish aluminium molded housing.
Replaces up to 400W, HID

RABAWL3SLED120A100H22KPC



Full Cut-Off LED Wall Pack

33 / 45 / 53W, 120 / 347V, 2,200K, 7 560LM (maximum), polycarbonate lens, bronze finish aluminium molded housing.
Replaces up to 175W, HID

RABWPF2LED55A33H22KBRDIM

Light Efficient Design
a division of TADD, LLC



Portable Work Light

100W, 120V, 5 000K, 12 000LM, IP64, 6 kA Surge Protection, 10 ft cord, stainless steel protective cage, integrated portable handle, can be daisy chain installed (6 units maximum).

LED90091005C



LED Stringlight for Temporary Lighting

100 ft - 120V, 10x 12W LED modules, 5 000K, 10 000LM total, 16-3 AWG cord, metallic suspension hooks, IP65, 360° beam, can be daisy chain installed (7 units maximum)

LED900350K10PK163



Replacement LED Lamp

Type B for bollard fixture
35 / 45 / 60W, 5 140 to 8 870LM, 3 000 / 4 000 / 5 000K.
Replaces up to 150W, HID

120 / 277V, E26 base
LED8029E345AFW

347V, E26 base
LED8029E345CAFW

120 / 277V, EX39 base
LED8029M345AFW

347V, EX39 base
LED8029M345CAFW



Replacement LED Lamp

Type B for post top fixture
35 / 45 / 60W, 5 140 to 8 870LM, 3 000 / 4 000 / 5 000K.
Replaces up to 320W, HID

120 / 277V, E26 base
LED8024E345G7FW

347V, E26 base
LED8024E345CG7FW

120 / 277V, EX39 base
LED8024M345G7FW

347V, EX39 base
LED8024M345CG7FW

MICROELECTRIC



Meter Socket
4 jaw

MICBE1TCV

SIEMENS



SEQ Series Distribution Panel
100A - 32 / 64 circuits, single phase 120 / 240V,
NEMA, with main circuit breaker

SIESEQ32100SM

**SIEMENS
NEW PRODUCTS!**



**Twin Arc-Fault
Breaker 15/15**
1P, 15A, 120V, 10 kA,
with pig tail

SIEQ1515AFCCSA



Arc-Fault Breaker
1P, 15A, 120V, 10 kA,
plug in neutral

SIEQA115AFNCNSA



Double Function Breaker
1P, 15A, 120V, 10 kA,
AFCI / GFCI, plug in neutral

SIEQ115DFNCNSA

**METER,
PANELS AND
BREAKERS KIT**

MICKITBEITCV/SEQ32100SM

Includes:

- 1X MICBE1TCV
- 1X SIESEQ32100SM
- 6X SIEQ115
- 1X SIEQ120
- 4X SIEQ2020NC
- 5X SIEQA115AFCCSA
- 1X SIEQ21530CTNC
- 1X SIEQ21540CTNC



Slip Meter Riser with TA

2 ft - The factory assembled SMR fitting is supplied with a male adapter, is 2 feet in length and is sized to accept the underground raceway.

- 2 in diameter # SCESMR20TA
- 3 in diameter # SCESMR30TA
- 4 in diameter # SCESMR40TA



SCEPTER® JBOX™ Hinged Cover Junction Box

The Scepter Hinged Cover JBox is NEMA 3R and 4X rated, ideally suited for indoor and outdoor industrial, MRO and OEM applications and in wash-down environments.


- 8 x 8 x 4 in # SCEJBXH884
- 12 x 10 x 6 in # SCEJBXH12106
- 12 x 12 x 4 in # SCEJBXH12124
- 12 x 12 x 6 in # SCEJBXH12126
- 12 x 12 x 8 in # SCEJBXH12128
- 16 x 16 x 10 in # SCEJBXH161610



Pre-Assembled Heating Cable

120V, self-regulating, with 6 ft lead cable and lighted plug.

- 12 ft # RAYFG112P
- 18 ft # RAYFG118P
- 24 ft # RAYFG124P
- 36 ft # RAYFG136P
- 50 ft # RAYFG150P
- 75 ft # RAYFG175P
- 100 ft # RAYFG1100P

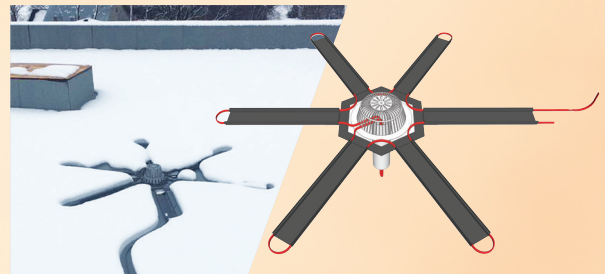

RIM-DT Ice Melting System for Roof Drains

Includes cable, connection kit and channel panel.

- 120V # RAYF6205AL231
- 208 / 240V # RAYF6205AL232



TBM840 Crimping Tool
For copper lug gage from 8AWG to 4/0 AWG.
Metal carrying case included.

THOTBM840



14-Ton Manual Crimping Tool

THOTBM14M



Power Outlet Surface Panel
100A, 120 / 240V, NEMA 3R, with 4 x 20A GFCI outlets and 4 x 20A circuit breakers.

MIDU014C010



Blackburn

TBM45S Compression Tool, Dies and Accessories Kit

Lithium battery, 175 one-hole lugs of different sizes, 125 bidirectional connectors of different sizes and metal case.

THOTBM45SKITN



Die Kit

Complete with 15 dies #2 AWG to 750 MCM copper and #2 AWG to 650 MCM aluminum.

BLAEZCKSSDIEKIT



Break-Away Connector Kit

Single pole in-line, electrical rating: for 600V, 10-30A, 13/32" x 1-1/2" fuse, 14-6 AWG, copper.

THOD65UC



NEMA 3R Power Outlets
Ideal outdoor connection solution for electric vehicle charging stations.



30A, 120V, R32U receptacle
MIDU013



50A, 120 / 240V, 14-50R receptacle
MIDU054



50A, 240V, 6-50R receptacle
MIDU051



600V Miniature Fuse

- 10A # FERATM10
- 15A # FERATM15
- 20A # FERATM20
- 25A # FERATM25
- 30A # FERATM30



Photocell
For HID or LED fixtures



Clear Cover

Weatherproof, heavy-duty

INTWP5100C



Button type, 120V, 6A, 1 650W to 277VAC.

INTEK4036S



Stem and swivel type, 120V, 6A, 1 650W to 277VAC

INTEK4236S



Twist lock type, 120 / 277V, 8A, 2 200W at 277VAC

INTLED4536SC

Circuit-Lock® Enclosure



30A - 3P, 600V, NEMA 3
HUBHBL13R89



60A - 3P, 600V, NEMA 3
HUBHBL16R93D



30A - 600V, NEMA 1, with switch
2P # HUBHBL1372
3P # HUBHBL1379



Motor Disconnect
NEMA 4X, 12 commercial grade
30A, 7.5HP # HUBMD30
60A, 20HP # HUBMD60



Duplex Wallplate
1G, 430 stainless steel, brushed finish.
HUBSS8L



GFCI Wallplate
1G, 430 stainless steel, varnish coated finish to prevent oxidation.
HUBSS26L



Single Opening Wallplate
1.60 in - 1G, 430 stainless steel, brushed finish.
HUBSS720



Service Pole 2KO-2 Duplex with Cord
Aluminum, three service capability ideal for delivering power, fiber, and data cabling from the ceiling to the floor.
9.6 in # HUBA259624D
10.6 in # HUBA2510624D
12.6 in # HUBA2512624D



PROVOLT™ Sensor Occupancy
120 / 277V, with integrated photocell, multi-tech, 2 000 ft², ceiling mount, extended range lens installed.
LEVODC20MDW



Decora Dimmer
120V, 300W LED and CFL, 600W incandescent / halogen, 60Hz, single pole and 3-way. ON / OFF rocker switch. Wallplate not included.
LEVDSL061LZ



Electronic Timer Switch
120VAC, 60 Hz, 1 800W incandescent, 20A resistive / inductive, 1HP, single pole, 3-way. Wallplate not included.
5-10-15-30 minutes # LEVLTB301LZ
10-20-30-60 minutes # LEVLTB601LZ



Occupancy Sensor
120 / 277VAC, 50 / 60Hz, PIR, wall switch, manual ON / Auto-OFF selectable, field of view 2100SF, white. Wallplate not included.
LEVODS10IDW




Smart Sensor
120 / 277VAC, 50 / 60Hz, PIR, antimicrobial, app configurable: manual ON / Auto-OFF selectable, neutral wire required, white. Wallplate not included.
LEVODS15IDW




Multi-Tech Occupancy Decora Sensor
120 / 277V, 50 / 60Hz, single pole, 60° or 180° field of view, 2 400 ft² coverage, 10 to 30 minute time delay. Wallplate not included.
LEVOSSMTMDW


rve

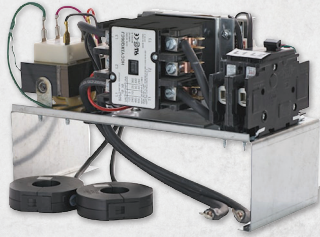

Energy Management System
Fits inside the DCC-9-BOX and connects an EV charger to the main feeder of a panel without affecting the load calculation. 40A breaker included.
RVEDCC9PCB40A

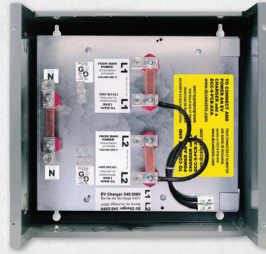

Charge Controller
Electric vehicle energy management system for multi-dwelling installations.
RVEDCC9BOX

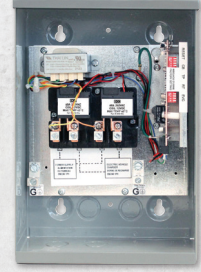

Charge Controller
For residence at 240V, 200A.
RVEDCC12

LEVITON®

New EV series

- For use with any SAE J1772™ compatible electric vehicle
- Cable design prevents cord from freezing and cracking
- For indoor and outdoor use with a thermoplastic, waterresistant enclosure rated NEMA Type 3R



Charging Station
32A # LEVEV320
48A # LEVEV480
80A # LEVEV800



Single Pedestal
LEVEPED1
Double Pedestal
LEVEPED2



Double pedestal assembly including cable management
LEVKITEPCM

wallbox™



Charging Station
40A, 9.6 kW - Adjustable load capacity from 6A to 40A
WALPULSARPLUS40A
48A, 11.2 kW - Adjustable load capacity from 16A to 48A
WALPULSARPLUS48A



Eiffel Basic Pedestal
55 x 7.9 x 7.95 in
Designed to be screwed to a concrete slab, anthracite gray color.
Single
WAL000002504
Double
WAL000002506



ABB



24 kW

Terra DC Wall Charger
Level 3 charging station
Fast and compact 24 kW direct current charger including RFID reader, Ethernet connection and CCS1 sockets. Other configurations available. Contact your Lumen representative for more information.
Single phase
ABBTERRA1PH24KWCCS1
3-phase
ABBTERRA3PH24KWHCCS1



80A

Terra AC Wall Charger
Level 2 charging station
80A smart charger including RFID reader, Ethernet connection and a 25 ft cable.
ABBTERRA80A



EV Charging
Done Right™



With the purchase of
10 units
of G5 or X5
receive **\$50 off each G5**
and **\$70 off each X5**

flo.com

FLO Home™
240 V | 30A | 7,2 kW

Residential level 2
charging station

- Certified to operate at temperatures ranging from -40 °C to 50 °C
- CSA-certified. Meet applicable UL safety standards
- NEMA 4X aluminum casing
- Integrated safety features
- 25-foot industrial grade cable

- Heavy-duty aluminum casing
- Safe
- Made in Canada
- Certified
- 3-Year Limited Warranty

Stock Available at

Lumen
A Sonepar Company

RAB
DESIGN



**Charging Station Pedestal
for Flo Home G5 and X5,
Core + and Core + Max**

*Aluminum post and base plate, ideal
for commercial and residential
applications, black finish.*

RABEVP5SBKFLOSL

**Pedestal for Flo Home
G5 and X5 Charging
Stations**

RABPIDESTALBORNEFLO



provoq
innovation



**RETRACK SERIES
Retractable Cable
Management System**

RETEVMWRA05B

**RETRACK SERIES
Pedestal for
Retrack Cable
Management System**

8 ft

RETRP08



FLUKE

**Test your electric vehicle
charging solutions!**



**Tester/Adapter Kit for Electric
Vehicle Charging Stations**

Now with Tesla vehicle adaptor

- **Vehicle simulation Control Pilot (CP)**
Simulation tests different charging states
- **Grounding protection**
PE Pre-Test for dangerous voltage
- **GFCI testing**
Stay protected and check risk of electric shock

FLUFEV100TY1TSL

ONTARIO - Effective from September 1st to October 31st 2023




Lumen

9

3 Series of Ductless Heat Pumps

Capella 16, Single Zone



Capella 28, Single Zone



Capella MZ, Multizone



Installation Accessories for Heat Pumps



Aluminum wall bracket


24" X 16" WBA2416
30" X 16" SV-ALBR3016



Insulated copper line

50' single ligne

1/4" D001412050BLK
3/8" D003812050BLK
1/2" D001212050BLK
5/8" D005812050BLK
3/4" D003412050BLK
7/8" D007812050BLK



Aluminum ground stand

14 1/4" X 26" SV-ALGS1426
14 1/4" X 30" SV-ALGS1430
17 1/8" X 27" SV-ALGS1727-3



No kink drain line

5/8", 165' long SV-NKDL58L50

164' single ligne

1/4" D001412164BLK
3/8" D003812164BLK
1/2" D001212164BLK
5/8" D005812164BLK

50' non-insulated

3/8" C0308050

Contact a Convectair representative for more details. 1 800 463-7043 • www.convectaircanada.com

by **INNOVAIR**
SOLUTIONS




CATAMOUNT® Standard Cable Tie

UV resistant, black nylon

7.5 in - Bundle diameter 1-3/4 in
Pack of 1 000 # THOL7500M

8 in - Bundle diameter 2 in
Pack of 1 000 # THOL8180M

8.5 in - Bundle diameter 2 in
Pack of 1 000 # THOL8400M




Concrete Screws

Box of 100, Hex head

3/16 x 1-1/4 in
VIS72100

1/4 x 1-1/4 in
VIS72240

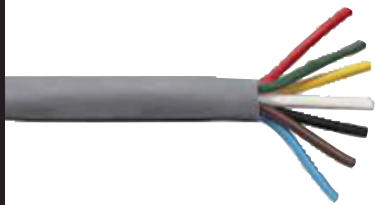

14 AWG Cable


75 m - 4 conductors, PVC, FT4, gray

CAB14/4PVCFT475



Disconnect Switch

60A, 120 / 240V, 1PH, NEMA 3R, metallic



Non-fusible, "pull-out" disconnect
MIDU065P



MIDU065NA1



Control your lighting with the Pico remote control or through the Lutron app (smart hub required)



CLARO SERIES



Smart Switch

120V, 600W incandescent / halogen, 5A LED, 3A fan, single and 3-way, white. Compatible with Caseta system.

LUTDVRF5NSWH

DIVA SERIES



Smart Dimmer

120V, 600W incandescent / halogen, 150W LED, single and 3-way, white. Compatible with Caseta system.

LUTDVRF6LWH

DIVA SERIES

Smart Dimmer Starter Caseta Kit

Includes: dimmer, smart hub, Pico remote control with mounting plate and faceplate, white.

LUTDVRFBGD1DC



PEDESTAL POWER SUPPLY
HAMMER HEAD SERIES

- 26" x 4" x 4"
- NEMA 3R, steel
- Includes 1 duplex 20A GFI receptacle


DAN1IDPP120AGFIDR45H

A SOLUTION for your reel problems!

BEFORE



AFTER

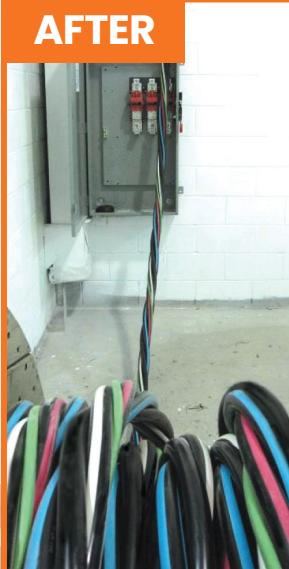

TWISTED assemblies RW90 NUAL® FEEDERPLEX

- Reduces quantity of reels required on construction sites by 3 to 5 times
- Ideal for existing buildings
- Reduces the pulling force by 50%
- Faster and cleaner (no lubricant required)
- Improves tension drop





Value of \$1390. Valid until October 8, 2023.
*To claim your warranty, visit: generac.com/national



Smart Switch
200A, service rated 120/240V,
1Ø NEMA 3R, CUL approved.

Primary
GENRXSW200A3CUL
Secondary
GENRXSC200A3



Air-Cooled Standby Generator
Aluminum enclosure. Permanently installed home backup generator protects your home automatically and delivers power directly to your home's electrical system.

18 / 17 kW # GEN7226
22 / 19.5 kW # GEN7042
24 / 21 kW # GEN7209
26 / 22.5 kW # GEN7290

9 to 26 kW Air Cooled Heater Kit

Battery # GEN7101
Oil # GEN7102
Breather # GEN7103



Smart Management Module (SMM)
50A
GEN7000



GREENLEE



Non-Contact Voltage Detector
50V to 1 000V AC. Bright flashlight for use in dark work areas.

GREGT13



6-Pieces Drill / Tap Bit Set
6-32 to 1/4-20

GREDTAPKIT



GFI Circuit Tester
Use to troubleshoot 120 VAC grounded outlets and test GFCI receptacles.

GREGT10GFI



Slug-Buster® Knockout Kit
1" ratchet wrench allows use with both 3/8" and 3/4" draw studs. 1/2" to 2" conduit.

GRE7238SB



Set of Pistons
For 1/2 to 2 inch conduits. Use with blower or vacuum power fishing system (to pioneer the line through the conduit run).

GRES2613



Heavy Duty Hacksaw
12 in

GRE333A

FLUKE



Pocket Thermal Imager PTi120

120 x 90, 9Hz. Rugged and weatherproof, this thermal imager provides easy troubleshooting and quickly scans the temperature of electrical equipment, machinery, and other assets. With an infrared resolution of 120 x 90, WiFi connectivity, and a temperature range of -4 to 752°F (-20 to 400°C).

FLUFLKPTI1209HZ400C

NEW PRODUCT!

Wire Tracer Kit

Locates and troubleshoots cables, wires, and breakers behind walls and ceilings. Kits include test leads, alligator clips, outlet adapters, magnet hanger, signal clamp and batteries.



Advanced kit
FLU2052

Advanced PRO kit
Smart Sensor™ technology visualizes orientation of energized wires on high resolution 3.5" TFT LCD color display (2062 only).

FLU2062



Wire Pulling Lubricant
Yellow 77



950 ml
IDE31358



3.78L (1 Gallon)
IDE31351



Fish Tape Replacement

120 ft - Blue steel, formed hook
1/8 in (width), 0.06 in (thick).

IDE31036



Square-Recessed Tip Screwdriver

8 in - #2, round-shank

KLE666



Keystone Demolition Driver

5/16 in - 7 in shank

KLE6027DD



7-in-1 Screwdriver / Nut Driver

Magnetic, nut driver sizes: 1/4, 5/16, 11/32, 3/8, 1/2, 7/16 and 9/16 in.

KLE32807MAG



Jobsite Bluetooth® Earbuds

Built-in microphones, 15 h of autonomy, 28dB noise reduction when used with memory foam tips, rigid charging case, IP67 certified: dustproof and waterproof (headphones only).

KLEAESEB1



Cross Line Laser Level

Automatic leveling with plumb spot. Integrated magnetic 360° mounting bracket with 1/4" and 5/8" tripod mounting threads. IP54: water and dust resistant.

Includes: hard plastic carrying case and 3 x AA batteries.


KLE93LCLS



Solid and Stranded Copper Wire Stripper and Cutter

Cuts, strips, and loops 10-18 AWG Solid and 12-20 AWG Stranded wire and cleanly shears 6-32 and 8-32 screws.

KLE11055



**Standard Compact
Portable Band Saw Blade**
35-3/4 in - Pack of 3

18 TPI # MIL48390529
24 TPI # MIL48390539



**M18 ROCKET
Tower Light/Charger**
6 000LM, integrated AC plug, you can plug the light with a standard extension cord and charge any M18 REDLITHIUM pack or use the USB port to charge your devices on site.
MIL213620



**M18 ROCKET
Dual Power Tower Light**
2 500LM of TRUEVIEW high definition output. Dual Power capability as they can be powered by M18 batteries or by an extension cord.
MIL213120



**M18 REDLITHIUM 1.5AH
Compact Battery Kit**
Runs cooler and performs in climates below -18°C (0°F).

Pack of 2 # MIL48111811



M18 FUEL 5-Tool Combo Kit
Includes: M18 FUEL 1/2" hammer drill / driver, M18 FUEL 1/4" hex impact driver, M18 FUEL SAWZALL® reciprocating saw, M18 FUEL 6-1/2" circular saw (tool only), M18 work light, M18 REDLITHIUM XC5.0 extended capacity battery pack, M18 & M12 multi-voltage charger.
MIL369725



39-Piece Tool-Check Plus Kit
With 1/4" wrench, rapidaptor bit holder, 1/4" adapter and socket.
Metric # WER056490
Imperial # WER056491



Wire Stripper
8 in - American style, multifunction electrician pliers. Fast, burr-free cutting of threaded rods and screws of UNC 6-32 and 8-32.
KNI13728SBA



3-Piece Pro Pliers Set
Includes: KNI0901240SBA, KNI7401200 and KNI8701250.
KNI9K0080157US



**17-Piece Kraftform
Kompakt Pouch Kit**
60 RA, imperial, 89 mm bits.
Imperial # WER051041



Heavy-Duty Extension Cord
3C/12AWG, SJEOW extreme cold or hot outdoor environments, illuminated end.
25 ft - Single ended
BERSC25123LTOR
50 ft - Single ended
BERSC50123LTOR
100 ft - Single ended
BERSC100123LTOR
50 ft - Triple ended
BERSC501233TOR
100 ft - Triple ended
BERSC1001233TOR



Temporary Stringlight
100 ft - Ten sockets, male / female ends. Lamps not included.
2C / 14AWG cable
BERGL100142MPC
3C / 14AWG cable
BERGL100143MPC



Virtua™ Glasses
Clear temples and anti-fog lens.
3MS11329



**Fire Barrier Sealant
IC 15WB+**
10.1 fl. oz (298 ml) - Firestop tested
up to 3 hours.
TROIC15WB+10.1OZ



Aura™ Particulate Respirator
NIOSH approved N95 rating. Adjustable nose clip,
nose foam, 3-panel, flat-fold style, stapled headbands.
Individually sealed, sold in pack of 20.
Box of 20 # 3MS9205+



**175 Temflex™ General Use
Vinyl Electrical Tape**
High performance
3/4 in x 60 ft - 7 Mil., -7° to 90°C, black
TRO175BK4A



**165 Temflex™ General Use
Vinyl Electrical Tape**
Multipurpose
3/4 in x 60 ft - 6 Mil., 0°C to 90°C, black
TRO165BK4A

**BENCHMARK
for electrical tape**



Other colors available!

Blue	# TRO165BL4A
Brown	# TRO165BR4A
Green	# TRO165GR4A
Gray	# TRO165GY4A
Orange	# TRO165OR4A
Purple	# TRO165PR4A
Red	# TRO165RD4A
White	# TRO165WH4A
Yellow	# TRO165YL4A



Clamp-On Breaker Lockout
This oversized 480/600V frame fits breaker switches up
to 2-1/4" wide and 7/8" thick. Applies in seconds with
thumbscrew mechanism, no screwdriver needed.
BRA65329



Panel Door Lockout
Prevents electrical panel doors from
being opened in a locked out state.
BRA151633



Original Cable Lockout
6 pi - Easy-to-use multi-purpose energy
isolation solution, ideal for unusual devices that
can't be locked out using traditional devices.
BRA65318



Kneepro Ultra Flex III Knee Pads
The articulating hinged design ensures proper
placement all day long - set them once and forget
you are even wearing them.
PIOVS96110




Safety Sash
Hi-viz, one size.
Orange # PIOV10408500/S
Yellow/green # PIOV10408600/S



Sweater with Hood
10.5 oz high end polyester fleece.
Detachable hood with drawstring.
Elastic cuffs and hem. 2 front pockets
in bias. 2 radiophone clip straps. Black.
Large # PIOV1060471L
X-Large # PIOV1060471XL
XX-Large # PIOV10604712XL

ORDER ONLINE 24 / 7

WEB · ERP INTEGRATION · MOBILE

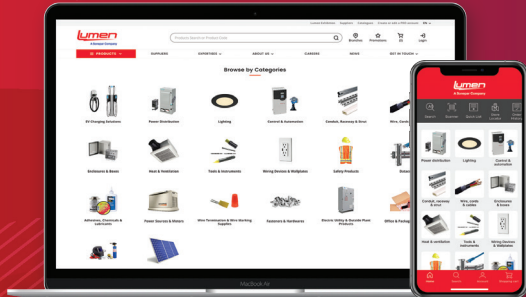

- Access your prices
- View real-time inventory
- Search products by category
- Download product spec sheets

Chat online and make an appointment with our e-Commerce experts.



PRIORITY PICK-UP FOR ORDERS ALREADY PLACED

Place your order in advance on lumen.ca or on the mobile app.

Two branches to better serve Ottawa and Eastern Ontario !

OTTAWA EAST

1000, Belfast Road, Ottawa (ON) K1G 4A2
Tel. : 613 789-7500 / **Fax :** 613 789-7501
Toll free : 1 855 589-7500

OTTAWA WEST

1050, Baxter Road, Ottawa (ON) K2C 3P1
Tel. : 613 828-2930 / **Fax :** 613 828-2972
Toll free : 1 888 491-2930



Prices are subject to change without notice. All images are for illustrative purposes only. Air Miles program is reserved to the Electrical Contractor ECAO or OEL members only. We are currently experiencing an exceptionally high demand for many popular products. As a result, some products advertised in this flyer may not be available. Please check your local branch for availability or visit lumen.ca. We are currently working on replenishing supplies as quickly as possible and apologize for any inconvenience this may cause.



FSC
POUR POSITION
SEULEMENT