

Lumen

A Sonepar Company

ONTARIO

Special deals
May - June
2024



AIR MILES.

Valid for Electrical Contractors
ECAO and OEL members only

NEW PRODUCT

Milwaukee

ROLL-ON POWER SUPPLY GENERATOR

7 200 / 3 600W, 2.5kWh

The generator you can use indoor

- REDLITHIUM Integrated 2.5kWh
- 2 x 20A duplex breaker outlets, 1x USB-C, and 1x USB-A
- The Power Supply delivers 7 200W and 3 600W continuous
- Charges to 100% in 3 hours and to 25% in less than 35 minutes
- IP54 rating
- The power supply is fully compatible with the PACKOUT Modular Storage System
- ROLL-ON includes a 3-year warranty

MIL3300R



STANPRO EMERGENCY LIGHTING

ECONO Series



Remote Head

Single - 2W / 6V DEL
STAN106V2WLJWH

Double - 2W / 6V DEL
STAN206V2WLJWH

EASY-OUT Series



Remote Head

Single - 3W / 6-12V DEL
STAN10612V3WLJ

Double - 3W / 6-12V DEL
STAN20612V3WLJ



Steel Battery Unit

120 / 347V, 27W / 6V,
2 x 2W DEL

STASL1



Steel Battery Unit

120 / 347V, 36W / 6V,
2 x 2W DEL

STASLA2L



Plastic Exit Sign

120 / 347V

STARMPN0WHIB1S



**Plastic Exit Sign
Combo**

120 / 347V, 2 x 2W DEL

STAPRMPN2HO



Steel Exit Sign

120 / 347V


STARMS0WHUDC



**Steel Exit Sign
Combo**

120 / 347V, 2 x 2W DEL

STAPRMS2L

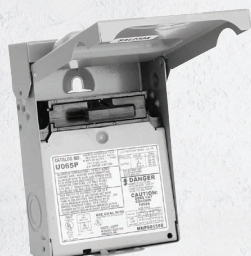

Non-Fusible

"Pull-Out" Disconnect

60A, 120 / 240V, 1PH, NEMA 3R, metallic

MIDU065P



Non-Automatic

Disconnect Switch

60A, 120 / 240V, 1PH, NEMA 3R, metallic

MIDU065NA1



LED Surface Fixture

4 ft - 34W, 120/277V, 5 000LM, IP66, dimmable 0/10V, frosted polycarbonate lens, captive polycarbonate latches. Replaces 2 X 32W, T8

4 000K # LITCSVTL485000LMMV4K80CR
5 000K # LITCSVTL485000LMMV5K80CR



LED Striplight

120/347V, 3 500/4 000/5 000K, frosted acrylic lens.

4 ft - 3 000/4 000/5 000LM
LITCSSL48ALO3UVOLTSWW3
8 ft - 6 000/8 000/10 000LM
LITCSSL96ALO4UVOLTSWW3



LED Full Cut Off Wall Pack

120/277V, 3 000K, bronze finish.

24W, 2 900LM
Replaces up to 150W, MH
LITWPX1LEDP230KMVDDDBXD
47W, 6 000LM
Replaces up to 250W, MH
LITWPX2LED30KMVDDDBXD
69W, 9 200LM
Replaces up to 400W, MH
LITWPX3LED30KMVDDDBXD



White only



High Bay LED Fixture

120/347V, 4 000/5 000K, medium distribution, open hook with 7 ft galvanized safety cable, 6 ft cord, dimmable 0/10V, polycarbonate lens.

12 000/15 000/18 000LM


White* # LITCPBALO13UVOLTSWW9DWH
Black # LITCPBALO13UVOLTSWW9DBL

21 000/24 000/27 000LM

White* # LITCPBALO14UVOLTSWW9DWH
Black # LITCPBALO14UVOLTSWW9DBL

Integrated passive infrared motion sensor (on/off)
LITCPBALO14UVOLTSWWWHMS

NEW!



Suitable for damp location



LED Ceiling Mount Fixture

11 in - 18W, 120V, 5 CCT 2 700 to 5 000K, 1 200LM, dimmable, white acrylic lens, black trim included, white.

JUNFMLR11INSWW5WBT

JUNO




Suitable for damp location

LED Ceiling Mount Fixture

6 in - 15W, 120V, 1 050LM, 3 000/4 000/5 000K, with passive infrared motion sensor, frosted polycarbonate lens, aluminium housing, non-dimmable, white.

JUNJSBT6INSWW290CRIPRMW

NEW!



Suitable for damp location



LED Ceiling Mount Fixture

15 in - 26W, 120V, 5 CCT 2 700 to 5 000K, 1 840LM, dimmable, white acrylic lens, black trim included, with 1800K amber night light, white.

JUNFMLSQ15INSWW5WBTNL




Suitable for wet location

LED Ceiling Mount Fixture

120V, 3 000K, dimmable, polycarbonate lens, direct mounting on octagonal junction box, can be used in storage room, shower, bathroom, outside under soffit or covered area.

4 in - 10.5W, 750LM
JUNJSBT4IN30K90CRIWLMW
6 in - 14.4W, 990LM
JUNJSBT6IN30K90CRIMWWL

NEW!



Suitable for wet location



LED Recessed Fixture

2 in - 120V, 5 CCT 2 700 to 5 000K, 517/689/862LM, dimmable, white.

Replaces up to 65W, incandescent
JUNWF2RDALO25SWW5120MW




Suitable for wet location

LED Recessed Fixture

5 CCT 2 700K to 5 000K, adjustable gimbal, dimmable, matte white.

4 in - 10W, 120V, 779LM
Replaces 65W, incandescent
JUNWF4ADJSWW590CRIMW
6 in - 12W, 120V, 1 007LM
Replaces 75W, incandescent
JUNWF6ADJSWW590CRIMW

NEW!



Suitable for wet location



LED Recessed Fixture

2 in - 120V, 5 CCT 2 700 to 5 000K, 544/725/907LM, recessed lens, dimmable, white.

Replaces up to 65W, incandescent
Conical smooth reflector
JUNWF2DREGSMALO25SWW5120
Baffle reflector
JUNWF2DREGBALO25SWW5120




Suitable for wet location

LED Recessed Fixture

120V, 5 CCT 2 700K to 5 000K, white.

4 in - 9W, 670LM
Replaces up to 65W, incandescent
JUNWF4SWW590CRIMW
6 in - 13W, 950LM
Replaces up to 75W, incandescent
JUNWF6SWW590CRIMW
8 in - 19W, 1 640LM
Replaces 100W, incandescent
JUNWF8SWW590CRIMW

STANPRO



LED Wraparound Surface Fixture

120 / 277V, 4 000K, frosted polycarbonate lens.

2 ft - 27W, 2 695LM, replaces 1 x 32W, T8
Interconnectable up to 15 units
STAL2WMG241G2

4 ft - 47W, 5 043LM, replaces 2 X 32W, T8
Interconnectable up to 8 units
STAL2WMG481



LED Flat Panel for T Bar Ceiling

120 / 347V, 3 500 / 4 000 / 5 000K, dimmable.

1 x 4 - 20 / 30 / 40W, 2 650 to 5 100LM
STAL3PNB1LPS40PQ3C

2 x 2 - 20 / 30 / 40W, 2 650 to 5 100LM
STAL3PNB2LPS40PQ3C

2 x 4 - 30 / 40 / 50W, 4 000 to 6 600LM
STAL3PNB4LPS50PQ3C



Suitable for wet location

LED Ceiling Mount Fixture

120V, 3 000K, white trim.

6 in - 11W, 855LM
STALEDCLE6DG11W3KFMNDWH

8 in - 14W, 1 066LM
STALEDCLE8DG14W3KFMNDWH

12 in - 22W, 1 647LM
STALEDCLE12EDG22W3KFMNDWH



LED Ceiling Mount Fixture

120 / 347V, 40 / 60 / 70W, 3 000 / 4 000 / 5 000K
6 000 / 7 600 / 9 000LM, frosted polycarbonate lens, bronze finish die cast aluminium housing.

Bronze # STAIFOPS70AQ3CBRP
White # STAIFOPS70AQ3CWHP

NEW!



Suitable for wet location

LED Recessed Light Fixture

120V, 5CCT 2 700 to 5 000K, dimmable, fire rated, white.

4 in - 11W, 750LM
STADLCO4R11A5CWHFX

6 in - 12W, 1 000LM
STADLCO6R12A5CWHFX



LED Compact Projector

120 / 277V, 3 000 / 4 000 / 5 000K, tempered glass, bronze finish die cast aluminium housing.

15 / 25W, 2 100 / 3 500LM
Knuckle mount
STAFLMPS25AW3CBRKN

Yoke mount
STAFLMPS25AW3CBRYK

35 / 60W, 4 900 / 8 400LM, photocell (on / off)

Knuckle mount
STAFLMPS60AW3CBRKNP

Yoke mount
STAFLMPS60AW3CBRYKP

ignify



Day-Brite

CFI
by @ignify

LED Striplight

8 ft - 4 000K, 8 000LM, dimmable 0 / 10V,
acrylic frosted lens, metal housing painted white.

120 / 277V # CFIFSS880L840UNVDIM
347V # CFIFSS880L840347DIM

KEENE

by @ignify




LED Wall Pack

20W, 120 / 277V, 2 277LM, 4 000K, bronze

Replaces 70W, HID
KEETW20NWG18BZ

KEENE

by @ignify



LED Wall Pack

120 / 347V, 3 000 / 4 000 / 5 000K,
integrated selectable photocell, glass lens,
die cast aluminium housing, bronze finish.

28 / 40 / 60W, 3 860 to 8 160LM
KEEWP60SCTG210BZ

70 / 80 / 90 / 100W, 9 240 to 13 600LM
KEEWP100SCTG210BZ

PHILIPS



T8

LED Linear Tube

48 in - 15W, 120 / 347V, ballast bypass installation,
frosted glass. Replaces 32W, fluorescent

3 500K, 2 000LM
PHI15T8COR48835MF20G347V

4 000K, 2 100LM
PHI15T8COR48840MF21G347V

5 000K, 2 100LM
PHI15T8COR48850MF21G347V

LIGHTOLIER

by @ignify



Suitable for damp location

LED Commercial Recessed Fixture

120 / 347V, 3 000 / 3 500 / 4 000K, aluminium white baffle reflector, dimmable 0 / 10V, metallic cable for connection included.

4 in - 5.5 / 8 / 12W, 500 / 700 / 1 000LM
LIGCR4RLMCCT

6 in - 7 / 10 / 17W, 700 / 1 000 / 1 500LM
LIGCR6RLMCCT

8 in - 10 / 15 / 21W, 1 000 / 1 500 / 2 000LM
LIGCR8RLMCCT

10 in - 20 / 25 / 32W, 2 000 / 2 500 / 3 000LM
LIGCR10RLMCCT

KEENE

by @ignify



LED Projector

120 / 347V, 3 000 / 4 000 / 5 000K,
integrated photocell, bronze finish.

60 / 80 / 100W, 9 540 / 12 320 / 14 800LM

Slip fitter # KEESF100SCTSG210PCBBZ
Trunnion # KEESF100SCTTG210PCBBZ

100 / 120 / 150W, 16 800 / 18 240 / 21 750LM

Slip fitter # KEESF150SCTSG210PCBBZ
Trunnion # KEESF150SCTTG210PCBBZ

120 / 150 / 205W, 18 600 / 22 500 / 29 725LM

Slip fitter # KEESF205SCTSG210BZ
Trunnion # KEESF205SCTTG210BZ



LANDSCAPE LIGHTING



LED Projector

12VAC, 2 200 / 2 700 / 3 000 / 3 500 / 4 000K, 180° directional, interchangeable clear lens of 10° / 40° / 90°, aluminum housing, ground stake included, black finish.

3 in diameter - 10W, 500LM
DALLSP3CCLBK

4 in diameter - 20W, 1 000LM
DALLSP4CCLBK



String Lights

48 ft - 15 LED bulbs, 24VDC, 24W, 1 200LM, 2 200 to 4 000K + RGB, black finish, IP65, plug in driver and on wire remote control included, bluetooth technology, compatible with Google Assistant and Amazon Alexa (pro core driver needed), Dals connect apps required.

DALDCPSTG48



Transformer

With timer, photocell, black finish.

60W, 120V to 12VAC, pluggable, plastic housing

1 # DALLTRP60BK

300W, 120V to 12 / 13 / 14 / 15VAC, metal housing

2 # DALLTR300BK



LED Path Light Fixture

Square head - 90° beam

12 in tall - 3W, 265LM, 12VAC, 2 200 / 2 700 / 3 000 / 3 500 / 4 000K, cast aluminium construction, ground stake and 21 in extension arm included, frosted lens, black finish.

DALLSQPCCBK



LED Path Light Fixture

Round head - 360° beam

20 in tall - 8W, 360LM, 12VAC, 2 200 / 2 700 / 3 000 / 3 500 / 4 000K, aluminum construction, ground stake included, frosted lens, black finish.

DALLPP20CCBK



LED Wall Luminaire

3W, 12V, 200LM, 5 CCT 2200 to 4000K, 110° beam, frosted lens, black finish aluminium housing, surface or recess mount, can be mounted to wood or concrete, ideal for walls, steps and patios.

DALLHS07CCBK

Liteline

LUNA SERIES LED Recessed Fixture

120V, 5 CCT 2 700 to 5 000K



Suitable for wet location

2 in - 7W, 565LM, dimmable, 40° beam, white finish

LITRA27F90WH



Suitable for wet location

Dimmable, 40° beam, white finish

5 or 6 in

17W, 1 150LM

LITRA5617F90WHWH

20W, 1 435LM

LITRA5620F90WHWH

33W, 2 330LM

LITRA5633F90WHWH



Suitable for wet location

12W, adjustable gimbal, diffused mirror reflector

3-1/2 in

White # LITRA3512RG90WH

Black # LITRA3512RG90BK

4 in

White # LITRA412RG90WH

Black # LITRA412RG90BK

3 000 to 2 000K - Warm dim

3-1/2 in

White # LITRA3512RGDTW90WH

Black # LITRA3512RGDTW90BK

4 in

White # LITRA412RGDTW90WH

Black # LITRA412RGDTW90BK



Suitable for damp location

Set of 3 LED Fixtures

3 in - 2W, 12V, 3000K, 120LM, recessed or surface mount, plug in driver, with 6 ft cord.

Black # LITSLMPOUCK390BK

Brushed nickel # LITSLMPOUCK390BN

White # LITSLMPOUCK390WH



Suitable for wet location

LED Recessed Fixture

120V, dimmable, white finish

4 in - 12W, 860LM, 75° beam

LITSLMB412WCCTWH

6 in - 16W, 1 400LM, 80° beam

LITSLMB616WCCTWH



Suitable for wet location


LED Recessed Fixture

4 in - 8W, 120V, 5 CCT 2 700K to 5 000K, 560LM, dimmable, with 3 magnetic trims (white, black, silver), direct mount on octagonal junction box or in a existing 4 in recessed can (for retrofit purpose).

LITSLMT48W




Weatherproof Covers - Double Gang




Toggle switch cover
SCEVSCU202



Double door duplex cover
SCEVSDD202



Double door GFCI cover
SCEVSGG202



Combination switch cover & GFI receptacle
SCEVSRUCU202


F-Series Universal Boxes - Double Gang




No opening
SCEFDU2



1/2, 3/4 and 1 in
SCEFSU2101520



1/2, 3/4 and 1 in
SCEFSCU2101520



1/2, 3/4 and 1 in
SCEFSSU2101520


Weatherproof Covers - Single Gang




Toggle switch cover
SCEVSC1510



Plunger style switch
SCEVPT1510



Duplex - gray receptacle
SCEWDR1510



Ground fault - gray receptacle
SCEWGF1510

F-Series Boxes - Single Gang



1/2 in
SCEFS10
3/4 in
SCEFS15



1/2 in
SCEFSC10
3/4 in
SCEFSC15




CABLE REPAIR KIT

Direct Burial Splice Kit

For 14-8 AWG conductor sizes.
Includes: heat-shrinkable insulating tube filled with adhesive to cover the splice and ensure water and weather tightness.

BLAUFK148DB



Galvanized Ground Plate with JAB

BLA1016BTB



Insulation Piercing Connector

Residential service entrance 200A and less.
Bolt head size: 1/2 in. Conductor range:
main 250MCM @ 1AWG, tap 4AWG @ 4/0.
As per Z462 and Z801 Standards.

TROTDD2610XFBTA



ERICO



Ground Rod Copper Plated

10 ft copper / steel - 99.9% pure electrolytic copper coating.

5/8 in diameter
ERH615800

3/4 in diameter
ERH613400

**SKYLARK
SERIES**



Dimmer

Compatible with : LED, incandescent, halogen, CFL, single and 3-way, white. Wallplate not included.

LUTCTCL153PWH

**DIVA
SERIES**



Dimmer

Compatible with : LED, incandescent, halogen, CFL, single and 3-way, white. Wallplate not included.

LUTDVCL153PHWHC

**MAESTRO
SERIES**



Dimmer

120V, 600W incandescent or halogen, 150W LED or CFL, single and 3-way, white. Wallplate not included.

LUTMACL153MHWHC



PROVOLT™ Sensor Occupancy

120 / 277V, with integrated photocell, multi-tech, 2 000 ft², ceiling mount, extended range lens installed.

LEVODC20MDW



Occupancy Sensor

120 / 277VAC, 50 / 60Hz, PIR, wall switch, manual ON / Auto-OFF selectable, field of view 2100SF, white. Wallplate not included.

LEVODS10IDW



Multi-Tech Occupancy Decora Sensor

120 / 277V, 50 / 60Hz, single pole, 60° or 180° field of view, 2 400 ft² coverage, 10 to 30 minute time delay. Wallplate not included.

LEVOSMTMDW



Clear Cover

Weatherproof, heavy-duty

INTWP5100C



Extendable Weatherproof Cover

Heavy duty, single gang, gray.

INTWP7000G



Photocell

Stem and swivel type, 120V, 6A, 1 650W to 277VAC, for HID or LED fixtures.

INTEK4236S



Digital Electronic Timer

30A, 120 / 208V, 1 pole, 1 circuit, 7-day astronomic programming, type NEMA 1 metal enclosure.

INTET1105C



Fish Tape Replacement

1/8 in (width) x 0.06 in (thick) x 120 ft Blue steel, formed hook.

IDE31036



Blued-Steel™ Fish Tape

120 ft x 1/8 in - With durable Tuff-Grip™ Pro case for superior pull-out and rewind.

IDE31056



Ductile Iron Conduit Bender

With BenderBoot™, 1/2" EMT # IDE74026

With 1" EMT handle, 3/4" Rigid/IMC # IDE74028



Wire Pulling Lubricant

Yellow 77®

950 ml

IDE31358

3,78L (1 gallon)

IDE31351

SIEMENS

Electrical Panel SPA Kit

120/240V - NEMA 3R

- 20A # SIEW0408ML112520
- 30A # SIEW0408ML112530
- 40A # SIEW0408ML112540
- 50A # SIEW0408ML112550
- 60A # SIEW0408ML112560



PROPANE BBQ - ROGUE SERIES



LIMITED QUANTITY

XT 525 - 57 000 BTU max, 4 burners + 1 infrared side burner, black.

NAPRXT525SIBPK1



LIMITED QUANTITY

XT 525 - 57 000 BTU max, 4 burners + 1 infrared side burner, stainless steel.

NAPRXT525SIBPSS1



LIMITED QUANTITY

XT 625 - 69 000 BTU max, 5 burners + 1 infrared side burner, black.

NAPRXT625SIBPK1



LIMITED QUANTITY

SE 525 - 76 500 BTU max, 4 burners, 1 side burner + 1 rear infrared burner, stainless steel.

NAPRSE525RSIBPSS1



LIMITED QUANTITY

SE 625 - 88 500 BTU max, 5 burners, 1 side burner + 1 rear infrared burner, stainless steel.

NAPRSE625RSIBPSS1



LIMITED QUANTITY


BBQ Cover

Rogue 525 series
NAP61527

Rogue 625 series
NAP61627

Costs up to 99% less to run than paper towels*

- # DYSHU02ARGENT
- # DYSHU02ARGENT208V
- # DYSHU02BLANC



dyson airblade V

*Average electricity price \$0.1/kWh as of April 2021. For calculations visit www.dysoncanada.ca/calcs.

Cool down for the summer

- # DYSFANAM07WHITE
- # DYSFANAM07BLACK



dyson cool

ONTARIO - Effective from May 1 to June 30, 2024



lumen

7



flo.com

Price drop alert!
Save up to \$646 on a new
FLO Home™ X5!
240 V | 30A | 7,2 kW

The home EV charger that
keeps charging, rain or shine.

- Certified to operate at temperatures ranging from -40 °C to 50 °C
- CSA-certified. Meet applicable UL safety standards
- NEMA 4X aluminum casing
- Integrated safety features
- 25-foot industrial grade cable

Get more details at your local branch.

- Heavy-duty aluminum casing
- Safe
- Assembled in Canada
- UL Certified
- 3-Year Limited Warranty

Stock Available at
Lumen

THE ENERGY MANAGEMENT SYSTEM FOR EV



DCC-9
RVEDCC930A
RVEDCC940A
RVEDCC950A
RVEDCC960A



DCC-12
RVEDCC12

Applicable taxes not included.

rve
FOR CHARGING AN EV
WITHOUT UPGRADING
THE PANEL



NEMA 3R Power Outlets

Ideal outdoor connection solution for electric vehicle charging stations.



30A, 120V,
R32U receptacle
MIDU013



50A, 120 / 240V,
14-50R receptacle
MIDU054



50A, 240V,
6-50R receptacle
MIDU501

Convectair now offers a complete range of heat pumps and installation accessories

Capella 16
Single Zone




Capella 28
Single Zone



Capella MZ
Multizone




SLIM24 HH
Central



Insulated copper line



Wall bracket



Ground stand



No-kink drain line

Insulated copper line	
COND001412050BLK	1/4" insulated copper line, 50' long
COND003812050BLK	3/8" insulated copper line, 50' long
COND001212050BLK	1/2" insulated copper line, 50' long
COND005812050BLK	5/8" insulated copper line, 50' long
COND003412050BLK	3/4" insulated copper line, 50' long
COND007812050BLK	7/8" insulated copper line, 50' long
COND001412164BLK	1/4" insulated copper line, 164' long
COND003812164BLK	3/8" insulated copper line, 164' long
COND001212164BLK	1/2" insulated copper line, 164' long
COND005812164BLK	5/8" insulated copper line, 164' long
Insulated copper line sets	
CONCO25121438W	1/2" and 1/4" insulated copper line set kit, 25' long
CONCO25381438W	3/8" and 1/4" insulated copper line set kit, 25' long
CONCO25581438W	5/8" and 1/4" insulated copper line set kit, 25' long
CONCO25583838W	5/8" and 3/8" insulated copper line set kit, 25' long

Non-insulated copper line	
CONC0308050	3/8" non-insulated copper line, 50' long, sold in box of 10 units
Wall bracket	
CONWBA2416	2 aluminum wall brackets 24" x 16"
CONVALBR3016	2 aluminum wall brackets 30" x 16", sold in boxes of 6 pairs
Ground stand	
CONVALGS1426	Aluminum ground stand 14 1/4" x 26"
CONVALGS1430	Aluminum ground stand 14 1/4" x 30"
CONVALGS17273 ¹	Aluminum ground stand 17 1/8" x 27" (2" x 3" Angle)
No-kink drain line	
CONSVNKL58L50	No-kink drain line 5/8", 165' long

¹ Floor support for central heat pump system.

Contact a Convectair representative for more details.
1 800 463-7043 • www.convectaircanada.com



STESFEX - STESFECM
10%
DISCOUNT

THE FURNACE

THE ALL-INCLUSIVE FURNACE

The Furnace line of products is the only one on the market equipped with a built-in temperature sensor that makes "The Furnace" very easy to install.

No temperature variations thanks to our state-of-the-art electronic controls.

Silent SFEx and SFECM furnaces are equipped with an ECM motor and deliver significant energy savings.

All models come with a 5-year warranty.

Find out now and save!



STESFEX

- ECM motor with preset speeds
- Soft start and stop
- Extremely energy-efficient
- Very quiet



STESFECM

- High-end model
- Variable-speed ECM motor
- Ultra-quiet
- Maximum energy savings
- Constant airflow



STELPRO.COM 1-844-STELPRO



Platinum member





Wraparound Splice Closure 1000 V

Water resistant GelWrap, with 14-8 AWG UL connector, 1 kit / pack.

RAYGELWRAPUF250UL



Hot Splice for 1 000V Teck Cable

14 @ 3
RAYTECK41

2 @ 3/0
RAYTECK42

4/0 @ 400 MCM
RAYTECK43



Power Outlet Surface Panel

100A, 120 / 240V, NEMA 3R, with 4 x 20A GFCI outlets and 4 x 20A circuit breakers.

MIDU014C010



Gutter Trough Enclosure

Used as junction or pull boxes, four mounting holes and M.A.L.T. screws included, housing and cover in 16 gauge steel, screwed cover, NEMA1.

12 x 4 x 4
BELGT1244

12 x 6 x 6
BELGT1266

18 x 4 x 4
BELGT1844

18 x 6 x 6
BELGT1866

24 x 4 x 4
BELGT2444

24 x 6 x 6
BELGT2466

36 x 4 x 4
BELGT3644

36 x 6 x 6
BELGT3666

48 x 4 x 4
BELGT4844

48 x 6 x 6
BELGT4866

60 x 4 x 4
BELGT6044

60 x 6 x 6
BELGT6066



Circuit-Lock® Enclosure



30A - 3P, 600V, NEMA 3
HUBHBL13R89



60A - 3P, 600V, NEMA 3
HUBHBL16R93D



30A - 600V, NEMA 1, with switch

2P
HUBHBL1372

3P
HUBHBL1379



Motor Disconnect

NEMA 4X, 12 commercial grade

30A, 7.5HP
HUBMD30

60A, 20HP
HUBMD60



M18 REDLITHIUM XC5.0 Batteries

2 pack, extended capacity.

MIL48111852



M18 FUEL 2-Tool Combo Kit

Includes: M18 FUEL 1/2 in hammer drill, M18 FUEL 1/4 in hex impact driver, 2x M18 REDLITHIUM XC 5.0Ah battery packs, M18 / M12 charger and carrying case.

MIL369722

BUY ONE M18 FUEL 7-Piece Tool Set AND GET ONE FREE M18 Redlithium High Output XC6.0 Battery



M18 FUEL 7-Piece Tool Set

Includes: hammer drill, 1/4" HEX impact wrench, reciprocating saw, 6-1/2" circular saw, 4-1/2-5" grinder, 1/2" medium torque impact wrench, work light, 2x REDLITHIUM XC5.0 batteries and an M12 / M18 multi-voltage charger.

MILKIT3697271865



M18 FUEL™ 2 Gallon Compact Quiet Compressor

MIL284020



REDLITHIUM USB Bluetooth® Ear Buds

Delivers uncompromised sound with awareness control, multiple ear tips and wings for a secure fit. Water, dust & impact resistant.

MIL219121

LIMITED QUANTITY



M18 FUEL Self-Propelled Mower Kit

21 in - Mulch, bag or side discharge. Includes: 2x High Output™ HD12.0Ah battery packs and rapid charger.

MIL282322HD

BUY ONE

M18 FUEL QUIK-LOK String Trimmer Kit with XC8.0 Battery and M12 / M18 Charger (2825-21ST)

LIMITED QUANTITY



AND GET ONE OF THESE TWO ITEMS FREE

1 M18 Hedge Trimmer 2726-20 (tool only)

MILKIT282521ST272620

2 XC 8.0AH Battery 48-11-1880

MILKIT282521ST111880

QUIK-LOK ACCESSORIES



Wide Bristle Brush Attachment 23 in # MIL49162741



Wide Rubber Broom Attachment 23 in # MIL49162740



Articulating Hedge Trimmer Attachment # MIL49162719



Brush Cutter Attachment # MIL49162738

Smart Switch

200A, service rated 120/240V,
1Ø NEMA 3R, CUL approved.

Primary

GENRXSW200A3CUL

Secondary

GENRXSC200A3



Air-Cooled Standby Generator

Aluminum enclosure. Permanently installed home backup generator protects your home automatically and delivers power directly to your home's electrical system.

18 / 17 kW
GEN7226

22 / 19.5 kW
GEN7042

24 / 21 kW
GEN7209

26 / 22.5 kW
GEN7290



Free 7-year warranty with the purchase of a 10 @ 26kW air-cooled residential standby generator purchased between April 1st and May 12th, 2024. Once your generator is installed and in operation, visit Generac.com/National to claim your free 7-year warranty. To be eligible, the generator must be installed and in operation before July 21, 2024. Conditions apply.



Smart Management Module (SMM)

50A
GEN7000

9 to 26 kW Air Cooled Heater Kit

Battery
GEN7101

Oil
GEN7102

Breather
GEN7103



Hex-Plus L-Key Set

9 pieces - Multicolour, ball-end hexagon tips, with durable plastic sleeve.

Metric # WER073593
Imperial # WER022640



Kraftform Kompakt 62

33 pieces - Pouch with 89 mm long bits. Kraftform bitholding screwdriver 816 R with Rapidaptor quick-release chuck.


WER059297



High Leverage Diagonal Cutter

8 in - 12° angled head offers clearance for gripping, cutting edge hardness approximately 64 HRC.

KNI7421200SBA

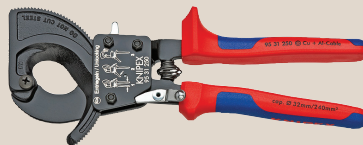

Ratchet Cable Cutter

Black lacquered tool, handles with multi-component grips. Good for cutting copper and aluminium single conductors as well as multiple stranded cables. Little handforce required due to high transmission ratio.

KNI9531250SBA



PLYAGE

WARNING MESH

The PLYAGE warning mesh* was designed to locate underground infrastructures from the surface and as a visual cue to warn of the presence of networks during excavation against potential assault by mechanical shovels or excavators.

300 mm x 100 m - Red

Non-detectable*
TECHZR300

Detectable*
TECHZD300

*Certified product by Hydro-Québec



Wire Pulling Foam Lubricant

19 oz - Stays where it is applied and wipes clean from hands and fabric. 4X greater yield than gel or wax lubricants. 30% more slippery than gel or wax lubricants.

KLE51100



Solid and Stranded Copper Wire Stripper and Cutter

Cuts, strips, and loops 10-18 AWG Solid and 12-20 AWG Stranded wire and cleanly shears 6-32 and 8-32 screws.

KLE11055



BUY Lineman's Pliers AND GET A FREE Multi-Bit Screwdriver / Nut Driver, 11-in-1



Lineman's Pliers

9 in - Fish tape pull / crimping. Pliers cut ACSR, screws, nails, etc.

KLEKITPINCETOURNEVIS



XT Cobalt Step Drill Bit # 8 for Stainless Steel

1/2 x 7/8 x 1-1/8 in - Engineered with Cobalt HSS material for maximum life. Cuts mild steel, copper, brass, aluminum, fiberglass, plastic, wood and laminates.

GRE30008C



Clear Lube Pulling Lubricant

950 mL - Designed for use within electrical or datacom cable pulls. Environmentally safe, non-hazardous, non-toxic and non-corrosive.

GRECLRQ



Bushing

7/8 in - Triple lock design holds bushing securely. Locks securely into metal studs from 24 gauge to 12 gauge (0.6 mm to 2.5 mm).

Pack of 100
GRE711C

Pack of 1 000
GRE711M

FLUKE



Voltage Detector

Voltbeat™ technology and continuous self-test. Upon detection, tip glows and beeper sounds. CAT IV, 1 000V.

FLU1ACA1II



Contact Infrared Thermometer

FLU561



Insulation Multimeter

Combine a digital insulation tester with a full-featured, true-rms digital multimeter in a single compact, handheld unit. CAT III 1000 V, CAT IV 600 V measurement category. Included accessories: Remote probe, test leads and probes, alligator clips and K-type thermocouple.

FLU1587FC



Dry Ice 3E Contractor Safety Boot

8 in - Anti-stress insole, 100% waterproof, vibram dry ice outsole, vibram 3D bumper, flexible and comfort collar, toe and plate composite, CSA Z-195-14 certification. Other sizes available.

PRODUCT #	COLOR	SIZE	PRODUCT #	COLOR	SIZE
UNIUSF89400070	Tan	7	UNIUSF89401070	Black	7
UNIUSF89400075		7.5	UNIUSF89401075		7.5
UNIUSF89400080		8	UNIUSF89401080		8
UNIUSF89400085		8.5	UNIUSF89401085		8.5
UNIUSF89400090		9	UNIUSF89401090		9
UNIUSF89400095		9.5	UNIUSF89401095		9.5
UNIUSF89400100		10	UNIUSF89401100		10
UNIUSF89400105		10.5	UNIUSF89401105		10.5
UNIUSF89400110		11	UNIUSF89401110		11
UNIUSF89400120		12	UNIUSF89401120		12



Portable Generator

120 / 240V, 9 500W, bi-fuel, electric and remote start, up to 17 hours of battery life, 30A Twist-Lock outlet.

Without CO sensor

WESWGEN9500DF*

With CO sensor

WESWGEN9500DFC*

*Subject to availability

3M



Vest-Style DELTA™ Harness

Back D-ring, tongue buckle leg straps, quick connect buckles. Universal size.

DBI1110600C



Nano-Lok™ Edge Self Retracting Lifeline

8 ft (2.4 m) - Cable, quick connect.

DBI3500221



PROTECTA® PRO™ Pack Shock Absorbing Lanyard

6 ft (1.8 m)

DBI1340125C



STAY HYDRATED WITH SQUINCHER



Qwik Stik® ZERO Powder Mix

Electrolyte, sugar free

Fruit punch

DEN11060102FP



KWIK PAK™ ZERO Powder Mix

Four different drinks for a total of 16 drinks : mixed berry, orange, fruit punch, strawberry lemonade.

DEN11QWKPMF



Sayline Synthetic Horizontal Lifeline System

60 ft (18.3 m) - Two 6 ft. (1.8 m) tie-off adaptor anchors included. Capacity of 2 workers.

DBI7600705



DBI-SALA® Suspension Trauma Safety Straps

Attaches to most harnesses to help provide comfort and help prevent suspension trauma. One pair included.

DBI9501403C

BRADY®



Clamp-On Breaker Lockouts

Versatile and easy to install using the proprietary thumbwheel design. Works on a wide range of single-pole and internal-trip multi-pole breakers.

BRA65965



Portable Metal Lock Box

Accommodates up to 13 padlocks on the lid and can also be used as a lock storage box for up to 40 padlocks (not included).

BRA65699



Clamp-On Breaker Lockout

Extremely versatile - works on a wide range of single-pole and internal-trip multi-pole breakers.

120/277V

BRA65396

480/600V

BRA65397



Delineator Post

44 in - Loop top

PIOV62102500/S



Delineator Base

11 lb (5 kg)

PIOV62201700/S



Orange Cotton Sweatband for Hard Hat

Innovative air-cushioned foam inner layer for maximum sweat absorption. Hook and loop for universal fit on most hard hats. Reusable and washable. Hat not included.

PIOV2051370-O/S



Professional Roofer's Kit

Includes: Grommated leg harness, reusable roof bracket, 2 ft shock pack lanyard with integral adp rope grab, 50 ft vertical lifeline, and 15-litre waterproof pail.

PIOV8257065



A Sonepar Company



Automation CABLE CUTTING

at our distribution center

1500 CUTS PER DAY



Download the Lumen app!



Place your orders directly
online at lumen.ca or via
the Lumen app.



Two branches to better serve Ottawa and Eastern Ontario !

OTTAWA EAST

1000, Belfast Road, Ottawa (ON) K1G 4A2
Tel. : 613 789-7500 / Fax : 613 789-7501
Toll free : 1 855 589-7500

OTTAWA WEST

1050, Baxter Road, Ottawa (ON) K2C 3P1
Tel. : 613 828-2930 / Fax : 613 828-2972
Toll free : 1 888 491-2930



Prices are subject to change without notice. All images are for illustrative purposes only. Air Miles program is reserved to the Electrical Contractor ECAO or OEL members only. We are currently experiencing an exceptionally high demand for many popular products. As a result, some products advertised in this flyer may not be available. Please check your local branch for availability or visit lumen.ca. We are currently working on replenishing supplies as quickly as possible and apologize for any inconvenience this may cause.



FSC
POUR POSITION
SEULEMENT