

Lumen

A Sonepar Company

ATLANTIC

Special deals September - October

2023



AIR MILES.

Valid for Electrical Contractors
ESA and ECA members only

Promotion



MARRETTE® PRO-BLU™

Get equipped for the jobsite!


Free inside!



Visit our website
for complete details
and rules.

ABB

°STELPRO

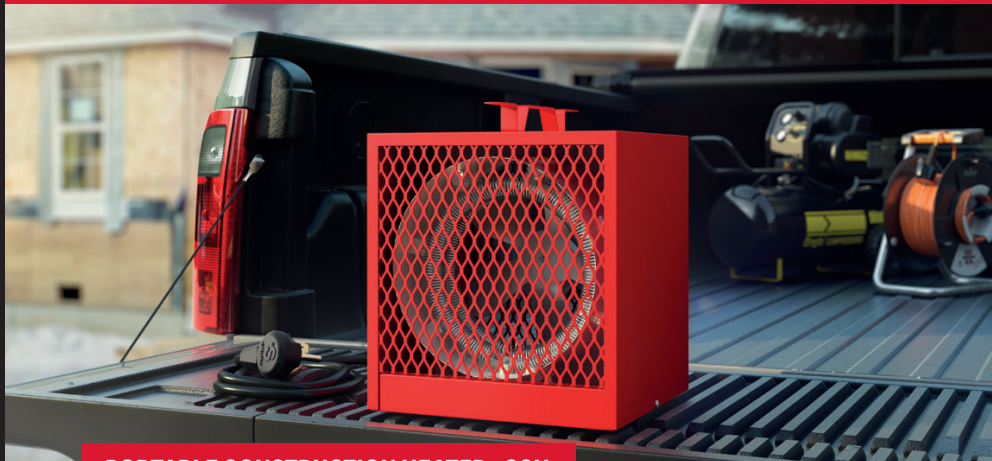

PORTABLE CONSTRUCTION HEATER - SCH

- SAFE AND STURDY
- CONVENIENT AND EASY TO TRANSPORT
- COOL TOUCH HOUSING
- ERGONOMIC CARRYING HANDLE FOR EASY CABLE STORAGE
- SEALED AND LIFETIME LUBRICATED MOTOR (SCH4800T)
- VERSATILE: FIXED OR TEMPORARY CONNECTION WITH OPTIONAL BRACKET AVAILABLE

Red STESCH48T

Yellow STESCH4800T

Milwaukee

Safety Glasses

Clear lenses

Anti-scratch

MIL48732011

Fog free

MIL48732013



Impact Demolition Gloves

ARMORTEX® and
padded palms



Small # MIL48228750

Medium # MIL48228751

Large # MIL48228752

X-Large # MIL48228753

2X-Large # MIL48228754



Breakaway Mesh Safety Vest

With 9 pockets, hi-viz, ANSI / CSA

Yellow - L / XL # MIL48735172

Yellow - 2XL / 3XL # MIL48735173

Orange - L / XL # MIL48735176

Orange - 2XL / 3XL # MIL48735177



1-844-STELPRO | WWW.STELPRO.COM



Platinum
member





LED Projector

Die cast aluminium housing, integrated selectable photocell, bronze finish

Knuckle or yoke mount

9 / 19 / 34W, 1 500 to 5 000LM

Replaces 500W, halogen or 150W, HID

LITESXF1ALOSWW2KYDDB

22 / 37 / 56W, 3 500 to 7 500LM

Replaces 500W, halogen or 175W, HID

LITESXF2ALOSWW2KYDDB

120 / 347V - Yoke or slip fitter mount

53 / 69 / 100W, 8 500 to 14 000LM

Replaces 250W, HID

LITESXF3ALOSWW2UVOLTYSD

111 / 124 / 150W, 16 000 to 20 000LM

Replaces 400W, HID

LITESXF4ALOSWW2UVOLTYSD



LED Panel for T-Bar Ceiling

120 / 347V, 3 500 / 4 000 / 5 000K, dimmable 0 / 10V

1 x 4 - 19 / 28 / 35W, 2 400 to 4 280LM

LITCPX1X4ALO7SWW7UVOLT

2 x 2 - 19 / 28 / 37W, 2 400 to 4 500LM

LITCPX2X2ALO7SWW7UVOLT

2 x 4 - 28 / 36 / 50W, 3 800 to 6 500LM

LITCPX2X4ALO8SWW7UVOLT



LED High Bay Fixture

120 / 347V, (4 000 / 5 000K), 21 000 / 24 000 / 27 000LM, medium distribution, open hook with 7 ft galvanized safety cable, 6 ft cord, dimmable 0 / 10V, polycarbonate lens.

LITCPRBALO14UVOLTSWW9DWH

With passive infrared motion sensor

LITCPRBALO14UVOLTSWWWHMS



LED Projector

120V, 4 000K, 2 750LM, bronze finish

1 25W

LITHGXLED2RH40K120DDB

2 Selectable lumen output (15W / 1750LM or 25W / 2750LM), with photocell

LITHGXLED2RHALO40K120PED

3 25W, with motion sensor, ceiling or wall mounted

LITHGXLED2RH40K120MODDB



LED Ceiling Mount Fixture

120 / 277V, 4 000K, bronze

35W, 4 500LM

Replaces up to 150W, HID

LITCNYPLEDP140KMVDD

52W, 6 600LM

Replaces up to 175W, HID

LITCNYPLEDP240KMVDD

Juno®



Pour endroit mouillé

LED Recessed Fixture

120V, 5 CCT 2 700 to 5 000K, dimmable, regressed lens and deflector designed to reduce glare, white.

4 in - 9W, 670LM

Replaces 65W, incandescent

JUNWF4REGSWW590CRMW

6 in - 13W, 950LM

Replaces 75W, incandescent

JUNWF6REGSWW590CRIMW

NEW!



Suitable for wet location

LED Recessed Fixture

5 CCT 2 700K to 5 000K, adjustable gimbal, dimmable, matte white.

4 in - 10W, 120V, 779LM

Replaces 65W, incandescent

JUNWF4ADJSWW590CRIMW

6 in - 12W, 120V, 1 007LM

Replaces 75W, incandescent

JUNWF6ADJSWW590CRIMW



Suitable for wet location

LED Recessed Fixture

120V, 5 CCT 2 700K to 5 000K

4 in - 9W, 670LM

Replaces up to 65W, incandescent

White # JUNWF4SWW590CRIMW

Black # JUNWF4SWW590CRIMB

6 in - 13W, 950LM


Replaces 75W, incandescent

White # JUNWF6SWW590CRIMW

Black # JUNWF6SWW590CRIMB

Liteline

LED Recessed Fixture



Suitable for wet location

LUNA SERIES

2 in - 7W, 120V, 565LM, dimmable, 40° beam, white finish

LITRA27F90WH



Suitable for wet location

SKYE SERIES

120V, dimmable, white finish

4 in - 12W, 860LM, 75° beam

LITSLMB412WCCTWH

6 in - 16W, 1 400LM, 80° beam

LITSLMB616WCCTWH



Suitable for wet location

LED Recessed Fixture

4 in - 8W, 120V, 5 CCT 2 700K to 5 000K, 560LM, dimmable, with 3 magnetic trims (white, black, silver), direct mount on octagonal junction box or in a existing 4 in recessed can (for retrofit purpose).

LITSLMT48W



KEENE
par @ignify



LED Ceiling Mount Fixture

120 / 347V, 3 000 / 4 000 / 5 000K, die cast aluminum housing, polycarbonate lens, textured bronze finish.

28 / 40 / 60W, 3 870 to 9 130LM
KEEGCR60SCTG1SM510BZ
70 / 80 / 90W, 9 000 to 13 310LM
KEEGCR90SCTG1SM510BZ

Day-Brite
CFI
par @ignify



Suitable for damp location

LED Strip Fixture

120 / 347V, (3 500 / 4 000 / 5 000K), dimmable 0 / 10V, frosted acrylic lens, metal housing paint white, safety cable between lens and fixture housing.

4 ft - 2 448LM
CFISDS42448L8CSTUN3DIM
8 ft - 4 998LM
CFISDS84998L8CSTUN3DIM

Day-Brite
CFI
par @ignify




LED High Bay Fixture

120 / 347V, CCT selectable (4000 / 5000K), suspension open hook, 6 ft cord, 0 / 10V dimmable, motion sensor receptacle, polycarbonate lens, selectable lumen output.

14 000 to 21 000LM
CFIHCV1421L8CSTUN3DIM
28 000 to 33 000LM
CFIHCV2833L8CSTUN3DIM

KEENE
par @ignify



LED Wall Pack

30W, 120 / 277V, 4 000K, 3 364LM
Replaces up to 150W, HID

Gray
KEELPW16G38DGY
Bronze
KEELPW16G38BZ

PHILIPS



T8

LED Linear Tube

4 ft - 10W, 100 / 277 / 347V, 1 600LM, dimmable, frosted glass
Replaces 32W, fluorescent

4 000K # PHI10T8CORE48840IF16GDIM
5 000K # PHI10T8CORE48850IF16GDIM

PHILIPS



T5 HO

LED Linear Tube

4 ft - 24W, 120 / 277 / 347V, made of polycarbonate
Replaces 54W, fluorescent

3 500K, 3 300LM # PHI24T5LEDHO483500IF
4 000K, 3 500LM # PHI24T5LEDHO484000IF
5 000K, 3 500LM # PHI24T5LEDHO485000IF



LED Wall Pack

20W, 120 / 277V, 4 000K (2 522LM) / 4 500K (2 926LM) / 5 000K (2 637LM), frosted polycarbonate lens, photocell included, bronze finish.

Replaces up to 70W, HID
STAWCILS2W3CBR



LED Wraparound Surface Fixture

120 / 277V, 4 000K, frosted polycarbonate lens.

2 pi - 27W, 2 695LM, replaces 1 x 32W, T8
Interconnectable up to 15 units
STAL2WMG241G2

4 pi - 47W, 5 043LM, replaces 2 x 32W, T8
Interconnectable up to 8 units
STAL2WMG481




Suitable for damp location

LED Strip Fixture

Rocker switch, aluminium housing, frosted lens, 120° beam, interconnect up to 300W, for under-cabinet or task lighting, residential or commercial use (accessories sold separately).

12 in - 5W, 360LM
LUMLUUCFL12IN120V5W3KFR
24 in - 10W, 730LM
LUMLUUCFL24IN120V10W3KFR
36 in - 15W, 1 050LM
LUMLUUCFL36IN120V15W3KFR



Temporary LED Lighting Fixture

150W, 120V, 17 380LM, 360° beam angle, 20 ft 18/3C cord with plug, eyebolt for suspended mounting included.

STATHBDSC150WCW



Suitable for wet location

Commercial LED Recessed Fixture

120 / 347V, 3 000 / 3 500 / 4 000K

4 in - 7 / 9 / 12W, 595 / 765 / 1 000LM
STACDU4RG2PS3Q3CWH

6 in - 12 / 16 / 20W, 1 080 / 1 440 / 2 000LM
STACDU6RG2PS3Q3CWH

8 in - 15 / 20 / 25W, 1 800 / 2 200 / 2 900LM
STACDU8RG2PS3Q3CWH



LED Lamp

120V, 5CCT 2 700K to 5 000K, base E26, dimmable.

R20, 6.5W, 615LM
Replaces 50W incandescent
STAR2065W5CCTSTD

BR30, 8W, 650LM
Replaces 75W incandescent
STABR308W5CCTSTD

BR40, 12.5W, 1075LM
Replaces 100W incandescent
STABR40125W5CCTSTD




TBM840 Crimping Tool
For copper lug gage from 8AWG to 4/0 AWG.
Metal carrying case included.

THOTBM840



14-Ton Manual Crimping Tool

THOTBM14M

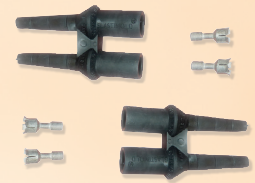

Break-Away Connector Kit

Single pole in-line, electrical rating: for 600V,
10-30A, 13/32" x 1-1/2" fuse, 14-6 AWG, copper.

THOD65UC



Blackburn®

**TBM45S Compression Tool,
Dies and Accessories Kit**

Lithium battery, 175 one-hole lugs of different sizes, 125
bidirectional connectors of different sizes and metal case.


THOTBM45SKITN



Die Kit

Complete with 15 dies #2 AWG to 750 MCM
copper and #2 AWG to 650 MCM aluminum.

BLAEZCKSSDIEKIT



**600V
Miniature Fuse**

10A # FERATM10
15A # FERATM15
20A # FERATM20
25A # FERATM25
30A # FERATM30



Disconnect Switch

60A, 120 / 240V, 1PH, NEMA 3R, metallic



Non-fusible, "pull-out" disconnect
MIDU065P



MIDU065NA1



Decora Dimmer

120V, 300W LED and CFL, 600W incandescent /
halogen, 60Hz, single pole and 3-way.
On / off rocker switch. Wallplate not included.

LEVDSL061LZ



Electronic Timer Switch

120VAC, 60 Hz, 1 800W incandescent, 20A resistive /
inductive, 1HP, single pole, 3-way. Wallplate not included.

5-10-15-30 minutes # LEVLTB301LZ
10-20-30-60 minutes # LEVLTB601LZ



Occupancy Sensor

120 / 277VAC, 50 / 60Hz, PIR, wall switch,
manual ON / Auto-OFF selectable, field of
view 210OSF, white. Wallplate not included.

LEVODS10IDW



Smart Sensor

120 / 277VAC, 50 / 60Hz, PIR, antimicrobial,
app configurable: manual ON / Auto-OFF selectable,
neutral wire required, white. Wallplate not included.

LEVODS15IDW



EV Charging
Done Right™

FLO Home™

240V | 30A | 7.2 kW

Residential level 2
charging station

Certified to operate at temperatures ranging from -40 °C to 50 °C

CSA-certified. Meet applicable UL safety standards

NEMA 4X aluminum casing

Integrated safety features

25-foot industrial grade cable

With the purchase of
10 units
of G5 or X5
receive **\$50 off each G5**
and **\$70 off each X5**

flo.com

Heavy-duty aluminum casing

Safe

Made in Canada

Certified

3-Year Limited Warranty

Lumen
A Sonepar Company

LEVITON®



Charging Station

32A # LEVEV320
48A # LEVEV480
80A # LEVEV800



Single Pedestal # LEVEPED1

Double Pedestal
LEVEPED2



Double pedestal
assembly
including cable
management

LEVKITEPCM

RAB DESIGN



Charging Station Pedestal for Flo Home G5 and X5, Core + and Core + Max

Aluminum post and base plate, ideal
for commercial and residential
applications, black finish.

RABEVP5SBKFLOSL



Pedestal for Flo Home G5 and X5 Charging Stations

RABPIEDESTALBORNEFLO

ABB

Terra DC Wall Charger

Level 3 charging station

Fast and compact 24 kW direct current
charger including RFID reader,
Ethernet connection and CCS1 sockets.
Other configurations available. Contact your
Lumen representative for more information.

Single phase

ABBKITERRA1PH24KWCCS1

3-phase

ABBKITERRA3PH24KWHCCS1



24 kW

Terra AC Wall Charger

**Level 2
charging station**

80A smart charger
including RFID reader,
Ethernet connection
and a 25 ft cable.

ABBTERRA80A



80A

wallbox



Charging Station

40A, 9.6 kW - Adjustable load
capacity from 6A to 40A
WALPULSARPLUS40A

48A, 11.2 kW - Adjustable load
capacity from 16A to 48A
WALPULSARPLUS48A



Eiffel Basic Pedestal

55 x 7.9 x 7.95 in
Designed to be screwed
to a concrete slab,
anthracite gray color.

Single

WAL000002504

Double

WAL000002506



ATLANTIC - Effective from September 1st to October 31st 2023



Lumen

5

FLUKE

NEW PRODUCT!

Wire Tracer Kit

Locates and troubleshoots cables, wires, and breakers behind walls and ceilings. Kits include test leads, alligator clips, outlet adapters, magnet hanger, signal clamp and batteries.



Advanced kit
FLU2052

Advanced PRO kit
Smart Sensor™ technology visualizes orientation of energized wires on high resolution 3.5" TFT LCD color display (2062 only).
FLU2062

Milwaukee

M18 ROCKET Tower Light/Charger

6 000LM, integrated AC plug, you can plug the light with a standard extension cord and charge any M18 REDLITHIUM pack or use the USB port to charge your devices on site.

MIL213620



M18 FUEL 5-Tool Combo Kit

Includes: M18 FUEL 1/2" hammer drill / driver, M18 FUEL 1/4" hex impact driver, M18 FUEL SAWZALL® reciprocating saw, M18 FUEL 6-1/2" circular saw (tool only), M18 work light, M18 REDLITHIUM XC5.0 extended capacity battery pack, M18 & M12 multi-voltage charger.

MIL369725

Wera



17-Piece Kraftform Kompakt Pouch Kit

60 RA, 89 mm bits, imperial

WER051041



39-Piece Tool-Check Plus Kit

With 1/4" wrench, Rapidaptor bit holder, 1/4" adapter and socket.

Metric # WER056490
Imperial # WER056491

BERGEN
INDUSTRIES, INC.

Temporary Stringlight

100 ft - Ten sockets, male/female ends. Lamps not included.

2C / 14AWG cable
BERGL100142MPC

3C / 14AWG cable
BERGL100143MPC



KNIPEX



Wire Stripper

8 in - American style, multifunction electrician pliers. Fast, burr-free cutting of threaded rods and screws of UNC 6-32 and 8-32.

KNI13728SBA



3-Piece Pro Pliers Set

Includes: KNI0901240SBA, KNI7401200 and KNI8701250.

KNI9K0080157US

KLEIN TOOLS



7-in-1 Screwdriver / Nut Driver

Magnetic, nut driver sizes: 1/4, 5/16, 11/32, 3/8, 1/2, 7/16 and 9/16 in.

KLE32807MAG



Bluetooth® Jobsite Earbuds

Built-in microphones, 15 h of autonomy, 28dB noise reduction when used with memory foam tips, rigid charging case, IP67 certified: dustproof and waterproof (headphones only).

KLEAESEB1



Solid and Stranded Copper Wire Stripper and Cutter

Cuts, strips, and loops 10-18 AWG Solid and 12-20 AWG Stranded wire and cleanly shears 6-32 and 8-32 screws.

KLE11055

3M 0°C



BENCHMARK
for electrical tapes

165 Temflex™
General Use Vinyl
Electrical Tape

Multipurpose
3/4 in x 60 ft - 6 Mil.,
0°C to 90°C, black
TRO165BK4A



Other colors available!

- Blue # TRO165BL4A
- Brown # TRO165BR4A
- Green # TRO165GR4A
- Gray # TRO165GY4A
- Yellow # TRO165YL4A
- Orange # TRO165OR4A
- Purple # TRO165PR4A
- White # TRO165WH4A
- Red # TRO165RD4A



-7°C

175 Temflex™
General Use Vinyl
Electrical Tape

High performance
3/4 in x 60 ft - 7 Mil.,
-7° to 90°C, black
TRO175BK4A

GREENLEE.



Heavy Duty Hack Saw

12 in
GRE333A



Slug-Buster® Knockout Kit


1" ratchet wrench allows use with both 3/8" and 3/4" draw studs. 1/2" to 2" conduit.
GRE7238SB

BRADY.



Clamp-On Breaker Lockout

This oversized 480/600V frame fits breaker switches up to 2-1/4" wide and 7/8" thick. Applies in seconds with thumbscrew mechanism, no screwdriver needed.
BRA65329

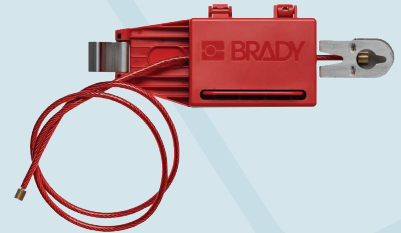

Panel Door Lockout

Prevents electrical panel doors from being opened in a locked out state.
BRA151633

GENERAC



Value of \$1390. Valid until October 8, 2023.
*To claim your warranty, visit: generac.com/national



Smart Switch
200A, service rated 120/240V,
1Ø NEMA 3R, CUL approved.
Primary
GENRXSW200A3CUL
Secondary
GENRXSC200A3



Air-Cooled Standby Generator

Aluminum enclosure. Permanently installed home backup generator protects your home automatically and delivers power directly to your home's electrical system.

- 18 / 17 kW # GEN7226
- 22 / 19.5 kW # GEN7042
- 24 / 21 kW # GEN7209
- 26 / 22.5 kW # GEN7290

9-26kW Air Cooled Heater Kit


- Battery # GEN7101
- Oil # GEN7102
- Breather # GEN7103



Smart Management Module (SMM)
50A
GEN7000

3 Series of Ductless Heat Pumps

Capella 16, Single Zone



Capella 28, Single Zone



Capella MZ, Multizone




Installation Accessories for Heat Pumps



Aluminum wall bracket

24" X 16" WBA2416
30" X 16" SV-ALBR3016



Aluminum ground stand

14 1/4" X 26" SV-ALGS1426
14 1/4" X 30" SV-ALGS1430
17 1/8" X 27" SV-ALGS1727-3



No kink drain line

5/8", 165' long SV-NKDL58L50



Insulated copper line

50' single ligne

1/4" D001412050BLK
3/8" D003812050BLK
1/2" D001212050BLK
5/8" D005812050BLK
3/4" D003412050BLK
7/8" D007812050BLK

164' single ligne

1/4" D001412164BLK
3/8" D003812164BLK
1/2" D001212164BLK
5/8" D005812164BLK

50' non-insulated

3/8" C0308050

Contact a Convectair representative for more details. 1 800 463-7043 • www.convectaircanada.com

by **INNOVAIR**
SOLUTIONS



Download the Lumen app!



Place your orders directly online at lumen.ca or via the Lumen app.



Two branches to better serve Atlantic Canada!

DARTMOUTH

121, Ilsley Avenue, unit 119, Dartmouth (NS), B3B 1S4
Tel. : 902 468-7996 / Fax : 902 468-7997
Toll free : 1 844 516-0158

MONCTON

1070, St-George Blvd., unit 1A, Moncton (NB), E1E 4K7
Tel. : 506 382-1396 / Fax : 506 382-9376
Toll free : 1 844 311-1396

Prices are subject to change without notice. All images are for illustrative purposes only. Air Miles program is reserved to the Electrical Contractor ECAO or OEL members only. We are currently experiencing an exceptionally high demand for many popular products. As a result, some products advertised in this flyer may not be available. Please check your local branch for availability or visit lumen.ca. We are currently working on replenishing supplies as quickly as possible and apologize for any inconvenience this may cause.

