

ONTARIO

Special deals March - April 2023

AIR MILES.

Valid for Electrical Contractors ECAO and OEL members only

LEVITON



Tamper Resistant Duplex Receptacle 15A - 120V, white # LEVT5325W



Tamper Resistant Duplex Receptacle 15A - 120V, black # LEVT5325E



Switch Decora 15A, 1P, 120V, white # LEV5601P2W Switch Decora 15A, 3W, 120V, white # LEV5603P2W

Milwaukee



M12 Cable Stapler Kit

Coil-spring mechanism sinks the staples to the appropriate depth when fastening loomex NMD 90 (14/2, 14/3, 12/2, 12/3, 10/2, 10/3) and low voltage cables. Only compatible with our 1" insulated staples. Sink up to 1,200 staples on a fully charged M12 CP2.0ah battery. **Includes:** stapler 2448-20, battery M12 CP2.0 48-11-2420, battery charger 48-59-2401 and carrying bag.

Control your lighting with the Pico remote control

or through the Lutron app (smart hub required)

 Stapler kit
 # MIL244821

 Tool only
 # MIL244820



Insulated Cable Staples for Stapler 2448

1 in - CUL approved for loomex NMD 90 cable (14/2, 14/3, 12/2, 12/3, 10/2, 10/3) installation.

Pack of 600 # MILMNM1600

LUTRON.





120V, 600W incandescent or halogen, 150W LED or CFL, single and 3-way dimmer, white. Wallplate not included.

LUTSCL153PHWHC



LUTMACL153MHWHC

Dimmer 120V, 600W incandescent or halogen, 150W LED or CFL, single and 3-way dimmer, white. Wallplate not included. DIVA SERIES

Smart Dimmer Starter Kit Includes: dimmer, smart hub, Pico remote control with mounting plate and faceplate, white

LUTDVRFBDG1DC



LED Surface Fixture

4 ft - 34W, 120/277V, 5000LM, IP66, frosted polycarbonate lens, captive polycarbonate latches, dimmable 0/10V. Replaces 2 X 32W, T8

4000K #LITCSVTL485000LMMV4K80CR 5000K #LITCSVTL485000LMMV5K80CR

LED Surface Fixture

120/277V, 4000K, dimmable, white acrylic lens.

2 ft - 32W, 3 000LM Replaces 1 x 32W, T8 # LITFMLWL24840ZTMVOLT

4 ft - 48W, 4 600LM Replaces 2 x 32W, T8 # LITFMLWL48840ZTMVOLT



LED Striplight

120/277V, 3 500/4 000/5 000K, frosted acrylic lens.

48 in - 3 000/4 000/5 000LM # LITCSSL48ALO3MVSWW380CRI

96 in - 6 000 / 8 000 / 10 000LM # LITCSSL96ALO4MVSWW380CRI

LED Panel for T-Bar Ceiling 120/277V, dimmable 0/10V, selectable output and CCT (3 500/4 000/5 000K) 1x4 # LITCPX1X4ALO7SWW7 2x2 # LITCPX2X2ALO7SWW7

2x4 # LITCPX2X4ALO8SWW7



LED Wall Pack 22W, 120/277V, 4 000K, 2 950LM, photocell included, bronze finish.

Replaces 100W, MH # LITTWX1LEDP240KMVPEDDB



Full Cut Off LED Wall Pack 120/277V, 4 Lumen output from 850LM to 1 650LM, CCT (3 000/4 000/5 000K), photocell (on / off) selectable, bronze finish.

LITWPX0LEDALOSWW2MVPEDDB



4 in - 3 000 / 4 000 / 5 000K, 700 to 780LM, adjustable gimbal, matte white.

Replaces up to 65W, incandescent # LITWF4ADJLED30K40K50KMW

Motion Detector

Passive infrared detection, white

Wall Switch

SENWSXWH

SENWSX347WH

800W, 120V

1 500W, 347V



Recessed LED Fixture 4 in - 9.6W, 120V, 3 000K, 675LM, dimmable, junction box, approved for daisy chain installation, matte white. Sold in multiples of 6 only.

Replaces up to 65W, incandescent # LITWF4LED30KMWM6



Ceiling Mounted Motion Detector 800W, 120V, white, standard range: 360°

Passive infrared detection
SENCMR9

Double technology (passive infrared and microphonic) # SENCMRPDT9



Suitable for wet location

LED Recessed Fixture 120V, 5CCT 2 700K to 5 000K, white

4 in - 9W, 670LM Replaces up to 65W, incandescent # JUNWF4SWW590CRIMW

6 in - 13W, 950LM Replaces 75W, incandescent # JUNWF6SWW590CRIMW



LED Recessed Fixture

120V, 5CCT 2 700 to 5 000K, dimmable, regressed lens and deflector designed to reduce glare, white.

4 in - 9W, 670LM Replaces 65W, incandescent # JUNWF4REGSWW590CRMW

6 in - 13W, 950LM Replaces 75W, incandescent # JUNWF6REGSWW590CRIMW

Sensor**switch**



(s)ignify

KEENE

LED Wall Pack 120 / 277V, 4 000K, 10W, 1 050LM Replaces up to 50W, HID

Titanium finish **# KEELPW7G38DGY**

Bronze finish # KEELPW7G38BZ

LED Wall Pack

Replaces up to 70W, MH

12W, 120V, 3000K, 1100LM,

photocell included, bronze finish,

plate, frosted polycarbonate lens.

KEELWLWWG2PCB1BZ

wall mount with galvanized mounting

KEENE

by (§ignify



KEENE

by (s)ignify

LED Ceiling Mount Fixture 28/40/60W, 120/347V, 4 100 to 8 650LM, 3 000/4 000/5 000K, die cast aluminium housing, polycarbonate lens, textured bronze finish.

KEEGC60SCTG2SM510BZ

KEENE

by (s)ignify

Day-Brite

by (s)ignify

LED Surface Fixture 4 ft - 120 / 277V, 4 000LM, adjustable CCT (3 000 / 3 500 / 4 000K), wraparound lens

and occupancy sensor. Replaces 2 X 32W, T8

CFINWL440L8CSTUNVDIMOCC



LED High Bay Fixture 120/347V, selectable CCT (4 000 / 5 000K), suspension open hook, 6 ft cord, 0 / 10V dimmable, motion sensor receptacle, polycarbonate lens.

Selectable lumen output (14 000 / 21 000LM) # CFIHCY1421L8CSTUN3DIM

Selectable lumen output (28 000 / 33 000LM) # CFIHCY2833L8CSTUN3DIM



LED Wall Pack 120 / 347V, 3 000 / 4 000 / 5 000K, integrated selectable photocell, glass lens, die cast aluminium housing, bronze finish.

28/40/60W, 3860 to 8 160LM **# KEEWP60SCTG210BZ**

70/80/90/100W, 9 240 to 13 600LM **# KEEWP100SCTG210BZ**



LED Wall Pack

13W, 120V, 3000K, 1200LM,

photocell included, bronze finish,

plate, frosted polycarbonate lens.

KEESWLWWG1PCB1BZ

Replaces up to 70W, HID

wall mount with galvanized mounting

LED Projector

120 / 277V, 4 000K, bronze finish <u>Knuckle or yoke mount</u> 30W, 3 250LM <u>Replaces 150W, HID</u> **# KEETF30NWG1KFL8BZ**

50W, 5 500LM Replaces 150W, HID # KEETF50NWG1KFL8BZ

<u>Montage sur étrier</u> 150W, 18 600LM Replaces up to 400W, MH # KEETF150NWG1YFL8BZ

200W, 25 000LM Replaces up to 400W, MH # KEETF200NWG1YFL8BZ LIGHTOLIER by (s) ignify Suitable for damp location

Commercial LED Recessed Fixture

120 / 347V, adjustable lumen output and CCT 3 000 / 3 500 / 4 000K, aluminium white baffle reflector, dimmable 0 / 10V, metallic cable for connection included.

4 in - 5.5/8/12W, 500/700/1000LM # LIGCR4RLMCCT

6 in - 7/10/17W, 700/1000/1500LM # LIGCR6RLMCCT

8 in - 10/15/21W,1000/1500/2000LM # LIGCR8RLMCCT

10 in - 20/25/32W, 2 000/2 500/3 000LM # LIGCR10RLMCCT

ONTARIO - Effective from March 1st to April 30th 2023

f in 🖸 🖻 <u>umen</u> 3



LED Surface Mount Ceiling Fixture

Suitable

for wet location

120V, 5CCT (2 700 / 3 000 / 3 500 / 4 000 / 5 000K), dimmable, round.

4 in - 8W, 580LM Replaces up to 60W, incandescent # STACLDK4R8WA5CWH

6 in - 15W, 1 000LM Replaces up to 75W, incandescent # STACLDK6R15WA5CWH





LED Surface Mount

7 in - 14W, 120V, 4 000K 1 000LM,

frosted polycarbonate lens, steel

housing, non-dimmable, white.

Replace 75W, incandescent # STACLDKMS7R14WA40WH

with motion detector (passive infrared),

Ceiling Fixture

Suitable

for wet

location

LED Strip Fixture

Rocker switch, aluminium housing, frosted lens, 120° beam, interconnect up to 300W, for under-cabinet or task lighting, residential or commercial use (accessories sold separately).

12 in - 5W, 360LM # LUMLUUCFL12IN120V5W3KFR

24 in - 10W, 730LM # LUMLUUCFL24IN120V10W3KFR

36 in - 15W, 1 050LM # LUMLUUCFL36IN120V15W3KFR



LED Wall Pack 120 / 347V, full cut off, adjustable CCT (3 000K / 4 000K / 5 000K) and power (25W / 3 625LM, 40W / 5 640LM, 60W / 8 220LM), dimmable, photocell included, die cast aluminium housing, bronze finish, polycarbonate lens.

Replaces up to 400W, HID or 250W, HPS # STAWFCPS60A3Q3CBRP



Temporary LED Lighting Fixture

150W, 120V, 17 380LM, 360° beam angle, 20 ft 18/3C cord with plug, eyebolt for suspended mounting included.

STATHBDSC150WCW



LED Wall Pack

20W, 120 / 277V, 4 000K (2 522LM) / 4 500K (2 926LM) / 5 000K (2 637LM), frosted polycarbonate lens, photocell included, bronze finish.

Replaces up to 70W, HID # STAWCILS2W3CBR



40º large beam

PAR30 - 12W 3 000K # STAP30L12W30K40CHOICESTD 4 000K # STAP30L12W40K40CHOICESTD

PAR38 - 16,5W 3 000K # STAP38165W30K40CHOICESTD 4 000K # STAP38165W40K40CHOICESTD



8W, dimmable Replaces 65W, incandescent

650LM, 2 700K # STALEDBR30S28W27KSTD

700LM, 4 000K # STALEDBR30S28W40KSTD



LED Lamp

A19 - 9.5W, 800LM, non-dimmable. Pack of 4. Replaces 60W, incandescent

3000K **#STAA1995W30KNDCHOICE4P** 4000K **#STAA1995W40KNDCHOICE4P** 5000K **#STAA1995W50KNDCHOICE4P**



Suitable for wet location 5 or 6 in 17W, 1 150LM # LITRA5617F90WHWH 20W, 1 435LM # LITRA5620F90WHWH

LED Recessed Fixture Dimmable, 40° beam, white finish # LITRA5620F90WHWH 33W, 2 330LM # LITRA5633F90WHWH

Luna Series 120V, adjustable CCT (2 700/3 000/3 500/4 000/5 000K)



LED Recessed Fixture 12W, adjustable gimbal, diffused mirror reflector 3-1/2 in White # LITRA3512RG90WH Black # LITRA3512RG90BK

4 in White #LITRA412RG90WH Black #LITRA412RG90BK

3000 to 2000K - Warm dim

3-1/2 in White # LITRA3512RGDTW90WH Black # LITRA3512RGDTW90BK <u>4 in</u> White # LITRA412RGDTW90WH

Black # LITRA412RGDTW90BK

ONTARIO - Effective from March 1st to April 30th 2023

LEVITON



Surface mount 30A, 2P, 3 wire, NEMA 6-30R # LEV5376P



Receptacle - 250V

Surface mount 50A, 2P, 3 wire, NEMA 6-50R **# LEV5378P**



Flush mount 30A, 2P, 3 wire, NEMA 6-30R # LEV5372S00



Flush mount 50A, 2P, 3W, NEMA 6-50R # LEV5374S00





For dryer 5.5 x 5.43 in - 30A, 3P, 4 wire, flush mount with integrated mounting plate, white.

LEV1278S30



For oven 5.5 x 5.43 in - 50A, 3P, 4 wire, flush mount with integrated mounting plate, white.

LEV1279S50



LED Surface Mount Ceiling Fixture 8 in - 18W, 120V, CCT (3 000K/4 000K/5 000K), with motion sensor, non-dimmable.

LEV9866B0W



Leather Pouch 8 in ²- Features two divided inside compartments with six screwdriver loops each, one large center compartment, four outside pockets and eight outside tool loops, with shoulder strap.

IDE35325



Medium Fuse Puller

250V 5 in - 9/32 to 1/2 in diameter # IDE34001

0-100A, 250V and 600V 7-1/2 in - 1/2-1 in diameter # IDE34002

0-100A, 250V and 600V 11-3/4 in - 1/2-1 in diameter # IDE34003





1G Cast Iron Box FS 1/2 in **# APPFS1** 3/4 in **# APPFS2**



1G Cast Iron Box FSC

 1/2 in
 # APPFSC1

 3/4 in
 # APPFSC2





24-Hour Mechanical Time Switch

125V, 2HP **# INTT10170** 208/277V, 5HP **# INTT10470**

40A



Mechanical Analog Timer SPST-1 NO, 15A, 125/277V,


plastic housing, white 0 to 15 min #INTFD15MWC70 0 to 30 min #INTFD30MWC70

0 to 60 min # INTFD60MWC70

ONTARIO - Effective from March 1st to April 30th 2023

f in 🖸 🗖 🛄

5

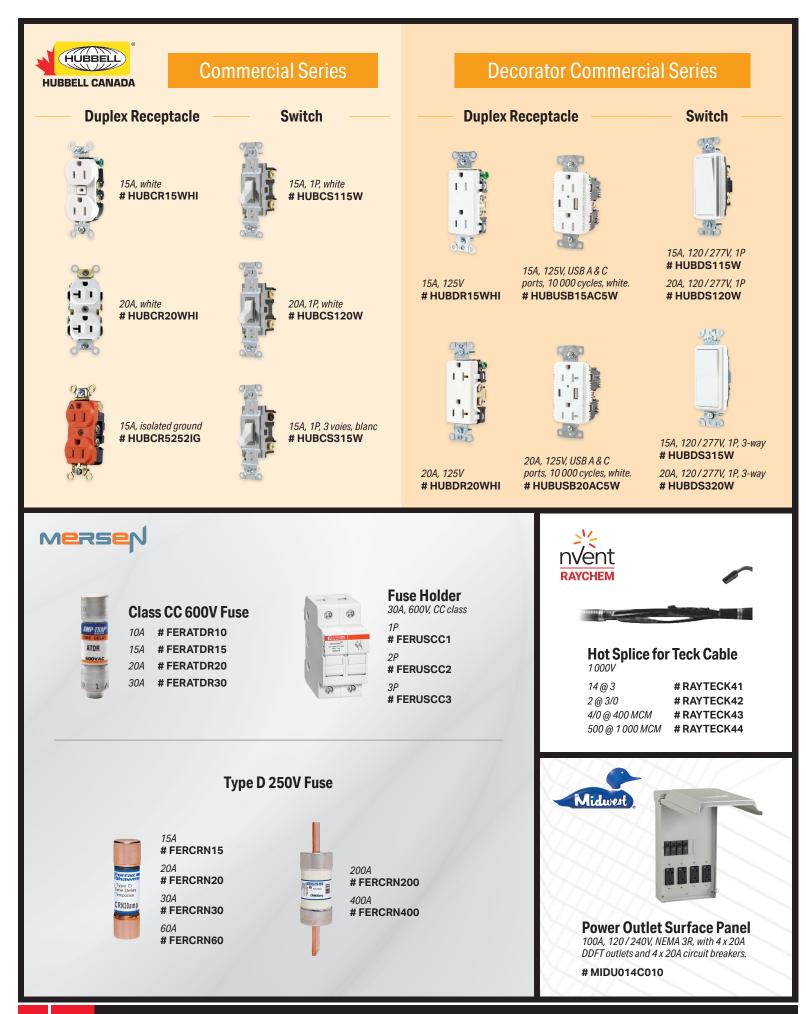

Iberville®



Octogonal Box 4x1-1/2in #IBE54151L



Dry-Wall LHTQ Junction Box 14.5 cu. in, gangable # IBE1304LHTQ

MICROLECTRIC



Galvanized Ground Plate with JAB # BLA1016BTB



Meter Socket 4 jaw # MICBE1TCV



MICMM12

Entrance Mast



Mast Kit 100A **# MICMMK1**

SIEMENS

Electrical Panel SPA Kit

120/240V - NEMA 3R

20A	# SIEW0408ML112520
30A	# SIEW0408ML112530
40A	# SIEW0408ML112540
50A	# SIEW0408ML112550
60A	# SIEW0408ML112560



The solution that allows you to cut costs while planning for the future installation of EV chargers

Ask your branch representative for more information about the DCC product line and its availability.





GET YOUR BUILDING EV READY WITH US

Iberville^{™D}



EMT Set Steel Screw Fitting

APPTW50S 1/2 in 3/4 in # APPTW75S **# APPTW100S** 1 in



EMT Set Steel Screw Coupling

1/2 in	# APPTWC50S
3/4 in	# APPTWC75S
1 in	# APPTWC1009



Scepter PVC Molded Junction Boxes NEMA 1 @ 13

4x4x2 in **# SCEJBX442** 4 x 4 x 4 in **# SCEJBX444** 5 x 5 x 2 in **# SCEJBX552** 6 x 3 x 4 in

SCEJBX634

6 x 6 x 6 in # SCEJBX666 8 x 8 x 4 in

SCEJBX664

6x6x4in

SCEJBX884 8x8x7in

SCEJBX887



CoRe+[™] 208 V or 240 V | 30A | 7,2 kW

Smart level 2 charging station for multi-unit residential buildings, commercial and industrial applications.

• NEMA 4X aluminum casing

IPEX by aliaxi

- Certified to operate at temperatures ranging from -40 °C to 50 °C
- Wall-mounted or pedestal configuration
- Optional cable management system
- User authentication via RFID card or mobile application

e way™

flo.com



0 🗗 f in lumer



ONTARIO - Effective from March 1st to April 30th 2023

f in 🖸 📭 <u>umen</u> 9

°STELPRO



HIGH-END BASEBOARD - BA

- CLEAN AND HIGH-END FINISH
- EXTREMELY SOLID, IMPACT AND RUST RESISTANT MADE OF EXTRUDED ALUMINUM
- FIT FOR RESIDENTIAL AND COMMERCIAL ENVIRONMENTS
- TOTALLY QUIET

300 W STEBA0302W	1 500 W STEBA1502W
500 W STEBA0502W	1 750 W STEBA1752W
750 W STEBA0752W	2 000 W STEBA2002W
1 000 W STEBA1002W	2 250 W STEBA2252W
1 250 W STEBA1252W	2 500 W STEBA2502W



COMPACT HIGH-END BASEBOARD - SPR

• UP TO 25% SHORTER THAN A TRADITIONAL BASEBOARD • FAST AND EASY TO CLEAN

GUIDE MARKS TO FACILITATE MOUNTING TO WALL

500 W STESPR0502W 1 000 W STESPR1002W 1 500 W STESPR1502W 2 000 W STESPR2002W



- ROUNDED CORNERS
- QUICK AND EASY INSTALLATION
- ONE-PIECE CONSTRUCTION

300 W STEB0302W	150
500 W STEB0502W	17
750 W STEB0752W	2 0
1 000 W STEB1002W	2 2
1 250W STEB1252W	2 50

500 W STEB1502W 50 W STEB1752W 000 W STEB2002W 250 W..... STEB2252W 00W..... STEB2502W


BUILT-IN ELECTRONIC THERMOSTAT FOR PRIMA AND BRAVA BASEBOARDS

STESIBTE12C



BUILT-IN MECHANICAL THERMOSTAT FOR BRAVA BASEBOARD STESIBT1W



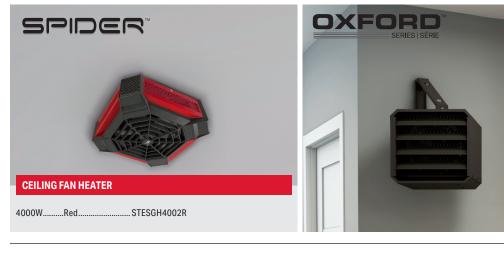

COMMERCIAL & RESIDENTIAL UNIT HEATER

Without built-in thermostat 2000W..... STERUH2CHAR 3000W..... STERUH3CHAR 4000W..... STERUH4CHAR 5000W..... STERUH5CHAR With built-in thermostat

2000W..... STERUH2TCHAR 3000W..... STERUH3TCHAR 4000W..... STERUH4TCHAR 5000W..... STERUH5TCHAR



STELPRO.COM 1-844-STELPRO







A SOLUTION for your reel problems!





TWISTED assemblies RW90 **NUAL® FEEDERPLEX**

- **Reduces quantity of reels required** on construction sites by 3 to 5 times
- Ideal for existing buildings •
- Reduces the pulling force by 50%
- Faster and cleaner (no lubricant required)
- Improves tension drop

Hvperlin

RJ45 UNSHIELDED KEYSTONE JACKS

CAT 5e # HYPKJNE8P8CC5E90**

Electron

•

•

•

CAT C6 # HYPKJNE8P8CC690**

Replace the orange asterix (**) by the 2 letter color code below



*Purchase 300 Keystone Jacks of any color and receive a

RE F PUNCH TOOL **HT-KJNE-TOOL**

Hyperline

*Per invoice / Non-cumulative.

To receive your free punch tool, please send a copy of your invoice to datacom-securite@lumen.ca before April 30th, 2023.



Adjustable Depth Wall Mount Support	Product #	Width	Height	Depth	RU
Light weight, sturdy construction	1 # ELMWMBADJ190420BK	19 in	7 in	15 to 20 in	4
Pre-punched holes for wall mounting Compatible with 19" equipment	2 # ELMWMBADJ190620BK	19 in	10.5 in	15 to 20 in	6
Large cable access cutout on rear	6 # ELMWMBADJ190820BK	19 in	14 in	15 to 20 in	8

ONTARIO - Effective from March 1st to April 30th 2023

► 11 f in • lumen



M12 REDLITHIUM XC6.0 Battery Switch to our REDLITHIUM XC6.0 Battery Pack to

Switch to our REDLITHIUM XC6.0 Battery Pack to instantly upgrade the runtime and durability of your Milwaukee M12 cordless tools.

MIL48112460



PACKOUT Tool Box

100 lb capacity. Impact resistant polymers and metal reinforced corners for ultimate durability in harsh jobsite conditions. Featuring an IP65 rated weather seal.

MIL48228425



M/2 2-Cutter SDS-Plus Rotary Hammer Drill Bit Sold in multiples of 25 5/32 in # MIL48207501 3/16 in # MIL48207511

-HENGWENE



M12 FUEL 2-Tool Combo Kit

Includes: M12 FUEL 1/2 in hammer drill/driver, M12 FUEL 1/4 in hex impact driver, M12 REDLITHIUM XC 4.0 extended capacity battery pack, M12 REDLITHIUM CP2.0 battery, M12 lithium-ion battery charger and contractor bag.

MIL349722



Green Cross Line & Plumb Points Laser

USB rechargeable. **Includes:** REDLITHIUM USB 3.0 battery, 2 ft heavy duty cable, wall plug and carrying case.

MIL352221



M12 Soldering Iron Kit

Includes: M12 soldering iron, pointed tip, M12 REDLITHIUM compact battery pack, M12 charger and carrying case.

lron kit Tool only # MIL248821 # MIL248820

BUY ONE OF 3 SELECTED BARE TOOLS AND GET A FREE MIS, HO, XCB OALL 43-11-1835 BATTLER







1 in - M18 FUEL SDS Plus Rotary Hammer # MILKIT2912201865

4-1/2 / 6 in - M18 FUEL Braking Grinder # MILKIT2980201865

G GREENLEE



Saw Keyhole Pointed tip easily punches through drywall. # GRE301A



Bushing 7/8 in - Triple lock design holds bushing securely. Locks securely into metal studs from 24 gauge to 12 gauge (0.6 mm to 2.5 mm).

Pack of 100 # GRE711C Pack of 1000 # GRE711M



Step drill bit #6

Minimum drill diameter 3/16 in, maximum drill diameterr 1/2 in. Durable split-point tip for fast, accurate material penetration. Patented design optimizes chip load for fast, smooth cutting, and more holes per charge.

GREGSB06



11-PC Pro Folding Hex Keys Includes: 1/2, 3/8, 5/16, 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32 in.

KLE70550



Digital Circuit Breaker Finder With GFCI outlet tester. CAT II 120V safety rating. Includes: transmitter, receiver and 9V battery.

KLEET310

FLUKE



Hvbrid Pliers

6-32 and 8-32 bolt shearing. Crimps non-insulated connectors, lugs and terminals.

KLEJ2158CR



Advanced Circuit Tracer Kit

provides reliable tracing of energized or non-energized breakers, fuses, and wires. Includes: transmitter, receiver, blade and ground prongs, alligator clips, 3 ft and 20 ft lead adapters, AC plug leads, instructions, required batteries, and a hard carrying case.

Electrical Tester

with OpenJaw technology.

325 True RMS **Clamp Meter**

Electrical Tester

FLUT61000PRO

Includes: Attached test leads with

removable 4 mm probe caps, black

AC285 SureGrip[™] alligator clip and

FLU325

H-T6 holster.

FLUT5600

AC/DC up to 600V, measures current

CAT IV 300V, CAT III 600V. Measures AC / DC current, voltage, temperature, frequency. Backlit, easy to read display.

up to 100A without breaking the circuit

KLEET450



- **Vehicle Charging Stations**
- Vehicle simulation Control Pilot (CP) state simulation tests different charging states
- Grounding protection PE Pre-Test for dangerous voltage
- GFCI testing Stay protected and check risk of electric shock
- # FLUFEV100TY1



Wera

Screwdriver Set

WER347778

Kraftform Kompakt 26

Comes with pouch.

WER051025

Retractable bayonet blade. Intergrated magazine

for bit storage. Tough viscous bits for universal use.

Ergonomic Kraftform handle for low-fatigue working.

Includes: 2 Philips, 2 slotted, 2 Robertson and a plastic storage rack.



Dismantling Knife With guide shoe at the blade piont. Insulated, 1 000V.

KNI9855SB



4-Piece Cobra Cutter and Plier Set Includes: 8 in long nose pliers with 12 AWG stripping hole, 10 in diagonal cutter, 10 in adjustable Cobra pliers, 8 in combination pliers.

KNI9K008094US



Strips 10-14 AWG solid and 12-16 stranded wire.



ONTARIO - Effective from March 1st to April 30th 2023





First-Aid Kit Plastic case

CSA Type 1 # DYNFAKCSAT1BP CSA Type 2 # DYNFAKCSAT2SBP CSA Type 3 # DYNFAKCSAT3SBP



PROPOLYMER® LED Flashlight LUX division 1, 100LM, up to 4 200 cd peak beam

corrosion proof, 4 AA alkaline batteries (included).

intensity, IP67 ingress protection, waterproof,



White

Yellow

Orange

Whistler[™] Safety Helmet

Ultra-light. Manufactured in a high density polyethylene. "Sure-Lock" ratchet suspension. CSA certified to standard Z94.

DYNHP241R01

DYNHP241R02

DYNHP241R03

1-15 type 1, in accordance to the vertical impact class E requirements.

DOUBLE CLUTCH[™] USB Headlamp

USB-rechargeable or 3 AAA alkaline batteries (included). Includes a rubber head strap that ensures a nonslip grip for hard hats. 60° tilting head. **Two modes:** spot or flood beam mode. Spot mode: 125LM, 82 m distance, 6h run time.

STR61607



DYNHP241R04

DYNHP241R07

DYNHP241R08

LED Headlamp

Forest green

Sky blue

Navy blue

Impact and water resistant. Meets lighting needs for "up close" work when seeing details is important. **Three modes :** 120LM with 7 LEDs, low-level battery indicator, push button switch. Easy to manipulate with gloves.

STR61052



STR68602

2-Piece Rainsuit

Hooded jacket and bib pant, fold into storage pouch, 100% waterproof polyester / PVC, CSA Z96-15, class 1, level 2.

 Small
 # PIOV1080150-S

 Medium
 # PIOV1080150-M

 Large
 # PIOV1080150L

 X-Large
 # PIOV1080150XL

 2X-Large
 # PIOV10801502XL

 3X-Large
 # PIOV1080150-3XL



FR-Tech[®] Hi-Viz Coveralls High visibility, flame resistant, 7 oz, 88% cotton, 12% nylon. ****Sizes :** 36 to 60.

 Orange
 # PIOV2540650**

 Royal blue
 # PIOV2540510-**



Professional Roofer's Kit Includes: Grommeted leg harness, reusable roof bracket, 2 ft shock pack lanyard with integral ADP rope grab, 50 ft vertical lifeline, and 15-litre waterproof pail.

PIOV8257065



Machine Screw 6-32 x 2 in - Round head Box of 100 # VISRMS632X2



Flat Socket Wood Screws 8x1-1/2-Zinc Jar of 600 # VISFWS8X11/2POT600



Pan socket "TEK" 10 x 1 in Jar of 500 # VISPTEK10X1POT500



Toggle Bolt 3/16 x 3 in Box of 50 # VISTB3/16X3

ONTARIO - Effective from March 1st to April 30th 2023



SecureFit[™] Protective Eyewear

Serie 200 - Anti-fog, anti-scratch polycarbonate lenses absorb 99.9% UVA and UVB rays. Certified CSA Z94.3.

Clear lens # 3MSSF201AF Amber lens # 3MSSF203AF



SecureFit[™] Protective Eyewear

Serie 400 - Anti-fog lens, protects against UV rays radiation. Adjustable nose pads and soft-touch temple inlays provide increased comfort and improved grip, black and green frame. Certified CSA Z94.3.

Clear lens # 3MSSF401AF Gray lens # 3MSSF402AF



Privo[™] Safety Glasses Anti-fog lens, polycarbonate lenses absorb 99.9% UV, soft nose bridge and temple tips, black frame. Certified CSA Z94.3-2007 and the High Impact Requirements of ANSI Z87.1-2003.

Clear lens # 3MS12261 Gray lens # 3MS12262



Super 33+ Vinyl Electrical Tape 3/4 in x 66 ft - 7 mil. All-weather, -18 to 105°C (0 to 220°F), black.

TRO333/4X66

BRADY



Super 88 Vinyl Electrical Tape 3/4 in x 66 ft - 8.5 mil. All-weather, -18 to 105°C (0 to 220°F), black.

TRO883/4X66



Linerless Rubber Splicing Tape 3/4 in x 30 ft - 30 mil. 130C. black.

TRO130C3/4X30



DO NOT OPERATE Lockout Tag 5-3/4 x 3 in

Pack of 25 # BRA65520



Steel Lockout Hasp with Tab 1 in diameter jaws and 3/8 in diameter lock holes.

BRA105718



Electrical Breaker Lockout Tagout Kit

With nylon safety padlock in pouch. Includes: 1 in lockout hasp, clamp-on circuit breaker lockout 480/600V, lockout pouch, nylon safety lockout padlock, 2x clamp-on circuit breaker lockouts 120/277V, 5x lockout tags, 5x zip ties.

BRA153669



Nylon Safety Lockout Padlocks

1.77 in H x 1.5 in W x 0.82 in D - Keyed different, steel shackle. Key-retaining brass cylinder prevents key removal in the unlocked position for added safety and helps limit lost keys. Shackle Vertical Clearance: 1.5 in.

Blue	# BRASDPLBLU38STKD
Green	# BRASDPLGRN38STKD
Orange	# BRASDPLORG38STKD
Yellow	# BRASDPLYLW38STKD
Red	# BRASDPLRED38STKD

Red - pack of 12 **# BRASDPLRED38STKD12**

Red - pack of 24 **# BRASDPLRED38STKD24**



Aluminum Safety Lockout Padlocks

1.8 in H x 1.5 in W x 0.75 in D - Keyed different, steel shackle, durable, corrosion-resistant and ideal for general lockout applications. Shackle vertical clearance: 1.5 in.

BRASDALBLU38STKD
BRASDALGRN38STKD
BRASDALORG38STKD
BRASDALYLW38STKD
BRASDALRED38STKD

Red - pack of 12 # BRASDALRED38STKD12

Red - pack of 24 # BRASDALRED38STKD24

ONTARIO - Effective from March 1st to April 30th 2023





Prices are subject to change without notice. All images are for illustrative purposes only. Air Miles program is reserved to the Electrical Contractor ECAO and OEL members only. We are currently experiencing an exceptionally high demand for many popular products. As a result, some products advertised in this flyer may not be available. Please check your local branch for availability or visit lumen.ca. We are currently working on replenishing supplies as quickly as possible and apologize for any inconvenience this may cause.





16 <u>umen</u> f in 🖸 🗖

