

Lumen

A Sonepar Company

ATLANTIC

Special deals
May - June
2024



AIR MILES.

Valid for Electrical Contractors
ESA and ECA members only

NEW PRODUCT

Milwaukee

**ROLL-ON
POWER SUPPLY
GENERATOR**

7 200 / 3 600W, 2.5kWh

The generator you can use indoor

- REDLITHIUM Integrated 2.5kWh
- 2 x 20A duplex breaker outlets, 1x USB-C, and 1x USB-A
- The Power Supply delivers 7 200W and 3 600W continuous
- Charges to 100% in 3 hours and to 25% in less than 35 minutes
- IP54 rating
- The power supply is fully compatible with the PACKOUT Modular Storage System
- ROLL-ON includes a 3-year warranty

MIL3300R



STANPRO EMERGENCY LIGHTING

ECONO Series



Remote Head

Single - 2W / 6V DEL
STAN106V2WLJWH

Double - 2W / 6V DEL
STAN206V2WLJWH


EASY-OUT Series



Remote Head

Single - 3W / 6-12V DEL
STAN10612V3WLJ

Double - 3W / 6-12V DEL
STAN20612V3WLJ

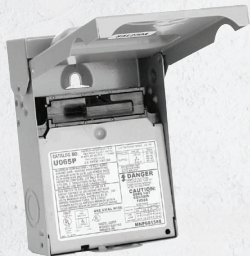

**Non-Fusible
"Pull-Out" Disconnect**
60A, 120/240V, 1PH, NEMA 3R, metallic
MIDU065P



**Non-Automatic
Disconnect Switch**
60A, 120/240V, 1PH, NEMA 3R, metallic
MIDU065NA1



Steel Battery Unit
120/347V, 27W/6V,
2 x 2W DEL
STASL1



Plastic Exit Sign
120/347V
STARMPN0WHIB1S



**Plastic Exit Sign
Combo**
120/347V, 2 x 2W DEL
STAPRMPN2HO



Steel Battery Unit
120/347V, 36W/6V,
2 x 2W DEL
STASLA2L



Steel Exit Sign
120/347V
STARMS0WHUDC



**Steel Exit Sign
Combo**
120/347V, 2 x 2W DEL
STAPRMS2L



Suitable for wet location

LED Ceiling Mount Fixture

6 in - 15W, 120V, 3 000 / 4 000 / 5 000K, 1 050LM, with passive infrared motion sensor, frosted polycarbonate lens, aluminium housing, non-dimmable, white.

JUNJSBT6INSWW290CRIPRMW



Suitable for wet location

LED Recessed Fixture

120V, 5 CCT 2 700K to 5 000K, white.

4 in - 9W, 670LM

Replaces up to 65W, incandescent
JUNWF4SWW590CRIMW

6 in - 13W, 950LM

Replace up to 75W, incandescent
JUNWF6SWW590CRIMW

8 in - 19W, 1 640LM

Replace 100W, incandescent
JUNWF8SWW590CRIMW



Suitable for wet location

LED Ceiling Mount Fixture

120V, 3 000K, dimmable, polycarbonate lens, direct mounting on octagonal junction box, can be use in storage room, shower, bathroom, outside under soffit or covered area.

4 in - 10.5W, 750LM

JUNJSBT4IN30K90CRIWLMW

6 in - 14.4W, 990LM

JUNJSBT6IN30K90CRIMWWL



White only



High Bay LED Fixture

120 / 347V, 4 000 / 5 000K, medium distribution, open hook with 7 ft galvanized safety cable, 6 ft cord, dimmable 0 / 10V, polycarbonate lens.

12 000 / 15 000 / 18 000LM

White* # LITCPRBALO13UVOLTSWW9DWH

Black # LITCPRBALO13UVOLTSWW9DBL

21 000 / 24 000 / 27 000LM

White* # LITCPRBALO14UVOLTSWW9DWH

Black # LITCPRBALO14UVOLTSWW9DBL

Integrated passive infrared motion sensor (on / off)

LITCPRBALO14UVOLTSWWHMS



LED Surface Fixture

4 ft - 34W, 120/277V, 5 000LM, IP66, dimmable 0 / 10V, frosted polycarbonate lens, captive polycarbonate latches. Replace 2 X 32W, T8

4 000K # LITCSVTL485000LMMV4K80CR

5 000K # LITCSVTL485000LMMV5K80CR



LED Striplight

120 / 347V, 3 500 / 4 000 / 5 000K, frosted acrylic lens.

4 ft - 3 000 / 4 000 / 5 000LM

LITCSSL48ALO3UVOLTSWW3

8 ft - 6 000 / 8 000 / 10 000LM

LITCSSL96ALO4UVOLTSWW3



LUNA SERIES LED Recessed Fixture

120V, 5 CCT 2 700 to 5 000K



Suitable for wet location

2 in - 7W, 565LM, dimmable, 40° beam, white finish.

LITRA27F90WH



Suitable for wet location

Dimmable, 40° beam, white finish.

5 or 6 in

17W, 1 150LM

LITRA5617F90WHWH

20W, 1 435LM

LITRA5620F90WHWH

33W, 2 330LM

LITRA5633F90WHWH



Suitable for wet location

12W, adjustable gimbal, diffused mirror reflector.

3-1/2 in

White # LITRA3512RG90WH

Black # LITRA3512RG90BK

4 in

White # LITRA412RG90WH

Black # LITRA412RG90BK

3 000 to 2 000K - Warm dim

3-1/2 in

White # LITRA3512RGDTW90WH

Black # LITRA3512RGDTW90BK

4 in

White # LITRA412RGDTW90WH

Black # LITRA412RGDTW90BK



Suitable for damp location

Set of 3 LED Fixtures

3 in - 2W, 12V, 3 000K, 120LM, recessed or surface mount, plug in driver, with 6 ft cord.

Black # LITSLMPOUCK390BK

Brushed nickel # LITSLMPOUCK390BN

White # LITSLMPOUCK390WH



Suitable for wet location

LED Recessed Fixture


120V, dimmable, white finish.

4 in - 12W, 860LM, 75° beam

LITSLMB412WCCTWH

6 in - 16W, 1 400LM, 80° beam

LITSLMB616WCCTWH



Suitable for wet location

LED Recessed Fixture

4 in - 8W, 120V, 5 CCT 2 700K to 5 000K, 560LM, dimmable, with 3 magnetic trims (white, black, silver), direct mount on octagonal junction box or in a existing 4 in recessed can (for retrofit purpose).

LITSLMT48W

signify



Day-Brite

CFI

by @signify

LED Striplight

8 ft - 4 000K, 8 000LM, dimmable 0 / 10V, acrylic frosted lens, metal housing painted white.

120 / 277V # CFIFSS880L840UNVDIM
347V # CFIFSS880L840347DIM

KEENE

by @signify




LED Wall Pack

20W, 120 / 277V, 4 000K, 2 277LM, bronze.

Replaces 70W, HID
KEETW20NWG18BZ

KEENE

by @signify



LED Wall Pack

120 / 347V, 3 000 / 4 000 / 5 000K, integrated selectable photocell, glass lens, die cast aluminium housing, bronze finish.


28 / 40 / 60W, 3 860 to 8 160LM

KEEWP60SCTG210BZ

70 / 80 / 90 / 100W, 9 240 to 13 600LM

KEEWP100SCTG210BZ

PHILIPS

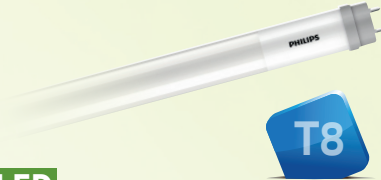

LED Linear Tube

48 in - 15W, 120 / 347V, ballast bypass installation, frosted glass. Replaces 32W, fluorescent

3 500K, 2 000LM
PHI15T8COR48835MF20G347V

4 000K, 2 100LM
PHI15T8COR48840MF21G347V

5 000K, 2 100LM
PHI15T8COR48850MF21G347V

LIGHTOLIER

by @signify



Suitable for damp location

LED Commercial Recessed Fixture

120 / 347V, 3 000 / 3 500 / 4 000K, aluminium white baffle reflector, dimmable 0 / 10V, metallic cable for connection included.

4 in - 5.5 / 8 / 12W, 500 / 700 / 1 000LM

LIGCR4RLMCCT

6 in - 7 / 10 / 17W, 700 / 1 000 / 1 500LM

LIGCR6RLMCCT

8 in - 10 / 15 / 21W, 1 000 / 1 500 / 2 000LM

LIGCR8RLMCCT

10 in - 20 / 25 / 32W, 2 000 / 2 500 / 3 000LM

LIGCR10RLMCCT

KEENE

by @signify



LED Projector

120 / 347V, 3 000 / 4 000 / 5 000K, integrated photocell, bronze finish.

60 / 80 / 100W, 9 540 / 12 320 / 14 800LM

Slip fitter # KEESF100SCTSG210PCBBZ

Trunnion # KEESF100SCTTG210PCBBZ

100 / 120 / 150W, 16 800 / 18 240 / 21 750LM

Slip fitter # KEESF150SCTSG210PCBBZ

Trunnion # KEESF150SCTTG210PCBBZ

120 / 150 / 205W, 18 600 / 22 500 / 29 725LM

Slip fitter # KEESF205SCTSG210BZ

Trunnion # KEESF205SCTTG210BZ

STANPRO



LED Wraparound Surface Fixture

120 / 277V, 4 000K, frosted polycarbonate lens.

2 ft - 27W, 2 695LM, replaces 1 x 32W, T8

Interconnectable up to 15 units

STAL2WMG241G2

4 ft - 47W, 5 043LM, replaces 2 x 32W, T8

Interconnectable up to 8 units

STAL2WMG481



Suitable for wet location

LED Surface Fixture

120V, 3 000K, white trim.

6 in - 11W, 855LM

STALEDC16EDG11W3KFMRNDWH

8 in - 14W, 1 066LM

STALEDC18EDG14W3KFMRNDWH

12 in - 22W, 1 647LM

STALEDC12EDG22W3KFMRNDW

NEW!



Suitable for wet location

LED Recessed Light Fixture

120V, 2 700 / 5 000 K, dimmable, fire rated, white.

4 in - 11W, 750LM

STADLCO4R11A5CWHFX

6 in - 12W, 1 000LM

STADLCO6R12A5CWHFX



LED Compact Projector

3 000 / 4 000 / 5 000K, 120 / 277V, tempered glass, bronze finish die cast aluminium housing.

15 / 25W, 2 100 / 3 500LM

Knuckle mount

STAF1MPS25AW3CBRKN

Yoke mount

STAF1MPS25AW3CBRYK

35 / 60W, 4 900 / 8 400LM, photocell (on / off)

Knuckle mount

STAF1MPS60AW3CBRKNP

Yoke mount

STAF1MPS60AW3CBRYKP



Ceiling Mount Fixture

120 / 347V, 40 / 60 / 70W, 3 000 / 4 000 / 5 000K
6 000 / 7 600 / 9 000LM, frosted polycarbonate lens, bronze finish die cast aluminium housing.

Bronze # STAIFOPS70AQ3CBRP

White # STAIFOPS70AQ3CWHP



LED Flat Panel for T Bar Ceiling

120 / 347V, 3 500 / 4 000 / 5 000K, dimmable

1X4 - 20 / 30 / 40W, 2 650 to 5 100LM

STAL3PNB1LPS40PQ3C

2X2 - 20 / 30 / 440W, 2 650 to 5 100LM

STAL3PNB2LPS40PQ3C

2X4 - 30 / 40 / 50W, 4 000 to 6 600LM

STAL3PNB4LPS50PQ3C



Weatherproof Covers - Double Gang




Toggle switch cover
SCEVSCU202



Double door duplex cover
SCEVSDD202



Double door GFCI cover
SCEVSGG202



Combination switch cover & GFI receptacle
SCEVSRUC202

F-Series Universal Boxes - Double Gang




No opening
SCEFDU2



1/2, 3/4 and 1 in
SCEFSU2101520



1/2, 3/4 and 1 in
SCEFSCU2101520



1/2, 3/4 and 1 in
SCEFSSU2101520

Weatherproof Covers - Single Gang



Toggle switch cover
SCEVSC1510



Plunger style switch
SCEVPT1510



Duplex - gray receptacle
SCEWDR1510



Ground fault - gray receptacle
SCEWGF1510

F-Series Boxes - Single Gang



1/2 in
SCEFS10
3/4 in
SCEFS15



1/2 in
SCEFSC10
3/4 in
SCEFSC15





CABLE REPAIR KIT

Direct Burial Splice Kit

For 14-8 AWG conductor sizes.

Includes: heat-shrinkable insulating tube filled with adhesive to cover the splice and ensure water and weather tightness.

BLAUFK148DB

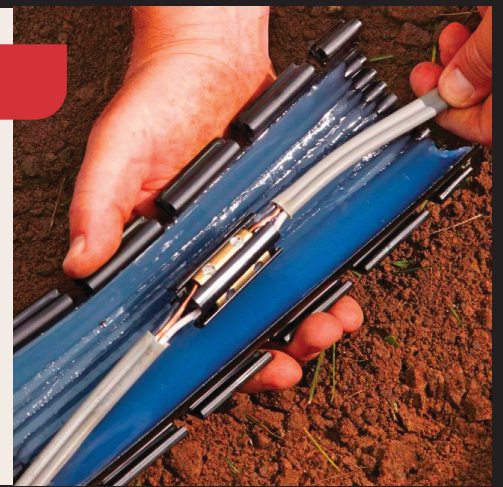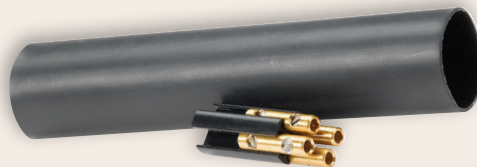

Wire Pulling Lubricant Yellow 77



950 ml
IDE31358



3.78L (1 gallon)
IDE31351



Blued-Steel™ Fish Tape
120 ft x 1/8 in - With durable Tuff-Grip™
Pro case for superior pull-out and rewind.

IDE31056

**SKYLARK
SERIES**



Dimmer

Compatible with : LED, incandescent, halogen, CFL, single and 3-way, white. Wallplate not included.

LUTCTCL153PWH

**DIVA
SERIES**



Dimmer

Compatible with : LED, incandescent, halogen, CFL, single and 3-way, white. Wallplate not included.

LUTDVCL153PHWHC

**MAESTRO
SERIES**



Dimmer

120V, 600W incandescent or halogen, 150W LED or CFL, single and 3-way, white. Wallplate not included.

LUTMACL153MHWHC



Clear Cover

Weatherproof, heavy-duty

INTWP5100C



**Extendable
Weatherproof Cover**

Heavy duty, single gang, gray.

INTWP7000G



Photocell

Stem and swivel type, 120V, 6A, 1 650W to 277VAC, for HID or LED fixtures.

INTEK4236S



Digital Electronic Timer

30A, 120/208V, 1 pole, 1 circuit, 7-day astronomic programming, type NEMA 1 metal enclosure.

INTET1105C



Wraparound Splice Closure 1000 V

Water resistant GelWrap, with 14-8 AWG UL connector, 1 kit / pack.

RAYGELWRAPUF250UL



Hot Splice for 1 000V Teck Cable

14 @ 3
RAYTECK41

2 @ 3/0
RAYTECK42

4/0 @ 400 MCM
RAYTECK43



Power Outlet Surface Panel

100A, 120/240V, NEMA 3R, with 4 x 20A GFCI outlets and 4 x 20A circuit breakers.

MIDU014C010

GFI Receptacle

Self-test SmartlockPro GFCI, monochromatic, back and side wired, white. Nylon wallplate, screws and self-grounding clip included.



15A, 125V
LEVGFNT1W



15A, 125V, tamper resistant
LEVGFTR1W



20A, 125V, for residential / commercial applications.
LEVGFNT2W



20A, 125V, tamper resistant, for residential / commercial applications.
LEVGFTR2W



**M18 REDLITHIUM
XC5.0 Batteries**
2 pack, extended capacity.

MIL48111852



M18 FUEL 2-Tool Combo Kit

Includes: M18 FUEL 1/2 in hammer drill, M18 FUEL 1/4" hex impact driver, 2x M18 REDLITHIUM XC 5.0Ah battery packs, M18 / M12 charger and carrying case.

MIL369722



Westinghouse



**Portable
Generator**

120 / 240V, 9 500W, bi-fuel, electric and remote start, up to 17 hours of battery life, 30A Twist-Lock outlet.

Without CO sensor

WESWGEN9500DF*

With CO sensor

WESWGEN9500DFC*

*Subject to availability



**XT Cobalt Step Drill Bit
8 for Stainless Steel**

1/2 x 7/8 x 1-1/8 in - Engineered with Cobalt HSS material for maximum life. Cuts mild steel, copper, brass, aluminum, fiberglass, plastic, wood and laminates.

GRE30008C



**Clear Lube
Pulling Lubricant**

950 mL - Designed for use within electrical or datacom cable pulls. Environmentally safe, non-hazardous, non-toxic and non-corrosive.

GRECLRQ



Bushing

7/8 in - Triple lock design holds bushing securely. Locks securely into metal studs from 24 gauge to 12 gauge (0.6 mm to 2.5 mm).

Pack of 100

GRE711C

Pack of 1 000

GRE711M



Smart Switch

200A, service rated 120/240V, 1Ø NEMA 3R, CUL approved.

Primary

GENRXSW200A3CUL

Secondary

GENRXSC200A3



Air-Cooled Standby Generator

Aluminum enclosure. Permanently installed home backup generator protects your home automatically and delivers power directly to your home's electrical system.

18 / 17 kW

GEN7226

22 / 19.5 kW

GEN7042

24 / 21 kW

GEN7209

26 / 22.5 kW

GEN7290



Free 7-year warranty with the purchase of a 10 @ 26kW air-cooled residential standby generator purchased between April 1st and May 12th, 2024. Once your generator is installed and in operation, visit Generac.com/National to claim your free 7-year warranty. To be eligible, the generator must be installed and in operation before July 21, 2024. Conditions apply.



**Smart Management
Module (SMM)**

50A

GEN7000

**9 to 26 kW
Air Cooled Heater Kit**

Battery

GEN7101

Oil

GEN7102

Breather

GEN7103



Wire Pulling Foam Lubricant
19 oz - Stays where it is applied and wipes clean from hands and fabric. 4X greater yield than gel or wax lubricants. 30% more slippery than gel or wax lubricants.

KLE51100



Solid and Stranded Copper Wire Stripper and Cutter
 Cuts, strips, and loops 10-18 AWG Solid and 12-20 AWG Stranded wire and cleanly shears 6-32 and 8-32 screws.

KLE11055



BUY Lineman's Pliers AND GET A FREE Multi-Bit Screwdriver / Nut Driver, 11-in-1

Lineman's Pliers
9 in - Fish tape pull / crimping. Pliers cut ACSR, screws, nails, etc.
 # KLEKITPINCETOURNEVIS

FLUKE



Voltage Detector
 Voltbeat™ technology and continuous self-test. Upon detection, tip glows and beeper sounds. CAT IV, 1 000V.

FLU1ACA1II



HVAC Contact Infrared Thermometer

FLU561



Insulation Multimeter
 Combine a digital insulation tester with a full-featured, true-rms digital multimeter in a single compact, handheld unit. CAT III 1000 V, CAT IV 600 V measurement category. Included accessories: Remote probe, test leads and probes, alligator clips and K-type thermocouple.

FLU1587FC

BRADY



Clamp-On Breaker Lockouts
 Versatile and easy to install using the proprietary thumbwheel design. Works on a wide range of single-pole and internal-trip multi-pole breakers.

BRA65965



Portable Metal Lock Box
 Accommodates up to 13 padlocks on the lid and can also be used as a lock storage box for up to 40 padlocks (not included).

BRA65699



Clamp-On Breaker Lockout
 Extremely versatile - works on a wide range of single-pole and internal-trip multi-pole breakers.

120/277V
 # BRA65396
 480/600V
 # BRA65397

3M



DBI-SALA® Suspension Trauma Safety Straps
 Attaches to most harnesses to help provide comfort and help prevent suspension trauma. One pair included.

DBI9501403C



Nano-Lok™ Edge Self Retracting Lifeline
 8 ft (2.4 m) - Cable, quick connect.

DBI3500221



Vest-Style DELTA™ Harness
 Back D-ring, tongue buckle leg straps, quick connect buckles. Universal size.

DBI1110600C



A Sonepar Company



Automation CABLE CUTTING

at our distribution center

1500 CUTS PER DAY



Download the Lumen app!



Place your orders directly online at lumen.ca or via the Lumen app.



Two branches to better serve Atlantic Canada!

DARTMOUTH

121, Ilsley Avenue, unit 119, Dartmouth (NS), B3B 1S4
Tel. : 902 468-7996 / Fax : 902 468-7997
Toll free : 1 844 516-0158

MONCTON

1070, St-George Blvd., unit 1A, Moncton (NB), E1E 4K7
Tel. : 506 382-1396 / Fax : 506 382-9376
Toll free : 1 844 311-1396



Prices are subject to change without notice. All images are for illustrative purposes only. Air Miles program is reserved to the Electrical Contractor ECAO or OEL members only. We are currently experiencing an exceptionally high demand for many popular products. As a result, some products advertised in this flyer may not be available. Please check your local branch for availability or visit lumen.ca. We are currently working on replenishing supplies as quickly as possible and apologize for any inconvenience this may cause.



FSC
POUR POSITION
SEULEMENT