



TEST AND MEASUREMENT SOLUTIONS

Leading Products for Automotive Electronics and 5G Testing

Managing Test Capabilities in the Rapidly Evolving Automotive Sector

The automotive industry is moving into a new era that will be defined by increasing connectivity and greater levels of electronic content in modern vehicles. New technologies such as 5G, Advanced Driver Assistance Systems, and work toward fully autonomous vehicles will significantly broaden the scope of items that require testing and verification.

To keep up with this demand within budget parameters, flexible testing solutions are needed. By leveraging the right product information and understanding the variety of financing options in advance, engineers and managers can find the ideal equipment for each project on a case-by-case basis—without compromise.

Why Electro Rent?

Electro Rent utilizes a consultative approach in advising automakers, suppliers, and auto engineers about the most cost-effective strategies for acquiring and managing modern test technology, while saving time and money and ensuring access to the latest equipment.

- Our large inventory ensures that you get the equipment you need, when you need it.
- We stand behind our products with support and service; our calibration facilities are world class.
- Our advisors recommend a variety of easy-to-start rental and financing programs to fit your situation.

We proudly offer automotive and 5G test solutions from world-leading brands in RF test and measurement.

Driver Assistance

Keysight

M8195A Arbitrary Waveform Generator (AWG)



The Keysight M8195A arbitrary waveform generator (AWG) provides up to 65 GSa/s, 25 GHz bandwidth, 8 bits vertical resolution, and up to 4 channels in a 1-slot AXle module - simultaneously. As devices and interfaces become faster and more complex, the M8195A AWG gives you the versatility to create the signals you need for digital applications, advanced research, wideband radar, satcom, and optical communications.

Key Facts

As devices and interfaces become faster and more complex, the M8195A AWG gives you the versatility to create the signals you need for digital applications, optical and electrical communication, advanced research, wideband radar and satcom.

- Multi-level / Multi-channel digital signals - generate NRZ, PAM4, PAM8, DMT, etc. signals at up to 32 GBaud
- In addition, protocols such as HDMITM, C-PHYTM and D-PHYTM are supported
- Embed/De-embed channels, add Jitter, ISI, noise and other distortions
- Electronics research – generate any mathematically defined arbitrary waveforms, ultra-short yet precise pulses and extremely wideband chirps
- Wideband RF/ μ W - generate extremely wideband RF signals with an instantaneous bandwidth of DC to 25 GHz

Driver Assistance

Rohde & Schwarz

FSW85 Signal and Spectrum Analyzer



The R&S®FSW85 signal and spectrum analyzer is ideal for measuring radar sensor RF parameters such as frequency, effective isotropically-radiated power (EIRP), and occupied bandwidth and spurious emissions during development, production and verification.

The analyzer scans the range from 2 Hz to 85 GHz (up to 90 GHz with the R&S®FSW-B90G option) and analyzes RF signals produced by radar sensors in the E band. No external harmonic mixers are required.

Infotainment

Rohde & Schwarz SMW200A Vector Signal Generator



The R&S®SMW200A is the vector signal generator for demanding applications. With its flexibility, performance and intuitive operation, it is especially suited for generating complex, digitally-modulated signals of high quality.

The SMW200A is the ideal generator for digitally-modulated signals required for the development of new wideband communications systems.

The I/Q modulation bandwidth of up to 2 GHz with internal baseband satisfies fourth- and fifth-generation standards (e.g. 5G, LTE-Advanced and IEEE802.11ac/ad), and is designed to meet future requirements.

Key Facts

- Frequency range from 100 kHz to 3 GHz, 6 GHz or 20 GHz
- Optional second RF path with 100 kHz up to 3 GHz, 6 GHz or 20 GHz
- Versatile configuration: from single-path vector signal generator to multichannel MIMO receiver tester
- Ideal for MIMO, MSR or LTE-Advanced applications thanks to up to eight signal sources and up to 16 fading channels
- Modular architecture for optimal adaptation to the application at hand

Power Management

Tektronix MDO4000 Series Mixed Domain Oscilloscope w/ Power Analysis Application



The Tektronix MDO4000 Series oscilloscopes with power analysis application module dramatically simplifies the analysis of power supplies. Automated power measurements such as harmonics, power quality, switching loss, safe operating area, slew rate, modulation and ripple ensure fast analysis. Simplified setup and deskview of probes provides maximum accuracy.


Key Facts

TEK-MDO4104C/SA0

- 4 analog channels
- Bandwidth 1GHz
- Up to 5 GS/s sample rate waveform capture rate
- 20 M record length on all channels
- 340,000 wfm/s maximum waveform capture rate
- Standard passive voltage probes with 3.9 pF capacitive loading and 1 GHz analog bandwidth
- TPP1000:1GHZ for MDO4104C

Power Management

Tektronix DPO4PWR Power Analysis Application Module

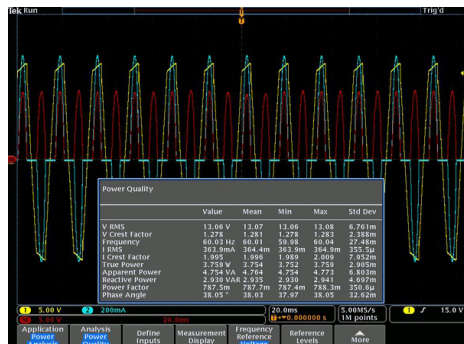

With the DPO4PWR Power Analysis Application Module installed on an MDO4000 Series oscilloscope, an embedded designer who rarely deals with power measurements can quickly get the same accurate, repeatable results as a power supply expert. A Power Analysis Application Module with an oscilloscope and differential voltage and current probes form a complete measurement system for power supply design and test.

Key Facts

- Power loss measurement at switching device
- Characterization of power semiconductor devices
- Optimal drive characterization of synchronous rectifiers
- Measurement and analysis of ripple and noise
- Pre-compliance testing to IEC standard EN61000 3-2 Class A, MIL Standard 1399 Section 300A, and up to 400 harmonics
- Debugging active power factor correction circuits
- 340,000 wfm/s maximum waveform capture rate
- Standard passive voltage probes with 3.9 pF capacitive loading and 1 GHz analog bandwidth
- TPP1000:1GHZ for MDO4104C

Power Management

Keysight N6705C Modular DC Power Analyzer



The N6705C DC Power Analyzer provides productivity gains for sourcing and measuring DC voltage and current into the DUT by integrating up to 4 advanced power supplies with DMM, Scope, Arb, and Data Logger features. Eliminates the need to gather multiple pieces of equipment and create complex test setups including transducers (such as current probes and shunts) to measure current into your DUT. The DC Power Analyzer also eliminates the need to develop and debug programs to control a collection of instruments and take useful measurements because all functions and measurements are available at the front panel.

The N6705C DC Power Analyzer can be used with the 14585A Control and Analysis Software. When automated bench setups are required, the N6705C is fully programmable over GPIB, USB, LAN and is LXI Compliant. The N6705C offers flexible configuration to meet your power sourcing and analysis requirements.

Key Facts

- 4-slot mainframe holds up to 600 W of total power and up to 4 modules.
- More than 30 DC power modules to choose from (modules ordered separately)
- Voltmeter accuracy: Up to 0.025% + 50 μ V, up to 18 bits
- Ammeter accuracy: Up to 0.025% + 8 nA, up to 18 bits
- Arbitrary waveform generator function: Bandwidth up to 100 kHz, output power up to 500 W
- Scope function: Digitizes voltage and current at up to 200 kHz, 512 kpts, up to 18 bits
- Data logger function: Measurement interval from 20 μ s to 60 s, max of 500 M readings per datalog
- 4 GB of non-volatile data storage for data log, scope traces, instrument settings

Connectivity

Keysight N5182B MXG X-Series RF Vector Signal Generator

Keysight N9020B MXA Signal Analyzer, Multi-Touch



Keysight offers accurate and flexible signal generation and signal analysis solutions for the 802.11p design and test lifecycle. The signal generation solution comprises the N7617B Signal Studio for WLAN 802.11a/b/g/j/p/n/ac/ah software, which enables creation of standard-compliant 802.11p waveforms that can be used for accurate receiver testing and evaluation of receiver performance using the N5182B MXG vector signal generator.

The signal analysis solution is made up of the 89601B vector signal analysis (VSA) software with WLAN Modulation Analysis for 802.11a/b/g/p/j (89601B VSA Option B7R) and the N9020B MXG signal analyzers with N9077 WLAN 802.11a/b/g/j/p/n/ac/ah Measurement Application. Together, these signal generation and analysis solutions address and exceed the stringent requirements of 802.11p physical layer tests—from research, development, verification to manufacturing.

Bus Systems / Sensors

Keysight – MSOS High Definition Oscilloscopes



The Infiniium S-Series oscilloscopes incorporate innovative technology designed to deliver superior measurements. Cutting edge hardware and a broad suite of software work together to give you unmatched measurement capability.

Keysight's 10-bit ADC and low-noise front-end work together to provide up to 8 GHz of performance with fantastic signal integrity. Improve noise performance even more using high resolution mode, which can achieve up to 16 bits of vertical resolution.

A large selection of high-speed digital debug tools gives you the best troubleshooting and design tools available on the market. All of these scope features in an advanced frame with a solid-state drive for fast boot-up, 15" capacitive touch display for ease of use, and a high-powered motherboard for fast processing. It's all compatible with a wide variety of Keysight probes and applications.

Key Features:

500 MHz to 8 GHz, Two and four channel models

10-bit ADC up to 8 GHz for additional resolution

Low-noise front end for precision signal viewing

- Only 90 uV noise at 1 mV/div and 1 GHz bw
- System ENOB values in excess of 8
- SFDR values down to -73 dBc
- 2 mV/div vertical scaling supported in hardware
- HW bandwidth limit filters on 50 Ω and 1 M Ω paths

Precision BNCs with > 8 GHz bandwidth

Correction filters ensure flat frequency magnitude and phase response

Low intrinsic jitter (100 fs (typical) for excellent jitter characterization)

Rohde & Schwarz ZNB Vector Network Analyzer



The R&S®ZNB family of vector network analyzers feature high measurement speed, outstanding precision and exceptional ease of operation.

Key Facts

- Wide dynamic range from 9 kHz for fast measurements on high-blocking DUTs
- Excellent raw data for high basic accuracy
- High temperature stability for long calibration intervals
- Fast synthesizers for high measurement speed
- Fast embedding/de-embedding for impedance matching using virtual networks
- Mixed-mode S-parameters for balanced DUT characterization
- Redefined S-parameters for flexible test setup configuration
- Extensive analysis functions for efficient trace analysis
- Amplifier measurements with wide power sweep range and receiver step attenuators
- Time domain analysis for distance-to-fault (DTF) measurements and filter adjustment
- Frequency conversion measurements on mixers and amplifiers – fast and simple with two independent internal generators
- The right calibration method for every test application TSM (Through, Short, Match) – full calibration in only five steps
- Automatic calibration units with up to 24 ports
- Flat and clear menu structures for efficient operation
- Optimal display configuration for each task

Haefely ONYX30 30kV Electrostatic Discharge Test System



The ONYX30 is a state-of-the-art electrostatic discharge simulator. It is an ergonomic 30 kV ESD gun without an additional base control unit that can be battery or mains operated. The easy to use touch screen, ergonomic design, modular RC units, multilingual interface, remote control software, built-in LED light, and temperature and humidity display allow for trouble-free use of the ONYX in all test sites. Also available in a 16kV version.

Key Facts

- User defined 'smart key' function
- Touch screen interface
- All-in-one design (no base unit)
- Predefined tests according to standards
- Define, store and load tests
- User changeable RC networks
- Automatic polarity switching
- Remote control
- Battery or mains operation, long battery life

Full-compliance and pre-compliance testing to a wide variety of standards: IEC/EN 61000-4-2 Edition 2 (2009), IEC/EN 61326, IEC/EN 61000-6-1 & -6-2, IEC 61340-3-1, ISO 10605, GMW 3097, Ford AB/AC, ANSI C63.16, PSA B21 7110, ISO 14304, ITU-T K.20, RTCA/DO-160, JEDEC 22-A114, MIL-STD-331 / -464 / -883 / -1512 / -1514 / -1541 / -1542, GR-78-CORE, GR-1089-CORE.

Contact Us Today

Contact us today to learn more about our complete portfolio of automotive 5G testing products.

You can reach us by phone at **1.800.553.2255** or email **automotive@electrorent.com**. Our experts are available to assist with your product testing and financing needs.



8511 Fallbrook Ave, Suite 200
West Hills, CA 91405

O: 818-787-2100
F: 818-786-4354
electrorent.com