

# R&S® ESW EMI TEST RECEIVER

## Specifications

3  
year  
warranty



Data Sheet  
Version 09.00

**ROHDE & SCHWARZ**

Make ideas real



# CONTENTS

<b>Definitions .....</b>	<b>3</b>
<b>Specifications.....</b>	<b>4</b>
Frequency .....	4
Sweep time.....	6
Preselection and preamplifier .....	6
R&S®ESW-B24 low-noise amplifier (LNA) .....	7
IF and resolution bandwidths .....	7
Level.....	8
Sensitivity .....	12
Spurious responses.....	20
Level measurement uncertainty .....	21
Time domain scan (TDS).....	23
Measurement speed .....	23
Trigger functions.....	24
Audio demodulator .....	24
Inputs and outputs .....	25
General data.....	28
<b>Options .....</b>	<b>30</b>
R&S®ESW-B10 external generator control.....	30
R&S®ESW-B21 LO/IF connections for external mixers (not available for R&S®ESW8).....	30
R&S®ESW-K980 health and utilization monitoring service (HUMS).....	31
<b>Ordering information .....</b>	<b>32</b>
Options.....	32
<i>Firmware</i> .....	32
Recommended extras.....	33
Service options.....	34

# Definitions


## General

Product data applies under the following conditions:

- Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

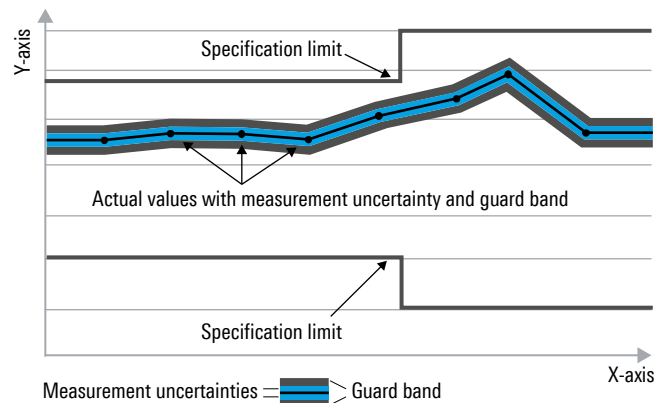

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP/3GPP2 standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in million bits per second (Mbps), thousand bits per second (kbps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Mcps, kbps, ksps and Msample/s are not SI units.

# Specifications

## Frequency

<b>Frequency range</b>	R&S®ESW8	
	input 1, DC coupled	1 Hz to 8 GHz
	input 1, AC coupled	10 MHz to 8 GHz
	R&S®ESW26	
	input 1, DC coupled	1 Hz to 26.5 GHz
	input 1, AC coupled	10 MHz to 26.5 GHz
	R&S®ESW44	
	input 1, DC coupled	1 Hz to 44 GHz
	input 1, AC coupled	10 MHz to 44 GHz
<b>Frequency resolution</b>	all models	
	input 2, DC coupled	1 Hz to 1 GHz
	input 2, AC coupled <sup>1</sup>	10 MHz to 1 GHz
		0.01 Hz


<b>Reference frequency, internal</b>		
Accuracy		±(time since last adjustment × aging rate + temperature drift + calibration accuracy)
Aging per year	standard	±1 × 10 <sup>-7</sup>
	with R&S®ESW-B4 OCXO precision frequency reference option	±3 × 10 <sup>-8</sup>
Temperature drift (0 °C to +50 °C)	standard	±1 × 10 <sup>-7</sup>
	with R&S®ESW-B4 OCXO precision frequency reference option	±1 × 10 <sup>-9</sup>
Achievable initial calibration accuracy	standard	±1 × 10 <sup>-8</sup>
	with R&S®ESW-B4 OCXO precision frequency reference option	±5 × 10 <sup>-9</sup>

<b>Frequency readout (analyzer mode)</b>		
Marker resolution		1 Hz
Uncertainty		±(marker frequency × reference accuracy + 10 % × resolution bandwidth + ½ (span / (sweep points – 1)) + 1 Hz)
Number of sweep (trace) points	default value	1001
	range	
	spectrum analyzer	101 to 100001
	EMI measurement	101 to 200001
Marker tuning frequency step size	marker step size = sweep points	span / (sweep points – 1)
	marker step size = standard	span / (default sweep points – 1)
Frequency counter resolution		0.001 Hz
Count accuracy		±(frequency × reference accuracy + ½ (last digit))
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Max. span deviation		±0.1 %

<b>Receiver scan</b>		
Scan		max. 10 subranges with different settings
Scan modes		normal, time domain
Measurement time	normal scan, per frequency	50 µs to 100 s
	time domain scan, per subrange	50 µs to 100 s
Number of trace points		up to 10 000 000
Frequency step size	normal scan	min. 1 Hz
	time domain scan	0.25 × resolution bandwidth

<sup>1</sup> Only available with pulse limiter = off.

Spectral purity		
SSB phase noise	frequency = 1000 MHz, carrier offset	
	10 Hz, without R&S®ESW-B4 option	-80 dBc (1 Hz) (nom.)
	10 Hz, with R&S®ESW-B4 option	-90 dBc (1 Hz) (nom.)
	100 Hz	-106 dBc (1 Hz), typ. -112 dBc (1 Hz)
	1 kHz	< -125 dBc (1 Hz), typ. -130 dBc (1 Hz)
	10 kHz	< -134 dBc (1 Hz), typ. -138 dBc (1 Hz)
	100 kHz	< -136 dBc (1 Hz), typ. -140 dBc (1 Hz)
	1 MHz	< -145 dBc (1 Hz), typ. -149 dBc (1 Hz)
Residual FM	frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms	< 0.1 Hz (nom.)

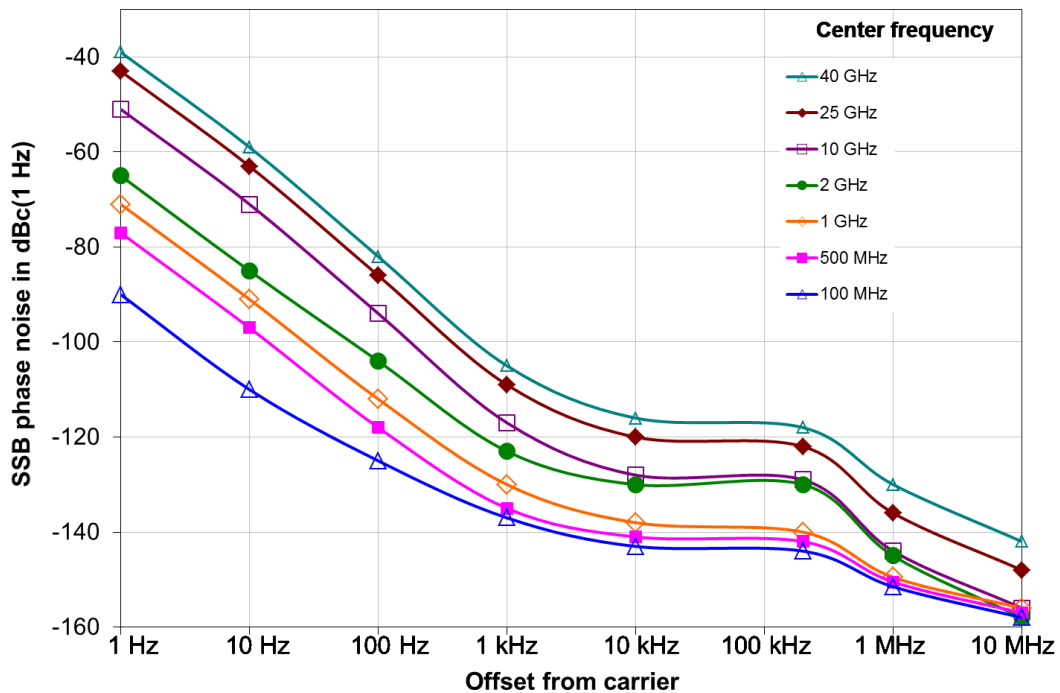

Typical phase noise at different center frequencies (with the R&S®ESW-B4 option for offsets  $\leq 10$  Hz)

## Sweep time

Sweep time range	span = 0 Hz	1 $\mu$ s to 16000 s
	span $\geq$ 10 Hz	3 $\mu$ s to 16000 s <sup>2</sup>
Sweep time accuracy	span = 0 Hz	$\pm$ 0.1 % (nom.)
	span $\geq$ 10 Hz	$\pm$ 3 % (nom.)

## Preselection and preamplifier

<b>Preselection</b>		
State	receiver mode	always on
	analyzer mode	on/off (selectable)
Number of preselection filters		21
<b>Preselection filters</b>		
Bandwidths (–6 dB), nominal	1 Hz to 150 kHz	200 kHz, fixed lowpass filter
	150 kHz to 30 MHz	38 MHz, fixed bandpass filter
	2 MHz to 30 MHz, selectable	36 MHz, fixed bandpass filter
	8 MHz to 30 MHz, selectable <sup>3</sup>	30 MHz, fixed bandpass filter
	30 MHz to 125 MHz	134 MHz, fixed bandpass filter
	125 MHz to 205 MHz	141 MHz, fixed bandpass filter
	205 MHz to 285 MHz	146 MHz, fixed bandpass filter
	285 MHz to 365 MHz	142 MHz, fixed bandpass filter
	365 MHz to 445 MHz	156 MHz, fixed bandpass filter
	445 MHz to 525 MHz	136 MHz, fixed bandpass filter
	525 MHz to 605 MHz	126 MHz, fixed bandpass filter
	605 MHz to 685 MHz	141 MHz, fixed bandpass filter
	685 MHz to 765 MHz	131 MHz, fixed bandpass filter
	765 MHz to 845 MHz	128 MHz, fixed bandpass filter
	845 MHz to 925 MHz	132 MHz, fixed bandpass filter
	925 MHz to 1001 MHz	133 MHz, fixed bandpass filter
	1001 MHz to 1795 MHz	1044 MHz, fixed bandpass filter
1795 MHz to 2895 MHz	1541 MHz, fixed bandpass filter	
2895 MHz to 4895 MHz	2452 MHz, fixed bandpass filter	
4895 MHz to 6800 MHz	fixed highpass filter	
6800 MHz to 8000 MHz	fixed highpass filter	
8 GHz to 44 GHz	YIG filter	
<b>Notch filters</b>		
Reject band	selectable	2400 MHz to 2483 MHz
		5725 MHz to 5875 MHz
Reject attenuation		20 dB (nom.)
<b>Preamplifier</b>		
Range		1 kHz to 8 GHz
Gain		20 dB (nom.)
Location		in the signal path between preselection and 1st mixer, only available with preselection = on
Interaction		preamplifier and LNA (R&S®ESW-B24 option) operate alternatively, preamplifier = on means LNA = off and vice versa

<sup>2</sup> The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

<sup>3</sup> Filter is only available for instruments starting from the following serial numbers:  
R&S®ESW8: 103055, R&S®ESW26: 103028, R&S®ESW44: 103048.

## R&S®ESW-B24 low-noise amplifier (LNA)

Frequency range	R&S®ESW8	150 kHz to 8 GHz
	R&S®ESW26	150 kHz to 26.5 GHz
	R&S®ESW44	150 kHz to 44 GHz
Gain		30 dB (nom.)
Location		in the signal path between RF attenuator and preselection
Interaction		preamplifier and LNA operate alternatively, LNA = on means preamplifier = off and vice versa

## IF and resolution bandwidths

IF filters, sweep filters and FFT filters		
Resolution bandwidths (-3 dB)	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®ESW-B8E option	20 MHz, 30 MHz, 40 MHz additionally <sup>4</sup>
	with R&S®ESW-B8 option	20 MHz, 30 MHz, 40 MHz, 50 MHz, 80 MHz additionally <sup>4</sup>
Bandwidth uncertainty	RBW ≤ 10 MHz	< 3 %
	RBW > 10 MHz	< 3 % (nom.)
Shape factor 60 dB:3 dB	RBW ≤ 10 MHz	< 5
	RBW > 10 MHz	< 5 (nom.)

EMI filters		
Bandwidths (-6 dB)	standard	1 Hz, 10 Hz, 100 Hz, 200 Hz, 1 kHz, 9 kHz, 10 kHz, 100 kHz, 120 kHz, 1 MHz, 10 MHz
	with R&S®ESW-B8E option	20 MHz, 30 MHz, 40 MHz additionally <sup>4</sup>
	with R&S®ESW-B8 option	20 MHz, 30 MHz, 40 MHz, 50 MHz, 80 MHz additionally <sup>4</sup>
Bandwidth uncertainty	RBW ≤ 10 MHz	< 3 %
	RBW > 10 MHz	< 3 % (nom.)
Shape factor 60 dB:6 dB	RBW ≤ 10 MHz	< 4
	RBW > 10 MHz	< 4 (nom.)

Channel filters (analyzer mode)		
Bandwidths (-3 dB)	standard (RRC = root raised cosine)	100 Hz, 200 Hz, 300 Hz, 500 Hz
		1/1.5/2/2.4/2.7/3/3.4/4/4.5/5/6/8.5/9/10/ 12.5/14/15/16/18 (RRC)/20/21/ 24.3 (RRC)/25/30/50/100/150/192/200/ 300/500 kHz
		1/1.228/1.28 (RRC)/1.5/2/3/3.84 (RRC)/ 4.096 (RRC)/5/8/10 MHz
	with R&S®ESW-B8E option	20 MHz, 30 MHz, 40 MHz additionally <sup>4</sup>
	with R&S®ESW-B8 option	20 MHz, 30 MHz, 40 MHz, 50 MHz, 80 MHz additionally <sup>4</sup>
Bandwidth accuracy		< 2 % (nom.)
Shape factor 60 dB:3 dB		< 2 (nom.)

Video bandwidths (analyzer mode)		
	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®ESW-B8E option	20 MHz, 30 MHz, 40 MHz additionally <sup>5</sup>
	with R&S®ESW-B8 option	20 MHz, 30 MHz, 40 MHz, 50 MHz, 80 MHz additionally <sup>5</sup>

<sup>4</sup> For  $f \geq 8$  GHz the bandwidth may be limited by the YIG preselector.

<sup>5</sup> For video bandwidth settings > 20 MHz, the video bandwidth filter is bypassed.

## Level

<b>Level display (analyzer mode)</b>		
Display range		displayed noise floor up to +30 dBm
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average, quasi-peak, CISPR-average, RMS-average
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation – preamplifier / LNA gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW
	linear level display	$\mu$ V, mV, $\mu$ A, mA, pW, nW

<b>Level display (receiver mode)</b>		
Level display	analog	bargraph display, separately for each detector
	digital	numeric; 0.01 dB resolution
Detectors	max. 4 selectable	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
Units of level axis		dBm, dB $\mu$ V, dBmV, dB $\mu$ A, dBpW, dBpT
<b>RF spectrum</b>		
Logarithmic level axis		10 dB to 200 dB, in steps of 10
Frequency axis		linear or logarithmic
Number of traces		6
Detectors	normal scan	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average
	time domain scan	max. peak, min. peak, RMS, average, quasi-peak, CISPR-average, RMS-average

<b>Amplitude probability display – CISPR APD measurement function</b>		
Min. amplitude probability		10 <sup>-7</sup>
Max. acquisition time		120 s
Analysis bandwidth (-6 dB)		200 Hz, 9 kHz, 120 kHz, 1 MHz

<b>APD multichannel measurement function (R&amp;S®ESW-K58 option)</b>		
Min. amplitude probability		10 <sup>-7</sup>
Max. acquisition time		120 s
Analysis bandwidth (-6 dB)		1 Hz ≤ analysis bandwidth ≤ 1 MHz
Max. number of analyzed channels	analysis bandwidth = 1 MHz	21
	analysis bandwidth ≤ 300 kHz	67



Maximum input level		
DC voltage	AC coupled	50 V
	DC coupled	0 V
CW RF power	RF attenuation = 0 dB	
	preselection off <sup>6</sup> , preamplifier off, LNA off <sup>7</sup>	20 dBm (= 0.1 W)
	preselection/preamplifier on or LNA on <sup>7</sup>	13 dBm (= 0.02 W)
	RF attenuation ≥ 10 dB	
	preselection off <sup>6</sup> , preamplifier off, LNA off <sup>7</sup>	30 dBm (= 1 W)
	preselection on <sup>8</sup> , preamplifier on or LNA on <sup>7</sup>	23 dBm (= 0.2 W)
Pulse spectral density	RF attenuation = 0 dB, preamplifier off, LNA off <sup>7</sup>	97 dB μV/MHz
Max. pulse voltage	RF attenuation ≥ 10 dB	
	input 1, input 2 with pulse limiter off	150 V
	input 2 with pulse limiter on	450 V
Response threshold of built-in pulse limiter	input 2, RF attenuation ≥ 10 dB, pulse limiter on	30 V (nom.)
Max. pulse energy, pulse duration τ = 10 μs	RF attenuation ≥ 10 dB	
	input 1, input 2 with pulse limiter off	1 mWs
	input 2 with pulse limiter on	20 mWs

Intermodulation		
1 dB compression of input mixer (two-tone)	RF attenuation = 0 dB, preselection off <sup>6</sup> , preamplifier off, LNA off <sup>7</sup>	
	$f_{in} \leq 3$ GHz	+15 dBm (nom.)
	$3$ GHz < $f_{in} \leq 8$ GHz	+10 dBm (nom.)
	$f_{in} > 8$ GHz	+7 dBm (nom.)
	RF attenuation = 0 dB, preselection on <sup>8</sup> and preamplifier off, LNA off <sup>7</sup>	
	$f_{in} \leq 3$ GHz	+10 dBm (nom.)
	$3$ GHz < $f_{in} \leq 8$ GHz	+5 dBm (nom.)
	$f_{in} > 8$ GHz	+7 dBm (nom.)
	RF attenuation = 0 dB, preselection on <sup>8</sup> , preamplifier on, LNA off <sup>7</sup>	
	$f_{in} \leq 3$ GHz	-5 dBm (nom.)
	$3$ GHz < $f_{in} \leq 8$ GHz	-10 dBm (nom.)
	$f_{in} > 8$ GHz	+7 dBm (nom.)
	RF attenuation = 0 dB, preselection on <sup>8</sup> , preamplifier off, LNA on <sup>7</sup>	
	$f_{in} \leq 3$ GHz	-18 dBm (nom.)
	$3$ GHz < $f_{in} \leq 8$ GHz	-25 dBm (nom.)
	$f_{in} > 8$ GHz	-23 dBm (nom.)
	RF attenuation = 0 dB, preselection off <sup>6</sup> , preamplifier off, LNA on <sup>7</sup>	
	$f_{in} \leq 3$ GHz	-13 dBm (nom.)
$3$ GHz < $f_{in} \leq 8$ GHz	-20 dBm (nom.)	
$f_{in} > 8$ GHz	-23 dBm (nom.)	

<sup>6</sup> Preselection off is only available in analyzer mode. In receiver mode the preselection is permanently on.

<sup>7</sup> With R&S®ESW-B24 option only.

<sup>8</sup> Default setting in receiver mode.

Third-order intercept point (TOI)	RF attenuation = 0 dB, level 2 × -15 dBm, $\Delta f > 5 \times \text{RBW}$ , preselection off <sup>6</sup> , preamplifier off, LNA off <sup>7</sup>	
	R&S®ESW8, R&S®ESW26, R&S®ESW44	
	$f_{in} < 10 \text{ MHz}$	28 dBm (nom.)
	$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	> 20 dBm, typ. 25 dBm
	$1 \text{ GHz} \leq f_{in} < 3 \text{ GHz}$	> 20 dBm, typ. 25 dBm
	$3 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	> 17 dBm, typ. 20 dBm
	R&S®ESW26	
	$8 \text{ GHz} \leq f_{in} < 10 \text{ GHz}$	> 14 dBm, typ. 17 dBm
	$10 \text{ GHz} \leq f_{in} < 12 \text{ GHz}$	> 16 dBm, typ. 20 dBm
	$12 \text{ GHz} \leq f_{in} < 17 \text{ GHz}$	> 18 dBm, typ. 23 dBm
	$17 \text{ GHz} \leq f_{in} < 19 \text{ GHz}$	> 16 dBm, typ. 20 dBm
	$19 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$	> 18 dBm, typ. 23 dBm
	R&S®ESW44	
	$8 \text{ GHz} \leq f_{in} \leq 13.6 \text{ GHz}$	> 8 dBm, typ. 11 dBm
	$13.6 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	> 10 dBm, typ. 15 dBm
	$f_{in} > 40 \text{ GHz}$	12 dBm (nom.)
	RF attenuation = 0 dB, level 2 × -20 dBm, $\Delta f > 5 \times \text{RBW}$ , preselection on <sup>8</sup> , preamplifier off, LNA off <sup>7</sup>	
	R&S®ESW8, R&S®ESW26, R&S®ESW44	
	$f_{in} < 10 \text{ MHz}$	20 dBm (nom.)
	$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	> 15 dBm, typ. 20 dBm
	$1 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	> 12 dBm, typ. 15 dBm
	R&S®ESW26	
	$8 \text{ GHz} \leq f_{in} < 10 \text{ GHz}$	> 14 dBm, typ. 17 dBm
	$10 \text{ GHz} \leq f_{in} < 12 \text{ GHz}$	> 16 dBm, typ. 20 dBm
	$12 \text{ GHz} \leq f_{in} < 17 \text{ GHz}$	> 18 dBm, typ. 23 dBm
	$17 \text{ GHz} \leq f_{in} < 19 \text{ GHz}$	> 16 dBm, typ. 20 dBm
	$19 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$	> 18 dBm, typ. 23 dBm
	R&S®ESW44	
	$8 \text{ GHz} \leq f_{in} \leq 13.6 \text{ GHz}$	> 8 dBm, typ. 11 dBm
	$13.6 \text{ GHz} \leq f_{in} \leq 40 \text{ GHz}$	> 10 dBm, typ. 15 dBm
	$f_{in} > 40 \text{ GHz}$	12 dBm (nom.)
	RF attenuation = 0 dB, level 2 × -45 dBm, $\Delta f > 5 \times \text{RBW}$ , preselection on <sup>8</sup> , preamplifier on, LNA off <sup>7</sup>	
	$f_{in} < 30 \text{ MHz}$	-10 dBm (nom.)
$30 \text{ MHz} \leq f_{in} < 3 \text{ GHz}$	> -8 dBm	
$3 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	> -10 dBm	
$8 \text{ GHz} \leq f_{in} \leq 44 \text{ GHz}$	-20 dBm (nom.)	
RF attenuation = 0 dB, level 2 × -55 dBm, $\Delta f > 5 \times \text{RBW}$ , preselection on <sup>8</sup> , preamplifier off, LNA on <sup>7</sup>		
$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	-15 dBm (nom.)	
$1 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	-18 dBm (nom.)	
$8 \text{ GHz} \leq f_{in} \leq 26.5 \text{ GHz}$	-20 dBm (nom.)	
RF attenuation = 0 dB, level 2 × -55 dBm, $\Delta f > 5 \times \text{RBW}$ , preselection off <sup>6</sup> , preamplifier off, LNA on <sup>7</sup>		
$10 \text{ MHz} \leq f_{in} < 1 \text{ GHz}$	-10 dBm (nom.)	
$1 \text{ GHz} \leq f_{in} < 8 \text{ GHz}$	-13 dBm (nom.)	
$8 \text{ GHz} \leq f_{in} \leq 44 \text{ GHz}$	-20 dBm (nom.)	

Second-harmonic intercept point (SHI)	RF attenuation = 0 dB, level = -5 dBm, preselection off <sup>6</sup> , preamplifier off, LNA off <sup>7</sup>	
	R&S®ESW8, R&S®ESW26	
	1 MHz < $f_{in}$ ≤ 350 MHz	> 50 dBm, typ. 62 dBm
	350 MHz < $f_{in}$ ≤ 500 MHz	> 70 dBm, typ. 80 dBm
	500 MHz < $f_{in}$ < 1.5 GHz	> 47 dBm, typ. 52 dBm
	1.5 GHz ≤ $f_{in}$ ≤ 4 GHz	> 62 dBm, typ. 70 dBm
	4 GHz < $f_{in}$ ≤ 13.5 GHz	65 dBm (nom.)
	R&S®ESW44	
	1 MHz < $f_{in}$ ≤ 500 MHz	> 45 dBm, typ. 55 dBm
	500 MHz < $f_{in}$ < 1.5 GHz	> 47 dBm, typ. 56 dBm
	1.5 GHz ≤ $f_{in}$ ≤ 4 GHz	> 62 dBm, typ. 70 dBm
	4 GHz < $f_{in}$ ≤ 22 GHz	65 dBm (nom.)
	RF attenuation = 0 dB, level = -10 dBm, preselection on <sup>8</sup> , preamplifier off, LNA off <sup>7</sup>	
	1 MHz < $f_{in}$ ≤ 15 MHz	> 50 dBm (nom.)
	15 MHz < $f_{in}$ ≤ 65 MHz	> 50 dBm (nom.)
	65 MHz < $f_{in}$ ≤ 4000 MHz	> 60 dBm (nom.)
	4 GHz < $f_{in}$ ≤ 22 GHz	65 dBm (nom.)
	RF attenuation = 0 dB, level = -30 dBm, preselection on <sup>8</sup> , preamplifier on, LNA off <sup>7</sup>	
	1 MHz < $f_{in}$ ≤ 15 MHz	> 20 dBm (nom.)
	15 MHz < $f_{in}$ ≤ 105 MHz	> 25 dBm (nom.)
105 MHz < $f_{in}$ ≤ 4000 MHz	> 40 dBm (nom.)	
4 GHz < $f_{in}$ ≤ 22 GHz	10 dBm (nom.) <sup>7</sup>	
RF attenuation = 0 dB, level = -55 dBm, preselection on <sup>8</sup> , preamplifier off, LNA on <sup>7</sup>		
50 MHz < $f_{in}$ ≤ 21.75 GHz	5 dBm (nom.)	
RF attenuation = 0 dB, level = -50 dBm, preselection off <sup>6</sup> , preamplifier off, LNA on <sup>7</sup>		
50 MHz < $f_{in}$ ≤ 21.75 GHz	10 dBm (nom.)	

## Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

<b>Displayed average noise level of instruments without R&amp;S®ESW-B24 option (analyzer mode)</b>	
Preselection off/on <sup>6</sup> , preamplifier off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
	1 Hz ≤ f < 2 Hz
	2 Hz ≤ f < 10 Hz
	10 Hz ≤ f ≤ 100 Hz
	100 Hz < f ≤ 1 kHz
	1 kHz < f < 9 kHz
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C
	R&S®ESW8
	9 kHz ≤ f ≤ 1 MHz
	1 MHz < f ≤ 1 GHz
	1 GHz < f < 3 GHz
	3 GHz ≤ f ≤ 8 GHz
	R&S®ESW26
	9 kHz ≤ f ≤ 1 MHz
	1 MHz < f ≤ 1 GHz
	1 GHz < f < 3 GHz
	3 GHz ≤ f < 8 GHz
	8 GHz ≤ f < 13.6 GHz
	13.6 GHz ≤ f < 18 GHz
	18 GHz ≤ f < 25 GHz
	25 GHz ≤ f ≤ 26.5 GHz
	R&S®ESW44
	9 kHz ≤ f ≤ 1 MHz
	1 MHz < f ≤ 1 GHz
	1 GHz < f < 3 GHz
	3 GHz ≤ f < 8 GHz
	8 GHz ≤ f < 13.6 GHz
	13.6 GHz ≤ f < 18 GHz
	18 GHz ≤ f < 25 GHz
	25 GHz ≤ f ≤ 34 GHz
	34 GHz < f ≤ 40 GHz
	40 GHz < f ≤ 44 GHz

Preselection on <sup>8</sup> , preamplifier on	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C	
	1 kHz < f < 9 kHz	-140 dBm, typ. -150 dBm
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C	
	R&S <sup>®</sup> ESW8	
	9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm
	1 MHz < f ≤ 30 MHz	-162 dBm, typ. -165 dBm
	30 MHz < f < 2.5 GHz	-165 dBm, typ. -168 dBm
	2.5 GHz ≤ f < 4.8 GHz	-162 dBm, typ. -165 dBm
	4.8 GHz ≤ f ≤ 8 GHz	-160 dBm, typ. -163 dBm
	R&S <sup>®</sup> ESW26	
	9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm
	1 MHz < f ≤ 30 MHz	-162 dBm, typ. -165 dBm
	30 MHz < f < 2.5 GHz	-163 dBm, typ. -166 dBm
	2.5 GHz ≤ f < 4.8 GHz	-160 dBm, typ. -163 dBm
	4.8 GHz ≤ f < 8 GHz	-157 dBm, typ. -160 dBm
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -155 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -153 dBm
	18 GHz ≤ f < 25 GHz	-147 dBm, typ. -150 dBm
	25 GHz ≤ f ≤ 26.5 GHz	-143 dBm, typ. -146 dBm
	R&S <sup>®</sup> ESW44	
	9 kHz ≤ f ≤ 1 MHz	-155 dBm, typ. -160 dBm
	1 MHz < f ≤ 30 MHz	-162 dBm, typ. -165 dBm
	30 MHz < f < 2.5 GHz	-163 dBm, typ. -166 dBm
	2.5 GHz ≤ f < 4.8 GHz	-160 dBm, typ. -163 dBm
	4.8 GHz ≤ f < 8 GHz	-157 dBm, typ. -160 dBm
	8 GHz ≤ f < 13.6 GHz	-150 dBm, typ. -154 dBm
	13.6 GHz ≤ f < 18 GHz	-149 dBm, typ. -153 dBm
18 GHz ≤ f < 25 GHz	-147 dBm, typ. -151 dBm	
25 GHz ≤ f ≤ 34 GHz	-143 dBm, typ. -147 dBm	
34 GHz < f ≤ 40 GHz	-140 dBm, typ. -144 dBm	
40 GHz < f ≤ 44 GHz	-138 dBm, typ. -142 dBm	

<b>Displayed average noise level of instruments with R&amp;S®ESW-B24 option (analyzer mode)</b>	
Preselection off/on <sup>6</sup> , preamplifier off, LNA off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
	1 Hz ≤ f < 2 Hz
	2 Hz ≤ f < 10 Hz
	10 Hz ≤ f ≤ 100 Hz
	100 Hz < f ≤ 1 kHz
	1 kHz < f < 9 kHz
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C
	<b>R&amp;S®ESW8</b>
	9 kHz ≤ f ≤ 1 MHz
	1 MHz < f ≤ 1 GHz
	1 GHz < f < 3 GHz
	3 GHz ≤ f ≤ 8 GHz
	<b>R&amp;S®ESW26</b>
	9 kHz ≤ f ≤ 1 MHz
	1 MHz < f ≤ 1 GHz
	1 GHz < f < 3 GHz
	3 GHz ≤ f < 8 GHz
	8 GHz ≤ f < 13.6 GHz
	13.6 GHz ≤ f < 18 GHz
	18 GHz ≤ f < 25 GHz
	25 GHz ≤ f ≤ 26.5 GHz
	<b>R&amp;S®ESW44</b>
	9 kHz ≤ f ≤ 1 MHz
1 MHz < f ≤ 1 GHz	
1 GHz < f < 3 GHz	
3 GHz ≤ f < 8 GHz	
8 GHz ≤ f < 13.6 GHz	
13.6 GHz ≤ f < 18 GHz	
18 GHz ≤ f < 25 GHz	
25 GHz ≤ f ≤ 34 GHz	
34 GHz < f ≤ 40 GHz	
40 GHz < f ≤ 44 GHz	
Preselection on <sup>8</sup> , preamplifier on, LNA off	RF attenuation = 0 dB, termination = 50 Ω, normalized to 1 Hz RBW, trace average, average mode = log, sample detector, +5 °C to +40 °C
	1 kHz < f < 9 kHz
	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C
	<b>R&amp;S®ESW8</b>
	9 kHz ≤ f ≤ 1 MHz
	1 MHz < f ≤ 30 MHz
	30 MHz < f < 2.5 GHz
	2.5 GHz ≤ f < 4.8 GHz
	4.8 GHz ≤ f ≤ 8 GHz
	<b>R&amp;S®ESW26</b>
	9 kHz ≤ f ≤ 1 MHz
	1 MHz < f ≤ 30 MHz
	30 MHz < f < 2.5 GHz
	2.5 GHz ≤ f < 4.8 GHz
	4.8 GHz ≤ f < 8 GHz
	8 GHz ≤ f ≤ 13.6 GHz
	13.6 GHz < f ≤ 22 GHz
	22 GHz < f ≤ 26.5 GHz
	<b>R&amp;S®ESW44</b>
	9 kHz ≤ f ≤ 1 MHz
	1 MHz < f ≤ 30 MHz
	30 MHz < f ≤ 2.5 GHz
	2.5 GHz ≤ f < 4.8 GHz
4.8 GHz ≤ f < 8 GHz	
8 GHz ≤ f ≤ 18 GHz	
18 GHz < f ≤ 26.5 GHz	
26.5 GHz < f ≤ 40 GHz	
40 GHz < f ≤ 43 GHz	
43 GHz < f ≤ 44 GHz	

Preselection off/on <sup>6</sup> , preamplifier off, LNA on	RF attenuation = 0 dB, termination = 50 Ω, log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C	
	R&S®ESW8	
	150 kHz < f ≤ 1 MHz	-130 dBm
	1 MHz < f ≤ 5 MHz	-140 dBm
	5 MHz < f ≤ 50 MHz	-150 dBm
	50 MHz < f ≤ 150 MHz	-163 dBm, typ. -166 dBm
	150 MHz < f ≤ 8 GHz	-166 dBm, typ. -169 dBm
	R&S®ESW26	
	150 kHz < f ≤ 1 MHz	-130 dBm
	1 MHz < f ≤ 5 MHz	-140 dBm
	5 MHz < f ≤ 50 MHz	-150 dBm
	50 MHz < f ≤ 150 MHz	-163 dBm, typ. -166 dBm
	150 MHz < f ≤ 8 GHz	-166 dBm, typ. -169 dBm
	8 GHz < f ≤ 13.6 GHz	-164 dBm, typ. -168 dBm
	13.6 GHz < f ≤ 22 GHz	-162 dBm, typ. -166 dBm
	22 GHz < f ≤ 26.5 GHz	-157 dBm, typ. -161 dBm
	R&S®ESW44	
	150 kHz < f ≤ 1 MHz	-160 dBm, typ. -163 dBm
	1 MHz < f ≤ 3 GHz	-165 dBm, typ. -169 dBm
	3 GHz < f ≤ 8 GHz	-162 dBm, typ. -166 dBm
8 GHz < f ≤ 18 GHz	-162 dBm, typ. -167 dBm	
18 GHz < f ≤ 26.5 GHz	-161 dBm, typ. -166 dBm	
26.5 GHz < f ≤ 40 GHz	-160 dBm, typ. -164 dBm	
40 GHz < f ≤ 43 GHz	-157 dBm, typ. -162 dBm	
43 GHz < f ≤ 44 GHz	-146 dBm	

Noise indication of instruments without R&S®ESW-B24 option (receiver mode)		
Nominal, calculated from displayed average noise level (DANL) data		
Preamplifier = off	RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C	
	all models	
	1 Hz ≤ f < 2 Hz, BW = 1 Hz	27 dBμV
	2 Hz ≤ f < 10 Hz, BW = 1 Hz	< 7 dBμV
	10 Hz ≤ f ≤ 100 Hz, BW = 10 Hz	< 7 dBμV
	100 Hz < f ≤ 1 kHz, BW = 100 Hz	< 7 dBμV
	1 kHz < f < 9 kHz, BW = 100 Hz	< -8 dBμV
	R&S®ESW8	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBμV
	150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz	< 1 dBμV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -4 dBμV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 8 dBμV
	1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 15 dBμV
	3 GHz ≤ f ≤ 8 GHz, BW = 1 MHz	< 15 dBμV
	R&S®ESW26	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBμV
	150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBμV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBμV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 9 dBμV
	1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 16 dBμV
	3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 17 dBμV
	8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 17 dBμV
	13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 18 dBμV
	18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 20 dBμV
	25 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz	< 24 dBμV
	R&S®ESW44	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBμV
	150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBμV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBμV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 9 dBμV
	1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 16 dBμV
	3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 17 dBμV
8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 17 dBμV	
13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 18 dBμV	
18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 20 dBμV	
25 GHz ≤ f ≤ 34 GHz, BW = 1 MHz	< 24 dBμV	
34 GHz ≤ f < 40 GHz, BW = 1 MHz	< 27 dBμV	
40 GHz ≤ f ≤ 44 GHz, BW = 1 MHz	< 29 dBμV	



Preamplifier = on	RF attenuation = 0 dB, termination = 50 $\Omega$ , average (AV) detector, +5 °C to +40 °C	
	all models	
	1 kHz $\leq$ f < 9 kHz, BW = 100 Hz	< -13 dB $\mu$ V
	R&S®ESW8	
	9 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -25 dB $\mu$ V
	150 kHz $\leq$ f $\leq$ 1 MHz, BW = 9 kHz	< -9 dB $\mu$ V
	1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -16 dB $\mu$ V
	30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< -7 dB $\mu$ V
	1 GHz $\leq$ f < 2.5 GHz, BW = 1 MHz	< 2 dB $\mu$ V
	2.5 GHz $\leq$ f < 4.8 GHz, BW = 1 MHz	< 5 dB $\mu$ V
	4.8 GHz $\leq$ f $\leq$ 8 GHz, BW = 1 MHz	< 7 dB $\mu$ V
	R&S®ESW26	
	9 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -25 dB $\mu$ V
	150 kHz $\leq$ f < 1 MHz, BW = 9 kHz	< -9 dB $\mu$ V
	1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -16 dB $\mu$ V
	30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< -5 dB $\mu$ V
	1 GHz $\leq$ f < 2.5 GHz, BW = 1 MHz	< 4 dB $\mu$ V
	2.5 GHz $\leq$ f < 4.8 GHz, BW = 1 MHz	< 7 dB $\mu$ V
	4.8 GHz $\leq$ f < 8 GHz, BW = 1 MHz	< 10 dB $\mu$ V
	8 GHz $\leq$ f < 13.6 GHz, BW = 1 MHz	< 17 dB $\mu$ V
	13.6 GHz $\leq$ f < 18 GHz, BW = 1 MHz	< 18 dB $\mu$ V
	18 GHz $\leq$ f < 25 GHz, BW = 1 MHz	< 20 dB $\mu$ V
	25 GHz $\leq$ f $\leq$ 26.5 GHz, BW = 1 MHz	< 24 dB $\mu$ V
	R&S®ESW44	
	9 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -25 dB $\mu$ V
	150 kHz $\leq$ f < 1 MHz, BW = 9 kHz	< -9 dB $\mu$ V
	1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -16 dB $\mu$ V
	30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< -5 dB $\mu$ V
	1 GHz $\leq$ f < 2.5 GHz, BW = 1 MHz	< 4 dB $\mu$ V
	2.5 GHz $\leq$ f < 4.8 GHz, BW = 1 MHz	< 7 dB $\mu$ V
	4.8 GHz $\leq$ f < 8 GHz, BW = 1 MHz	< 10 dB $\mu$ V
	8 GHz $\leq$ f < 13.6 GHz, BW = 1 MHz	< 17 dB $\mu$ V
	13.6 GHz $\leq$ f < 18 GHz, BW = 1 MHz	< 18 dB $\mu$ V
18 GHz $\leq$ f < 25 GHz, BW = 1 MHz	< 20 dB $\mu$ V	
25 GHz $\leq$ f $\leq$ 34 GHz, BW = 1 MHz	< 24 dB $\mu$ V	
34 GHz $\leq$ f < 40 GHz, BW = 1 MHz	< 27 dB $\mu$ V	
40 GHz $\leq$ f $\leq$ 44 GHz, BW = 1 MHz	< 29 dB $\mu$ V	

Noise indication of instruments with R&S®ESW-B24 option (receiver mode)		
Nominal, calculated from DANL data		
Preamplifier = off, LNA = off	RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C	
	all models	
	1 Hz ≤ f < 2 Hz, BW = 1 Hz	27 dBμV
	2 Hz ≤ f < 10 Hz, BW = 1 Hz	< 7 dBμV
	10 Hz ≤ f ≤ 100 Hz, BW = 10 Hz	< 7 dBμV
	100 Hz < f ≤ 1 kHz, BW = 100 Hz	< 7 dBμV
	1 kHz < f < 9 kHz, BW = 100 Hz	< -8 dBμV
	R&S®ESW8	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBμV
	150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz	< 1 dBμV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -4 dBμV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 8 dBμV
	1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 15 dBμV
	3 GHz ≤ f ≤ 8 GHz, BW = 1 MHz	< 15 dBμV
	R&S®ESW26	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBμV
	150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBμV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBμV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 9 dBμV
	1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 17 dBμV
	3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 18 dBμV
	8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 18 dBμV
	13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 19 dBμV
	18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 22 dBμV
	25 GHz ≤ f ≤ 26.5 GHz, BW = 1 MHz	< 26 dBμV
	R&S®ESW44	
	9 kHz ≤ f < 150 kHz, BW = 200 Hz	< -15 dBμV
	150 kHz ≤ f < 1 MHz, BW = 9 kHz	< 1 dBμV
	1 MHz ≤ f < 30 MHz, BW = 9 kHz	< -3 dBμV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< 9 dBμV
	1 GHz ≤ f < 3 GHz, BW = 1 MHz	< 17 dBμV
	3 GHz ≤ f < 8 GHz, BW = 1 MHz	< 18 dBμV
	8 GHz ≤ f < 13.6 GHz, BW = 1 MHz	< 19 dBμV
13.6 GHz ≤ f < 18 GHz, BW = 1 MHz	< 20 dBμV	
18 GHz ≤ f < 25 GHz, BW = 1 MHz	< 22 dBμV	
25 GHz ≤ f ≤ 34 GHz, BW = 1 MHz	< 27 dBμV	
34 GHz ≤ f < 40 GHz, BW = 1 MHz	< 30 dBμV	
40 GHz ≤ f ≤ 44 GHz, BW = 1 MHz	< 32 dBμV	

Preamplifier = on, LNA = off	RF attenuation = 0 dB, termination = 50 $\Omega$ , average (AV) detector, +5 °C to +40 °C	
	all models	
	1 kHz $\leq$ f < 9 kHz, BW = 100 Hz	< -13 dB $\mu$ V
	<b>R&amp;S®ESW8</b>	
	9 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -25 dB $\mu$ V
	150 kHz $\leq$ f $\leq$ 1 MHz, BW = 9 kHz	< -9 dB $\mu$ V
	1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -16 dB $\mu$ V
	30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< -7 dB $\mu$ V
	1 GHz $\leq$ f < 2.5 GHz, BW = 1 MHz	< 2 dB $\mu$ V
	2.5 GHz $\leq$ f < 4.8 GHz, BW = 1 MHz	< 5 dB $\mu$ V
	4.8 GHz $\leq$ f $\leq$ 8 GHz, BW = 1 MHz	< 7 dB $\mu$ V
	<b>R&amp;S®ESW26</b>	
	9 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -25 dB $\mu$ V
	150 kHz $\leq$ f < 1 MHz, BW = 9 kHz	< -9 dB $\mu$ V
	1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -15 dB $\mu$ V
	30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< -4 dB $\mu$ V
	1 GHz $\leq$ f < 2.5 GHz, BW = 1 MHz	< 5 dB $\mu$ V
	2.5 GHz $\leq$ f < 4.8 GHz, BW = 1 MHz	< 9 dB $\mu$ V
	4.8 GHz $\leq$ f < 8 GHz, BW = 1 MHz	< 12 dB $\mu$ V
	8 GHz $\leq$ f $\leq$ 13.6 GHz, BW = 1 MHz	< 3 dB $\mu$ V
	13.6 GHz < f $\leq$ 22 GHz, BW = 1 MHz	< 5 dB $\mu$ V
	22 GHz < f $\leq$ 26.5 GHz, BW = 1 MHz	< 10 dB $\mu$ V
	<b>R&amp;S®ESW44</b>	
	9 kHz $\leq$ f < 150 kHz, BW = 200 Hz	< -25 dB $\mu$ V
	150 kHz $\leq$ f < 1 MHz, BW = 9 kHz	< -9 dB $\mu$ V
	1 MHz $\leq$ f < 30 MHz, BW = 9 kHz	< -15 dB $\mu$ V
	30 MHz $\leq$ f < 1 GHz, BW = 120 kHz	< -4 dB $\mu$ V
1 GHz $\leq$ f < 2.5 GHz, BW = 1 MHz	< 5 dB $\mu$ V	
2.5 GHz $\leq$ f < 4.8 GHz, BW = 1 MHz	< 9 dB $\mu$ V	
4.8 GHz $\leq$ f < 8 GHz, BW = 1 MHz	< 12 dB $\mu$ V	
8 GHz $\leq$ f $\leq$ 18 GHz, BW = 1 MHz	< 5 dB $\mu$ V	
18 GHz < f $\leq$ 26.5 GHz, BW = 1 MHz	< 6 dB $\mu$ V	
26.5 GHz < f $\leq$ 40 GHz, BW = 1 MHz	< 7 dB $\mu$ V	
40 GHz < f $\leq$ 43 GHz, BW = 1 MHz	< 10 dB $\mu$ V	
43 GHz < f $\leq$ 44 GHz, BW = 1 MHz	< 21 dB $\mu$ V	

Preamplifier = off, LNA = on	RF attenuation = 0 dB, termination = 50 Ω, average (AV) detector, +5 °C to +40 °C	
	R&S®ESW8	
	150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz	< 16 dBμV
	1 MHz < f ≤ 5 MHz, BW = 9 kHz	< 6 dBμV
	5 MHz < f < 30 MHz, BW = 9 kHz	< -4 dBμV
	30 MHz ≤ f ≤ 50 MHz, BW = 120 kHz	< 7 dBμV
	50 MHz < f ≤ 150 MHz, BW = 120 kHz	< -5 dBμV
	150 MHz < f < 1 GHz, BW = 120 kHz	< -8 dBμV
	1 GHz ≤ f ≤ 8 GHz, BW = 1 MHz	< 1 dBμV
	R&S®ESW26	
	150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz	< 16 dBμV
	1 MHz < f ≤ 5 MHz, BW = 9 kHz	< 6 dBμV
	5 MHz < f < 30 MHz, BW = 9 kHz	< -4 dBμV
	30 MHz ≤ f ≤ 50 MHz, BW = 120 kHz	< 7 dBμV
	50 MHz < f ≤ 150 MHz, BW = 120 kHz	< -5 dBμV
	150 MHz < f < 1 GHz, BW = 120 kHz	< -8 dBμV
	1 GHz ≤ f ≤ 8 GHz, BW = 1 MHz	< 1 dBμV
	8 GHz < f ≤ 13.6 GHz, BW = 1 MHz	< 3 dBμV
	13.6 GHz < f ≤ 22 GHz, BW = 1 MHz	< 5 dBμV
	22 GHz < f ≤ 26.5 GHz, BW = 1 MHz	< 10 dBμV
	R&S®ESW44	
	150 kHz ≤ f ≤ 1 MHz, BW = 9 kHz	< -14 dBμV
	1 MHz < f < 30 MHz, BW = 9 kHz	< -19 dBμV
	30 MHz ≤ f < 1 GHz, BW = 120 kHz	< -7 dBμV
	1 GHz ≤ f ≤ 3 GHz, BW = 1 MHz	< 2 dBμV
	3 GHz < f ≤ 8 GHz, BW = 1 MHz	< 5 dBμV
	8 GHz < f ≤ 18 GHz, BW = 1 MHz	< 5 dBμV
	18 GHz < f ≤ 26.5 GHz, BW = 1 MHz	< 6 dBμV
	26.5 GHz < f ≤ 40 GHz, BW = 1 MHz	< 7 dBμV
	40 GHz < f ≤ 43 GHz, BW = 1 MHz	< 10 dBμV
43 GHz < f ≤ 44 GHz, BW = 1 MHz	< 21 dBμV	

## Spurious responses

<b>Spurious responses</b>	mixer level ≤ -10 dBm <sup>9</sup> , sweep optimization: auto or dynamic	
Image response	$f_{in} - 2 \times 8997$ MHz (1st IF)	< -90 dBc
	$f_{in} - 2 \times 1317$ MHz (2nd IF)	< -90 dBc
	$f_{in} - 2 \times 37$ MHz (3rd IF)	< -90 dBc
	$f_{in}$ = external interfering signal frequency	
Intermediate frequency response	$f_{in}$ = 1st IF (8997 MHz)	< -90 dBc
	$f_{in}$ = 2nd IF (1317 MHz)	< -90 dBc
	$f_{in}$ = 3rd IF (37 MHz)	< -90 dBc
	$f_{in}$ = external interfering signal frequency	
Residual spurious response	RF attenuation = 0 dB	
	$f \leq 1$ MHz	< -90 dBm
	1 MHz < f ≤ 8900 MHz	< -110 dBm
	8900 MHz < f ≤ 26.5 GHz	< -100 dBm
	26.5 GHz < f ≤ 44 GHz	< -100 dBm
	f = receive frequency	
Local oscillator related spurious	$f_{in} < 1$ GHz	
	10 Hz ≤ offset from carrier < 200 Hz	< -90 dBc
	offset from carrier > 200 Hz	< -100 dBc
	$f_{in} \geq 1$ GHz	
	10 Hz ≤ offset from carrier < 200 Hz	< -90 dBc + 20 log ( $f_{in}/\text{GHz}$ )
	offset from carrier > 200 Hz	< -100 dBc + 20 log ( $f_{in}/\text{GHz}$ )
Vibrational environmental stimuli	max. 0.21 g (RMS)	
	< -60 dBc + 20 log ( $f_{in}/\text{GHz}$ ) (nom.)	

<sup>9</sup> Mixer level = signal level – RF attenuation + preamplifier/LNA gain.

## Level measurement uncertainty

Absolute level uncertainty at 64 MHz	RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB	
	preselection off <sup>6</sup> , +20 °C to +30 °C	< 0.2 dB ( $\sigma = 0.07$ dB)
	preselection on or off <sup>6</sup> , +15 °C to +40 °C	< 0.35 dB ( $\sigma = 0.12$ dB)
Frequency response, referenced to 64 MHz, preselection off <sup>6</sup>	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, LNA off <sup>7</sup> , +20 °C to +30 °C	
	1 Hz $\leq$ f < 2 Hz	< 2 dB ( $\sigma = 0.67$ dB)
	2 Hz $\leq$ f < 9 kHz	< 1 dB ( $\sigma = 0.33$ dB)
	9 kHz $\leq$ f < 10 MHz	< 0.45 dB ( $\sigma = 0.17$ dB)
	10 MHz $\leq$ f < 3.6 GHz	< 0.3 dB ( $\sigma = 0.10$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 0.5 dB ( $\sigma = 0.17$ dB)
	8 GHz < f < 22 GHz, span < 1 GHz	< 1.5 dB ( $\sigma = 0.50$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	26.5 GHz < f $\leq$ 44 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	any RF attenuation, LNA off <sup>7</sup> , +15 °C to +40 °C	
	1 Hz $\leq$ f < 2 Hz	< 2 dB ( $\sigma = 0.67$ dB)
	2 Hz $\leq$ f < 9 kHz	< 1 dB ( $\sigma = 0.33$ dB)
	9 kHz $\leq$ f < 3.6 GHz	< 0.6 dB ( $\sigma = 0.20$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
	8 GHz < f < 22 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	26.5 GHz < f $\leq$ 44 GHz, span < 1 GHz	< 3 dB ( $\sigma = 1.0$ dB)
	RF attenuation $\leq$ 20 dB, LNA on <sup>7</sup> , +20 °C to +30 °C	
	150 kHz $\leq$ f < 10 MHz	< 1 dB
	10 MHz $\leq$ f < 3.6 GHz	< 0.6 dB ( $\sigma = 0.2$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
	8 GHz < f < 22 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	26.5 GHz < f $\leq$ 44 GHz, span < 1 GHz	< 2.8 dB ( $\sigma = 0.93$ dB)
Frequency response, referenced to 64 MHz, preselection on <sup>8</sup>	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier and LNA off <sup>7</sup> , +20 °C to +30 °C	
	1 Hz $\leq$ f < 2 Hz	< 2 dB ( $\sigma = 0.67$ dB)
	2 Hz $\leq$ f < 9 kHz	< 1 dB ( $\sigma = 0.33$ dB)
	9 kHz $\leq$ f < 10 MHz	< 0.65 dB ( $\sigma = 0.22$ dB)
	10 MHz $\leq$ f < 3.6 GHz	< 0.5 dB ( $\sigma = 0.17$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 0.7 dB ( $\sigma = 0.23$ dB)
	8 GHz < f < 22 GHz, span < 1 GHz	< 1.5 dB ( $\sigma = 0.50$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	26.5 GHz < f $\leq$ 44 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	any RF attenuation, preamplifier and LNA off <sup>7</sup> , +15 °C to +40 °C	
	1 Hz $\leq$ f < 2 Hz	< 2 dB ( $\sigma = 0.67$ dB)
	2 Hz $\leq$ f < 9 kHz	< 1 dB ( $\sigma = 0.33$ dB)
	9 kHz $\leq$ f < 3.6 GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 1.2 dB ( $\sigma = 0.4$ dB)
	8 GHz < f < 22 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	22 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2.5 dB ( $\sigma = 0.83$ dB)
	26.5 GHz < f $\leq$ 44 GHz, span < 1 GHz	< 3 dB ( $\sigma = 1.0$ dB)
	RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier on, LNA off <sup>7</sup> , +20 °C to +30 °C	
	1 kHz $\leq$ f < 10 MHz	< 1 dB ( $\sigma = 0.33$ dB)
	10 MHz $\leq$ f < 3.6 GHz	< 0.8 dB ( $\sigma = 0.27$ dB)
	3.6 GHz $\leq$ f $\leq$ 8 GHz	< 1.2 dB ( $\sigma = 0.4$ dB)
	8 GHz < f < 13.6 GHz, span < 1 GHz	< 1.5 dB ( $\sigma = 0.50$ dB)
	13.6 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)
	26.5 GHz < f $\leq$ 44 GHz, span < 1 GHz	< 2.8 dB ( $\sigma = 0.93$ dB)
RF attenuation $\leq$ 20 dB, preamplifier off, LNA on <sup>7</sup> , +20 °C to +30 °C		
150 kHz $\leq$ f < 10 MHz	< 1 dB ( $\sigma = 0.33$ dB)	
10 MHz $\leq$ f < 3.6 GHz	< 0.8 dB ( $\sigma = 0.27$ dB)	
3.6 GHz $\leq$ f $\leq$ 8 GHz	< 1.2 dB ( $\sigma = 0.4$ dB)	
8 GHz < f < 13.6 GHz, span < 1 GHz	< 1.5 dB ( $\sigma = 0.50$ dB)	
13.6 GHz $\leq$ f $\leq$ 26.5 GHz, span < 1 GHz	< 2 dB ( $\sigma = 0.67$ dB)	
26.5 GHz < f $\leq$ 44 GHz, span < 1 GHz	< 2.8 dB ( $\sigma = 0.93$ dB)	

Attenuator switching uncertainty	f = 64 MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ( $\sigma = 0.07$ dB)
Uncertainty of reference level setting	input mixer level $\leq -15$ dBm	0 dB <sup>10</sup>
	input mixer level $> -15$ dBm	< 0.1 dB (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz	< 0.1 dB ( $\sigma = 0.04$ dB)

<b>Nonlinearity of displayed level</b>		
Logarithmic level display	S/N > 16 dB, 0 dB $\leq$ level $\leq -70$ dB	< 0.1 dB ( $\sigma = 0.04$ dB)
	S/N > 16 dB, $-70$ dB < level $\leq -90$ dB	< 0.2 dB ( $\sigma = 0.08$ dB)
Linear level display	S/N > 16 dB, 0 dB to $-70$ dB	< 5 % of reference level (nom.)

<b>CISPR detectors</b>		
Max. peak, quasi-peak, CISPR-average, RMS-average	receiver mode or analyzer mode with preselection on, span = 0 Hz	level measurement uncertainty in line with CISPR 16-1-1:2019

<b>Total measurement uncertainty</b>		
Preselection off <sup>6</sup>	signal level = 0 dB to $-70$ dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, LNA off <sup>7</sup> , span / RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz $\leq$ f $\leq$ 10 MHz	$\pm 0.37$ dB
	10 MHz < f $\leq$ 3.6 GHz	$\pm 0.27$ dB
	3.6 GHz < f $\leq$ 8 GHz	$\pm 0.37$ dB
	8 GHz < f $\leq$ 22 GHz	$\pm 1$ dB
	22 GHz < f $\leq$ 26.5 GHz	$\pm 1.33$ dB
	26.5 GHz < f $\leq$ 44 GHz	$\pm 1.65$ dB
Preselection on <sup>8</sup>	signal level = 0 dB to $-70$ dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, 30 dB, 40 dB, preamplifier off, LNA off <sup>7</sup> , span / RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	9 kHz $\leq$ f $\leq$ 10 MHz	$\pm 0.51$ dB
	10 MHz < f $\leq$ 3.6 GHz	$\pm 0.43$ dB
	3.6 GHz < f $\leq$ 8 GHz	$\pm 0.54$ dB
	8 GHz < f $\leq$ 22 GHz	$\pm 1$ dB
	22 GHz < f $\leq$ 26.5 GHz	$\pm 1.33$ dB
	26.5 GHz < f $\leq$ 44 GHz	$\pm 1.65$ dB
	signal level = 0 dB to $-70$ dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10 dB, 20 dB, preamplifier on or LNA on <sup>7</sup> , span / RBW < 100, 95 % confidence level, +20 °C to +30 °C	
	150 kHz $\leq$ f $\leq$ 10 MHz	$\pm 0.71$ dB
	10 MHz < f $\leq$ 3.6 GHz	$\pm 0.59$ dB
	3.6 GHz < f $\leq$ 8 GHz	$\pm 0.83$ dB
	8 GHz < f $\leq$ 13.6 GHz	$\pm 1$ dB
	13.6 GHz < f $\leq$ 26.5 GHz	$\pm 1.33$ dB
	26.5 GHz < f $\leq$ 44 GHz	$\pm 1.84$ dB

<sup>10</sup> The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself. The reference level setting causes no additional uncertainty in measurement results.

## Time domain scan (TDS)

The R&S®ESW features three time domain scan optimization modes:

- Automatic mode <sup>3</sup>: full compliant to CISPR 16-1-1
- Fast: compliant to CISPR 16-1-1 for pulses with a repetition frequency  $\geq 10$  Hz
- Dynamic: enhanced dynamic in CISPR band D for applications with requirements beyond CISPR 16-1-1

Maximum frequency segment processed in parallel		
TDS optimization: fast, any detector	RBW = 200 Hz	1.31 MHz
	RBW = 9 kHz	60 MHz
	RBW = 120 kHz	49.2 MHz
	RBW = 1 MHz	51.2 MHz
TDS optimization: dynamic, any detector	RBW = 200 Hz	0.66 MHz
	RBW = 9 kHz	30 MHz
	RBW = 120 kHz	24.6 MHz
	RBW = 1 MHz	25.6 MHz
TDS optimization: automatic	CISPR detector off	see TDS optimization "fast"
	CISPR detector on	
	RBW = 200 Hz, 9 kHz, 1 MHz	see TDS optimization "dynamic"
	RBW = 120 kHz, CISPR band B, C	see TDS optimization "dynamic"
	RBW = 120 kHz, CISPR band D, E	see TDS optimization "fast"

## Measurement speed

CISPR band B, 150 kHz to 30 MHz		
TDS optimization: automatic, fast	RBW = 9 kHz, measurement time = 100 ms, peak detector	110 ms (meas.)
	RBW = 9 kHz, measurement time = 1 s, quasi-peak + CISPR-average detector	2 s (meas.)
CISPR band C/D, 30 MHz to 1000 MHz		
TDS optimization: automatic	RBW = 120 kHz, measurement time = 10 ms, peak detector	380 ms (meas.)
	RBW = 120 kHz, measurement time = 1 s, quasi-peak + CISPR-average detector	50 s (meas.)
	RBW = 9 kHz, measurement time = 1 s, quasi-peak + CISPR-average detector	64 s (meas.)
TDS optimization: fast	RBW = 120 kHz, measurement time = 10 ms, peak detector	380 ms (meas.)
	RBW = 120 kHz, measurement time = 1 s, quasi-peak + CISPR-average detector	40 s (meas.)
	RBW = 9 kHz, measurement time = 1 s, quasi-peak + CISPR-average detector	40 s (meas.)
CISPR band E, 1 GHz to 18 GHz		
TDS optimization: automatic, fast	RBW = 1 MHz, measurement time = 10 ms, peak detector	8 s (meas.)

## Trigger functions

<b>Trigger</b>		
Trigger source	analyzer mode	free run, video, external, IF power, RF power
	receiver mode	free run, video, external
Trigger offset	span $\geq$ 10 Hz	5 ns to 20 s
	span = 0 Hz	(–sweep time) to 20 s
Min. trigger offset resolution	span > 0 Hz	5 ns
	span = 0 Hz, trigger offset > 0	5 ns
	span = 0 Hz, trigger offset < 0	sweep time / number of sweep points
Max. deviation of trigger offset		5 ns
<b>IF power trigger (analyzer mode)</b>		
Sensitivity	min. signal power	–60 dBm + RF attenuation – LNA gain (nom.)
	max. signal power	–10 dBm + RF attenuation – LNA gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz	20 MHz (nom.) <sup>11</sup>
	RBW $\leq$ 500 kHz, FFT	20 MHz (nom.)
	RBW $\leq$ 500 kHz, swept	6 MHz (nom.)
<b>RF power trigger (analyzer mode)</b>		
Sensitivity	min. signal power	–30 dBm + RF attenuation – LNA gain (nom.)
	max. signal power	+10 dBm + RF attenuation – LNA gain (nom.)
RF power trigger frequency range	f $\leq$ 8 GHz	8 GHz (nom.)
	f > 8 GHz	center frequency $\pm$ 25 MHz (nom.)
<b>Gated sweep</b>		
Gate source		video, external, IF power, RF power
Gate delay		5 ns to 20 s, min. resolution 5 ns
Gate length		5 ns to 20 s, min. resolution 5 ns
Max. deviation of gate length		$\pm$ 5 ns

## Audio demodulator

<b>Demodulation</b>		
AF demodulation types		AM and FM
Audio output		loudspeaker and phone jack
Marker stop time in spectrum mode		100 ms to 60 s

<sup>11</sup> Sweep optimization = auto.



## Inputs and outputs

RF input			
Impedance		50 $\Omega$	
Connector	R&S®ESW8		
	RF input 1, RF input 2	N female	
	R&S®ESW26		
	RF input 1	APC 3.5 mm male (compatible with SMA)	
	RF input 2	N female	
	R&S®ESW44		
	RF input 1	2.92 mm male (compatible with SMA)	
	RF input 2	N female	
	VSWR of R&S®ESW8	RF attenuation $\leq 4$ dB	
		1 Hz $\leq f < 9$ kHz, DC coupled	2.0 (nom.) <sup>12</sup>
		9 kHz $\leq f < 10$ MHz, DC coupled	< 2.0
		10 MHz $\leq f \leq 1$ GHz	< 2.0
	1 GHz $< f \leq 8$ GHz	< 3.0	
	5 dB $\leq$ RF attenuation $\leq 9$ dB		
		1 Hz $\leq f < 9$ kHz, DC coupled	1.5 (nom.)
		9 kHz $\leq f < 10$ MHz, DC coupled	< 1.5, typ. 1.20 <sup>13</sup>
		10 MHz $\leq f < 1$ GHz	< 1.5, typ. 1.20 <sup>13</sup>
		1 GHz $\leq f < 3.6$ GHz	< 1.5, typ. 1.31 <sup>13</sup>
		3.6 GHz $\leq f \leq 8$ GHz	< 2.0, typ. 1.51 <sup>13</sup>
		RF attenuation $\geq 10$ dB	
		1 Hz $\leq f < 9$ kHz, DC coupled	1.2 (nom.)
		9 kHz $\leq f < 10$ MHz, DC coupled	< 1.2, typ. 1.09 <sup>13</sup>
		10 MHz $\leq f < 1$ GHz	< 1.2, typ. 1.09 <sup>13</sup>
		1 GHz $\leq f < 3.6$ GHz	< 1.5, typ. 1.19 <sup>13</sup>
		3.6 GHz $\leq f \leq 8$ GHz	< 2.0, typ. 1.42 <sup>13</sup>
VSWR of R&S®ESW26, R&S®ESW44	RF attenuation $\leq 4$ dB		
		1 Hz $\leq f < 9$ kHz, DC coupled	2.0 (nom.) <sup>12</sup>
		9 kHz $\leq f < 10$ MHz, DC coupled	< 2.0
		10 MHz $\leq f \leq 1$ GHz	< 2.0
		1 GHz $< f \leq 40$ GHz	< 3.0
		40 GHz $< f \leq 44$ GHz	3.0 (nom.)
		5 dB $\leq$ RF attenuation $\leq 9$ dB	
		1 Hz $\leq f < 9$ kHz, DC coupled	1.5 (nom.)
		9 kHz $\leq f < 10$ MHz, DC coupled	< 1.5, typ. 1.24 <sup>13</sup>
		10 MHz $\leq f \leq 3.5$ GHz	< 1.5, typ. 1.24 <sup>13</sup>
		3.5 GHz $< f \leq 8$ GHz	< 1.8, typ. 1.26 <sup>13</sup>
		8 GHz $< f \leq 18$ GHz	< 1.8, typ. 1.39 <sup>13</sup>
		18 GHz $< f \leq 26.5$ GHz	< 2.0, typ. 1.43 <sup>13</sup>
		26.5 GHz $< f \leq 40$ GHz	< 2.5, typ. 1.8 <sup>13</sup>
		40 GHz $< f \leq 44$ GHz	2.0 (nom.)
		RF attenuation $\geq 10$ dB	
		1 Hz $\leq f < 9$ kHz, DC coupled	1.2 (nom.)
		9 kHz $\leq f < 10$ MHz, DC coupled	< 1.2, typ. 1.12 <sup>13</sup>
		10 MHz $\leq f \leq 3.5$ GHz	< 1.2, typ. 1.12 <sup>13</sup>
		3.5 GHz $< f \leq 8$ GHz	< 1.5, typ. 1.19 <sup>13</sup>
	8 GHz $< f \leq 18$ GHz	< 1.5, typ. 1.25 <sup>13</sup>	
	18 GHz $< f \leq 26.5$ GHz	< 2.0, typ. 1.37 <sup>13</sup>	
	26.5 GHz $< f \leq 40$ GHz	< 2.5, typ. 1.7 <sup>13</sup>	
	40 GHz $< f \leq 44$ GHz	2.0 (nom.)	
Setting range of attenuator		0 dB to 79 dB, in 1 dB steps <sup>14</sup>	

<sup>12</sup> Preselection off.

<sup>13</sup> Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature +20 °C to +30 °C, input set to "DC coupling". These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.

<sup>14</sup> Mechanical RF attenuator: 5 dB steps; electronic IF attenuator: 1 dB steps.

<b>Probe power supply</b>		
Supply voltages, selectable	probe 1: 3-pin connector	+15 V DC, -12.6 V DC and ground, max. 150 mA (nom.)
	probe 2: 5-pin connector	±10 V DC and ground, max. 100 mA (nom.)

<b>USB interface</b>		
		7 ports, type A plug, version 2.0
		1 port, type B plug, version 2.0

<b>AF output</b>		
Connector		3.5 mm mini-jack
Output impedance		10 Ω (nom.)
Open-circuit voltage		up to 1.5 V, adjustable

<b>External trigger/gate</b>		
Number of ports		1 × input, 2 × input/output, selectable
Connector		BNC female
Trigger input voltage		0.5 V to 3.5 V (nom.)
Trigger output voltage		TTL-compatible, 0 V/5 V (nom.)
Impedance		10 kΩ (nom.)

<b>Reference input 1 MHz to 50 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Input frequency range		1 MHz ≤ f <sub>in</sub> ≤ 50 MHz, in 1 Hz steps
Required level		> 0 dBm

<b>Reference input 100 MHz/1 GHz</b>		
Connector		SMA female
Impedance		50 Ω (nom.)
Input frequency range		100 MHz, 1 GHz
Required level		0 dBm to 10 dBm

<b>Reference output 10 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency		10 MHz
Level		10 dBm (nom.)

<b>Reference output 1 MHz to 50 MHz</b>		
Connector		BNC female
Impedance		50 Ω (nom.)
Output frequency	internal reference	not active
	external reference	same as reference input signal
Level		same as reference input signal

<b>Reference output 100 MHz</b>		
Connector		SMA female
Impedance		50 Ω (nom.)
Output frequency		100 MHz
Level		6 dBm (nom.)

<b>Reference output 640 MHz</b>		
Connector		SMA female
Impedance		50 Ω (nom.)
Output frequency		640 MHz
Level		16 dBm (nom.)

<b>IF/video output</b>		
Connector		BNC female, 50 $\Omega$ (nom.)
<b>IF out</b>		
Bandwidth		equal to RBW setting
IF frequency		(RBW / 2) to (240 MHz – RBW / 2)
Output level	center frequency > 10 MHz, span = 0 Hz or I/Q analyzer on, signal at reference level and center frequency	0 dBm (nom.)
<b>Video out</b>		
Bandwidth		equal to VBW setting
Output scaling	log. display scale lin. display scale	logarithmic linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V at 50 $\Omega$ load (nom.)

<b>IEC/IEEE bus control</b>		
Command set		interface in line with IEC 625-2 (IEEE-488.2)
Connector		SCPI 1997.0
Interface functions		24-pin Amphenol female SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

<b>LAN interface</b>		
Connector		10/100/1000BASE-T RJ-45

<b>External monitor</b>		
Connectors		DVI-D, DisplayPort Rev 1.1

## General data

<b>Display</b>		30.7 cm (12.1") WXGA color touchscreen
Resolution		1280 x 800 pixel (WXGA resolution)
Pixel failure rate		$< 1 \times 10^{-5}$

<b>Data storage</b>		
Internal	standard	solid-state disk $\geq 32$ Gbyte
External		supports USB 2.0 compatible memory devices

<b>Temperature</b>		
Temperature	operating temperature range	+5 °C to +50 °C
	permissible temperature range	0 °C to +55 °C
	storage temperature range	-40 °C to +70 °C
Climatic loading	without condensation	+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

<b>Altitude</b>		
Max. operating altitude	above sea level	4600 m (approx. 15100 ft)

<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz, displacement: 0.15 mm constant amplitude (1.8 g at 55 Hz); 55 Hz to 150 Hz, acceleration: 0.5 g constant, in line with EN 60068-2-6
	random	10 Hz to 300 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I, MIL-PRF-28800F, class 3

<b>EMC</b>		in line with EMC Directive 2014/30/EU including: <ul style="list-style-type: none"> <li>• IEC/EN 61326-1<sup>15, 16</sup></li> <li>• IEC/EN 61326-2-1</li> <li>• CISPR 11/EN 55011<sup>15</sup></li> <li>• IEC/EN 61000-3-2</li> <li>• IEC/EN 61000-3-3</li> </ul>
------------	--	--

<b>Recommended calibration interval</b>		1 year
---	--	--------

<b>Warranty</b>	base unit	3 years
	accessories	1 year

<sup>15</sup> Emission limits for class B equipment apply.

<sup>16</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

<b>Power supply</b>		
AC input voltage range		100 V to 240 V
AC supply frequency		50 Hz to 60 Hz/400 Hz
Maximum input current		7.3 A (100 V) to 4.6 A (240 V)
Power consumption	<b>R&amp;S®ESW8</b>	
	without options	150 W
	with all options	250 W (meas.)
	<b>R&amp;S®ESW26</b>	
	without options	175 W
	with all options	275 W (meas.)
Safety	<b>R&amp;S®ESW44</b>	
	without options	200 W
	with all options	300 W (meas.)
Safety		in line with: IEC 61010-1, EN 61010-1, UL 61010-1, CAN/CSA-C22.2 No. 61010-1
Test marks		VDE, cCSA <sub>US</sub> , CE, KCC

<b>Dimensions and weight</b>		
Dimensions (nom.)	W x H x D, including front handles and rear feet	462 mm x 240 mm x 504 mm (18.15 in x 9.44 in x 19.81 in)
Net weight, without options (nom.)	<b>R&amp;S®ESW8</b>	20.6 kg (45.42 lb)
	<b>R&amp;S®ESW26</b>	22.1 kg (48.72 lb)
	<b>R&amp;S®ESW44</b>	25.2 kg (55.56 lb)

## Options

### R&S®ESW-B10 external generator control

Interface		
IEC/IEEE bus control		24-pin Amphenol female
Aux control		9-pin D-Sub female

Supported signal generators		R&S®SGS100A, R&S®SGT100A, R&S®SMA100A, R&S®SMA100B, R&S®SMB100A, R&S®SMB100B, R&S®SMBV100A, R&S®SMBV100B, R&S®SMC100A, R&S®SME, R&S®SMF100A, R&S®SMG, R&S®SMGL, R&S®SMGU, R&S®SMH, R&S®SMHU, R&S®SMIQ, R&S®SMJ100A, R&S®SML, R&S®SMP, R&S®SMR, R&S®SMT, R&S®SMU200A, R&S®SMV03, R&S®SMW200A, R&S®SMX, R&S®SMY
-----------------------------	--	---

### R&S®ESW-B21 LO/IF connections for external mixers (not available for R&S®ESW8)

LO signal		
Frequency range		7.65 GHz to 17.45 GHz
Level	+20 °C to +30 °C	+15.5 dBm ± 1.5 dB
	+5 °C to +40 °C	+15.5 dBm ± 3 dB

IF input		
IF frequency	set signal analysis bandwidth	
	≤ 80 MHz, bandwidth-dependent	1310 MHz to 1330 MHz
Full-scale level	compression < 1 dB	
	2-port mixer (LO output/IF input, front panel)	-20 dBm (nom.)
	3-port mixer (IF input, front panel)	-20 dBm (nom.)
Level uncertainty at IF frequency	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 2-port mixer, LO output/IF input connector (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 3-port mixer, IF input connector (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

Inputs and outputs		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

## R&S®ESW-K980 health and utilization monitoring service (HUMS)

Health and utilization monitoring service (HUMS) <sup>17, 18</sup>		
Interfaces	protocols and interfaces supported for data readout and display	<ul style="list-style-type: none"> <li>• SNMP (v1, v2c, v3)</li> <li>• REST (JSON)</li> <li>• SCPI</li> <li>• device web</li> </ul>
Services	information provided	<ul style="list-style-type: none"> <li>• device information (model, serial number, BIOS, date, time, system, HUMS and software information)</li> <li>• user-defined information tags (e.g. for asset management)</li> <li>• equipment information (hardware, options, software, licenses)</li> <li>• system operating status</li> <li>• instrument security information</li> <li>• service related information (due dates etc.)</li> <li>• mass storage related information</li> <li>• instrument utilization data</li> <li>• device history (event log)</li> </ul>

<sup>17</sup> For details, see application note: [www.rohde-schwarz.com/appnote/GFM336](http://www.rohde-schwarz.com/appnote/GFM336)

<sup>18</sup> For use with common available asset management tools.

## Ordering information

Designation	Type	Order No.
EMI test receiver, 1 Hz to 8 GHz	R&S®ESW8	1328.4100.09
EMI test receiver, 1 Hz to 26.5 GHz	R&S®ESW26	1328.4100.27
EMI test receiver, 1 Hz to 44 GHz	R&S®ESW44	1328.4100.45
<b>Accessories supplied</b>		
Power cable, quick start guide, R&S®ESW26: adapter 3.5 mm APC3.5-compatible female/female, R&S®ESW44: adapter 2.92 mm female/female		

## Options

Designation	Type	Order No.	Retrofittable	Remarks
OCXO precision frequency reference	R&S®ESW-B4	1328.5012.02	yes	user-retrofittable
Resolution bandwidths up to 40 MHz	R&S®ESW-B8E	1345.0167.02	yes	for R&S®ESW8/26/44, user-retrofittable
Resolution bandwidths up to 80 MHz (hardware option)	R&S®ESW-B8	1325.1474.26	no	for R&S®ESW8/26
Resolution bandwidths up to 80 MHz (hardware option)	R&S®ESW-B8	1325.1474.02	no	for R&S®ESW44, export license required
External generator control	R&S®ESW-B10	1328.5006.02	yes	contact service center
Spare solid state drive (removable hard drive)	R&S®ESW-B18	1328.4997.10	yes	user-retrofittable
LO/IF connections for external mixers	R&S®ESW-B21	1331.6945.26	yes	for R&S®ESW26, contact service center
LO/IF connections for external mixers	R&S®ESW-B21	1331.6945.44	yes	for R&S®ESW44, contact service center
Low-noise amplifier, 150 kHz to 8 GHz	R&S®ESW-B24	1328.4980.08	yes	for R&S®ESW8, contact service center
Low-noise amplifier, 150 kHz to 26.5 GHz	R&S®ESW-B24	1328.4980.26	yes	for R&S®ESW26, contact service center
Low-noise amplifier, 150 kHz to 44 GHz	R&S®ESW-B24	1328.4980.44	yes	for R&S®ESW44, no export license required, contact service center
USB mass memory write protection	R&S®FSW-B33	1313.3602.02	no	pre-installed in factory

## Firmware

Designation	Type	Order No.	Retrofittable	Remarks
AM/FM/PM modulation analysis	R&S®ESW-K7	1331.6216.02		
Security write protection of solid state drive	R&S®ESW-K33	1328.4916.02		
80 MHz real-time measurement application, POI > 15 µs	R&S®ESW-K55	1328.4968.02		no export license required
APD multichannel measurement function	R&S®ESW-K58	1345.0150.02		
Health and utilization monitoring service (HUMS)	R&S®ESW-K980	1345.0221.02		



## Recommended extras

Designation	Type	Order No.
Headphones		0708.9010.00
IEC/IEEE bus cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE bus cable, length: 2 m	R&S®PCK	0292.2013.20
Front cover	R&S®ZZF-511	1174.8825.00
19" rack adapter	R&S®ZZA-KN5	1175.3040.00
<b>Matching pads, 50 Ω/75 Ω</b>		
L section, matching at both ends	R&S®RAM	0358.5414.02
Series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
<b>High-power attenuators</b>		
100 W, 3/6/10/20/30 dB, 1 GHz	R&S®RBU100	1073.8495.xx (xx = 03/06/10/20/30)
50 W, 3/6/10/20/30 dB, 2 GHz	R&S®RBU50	1073.8695.xx (xx = 03/06/10/20/30)
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
<b>RF adapters and cables</b>		
Coaxial adapter, 2.92 mm (f) – 2.92 mm (f)		3588.8664.00
Coaxial adapter, 3.5 mm (f) – 3.5 mm (f), APC3.5-compatible		3587.7793.00
Coaxial adapter, 3.5 mm (m) – 3.5 mm (m), APC3.5-compatible		3689.9442.00
Coaxial adapter, N (f) – 3.5 mm (m), APC3.5-compatible		3587.7806.00
Coaxial adapter, N (f) – 3.5 mm (f), APC3.5-compatible		3587.7829.00
Coaxial cable, SMA (m) – SMA (m), length: 1 m		3586.9970.00
<b>Connectors and cables</b>		
Probe power connector, 3-pin		1065.9480.00
<b>DC block</b>		
DC block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.03
<b>External harmonic mixers (for R&amp;S®ESW26 and R&amp;S®ESW44 with R&amp;S®ESW-B21 option)</b>		
Harmonic mixer, 40 GHz to 60 GHz	RPG FS-Z60 <sup>19</sup>	1048.0171.02
Harmonic mixer, 50 GHz to 75 GHz	RPG FS-Z75 <sup>19</sup>	3638.2240.02
Harmonic mixer, 60 GHz to 90 GHz	RPG FS-Z90 <sup>19</sup>	3638.2270.02
Harmonic mixer, 75 GHz to 110 GHz	RPG FS-Z110 <sup>19</sup>	3638.2292.02
Harmonic mixer, 90 GHz to 140 GHz	RPG FS-Z140 <sup>19</sup>	3622.0708.02
Harmonic mixer, 110 GHz to 170 GHz	RPG FS-Z170 <sup>19</sup>	3622.0714.02
Harmonic mixer, 140 GHz to 220 GHz	RPG FS-Z220 <sup>19</sup>	3593.3250.02
Harmonic mixer, 220 GHz to 325 GHz	RPG FS-Z325 <sup>19</sup>	3593.3267.02
Harmonic mixer, 325 GHz to 500 GHz	RPG FS-Z500 <sup>19</sup>	3593.3273.02
<b>Waveguide to coaxial adapters</b>		
Waveguide to coaxial adapter, WR10 to 1 mm (f)	WCA110	3626.1067.02
Waveguide to coaxial adapter, WR10 to 1 mm (m)	WCA110	3626.1067.03
Waveguide to coaxial adapter, WR12 to 1 mm (f)	WCA90	3626.1050.02
Waveguide to coaxial adapter, WR12 to 1 mm (m)	WCA90	3626.1050.03
Waveguide to coaxial adapter, WR15 to 1 mm (f)	WCA75	3626.1044.02
Waveguide to coaxial adapter, WR15 to 1 mm (m)	WCA75	3626.1044.03
<b>Horn antennas</b>		
Horn antenna, 110 GHz to 170 GHz	FH-SG-170	3629.2493.02
Horn antenna, 26 GHz to 40 GHz	FH-SG-40	3629.2393.02
Horn antenna, 50 GHz to 75 GHz	FH-SG-75	3629.2458.02
Horn antenna, 60 GHz to 90 GHz	FH-SG-90	3629.2464.02
<b>Tools</b>		
Torque wrench for type N connectors, 1.5 Nm coupling torque (for R&S®ESW8)	R&S®ZN-ZTW	1328.8534.71
Torque wrench for 3.5 mm/2.92 mm connectors, 0.9 Nm coupling torque (for R&S®ESW26/44)	R&S®ZN-ZTW	1328.8534.35

<sup>19</sup> RPG is the abbreviation of Radiometer Physics GmbH, a Rohde & Schwarz company.

## Service options

Service options		
Extended warranty, one year	R&S®WE1	Please contact your local Rohde & Schwarz sales office.
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

### Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge <sup>20</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

### Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs <sup>20</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

### Extended warranty with accredited calibration (AW1 and AW2)

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs <sup>20</sup> and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

<sup>20</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.



## Service that adds value

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

## Rohde & Schwarz

The Rohde&Schwarz technology group is among the trail-blazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks&cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

Certified Environmental Management

**ISO 14001**

## Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

## Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

