


Catalogo Strumentazione RF

Un modo migliore per ottenere gli strumenti che ti servono

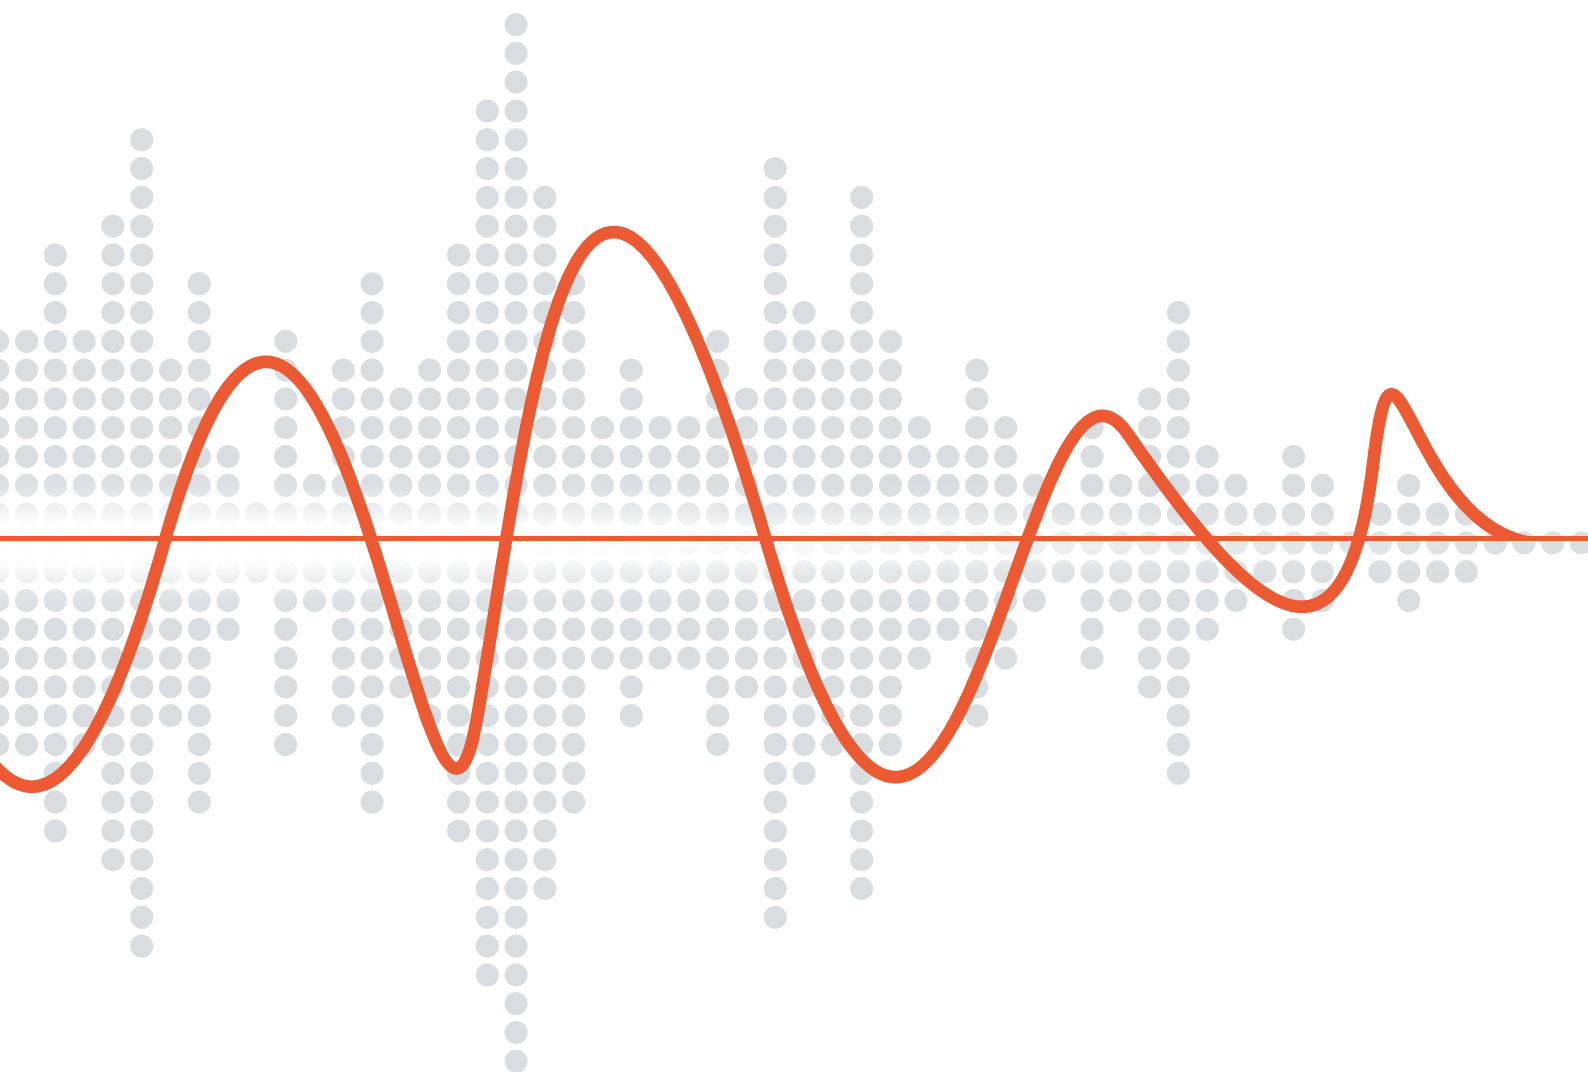

Strumentazione di misura e collaudo RF – Una lunga tradizione

Da oltre 50 anni Electro Rent fornisce strumenti RF per aiutare i suoi clienti a progettare e collaudare prodotti destinati ai mercati dell'aerospazio, difesa, comunicazioni satellitari, semiconduttori, industria automobilistica, comunicazioni mobili e altro ancora.

Il tuo partner di fiducia per il noleggio degli strumenti

Già nota come Microlease e Livingston, Electro Rent è un'azienda esperta in strumentazione di test RF. Sappiamo cosa serve per fornire le giuste configurazioni per tempo, con soluzioni di noleggio e finanziarie adatte alla tua organizzazione.

Grazie al nostro parco strumenti globale con modelli di oltre 200 costruttori, dal valore di 1 miliardo di euro, le nostre soluzioni di misura e collaudo aiutano le aziende a migliorare la loro efficienza in un mercato che cambia molto rapidamente.

Scopri il nostro ricco catalogo di strumenti

Sfoglia il nostro catalogo per scoprire tutte le offerte sugli strumenti RF più popolari. Se non trovi quello che stai cercando, chiamaci. Abbiamo migliaia di altri strumenti in magazzino e tanti nuovi modelli in arrivo che arricchiscono costantemente il nostro catalogo.

Indice

Presenza globale	1
Soluzioni di noleggio	2
Analizzatori di spettro	3
Analizzatori di reti	5
Kit di calibrazione	7
Generatori	8
Generatori di segnali vettoriali	9
Oscilloscopi	10
Analizzatori del rumore di fase	12
Sensori e misuratori di potenza	13
Analizzatori di spettro portatili	14
Gamma completa di servizi	15
Contatti	16

Presenza globale, supporto locale

Grazie alla nostra ampia infrastruttura globale, aiutiamo le aziende di tutto il mondo offrendo servizi di supporto locali, hub logistici e competenze ineguagliabili.

Le nostre soluzioni innovative per l'approvvigionamento strumenti di test sono progettate per integrarsi perfettamente con le tue attività esistenti. Lavoriamo insieme a te per ridurre i costi complessivi dei test, aumentando la produttività e riducendo le spese generali di gestione della strumentazione di misura e collaudo.

50 anni di innovazioni	23 filiali nel mondo
600 collaboratori nel mondo	180 specialisti del test
€1bn valore del magazzino	60k+ strumenti
200+ costruttori	12k linee di prodotto

Tutte le soluzioni per noleggiare i migliori strumenti del settore

I nostri servizi di noleggio ti permettono di ottenere gli strumenti più recenti in modo rapido e conveniente. Grazie al più grande parco strumenti del mondo e ai costanti investimenti per mantenere aggiornato il nostro portafoglio prodotti, il noleggio ti consente di accedere alle soluzioni tecnologiche più recenti, quando e dove ne hai bisogno.

FLESSIBILITÀ TOTALE

Modifica, estendi o termina il noleggio come e quando necessario

VASTISSIMA SCELTA

Migliaia di strumenti a noleggio disponibili in pronta consegna

PAGHI SOLO L'UTILIZZO, NON A VITA

Puoi noleggiare anche per una sola settimana, oppure scegliere i piani a lungo termine a basso costo

NESSUN COSTO DI POSSESSO

Manutenzione e calibrazione sono incluse

PRESENZA LOCALE

Hub logistici, centri di assistenza e filiali commerciali locali

CONSEGNE RAPIDE

Strumenti spesso consegnati entro 24-48 ore dall'ordine

SUPPORTO DAGLI ESPERTI

Assistenza dal nostro team di esperti con il supporto degli specialisti degli OEM partner

LE TECNOLOGIE PIÙ RECENTI

Il nostro parco strumenti sempre aggiornato e rinnovato ti permette di utilizzare le soluzioni tecnologiche più recenti

Offriamo una consulenza indipendente sugli strumenti di oltre 200 costruttori leader del settore.




Keysight N9041B | UXA Signal Analyzer; 2 Hz to 110 GHz

- Analysis Bandwidth to 1 GHz for 5G, 802.11ad & 802.11 be and Automotive Radar
- DANL of -150 dBm/Hz >50 GHz
- Dual RF Inputs: 2.4 mm to 50 GHz, 1.0 mm to 110 GHz
- Real-time Streaming up to 40 MHz


Rohde & Schwarz FSW26 | Signal and Spectrum Analyzer; 2 to 26.5 GHz

- Analysis Bandwidth to 2 GHz
- Advanced Radar Analysis Functions
- DANL of -159 dBm/Hz @ 2 GHz
- Phase Noise: -140 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Popular Model with Over 50 Configurations


Keysight N9021B | MXA Signal Analyzer; 10 Hz to 50 GHz

- Real-time I/Q Data Streaming
- Analysis Bandwidth to 510 MHz
- Phase Noise: -136 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)


Rohde & Schwarz FSV3044 | Signal and Spectrum Analyzer; 10 Hz to 44 GHz

- Analysis Bandwidth of 200 MHz
- DANL < -162 dBm
- Phase Noise: -114 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)


Keysight N9030B | PXA Signal Analyzer

- Frequency Ranges: 2 Hz to 3.6, 8.4, 13.6, 26.5, 44, 50 GHz
- Analysis Bandwidth to 510 MHz
- Phase Noise: -136 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Popular Model with Over 100 Configurations


Keysight N9032B | PXA Signal Analyzer; 2 Hz to 26.5 GHz


- Analysis Bandwidth to 2 GHz
- LNA with Preamp for Low-Level Signals and Noise Figure
- Low DANL (-174 dBm) for better EVM sensitivity
- Preconfigured with 5G NR, and PowerSuite Measurements


Keysight N9020B | MXA Signal Analyzer

- Frequency Ranges: 2 Hz to 3, 8, 13, 26.5, 32, 44, 50 GHz
- Analysis Bandwidth of 160 MHz
- Phase Noise: -114 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Popular Model with Over 70 Configurations


Keysight N9000B | CXA Signal Analyzer

- Economy Version of X-Series Signal Analyzers
- Frequency Ranges: 9 kHz to 3, 7.5, 26.5 GHz
- Tracking Generator Option

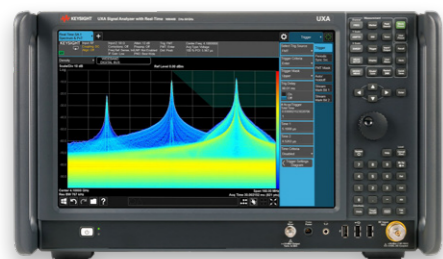
Keysight N9040B | UXA Signal Analyzer; 2 Hz to 50 GHz

- Real-time I/Q Data Streaming
- Analysis Bandwidth to 2 GHz
- Phase Noise: -136 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Over 50 Configurations available.


Rohde & Schwarz FSW50 | Signal and Spectrum Analyzer; 2 Hz to 50 GHz

- DANL of -129 dBm at 50 GHz
- Full Band 50 GHz Preamp Available
- Phase Noise: -140 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Multiple Software Options Available for Rental

**INQUADRA
IL QR CODE**

Abbiamo migliaia di altri modelli nel nostro ampio catalogo di strumenti catalogo di strumenti. Inquadra il QR code per consultare la nostra offerta completa.

Inquadra il QR Code per vedere l'intero catalogo.






Keysight N5245B | PNA-X Microwave Network Analyzer; 900 Hz/10 MHz to 50 GHz

- 2-Port and 4-Port Versions with Configurable Test Sets
- Second Source, Pulse Modulators, Receiver Attenuator Configurations Available
- Separate Noise Receiver Available with Vector Correction
- Compatible E-Cal Calibration Kits Available



Rohde & Schwarz ZNA26 | Vector Network Analyzer; 10 MHz to 26.5 GHz

- 2-Port and 4-Port Versions with Configurable Test Sets
- Up to 4 Sources Available
- High Dynamic Range 147 dB with Receiver Attenuators
- Internal Pulse Modulators and Pulse Generators
- Wide Range of Software Options Available for Rental

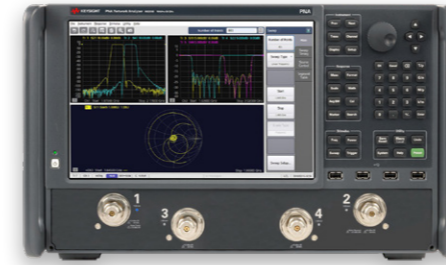

Keysight N5225B | PNA Microwave Network Analyzer; 10 MHz to 50 GHz

- 2 and 4-Port Version with Configurable Test Set
- Dynamic Range > 127 dB with High Output Power +13 dBm
- Optional Bias-Tees, Pulse Generators and Modulators




Keysight N5242B | PNA-X Microwave Network Analyzer; 10 MHz to 26.5 GHz 2-Port

- Dynamic Range of 130 dB @ 20 GHz
- Output Power +13 dBm
- Multiple Software Options Available for Rental




Keysight N5244B | PNA-X Microwave Network Analyzer; 10 MHz to 43.5 GHz

- 2-Port and 4-Port Versions with Configurable Test Sets
- Optional Second Source, Pulse Modulators, Receiver Attenuators
- Separate Noise Receiver Available with Vector Correction
- High Dynamic Range: 134 dB at 20 GHz at Test Port
- Multiple Software Options Available for Rental

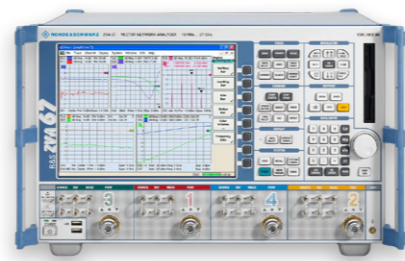

Rohde & Schwarz ZVA67 | Vector Network Analyzer; Four Ports, Four Sources, 67 GHz

- High Output Power up to +18 dBm
- Receiver and Generator Attenuators and Pulse Modulators / Generators
- Wide Dynamic Range >140 dB for Fast and Accurate Measurements
- Virtual and True Differential Measurement Modes
- Simultaneous Measurement of Noise Figure And S-Parameters

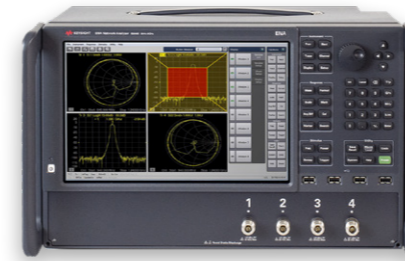

Keysight E5080B | ENA Series Network Analyzer

- 2 and 4-Port Versions
- Maximum Frequency of 9, 20 and 53 GHz
- Low Trace Noise of 0.0015 dB rms
- TDR Options for Signal Integrity Testing




Keysight E5061B | ENA Series Network Analyzer / Impedance Analyzer; 100 kHz to 3 GHz

- 3 GHz Network Analyzer and Impedance Analyzer in One Unit
- Gain-Phase Test Port, 5 Hz to 30 MHz for Impedance Measurements
- Compatible with Keysight Component Measurement Fixtures



Rohde & Schwarz ZNA43 | Vector Network Analyzer; 4 ports, 10 MHz to 43.5 GHz

- Up to 4 Sources Available with Attenuators
- High Dynamic Range 147 dB with Receiver Attenuators
- Internal Pulse Modulators and Pulse Generators
- Full Touchscreen Interface

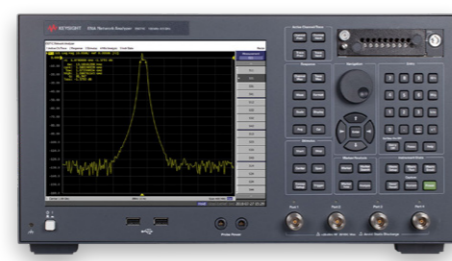

Keysight E5071C | ENA Series Network Analyzer

- Low-Cost VNA with Frequencies: 4.5, 8.5, 20 GHz
- 2 and 4-Port Versions
- Popular Model with Over 100 Configurations Available
- TDR Options for Signal Integrity Measurements

APPENA ARRIVATO **Til nuovo analizzatore di reti Vettoriale Serie ENA-X**

Keysight E5081A Analizzatore di reti vettoriale ENA-X

Accelera la caratterizzazione dei componenti per le comunicazioni 5G e satellitari con il VNA Keysight E5081A ENA-X. Questa nuova serie di VNA offre una gamma di frequenze fino a 20 GHz o 44 GHz e opzioni con ricevitori a basso rumore per la misura della figura di rumore. La nuova tecnica di correlazione spettrale di Keysight consente di effettuare misure EVM rapide su un VNA di costo medio.





- Keysight N4692D** | Electronic Calibration Module (ECal); 2.92 mm, 2-Port, 40 GHz
- Available in Male/Male (Option M0M), Female/Female (Option F0F), and Male/Female (Option M0F) Connector Configurations
 - Frequency Coverage from 10 MHz to 40 GHz or DC to 40 GHz (Option 0DC)
 - Rentals Include Torque Wrenches for Properly Connecting Standards



- Keysight 85092C** | RF Electronic Calibration Module (ECal); Type N, 2 Port, 300 kHz to 9 GHz
- Fast Full 2-Port Calibration with a Single Connection
 - Simple Non-Insertable Device Calibration
 - USB Interface for Direct Control with PNA and ENA Series of Network Analyzers
 - Rentals Include Torque Wrenches for Properly Connecting Standards



- Rohde & Schwarz ZN-Z54** | Calibration Unit; 2 Ports, 2.92 mm, Female, 9 kHz to 40 GHz
- Automatically Detected Via USB Connection
 - Rentals Include Torque Wrenches for Properly Connecting Standards



- Keysight N4693D** | Electronic Calibration Module (ECal); 2.4 mm, 2-Port, 50 GHz
- Available in Male/Male (Option M0M), Female/Female (Option F0F), and Male/Female (Option M0F) Connector Configurations
 - Frequency Coverage from 10 MHz to 50 GHz or DC to 50 GHz (Option 0DC)
 - Rentals Include Torque Wrenches for Properly Connecting Standards

Calibration Kits

Model	OEM	Description	Connector	Frequency	Rental Torque Wrenches
85032F	Keysight	Standard Mechanical Calibration Kit	N-Type	9 GHz	No
85033E	Keysight	Standard Mechanical Calibration Kit	3.5 mm	9 GHz	Yes
85052D	Keysight	Economy Mechanical Calibration Kit	3.5 mm	26.5 GHz	Yes
ZN-Z52	Rohde & Schwarz	Calibration Unit, 4-Port	3.5 mm	26.5 GHz	Yes
85056D	Keysight	Economy Mechanical Calibration Kit	2.4 mm	50 GHz	Yes
85059B	Keysight	Precision Calibration Kit	1.0 mm	120 GHz	Yes



- Keysight E8257D** | PSG Analog Signal Generator
- Popular Model with Over 250 Configurations
 - Frequency Range: 250 kHz to 20, 40, 50 and 67 GHz
 - Low Phase Noise: -138 dBc/Hz @ 1 GHz Carrier (10 kHz Offset) to Address Doppler Radar, ADC and Receiver-Blocking Tests
 - High Power Options Available for +30 dBm Output
 - Characterize Devices and Circuits by Adding AM, FM, φM and Pulse Modulation to Your Signal



- Rohde & Schwarz SMA100B** | Signal Generator
- Frequency Range: 8 kHz to 3, 6, 12.75, 20, 31.8, 40, 50 and 67 GHz
 - Exceptionally Low Harmonics
 - Maximum Output Power Exceeds +30 dBm Across Wide Frequency Range




- Keysight N5183B** | Signal Generator
- Frequency Options: 20, 31.8 and 40 GHz
 - Phase Noise: -130 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
 - Settable range +3- to -135dBm (with options 1E1 and 1EA)
 - Modulation Types Available: AM, FM, φM and Pulse



- Rohde & Schwarz SMA100A** | Signal Generator
- Frequency Range: 100 kHz to 12.75, 20, 31.8 and 40 GHz
 - SSB Phase Noise of -108 dBc/Hz (typ.) at 10 GHz and 20 kHz Offset
 - Analog Modulations with AM, FM, φM and Pulse Modulation Supported



- Rohde & Schwarz SMB100B** | Signal Generator
- Frequency Range: 8 kHz to 1 GHz, 3 or 6 GHz
 - Very Low Wideband Noise of < -153 dBc (typ.) at 15 MHz < f ≤ 6 GHz and an Offset of 30 MHz
 - Ultra-high Output Power of +34 dBm at 1 GHz

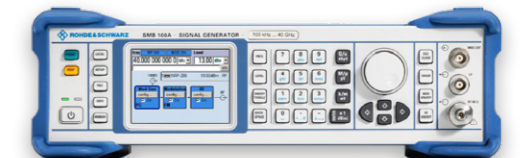

- Rohde & Schwarz SMB100A** | Signal Generator
- Frequency Range: 100 kHz to 12.75, 20, 31.8 and 40 GHz
 - SSB phase noise of -108 dBc (typ.) at 10 GHz and 20 kHz offset
 - Analog Modulations with AM, FM/φM and Pulse Modulation Supported



Keysight E8267D | PSG Vector Signal Generator

- Frequency Ranges: 20, 32, 44 GHz
- Ultra-Low Phase Noise Options Delivers -143 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Vector Support for Cellular, Wi-Fi, Video Broadcasting, SATCOM and More
- Popular Model with Over 125 Configurations



Rohde & Schwarz SMW200A | Vector Signal Generator

- Multiple RF Paths with Frequency Ranges: 3, 6, 20, 40, 44 GHz
- Low Phase Noise Options Delivers -150 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Popular Model with Over 125 Configurations
- Modulation Bandwidths up to 2 GHz



Keysight UXR0254AP | Infiniium UXR Real-Time Oscilloscope; 4 Channels, 25 GHz

- Up to 2G Memory with 256 GS/s on All Channels
- 1mm Input Connectors on 4 Phase-Coherent Channels
- AP Version License Key Upgradeable to 110 GHz
- Real-time Digital Down Conversion with 2.16 GHz Bandwidth
- Applications: USB4 v2, PCIe Gen5/6, DDR4/5, Phase Noise



Tektronix MSO68B | Mixed Signal Oscilloscope; 8 Channel to 10 GHz

- Frequency Range: 1, 4, 6, 8, 10 GHz Models
- Low Noise Inputs: < 1.25 mV of Noise at 50 mV/div at 10 GHz
- Built-In FFT Spectrum Analysis on all Channels
- 50 GS/s on 2-Channels, 25 GS/s on 4-Channels



Keysight N5182B | MXG Series Vector Signal Generator

- Frequency Range: 9 kHz to 3, 6 GHz
- Low Phase Noise Options Delivers -146 dBc/Hz @ 1 GHz Carrier (20 kHz Offset)
- Output Power of +27 dBm, Low EVM of 0.4% (802.11ac/LTE)
- Real-time Signal Simulation Options
- Popular Model with over 125 Configurations



Rohde & Schwarz SMBV100B | Vector Signal Generator

- Frequency Range: 8 kHz to 3, 6 GHz
- High Power Option to +33 dBm
- Generation of Communications Signals: 5G NR, LTE, WLAN
- GNSS with Constellation Simulation



Rohde & Schwarz RTP164 | High Performance Digital Oscilloscope; 4 Channel, 16 GHz

- Sample Rate: 40 GS/s with 2G Record Length
- Real Time De-Embedding with S-Parameters in Hardware
- Software Options for: USB3.2, 10G Ethernet, MIPI D-PHY, DDR3/4, Automotive Ethernet



Keysight MSOS804A | Infiniium S-Series Digital Oscilloscope; 4-Channels, 8 GHz

- Sample Rate: 20 GS/s with 100 M/Chan, upgradeable up to 400 M/Chan
- 10-Bit ADC with 16-Bits in High Resolution Mode
- 260 μ V Full Bandwidth Noise Floor



Keysight N5172B | EXG Series Vector Signal Generator

- Frequency Range: 9 kHz to 3, 6 GHz
- Phase Noise Options Delivers -122 dBc/Hz @ 1 GHz Carrier (20 kHz Offset)
- Output Power of +27 dBm, Low EVM of 0.4% (802.11ac/LTE)
- Modulation Bandwidth of 160 MHz



Tektronix AWG70002B | Arbitrary Waveform Generator; 2 Channels at 25 Gs/s

- 10-bit Vertical Resolution, 16 GS Waveform Memory Per Channel
- Generate Wideband RF Signals Up To 20 GHz
- Suitable for Radar with Options for Pulsed Waveforms and Impairments




Keysight MXR608A | Infiniium MXR-Series Real-Time Oscilloscope; 8 Channels, to 6 GHz

- Sample Rate: 16 GS/s on 8 Channels, 200M Record Length per Channel
- 10-Bit ADC with 16-Bits in High Resolution Mode
- Low Noise: 1mV/div 43 μ V, Low Jitter: 120 fs rms
- Real Time Spectrum Analysis on 8 Scope Channels

Oscilloscopi come strumenti di test RF?

Assolutamente sì. Con il progredire della tecnologia degli oscilloscopi, questi strumenti sono sempre più utilizzati nei laboratori RF. L'aumento della larghezza di banda fa sì che svolgano un ruolo importante nella demodulazione di segnali per le comunicazioni 5G, 6G e satellitari.


Grazie a ulteriori capacità esclusive, tra cui la conversione di frequenza digitale, l'analisi dello spettro in tempo reale e la trasformata FFT multicanale, gli oscilloscopi si sono conquistati un ruolo importante nel test RF. Se non trovi quello che ti serve, chiamaci. Abbiamo modelli adatti a ogni applicazione.

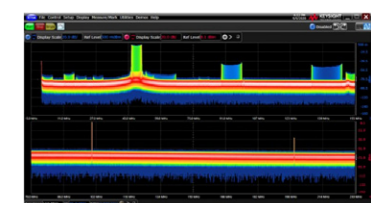



Tektronix MSO58B | Mixed Signal Oscilloscope; 8-Channel

- Frequency Range: 350, 500 MHz, 1, 2 GHz Models
- Record Length: 500 M
- Built-In FFT Spectrum Analysis on all Channels
- Serial Decode Trigger Support for: I2C, SPI, USB 2.0, Ethernet, CAN, LIN,
- Perform RF Measurements: Channel Power, ACPR, OBW

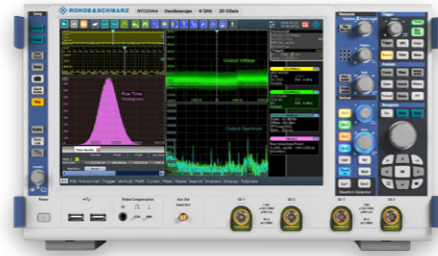

Rohde & Schwarz RTO2064 | Digital Oscilloscope; 4 Channels, 6 GHz

- Record Length: 2 G sample @ 20 GS/s
- Digital Triggering on 16-Bit High-Definition Signals
- Real Time De-embedding with S-Parameters in Hardware



Keysight E5055A | SSA-X Signal Source Analyzer, 10 MHz to 8 GHz

- Fast Cross Correlation Measurements
- Phase Noise: -169 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Software Options Include: Pulsed Analysis, Spectrum Analysis
- Two Built-in Isolated DC Voltage Channels



Rohde & Schwarz FSWP26 | Phase Noise Analyzer; 1 MHz to 26.5 GHz

- Full-featured Phase Noise Analyzer and Spectrum Analyzer
- Phase Noise: -166 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Low Phase Noise Internal LO, Needs No External Sources
- Cross-Correlation Measurements for 25 dB Improved Sensitivity



Rohde & Schwarz RTO64 | Digital Oscilloscope; 4 Channels

- Frequency Range: 4, 6 GHz
- Sample Rate: 20 GS/s, 1 M Waveforms per Second
- Digital Triggering on 16-Bit High-Definition Signals
- Software Options Include: Power Analysis, Jitter Analysis, De-embedding, TDR



Tektronix DPS75004SX | ATI Performance Oscilloscope System, 33/50 GHz

- 2 Channels @ 50 GHz 200 GS/s, or 4 x 33 GHz 100 GS/s
- > 25 GHz Edge Trigger
- Software Available for PCIe Gen 5/6 Debugging and Compliance Testing



Rohde & Schwarz FSWP50 | Phase Noise Analyzer; 1 MHz to 50 GHz

- Full-featured Phase Noise Analyzer and Spectrum Analyzer
- Phase Noise: -166 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Low Phase Noise Internal LO, Needs No External Sources
- Phase Noise @ 50 GHz: -138 dBc/Hz (10 kHz Offset)



Rohde & Schwarz FSPN26 | Phase Noise Analyzer and VCO Tester; 1 MHz to 26.5 GHz

- Cross-Correlation and High-Speed for VCOs, OXCOs, DROs
- Phase Noise: -163 dBc/Hz @ 1 GHz Carrier (10 kHz Offset)
- Offset Frequency Range: 1 μHz to 1 GHz

SPECIALE

NI PXIe-5841 | Vector Signal Transceiver

- Frequency Ranges: 500 MHz, 6, 21 GHz
- Signal Analyzer and Vector Generator
- 1 GHz Bandwidth
- Test wireless standards: 5G NR, Wi-Fi



SPECIALE

Offerta strumenti NI

Gli strumenti National Instruments presenti nel catalogo di Electro Rent comprendono generatori RF e a microonde, analizzatori RF e a microonde, ricetrasmittitori di segnali vettoriali PXI, generatori di forme d'onda arbitrarie PXI e altri strumenti modulari PXI correlati






Keysight N1914A | EPM Series Dual-Channel Power Meter

- Average Power Measurements
- Compatible with all N8480, 8480, U2000 Series and E-series Sensors (except the E9320 family)
- Configurations Available with Calibrator



Rohde & Schwarz NRX | RF Power Meter

- Presets for All Mobile Standards Including: 3GPP LTE, 3GPP WCDMA, WLAN, Bluetooth
- Automatic Statistics for CCDF, CDF, PDF
- Touch Interface with LAN, USB and Optional GPIB Interfaces

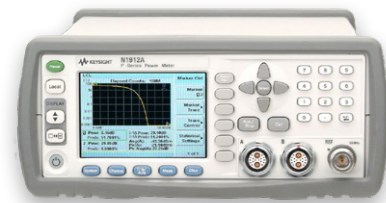

Keysight N1912A | P-Series Single-Channel Power Meter

- 100 MS/s, 30 MHz Video Bandwidth
- Predefined Formats for Cellular, Wi-Fi
- Internal Zero and Calibration with DUT Connection
- Compatible with P-Series Sensors, E-Series Sensors, 8480 and N8480 Sensors



Rohde & Schwarz NRP2 | RF Power Meter

- Supports Up to Four NRP-Zxx Power Sensors
- Automatic Statistics for CCDF, CDF, PDF
- LAN, USB, GPIB Interfaces Standard



Keysight N991xA/B | FieldFox RF Combination Analyzer

- Several Models Covering: 30 kHz to 4, 6.5, 18, 26.5 GHz
- B Version: 120 MHz of Real-Time Bandwidth
- Performs Over-the-air Measurements of 5G NR and LTE
- Software Upgrades Available for 2-Port VNA Operation, Real-time Spectrum Analysis, Vector Voltmeter, Noise Figure and More
- Multiple Software Options Available for Rental



Keysight N9952B | FieldFox Microwave Combination Analyzer; 300 kHz to 50 GHz

- Cable and Antenna Analyzer, Network Analyzer and Spectrum Analyzer
- 120 MHz of Real-Time Bandwidth
- Performs Over-the-air Measurements of 5G NR and LTE in FR2 Bands
- Software Upgrades Available for 2-Port VNA Operation, Real-time Spectrum Analysis



Rohde & Schwarz FPH | Spectrum Rider Handheld Spectrum Analyzer

- Frequency Ranges: 5 kHz to 2, 4, 13, 26.5 GHz
- Low DANL: -163 dBm
- Software Applications Include: AM/FM Modulation Analysis, Signal Strength Mapping, Interference Analysis, Receiver Mode



Rohde & Schwarz ZVH | Handheld Cable and Antenna Analyzer

- Frequency Ranges: 100 kHz to 3.6, 8 GHz
- 2-Port Unit with Both One Port and Two Port Functions
- Measurements Include: DTF, Reflection/Transmission, 2-Port VNA, Spectrum and Spectrogram, Vector Voltmeter

Power Sensors

Model	OEM	Description	Frequency Range	Power	Connector
N1921A	Keysight	P-Series Wideband Power Sensor	50 MHz to 18 GHz	-30 to +20 dBm	N-Type
U2001A	Keysight	USB Power Sensor	10 MHz to 6 GHz	-60 to +20 dBm	N-Type
U2002A	Keysight	USB Power Sensor	50 MHz to 24 GHz	-60 to +20 dBm	3.5 mm
NRP-Z81	Rohde & Schwarz	Wideband Power Sensor	50 MHz to 18 GHz	-60 to +20 dBm	N-Type
NRP-Z85	Rohde & Schwarz	Wideband Power Sensor	50 MHz to 40 GHz	-60 to +20 dBm	2.92 mm
NRP-Z27	Rohde & Schwarz	Power Sensor Module	DC to 18 GHz	-24 to +26 dBm	N-Type
NRP33S	Rohde & Schwarz	3-Path Diode Power Sensor	10 MHz to 33 GHz	-70 to +23 dBm	3.5 mm
NRP50S	Rohde & Schwarz	3-Path Diode Power Sensor	50 MHz to 50 GHz	-70 to +23 dBm	2.4 mm
U2022XA	Keysight	USB Peak and Average Power Sensor	50 MHz to 40 GHz	-30 to +20 dBm	2.4 mm
U2049XA	Keysight	LAN Peak and Average Power Sensor	10 MHz to 33 GHz	-70 to +20 dBm	3.5 mm
U2054XA	Keysight	USB Wide Dynamic Range Average Power Sensor	10 MHz to 40 GHz	-70 to +20 dBm	2.92 mm
U2043XA	Keysight	USB Wide Dynamic Range Sensor	10 MHz to 18 GHz	-70 to +26 dBm	N-Type
8481A	Keysight	Power Sensor	10 MHz to 18 GHz	-30 to +20 dBm	N-Type
8485D	Keysight	Diode Power Sensor	50 MHz to 26.5 GHz	-70 to +20 dBm	3.5 mm
8487A	Keysight	Power Sensor	50 MHz to 50 GHz	-30 to +20 dBm	2.4 mm



Anritsu MS2720T | Spectrum Master Spectrum and Interference Analyzer

- Frequency Ranges: 9 kHz to 9, 20, 43 GHz
- Low DANL: -164 dBm
- Interference Analyzer: Spectrogram, Signal Strength, RSSI, Coverage Mapping
- PIM Analysis & Hunting



Anritsu MS2090A | Field Master Pro Handheld Spectrum Analyzer

- Frequency Ranges: 9 kHz to 9, 44 GHz
- Low DANL: -164 dBm
- 110 MHz Analysis Bandwidth with RTSA
- 5G NR, LTE FDD/TDD, RF and Modulation Quality Measurements

Una gamma completa di servizi da Electro Rent

Offriamo una gamma completa di servizi di approvvigionamento e assistenza per la strumentazione di misura e collaudo.

NOLEGGIO E LEASING

Per ottenere in modo rapido e conveniente gli strumenti più recenti

- Opzioni che vanno dal noleggio di una settimana al leasing a lungo termine di diversi anni.
- Flessibilità totale nel cambiare, estendere il noleggio o aggiornare gli strumenti
- Assistenza completa per tutta la durata del noleggio
- Calibrazione e manutenzione incluse

SOLUZIONI FINANZIARIE

Svariate opzioni che aiutano a spalmare il costo di acquisto

- Ampia possibilità di scelta dal nostro ampio parco strumenti
- Consegna rapida
- Consulenza e guida alla scelta indipendente
- Assistenza locale continua

USATO CERTIFICATO

Strumenti di alta qualità a un prezzo molto inferiore rispetto all'acquisto del nuovo.

- Processo di ispezione in 23 passi che ti permette di usare subito gli strumenti
- Garanzia di un anno e diritto di recesso per 14 giorni
- Ampia disponibilità e consegne rapide
- Strumenti calibrati e pronti all'uso

OTTIMIZZAZIONE DEGLI ASSET

Massimizza e ottimizza le apparecchiature esistenti con i nostri servizi e il nostro know-how.

- Tracciabilità degli asset sul campo o in laboratorio
- Aumento della condivisione e del tasso di utilizzo delle apparecchiature
- Gestione facilitata delle attività di calibrazione e riparazione
- Migliore gestione dell'obsolescenza e dell'evoluzione tecnologica

NORD AMERICA

Sede centrale
8511 Fallbrook Avenue
Suite 200
West Hills, CA 91304
Tel: +1 800 553 2255
sales@electrorent.com

ASIA

Asia Pacific Headquarters & Malaysia Plot 253, Jalan Kampung Jawa, Bayan Lepas (FIZ Phase 3), Bayan Lepas, 11900 Penang, Malaysia.
Tel: +604 614 6000
info.asia@electrorent.com

Cina

Laiguangying West Road, Chao Lai Hi- Tech Industrial Park Building No.18, Block 4, Unit 301 Chaoyang District, Beijing, 100102
Tel: +86 400 819 2800
info.china@electrorent.com

India

4051-53, Vipul Square, B Block, Sushant Lok Phase - I, Gurgaon 122002, Haryana, India
Tel: +91 124 4831 400
info.india@electrorent.com

Singapore

38 Beach Road, #30-19 South Beach Tower, 189767 Singapore
Tel: +65 6773 9136
info.asia@electrorent.com

Taiwan

12 F., No. 508, Sec. 5, Zhongxiao E. Rd., Xinyi Dist., Taipei City 11083, Taiwan (R.O.C.)
Tel: +886-701 0152 200
info.china@electrorent.com

EUROPA

Francia

Parc Tertiaire Icade
43 Avenue Robert Schuman
BP10181
94150 Rungis Cédex
France
Tel: +33 (0) 1 45 12 65 65
france@electrorent.com

Italia

Via Melchiorre Gioia 8,
20124 Milano
Italia
Tel: +39 02 9239 2801
infoitaly@electrorent.com

Paesi nordici

Intercity Business Park
Generaal de Wittelaan 9/18
B-2800 Mechelen
Belgium
Tel: +32 15 740 800
nordics@electrorent.com

Germania

Borsigstrasse 11
64291 Darmstadt
Deutschland
Tel: +49 (0) 6151 36041-0
germany@electrorent.com

Olanda

Fokkerstraat 29
3905 KV Veenendaal
Nederland
Tel: +31 (0) 318 588 688
netherlands@electrorent.com

Polonia

UL. Długa 44/50
Warsaw
00-241 Poland
Tel: +48 (0) 22 331 66 66
poland@electrorent.com

Spagna

Regus Las Rozas,
Calle Gabriel Garcia Márquez 4 1a
Planta,
Las Rozas de Madrid 28232
Madrid
España
Tel: +34 (0) 91 076 21 90
spain@electrorent.com

Belgio

Intercity Business Park
Generaal de Wittelaan 9/18
B-2800 Mechelen
Belgium
Tel: +32 (0) 15 740 800
belgium@electrorent.com

Regno Unito e Irlanda

Unit 1, Waverley Industrial Park
Hailsham Drive Harrow Middlesex
HA1 4TR
United Kingdom
Tel: +44 (0) 20 84 200 200
info.eu@electrorent.com

MEDIO ORIENTE E AFRICA

Unit 1, Waverley Industrial Park,
Hailsham Drive, Harrow, HA1 4TR
Tel: +44 20 84 200 200
info.eu@electrorent.com

SUD AMERICA

Sede centrale
8511 Fallbrook Avenue
Suite 200
West Hills, CA 91304
Tel: +1 800 553 2255
western.sales@electrorent.com

