

Data Sheet

**VIAMI**

## SmartClass™ OLA-54 and OLA-55

Optical Level Attenuator

### VIAMI SmartClass optical handhelds go beyond the basics

With more than 100,000 optical handhelds already in use, VIAMI continues the success story with the SmartClass optical handhelds. The SmartClass help your network move to the next level of performance. VIAMI SmartClass optical handhelds encompass a new, intelligent, and next level product line for testing all optical signals and systems, including broadband, PONs, and Gigabit Ethernet.

All of SmartClass optical handhelds provide:

- An extended number of calibration wavelengths for the highest performance range in the industry.
- The intuitive graphical user interface for fast, easy, and straightforward operation.
- The intelligent power supply management system.
- The belt bag for safe and hands-free operation and transport
- Traceable measurements to international standards for confidence in accuracy.
- A robust, shock-proof, and splash-proof design for field operation
- Quick start operation, requiring no warm-up time and reducing testing time.

The SmartClass OLA-54 (optical level attenuator) is designed for multimode fiber systems (50/125  $\mu\text{m}$  fiber).

The SmartClass OLA-55 (optical level attenuator) is a future-proof instrument for system testing, installation, maintenance, and production of single-mode fibers.

### Features

- 50/125  $\mu\text{m}$  multimode fiber design (SmartClass OLA-54)
- New optical design allowing for low minimum insertion loss
- Wheel for precise and fast manual setting
- Absolute and relative attenuation setting
- FTTx ready



## Accessories




OCK-10 Optical Connector Cleaning Kit (accessory)



OVF-1 Visual Fault Locator (accessory)



Optical adapters (BN 2150) for laser source output

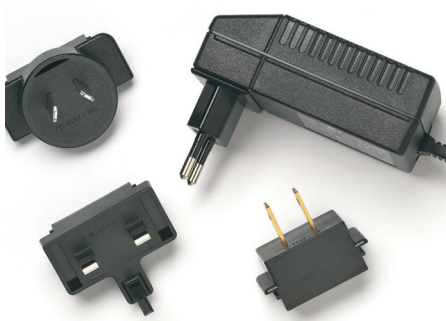

Worldwide compatible AC adapter (SNT-121A)



Dust cap for the optical interface

Shock-proof design

Display (128 x 64 dots) shows up to three results simultaneously

Backlight for the display

Wheel for precise and fast manual setting

Power-on, auto power-off (after 20 min)

## Specifications

	<b>SmartClass OLA-54</b> BN 2280/41 Multimode	<b>SmartClass OLA-55</b> BN 2280/01 Single-mode BN 2280/21 Single-mode APC
<b>Table adjustable wavelength range</b>	<b>750 to 1350 nm in 1 nm increments</b>	<b>1260 to 1650 nm in 1 nm increments</b>
Fiber type	50/125 µm	9/125 µm
Calibrated wavelengths	850 nm, 1300 nm	1310 nm, 1550 nm, 1625 nm
Display range <sup>(1)</sup>	<2.5 to 55 dB	2.0 to 60 dB
Minimum insertion loss <sup>(1)</sup>	<2.5 dB	<2.0 dB
Linearity	± 0.2	± 0.2
Repeatability of attenuation setting <sup>(2)</sup>	± 0.1 dB	± 0.1 dB
Total attenuation accuracy <sup>(1)</sup>	typ. ± 0.8 dB	± 0.8 dB
Setting type	Continuous over the entire range	Continuous over the entire range
Function	Bi-directional	Bi-directional
Displayed value <sup>(1)</sup>	Absolute or relative attenuation value	Absolute or relative attenuation value
Max. permitted level	+20 dBm	+23 dBm

1. Including connectors (to IEC874-1, method 6), depending on quality of the connectors applied to the OLA

2. Excluding remating

## General Data

<b>Display</b>	
Illuminated graphical display, resolution of 128 × 64 dots.	
Results displayed in	dB
Backlight function switchable via a separate key	
<b>Connector</b>	
Optical connector interchangeable adapter from BN 2150/00.xx range is suitable for measurements on flat or angled physical contact systems	
<b>Power supply</b>	
Four dry batteries Mignon/AA, 1.5 V or NiMH rechargeable cells Mignon/AA, 1.2 V	
Operating time from dry batteries	>300 h
Batteries/NiCd/NiMH power saving: The instrument switches off automatically after ~20 min (function can be disabled)	
AC line operation via separate AC adapter	
Integrated fast battery charging function (2 hours)	
External 12 V DC operating via an AC adapter or a 12 V car battery adapter	
<b>Electromagnetic compatibility</b>	
Corresponds to IEC 61326 (CE conformance)	
<b>Calibration</b>	
Suggested calibration interval	3 years
<b>Ambient temperature</b>	
Nominal range of use	-10°C to +55°C
Storage and transport	-40°C to +70°C
<b>Dimensions and Weight</b>	
W × H × D approximately	95 × 60 × 195 mm
	(3.74 × 2.36 × 7.68 in)
Weight approximately	500 g (1.1 lb)

## Ordering Information

Order number	Instrument
BN 2280/01	SmartClass OLA-55 Single-mode, variable attenuator, PC
BN 2280/21	SmartClass OLA-55 Single-mode, variable attenuator, APC
BN 2280/41	SmartClass OLA-54 Multimode, variable attenuator, 50/125 $\mu\text{m}$

## Included with the SmartClass OLA-55

2 interchangeable adapter from BN 2150/00.xx (range (must be selected), 4 dry batteries Mignon/AA, 1.5 V, operating manual, MT-1S belt bag

Order number	Accessories
BN 2150/00.32	Optical adapter ST type
BN 2150/00.58	Optical adapter SC type
BN 2150/00.51	Optical adapter FC type
BN 2150/00.50	Optical adapter DIN type
BN 2150/00.59	Optical adapter LC type
BN 2252/01	OVF-1 Visual Fault Locator
BN 2229/90.21	OCK-10 Optical Connector Cleaning Kit
BN 2229/90.07	Optical cleaning tape
BN 2229/90.08	Spare tape for optical cleaning tape
BN 2237/90.02	NiMH cells, Mignon/AA, 1.2 V (4 required per instrument)
BN 2277/90.01	SNT-121A Worldwide compatible AC adapter
K804	USB connection cable
BN 2277/90.02	MT-1S belt bag for one instrument
BN 2126/03	MT-2S soft bag for two instruments
BN 2126/04	MT-3S soft bag for three instruments
BN 2093/31	MK-3S hard case for three instruments
BN 2280/90.01	Calibration Report



Contact Us **+1 844 GO VIAVI**  
(+1 844 468 4284)

To reach the VIAVI office nearest you,  
visit [viavisolutions.com/contact](https://www.viavisolutions.com/contact)

© 2020 VIAVI Solutions Inc.  
Product specifications and descriptions in this  
document are subject to change without notice.  
ola-54-55-ds-fop-nse-ae  
30137101 003 0720