


Keysight Couplers

The Keysight Technologies, Inc. couplers consists of hybrid coupler, broadband directional coupler, single directional coupler, and dual directional coupler. This is a complete line of coaxial single and dual port directional couplers, bridges for isolating, separating, and combining RF and microwave signals in applications such as power monitoring, source leveling, swept transmission, and reflection measurements.

775D



87300/301 series, 87301B

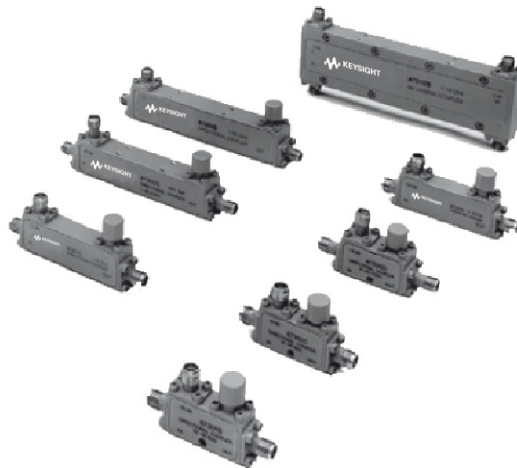

776D



777D



778D



Key features

- Broadband couplers maximize your operating frequency up to 50 GHz
- Excellent directivity of min 40 dB for higher measurement accuracy
- Low SWR (< 1.1 dB) minimizes mismatch errors

Product specifications

Model	Frequency range (GHz)	Coupling	Amplitude imbalance	Phase imbalance	Isolation	Maximum SWR (dB)	Insertion loss (dB)	Power rating average, peak	Connectors
Hybrid coupler									
87310B	1 to 18	3 dB	± 0.5 dB at each port, centered at -3 dB	± 10 degrees	> 17 dB	1.35	< 2.0	20 W, 3 kW	SMA (f)
Broadband directional coupler									
87300B	1 to 20	10 ± 0.5		> 16	1.35		< 1.5	20 W, 3 kW	
87300C	1 to 26.5	10 ± 1.0		> 14 to 12.4 GHz > 12 to 26.5 GHz	1.35 to 12.4 GHz 1.5 to 26.5 GHz		< 1.2 to 12.4 GHz < 1.7 to 26.5 GHz	20 W, 3 kW	
87300D	6 to 26.5	10 ± 0.5		> 13	1.4		< 1.3	20 W, 3 kW	
87301B	10 to 46	10 ± 0.7		> 10	1.8		< 1.9	20 W, 3 kW	
87301C	10 to 50	10 ± 0.7		> 10	1.8		< 1.9	20 W, 3 kW	
87301D	1 to 40	13 ± 1.0		> 14 to 20 GHz > 10 to 40 GHz	1.5 to 20 GHz 1.7 to 40 GHz		< 1.2 to 20 GHz < 1.9 to 40 GHz	20 W, 3 kW	
87301E	2 to 50	10 ± 1.0		> 13 to 26.5 GHz > 10 to 50 GHz	1.5 to 26.5 GHz 1.8 to 50 GHz		< 2.0	20 W, 3 kW	
Single directional coupler									
773D ¹	2 to 18	20 ± 0.9		> 30 to 12.4 GHz > 27 to 18 GHz	1.2		< 0.9	50 W, 250 W	
Dual directional coupler									
772D ¹	2 to 18	20 ± 0.9		> 30 to 12.4 GHz > 27 to 18 GHz	1.28 to 12.4 GHz 1.4 to 18 GHz		< 1.5	50 W, 250 W	
775D ²	0.45 to 0.94	20 ± 1		> 40	1.15		< 0.40	50 W, 500 W	
776D ²	0.94 to 1.9	20 ± 1		> 40	1.15		< 0.35	50 W, 500 W	
777D ²	1.9 to 4	20 ± 0.4		> 30	1.2		< 0.75	50 W, 500 W	
778D	0.1 to 2	20 ± 1.5		> 36 to 1 GHz ³ > 32 to 2 GHz ³	1.1		< 0.60	50 W, 500 W	

1. See data sheet for typical out of band data from 0.1 to 2 GHz and 18 to 20 GHz.

2. Maximum auxiliary arm tracking: 0.3 dB for Keysight 776D; 0.5 dB for Keysight 777D.

3. 30 dB to 2.0 GHz, input port.

Download or order from www.keysight.com/find/mta

To find a distributor in your area, go to www.keysight.com/find/distributors

Ordering information

Model	Option	Standard connector	
		Primary line	Auxiliary arm
772D	STD	APC-7, APC-7	N(f)
	001	N(f), N(f)	N(f)
773D	STD/101	APC-7, APC-7	N(f)
	001	N(f), N(f)	N(f)
	010	N(m), N(f)	N(f)
	002	N(f), N(m)	N(f)
775D/ 777D	STD	N(m), N(f)	N(f)
778D	STD	N(f), N(m)	N(f), N(f)
	011	APC-7, N(f)	N(f), N(f)
	012	N(m), N(f)	N(f)
87301D	240	2.4 mm(f), 2.4 mm(f)	2.4 mm(f)
	292	2.92 mm(f), 2.92 mm(f)	2.92 mm(f)
87300B	–	SMA (f), SMA (f)	SMA (f)
87300C	–	3.5 mm(f), 3.5 mm(f)	3.5 mm(f)
87300D	–	3.5 mm(f), 3.5 mm(f)	3.5 mm(f)
87301B	–	2.92 mm(f), 2.92 mm(f)	2.92 mm(f)
87301C	–	2.4 mm(f), 2.4 mm(f)	2.4 mm(f)
87301E	–	2.4 mm(f), 2.4 mm(f)	2.4 mm(f)
87310B	–	SMA (m), SMA (m)	SMA (m)

Three-Year Warranty

www.keysight.com/find/ThreeYearWarranty

Keysight's commitment to superior product quality and lower total cost of ownership.

The only test and measurement company with three-year warranty standard on all instruments, worldwide.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

