

GROUND RESISTANCE TESTERS

MULTI-FUNCTION

GROUND FLEX® FIELD KIT

Test active tower grounds safely without de-energizing or disconnecting any cables. Unique in the industry!



cover closed

SPECIFICATIONS

MODELS	6472 & 6474						
ELECTRICAL	3-POINT METHOD	4-POINT SELECTIVE METHOD	GROUND MEASUREMENT WITH 2 CLAMPS	SOIL RESISTIVITY	GROUND POTENTIAL MEASUREMENT	DC RESISTANCE MEASUREMENT	MEASUREMENTS WITH 6474
Range (Auto-Ranging)	0.01W to 99.9kW	0.001 to 99.99W	0.01 to 500W	0.01W to 99.9kW	0.01mV to 65.00V	0.001W to 99.9kW	0.001W to 99.9kW
Resolution	0.01 to 100W	0.001 to 10W	0.01 to 1W	0.01 to 100W	0.01 to 10mV	2 wires: 0.01 to 100W 4 wires: 0.001 to 10W	0.001 to 10W
Accuracy	±(2% + 1 count)	±(2% + 1 count)	±(10% + 1 count)	±(2% + 1 count)	±(5% + 1 count)	±(2% + 2 counts)	±(5% + 1 count)
No-Load Voltage	10, 16, 32 or 60Vrms	10, 16, 32 or 60Vrms	10, 16, 32 or 60Vrms	10, 16, 32 or 60Vrms	10, 16, 32 or 60Vrms	±16Vdc	10, 16, 32 or 60Vrms
Measurement Frequency	41 to 5078Hz	41 to 5078Hz	Auto: 1611Hz Manual: 128Hz, 1367Hz, 1611Hz, 1758Hz	41 to 128Hz	41 to 128Hz	DC	41 to 5078Hz
Coupling Measurement	Yes	-	-	-	-	-	-
Auxiliary Rod Resistance Measurement	0.1W to 100kW	0.01W to 100kW	-	-	-	-	0.01W to 100kW
Voltage Interference	Maximum 60Vpeak						
Soil Resistivity	-	-	-	Wenner and Schlumberger	-	-	-
Type of Measurement	3 wires	4 wires	-	4 wires	3 wires	2 wires or 4 wires	-
Measurement Current	-	-	-	-	-	> 200mA DC	-
MECHANICAL							
Memory/Communication	512-record memory / optical link / USB						
Dimensions/Weight	10.7 x 9.84 x 5.04" (272 x 250 x 128mm) / Model 6472: 7.05lbs (3.2kg) / Model 6474: 5.07lbs (2.3kg)						
Protection Safety	IP53 (cover closed)						
Electrical Safety	50V CAT IV, complies with IEC 61326-1 / IEC 61010 / IEC 61557-1-4-5						

GROUND FLEX® FIELD KIT MODEL 6474

Includes Groundflex® Adapter Model 6474, four Groundflex® sensors (5m) with twelve color-coded rings, connection lead, two extension leads on H reel (black/green) with color-coded alligator clips, one extra black and green alligator clip, six BNC extension leads, calibration loop, three C-clamps, carrying case with wheels and handle for meters, one inverter 12Vdc to 120Vac 200 watt (vehicle use) and user manual. Catalog #2136.03 (includes Cat. #2135.54)

INCLUDED IN KIT:

GROUND TESTER MODEL 6472 KIT-500FT

Includes meter, rechargeable NiMH batteries, optical USB cable, power adapter 110/240V with power cord 115V US, two 500ft color-coded leads on spools (red/blue), two 100ft color-coded leads (hand-tied, green/black), one 30ft lead (green), four T-shaped auxiliary ground electrodes, one 100ft AEMC® tape measure, DataView® software, ground tester workbook and user manual on USB drive, carrying bag for meter and carrying bag for kit. Catalog #2135.54

Shown: Model 6474 Kit




GROUND RESISTANCE TESTERS

MULTI-FUNCTION

AUTOMATIC RECOGNITION AND DISPLAY OF INPUT CONNECTIONS TO MATCH TEST

The connections are displayed and flash if incorrect or absent for the test selected.

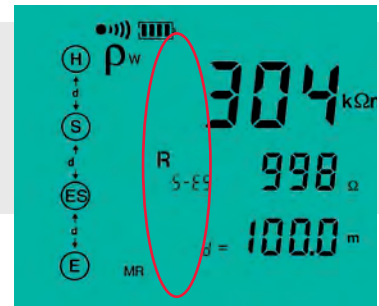

FEATURES



- Ground Integrity® Measurement
- 3- and 4-Point Fall-of-Potential measurement with manual or automatic frequency selection
- 4-Point soil resistivity measurement with automatic calculation of Rho (ρ) and user selection of the Wenner or Schlumberger test method
- 2- and 4-Wire DC resistance measurement (Bond testing) with automatic polarity reversal
- 3-Point Earth coupling measurement
- Automatic frequency scan from 40 to 5078Hz for optimum test accuracy in electrically noisy environments
- Selectable test voltage limit of 16 or 32V with up to 250mA of test current
- Automatic recognition of all electrode connections and measurement of their resistance value
- Determines bonding condition of overhead ground conductors
- Auto Power OFF management
- Optically isolated USB communication
- Remote set up and operation of all measurements using DataView® software supplied
- Automatic report generation
- Rechargeable NiMH batteries from wall charger or vehicle power
- Rugged dustproof and water-resistant field case — IP53 rated in closed position
- IEC 61557 parts 4 and 5 compliant
- Includes DataView® software for data retrieval, real-time display, analysis, report generation and system configuration

GROUND MEASUREMENT ON TOWERS WITH GROUND CABLE

High-voltage lines are usually equipped with a ground cable to allow lightning to discharge to ground via the tower. As all the towers are all connected to this conductor, all the tower's resistances are in parallel. This means it is impossible to measure tower resistance using traditional 3-Point methods unless the ground cable is disconnected, which is a dangerous and time-consuming operation.

GROUND RESISTANCE MEASUREMENT USING 2 CLAMPS

For systems with parallel ground connections, the Model 6472 is capable of accurately measuring a ground resistance using clamps only. This method involves placing 2 clamps around the ground conductor to be tested and connecting them each to the instrument. One clamp injects a known signal (32V/1367Hz) while the other clamp measures the current circulating in the loop. This method saves considerable time when ground testing because it is no longer necessary to set up auxiliary rods or to disconnect the ground connector.

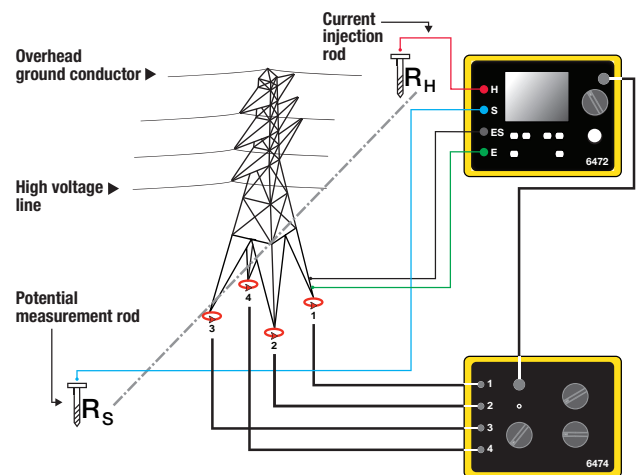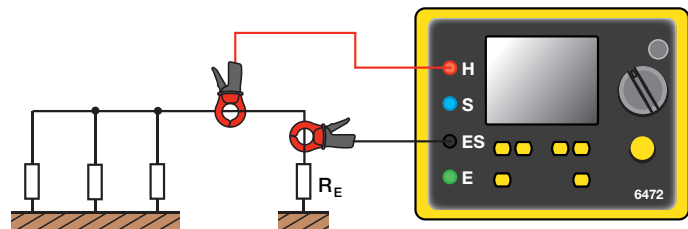

4 AmpFlex® channels connected

CATALOG NO.	DESCRIPTION
2136.03	Groundflex® Field Kit Model 6474 (Includes Cat. #2135.54)
2136.05	Groundflex® Adapter Model 6474 w/{1} 10m Groundflex® Sensor (Includes Cat. #2135.54)