

ETS-1000L

ETHERNET LOOPBACK DEVICE



Please note that this model has been discontinued. For more information, visit EXFO.com

A cost-effective, compact Ethernet loopback tool that can be used as a remote unit to return test traffic, enabling service providers to turn-up and install Carrier Ethernet services.

KEY FEATURES

10/100/1000BaseT and GigE ports

Can be used as a remote loopback/reflector for all carrier Ethernet validation tests, including RFC 2544, bit error rate (BER) and quality of service (QoS)

Selectable loopback at layers 1 through 4

Complete interoperability with EXFO's Ethernet analyzers (ETS-1000, AXS-200/850 series, RTU-310/310G) and Ethernet test modules (FTB-8510B, FTB-8510G, FTB-8525/8535 and FTB-8120NGE/8130NGE)


802.3ah remote loopback support

SPEC SHEET

FIELD ASSESSMENT OF CARRIER ETHERNET SERVICES

EXFO's ETS-1000L is a cost-effective, compact Ethernet loopback tool that can be used as a remote unit to return test traffic, enabling service providers to turn up and install next-generation carrier Ethernet services. It is fully compatible with EXFO's complete portfolio of Ethernet analyzers (ETS-1000, AXS-850 series, RTU-310/310G) and Ethernet test modules (FTB-8510B, FTB-8510G, FTB-8525/8535 and FTB-8120NGE/8130NGE).

The ETS-1000L supports the following interfaces: 10/100/1000Base-T, 1000Base-SX, 1000Base-LX and 1000Base-ZX. Thanks to this simple loopback tool, technicians can loop back traffic up to layer 4 with configurable MAC, IP and VLAN parameters. The ETS-1000L can also be used as an endpoint for all of today's necessary Ethernet/IP field-testing applications, including RFC 2544, bit-error-rate testing, packet jitter as well as multistream generation and analysis (quality of service testing).

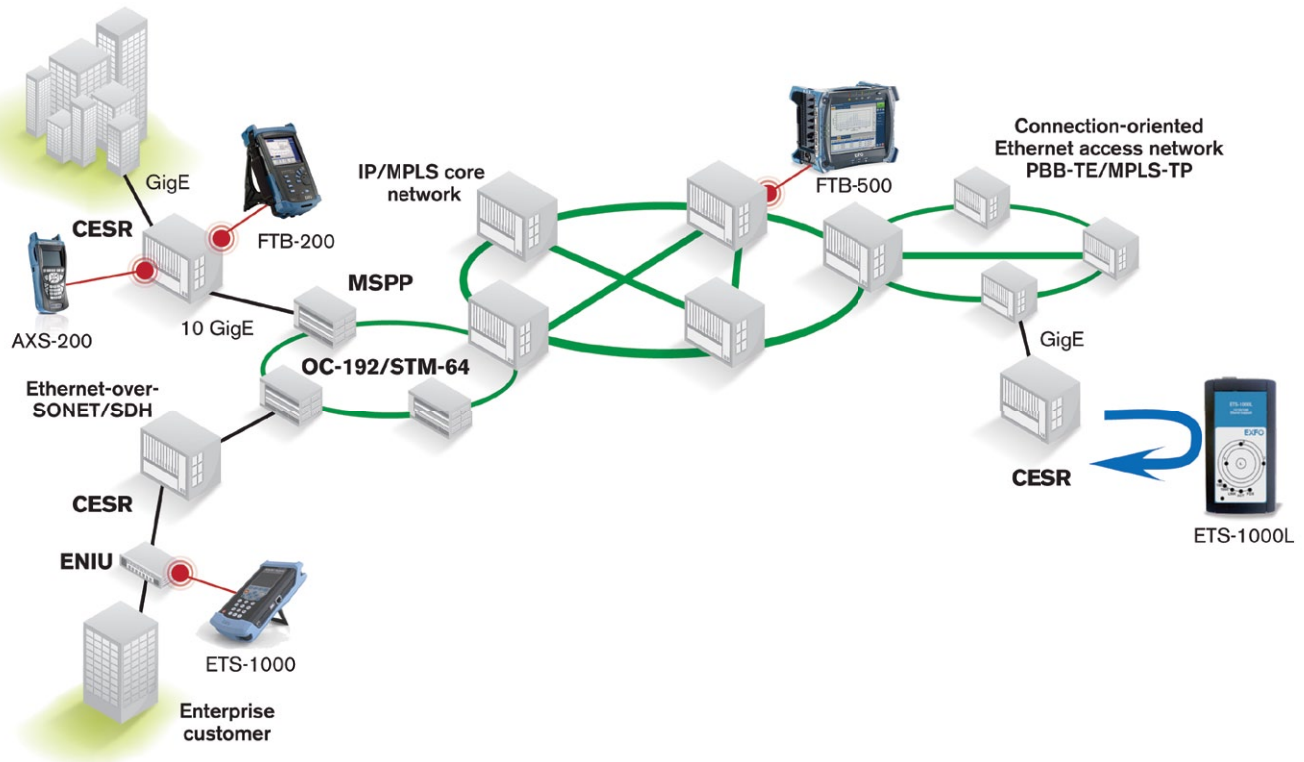

KEY FEATURES

10/100/1000BaseT and GigE ports

Can be used as a remote loopback/reflector for all carrier Ethernet validation tests, including RFC 2544, bit error rate and quality of service (QoS)

Supports user-configurable full-line-rate loopback at layers 1 through 4

802.3ah remote loopback support

Complete interoperability with EXFO's Ethernet analyzers (ETS-1000, AXS-200/850 series, RTU-310/310G) and Ethernet test modules (FTB-8510B, FTB-8510G, FTB-8525/8535 and FTB-8120NGE/8130NGE)

Responds to ping requests

Configurable MAC/IP address and VLAN

SPECIFICATIONS

Optical interfaces

OPTICAL INTERFACES			
Available wavelengths (nm)	1000Base-SX	1000Base-LX	1000Base-ZX
Wavelength (nm)	850	1310	1550
Transmission level (dBm)	-9 to -3	-9.5 to -3	0 to +5
Reception level sensitivity (dBm)	-20	-22	-22
Maximum reach	550 m	10 km	80 km
Transmission bit rate (Gbit/s)	1.25	1.25	1.25
Reception bit rate (Gbit/s)	1.25	1.25	1.25
Transmission operational wavelength range (nm)	830 to 860	1270 to 1360	1540 to 1570
Maximum reception before damage (dBm)	+6	+6	+6
Jitter compliance	IEEE 802.3	IEEE 802.3	
Ethernet classification	IEEE 802.3	IEEE 802.3	
Laser type	VCSEL	FP	DFB
Eye safety	Class 1	Class 1	Class 1
Connector	LC	LC	LC
Transceiver type	SFP	SFP	SFP

ELECTRICAL INTERFACES			
Electrical interfaces	Two ports, 10/100BaseT half/full duplex, 1000BaseT full duplex Straight/crossover cable auto-detection		
Transmission bit rate	10 Mbit/s	125 Mbit/s	1 Gbit/s
Transmission accuracy (ppm)	±100	±100	±100
Reception bit rate	10 Mbit/s	125 Mbit/s	1 Gbit/s
Duplex mode	Half and full duplex	Half and full duplex	Full duplex
Jitter compliance	IEEE 802.3	IEEE 802.3	IEEE 802.3
Connector	RJ-45	RJ-45	RJ-45
Maximum reach (m)	100	100	100

Ethernet Functional Specifications

TESTING	
Loopback	Ability to return traffic to the local unit by swapping packet overhead up to layer 4 of the OSI stack; user-selectable.
802.3ah (OAM)	Supports 802.3ah Ethernet-in-the-First-Mile OAM passive mode, allowing remote test equipment to initiate a loopback on the ETS-1000L.
Configurable address	Ability to configure the MAC, IP addresses and VLAN ID of the test port.
Remote control	Remote control of the unit via a test port.

GENERAL SPECIFICATION

Size (H x W x D)	125 mm x 68 mm x 30 mm
Weight	0.135 kg
Temperature operating	0 °C to 45 °C
storing	-40 °C to 60 °C
Relative Humidity	0 % to 93 %, noncondensing
Power consumption	12 W
Languages	English, Spanish, Chinese

ORDERING INFORMATION

ETS-1000L

Example: ETS-1000L

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.