

The new ClareHAL Series.

Keeping electrical products safe.



CLAREHAL SERIES, FROM SEAWARD

Tested by time.

For over 70 years, manufacturers of electrical products have relied on Seaward technology to ensure that their products comply with all required performance and safety standards. Literally millions of products are tested every day with a Clare Safety Tester from Seaward.

The new Clare range from Seaward combines comprehensive electrical safety and functional testing with flexibility and genuine value for money.

Incorporating specialist expertise from Seaward, the ClareHAL Series offers innovative solutions and the highest levels of quality.

Safety and Versatility

The ClareHAL Instruments are designed for simple manual testing and automatic mode for large volume applications in the most demanding environments. They are designed for use in manufacturing, laboratory, maintenance and high speed production environments either as a stand-alone test instrument or as an integrated part of a production line system. The full range of enclosures and accessories enable users to quickly and economically meet all common international safety requirements.

Meeting the Standard

With five versions of the HAL customers can select the instrument that best meets their own particular requirements. The top of the range HAL 104, provides the full suite of electrical safety tests together with load leakage and power factor. This version is the ideal solution for safety and functional testing.

With the ever changing demands of international standards, the new ClareHAL Series meets a wide range of product compliance requirements including: **IEC/EN 60598.** For testing luminaires and light fittings, industrial lighting, domestic lighting, street lighting, metal halide, mercury vapour, halogen and fluorescent sodium lamps and LEDs.

IEC/EN 60950. For IT equipment such as PCs, telecoms equipment, satellite receivers and printers.

IEC/EN 60335. For household and similar electrical appliances such as washing machines, spin dryers, fridges, microwave cookers and electric cookers.

BS EN 60745. For hand-held electric tools such as electric drills, orbital sanders, circular saws, jigsaws and electric screwdrivers.

IEC/EN 61010. For electrical equipment, test and measurement equipment, DMMs, Oscilloscopes and laboratory equipment.

Traceability and production line control

ClareHAL is so much more than a test instrument range. It's an integrated system designed for test traceability. The first in the world to store results, it can be programmed with suitable test sequences which are applied automatically on your production line.

The advanced automation technology of the range gives your operation dramatic improvements in both productivity and production line efficiency.





CLAREHAL SERIES

Five individual test units for different jobs, each with results memory.

The ClareHAL range is one of the most advanced designs available with outstanding levels of flexibility, functionality and user safety. With a simple intuitive user interface the ClareHAL can be used as a simple manual tester with the push of a button. Alternatively the full power of this unique instrument can be used to automate the testing sequence for fast performance on the most demanding of production lines.

A large, clear, full graphic display presents information either in a numerical or analogue format. Tests can be started and stopped by simply pushing the large buttons on the front of the instrument or choose from a variety of pre-selected automated configurations, including remote PCs, PLCs or interlocks.

The advanced electronic design allows the operator to select either 50 or 60 hertz HiPot and Ground Bond Testing, making the instrument truly international in its application.

Features such as arc detection and the ability to set maximum and minimum thresholds all combine to enhance the quality of the testing process.

In addition to the ClareHAL's internal memory, which will record up to 6000 test results, the instruments can be interfaced with a variety of accessories ranging from bar code scanners through to label printers.

The fully comprehensive ClareHAL 104 combines all the electrical safety tests with the functional testing of load leakage and power factor. These features are particularly beneficial to organisations where energy consumption and efficiency are becoming a more important aspect of a product's design.

Select the ClareHAL unit which suits your requirements					
Features	101	102	103	104	LED
Earth/Ground Bond				•	•
AC Flash/Hipot					
DC Flash/Hipot	•	•			•
DC Insulation Resistance	•	•	•		
ARC Detection	•	•		•	•
Leakage					
Load Power					
Load Power (200mVA resolution)					
Power Factor					•
Results Memory		•			
Automation Option					
Barcode scanner/printer Option					
Internal scanner		•			









ClareHAL LED
All of the features of HAL 104
with a high resolution power
measurement
Part No: HLED



ClareHAL 103
AC/DC Hipot (flash/dielectric strength) and Insulation and Ground/Earth Bond Tester
Part No: H103



ClareHAL 102
AC/DC Hipot and DC
Insulation Tester with built-in
scanner switching matrix
Part No: H102



ClareHAL 101 AC/DC Hipot and DC Insulation Tester

Part No: H101

CLAREHAL SERIES

A clever design makes compliance, integration and traceability very easy to achieve.


Because traceability is such an important aspect of any safety programme, the ClareHAL incorporates an internal memory which records the results of all tests. The instrument can therefore operate in a stand-alone mode storing the result ready for download to an external database. The instrument also incorporates various input and output ports which allow the test to be mechanised when connected to a suitable safety enclosure or initiated from external controls or a bar code scanner.

The Safety E Base software package provided by Seaward runs on a host PC and provides remote control of the ClareHAL instrument. In addition, control protocols are

available to allow the test instrument to be integrated into a manufacturing system where the host system takes total control of the ClareHAL safety/functional testing.

A variety of optional accessories are available including a label printer which can be driven directly from the ClareHAL. Upon completion of each test sequence a label can be printed which provides the PASS information or a FAIL label should the item under test fail to comply with the test requirements.

Whatever the testing requirement, the ClareHAL instruments have the flexibility to give any organisation the level of control and traceability which suit their own requirements.

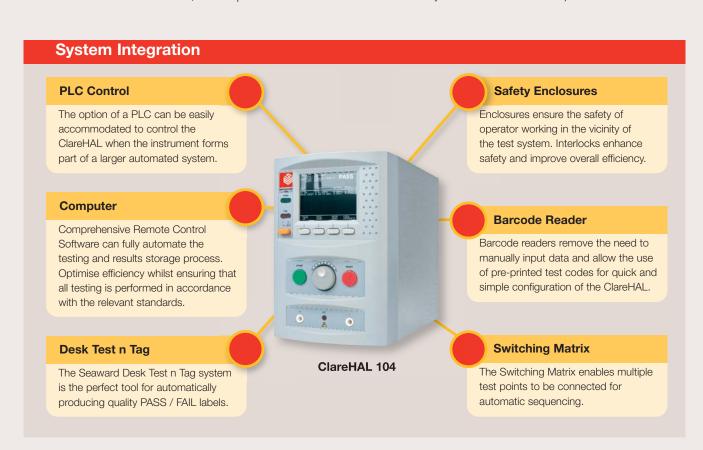

www.clare.co.uk



SPECIFICATIONS: ClareHAL 104, LED, 103, 102, 101,

Power Requirement

Selectable 115 or 230 VAC RMS AC Voltage

50/60 Hz Frequency

Mechanical Specification

Size (HxWxL) 300mm-200mm-370mm

Weight 15kg Approx

Ground Bond Test - 104, LED, 103, 102,

Nominal 6V AC Test Voltage

50 or 60 Hz (Independent Frequency

of supply)

Display Range and Accuracy $0-1500m\Omega$ ±2% ±5 Counts

Display Resolution 1 mO

Compliance Test Ranges:

Current/Load Resistance/Time $5 \text{ A-} 1000 \text{m} \Omega$ - Continuous

> $10 \text{ A-}500\text{m}\Omega$ - Continuous $25 \text{ A-}200 \text{ m}\Omega$ - Continuous $30 \text{ A-}150 \text{ m}\Omega$ - 60 secs40A-100 mΩ - 60 secs

Settable Output Current Range 0.1A-40.0A Selectable Range of Pass/Fail Levels 0-1500m Ω

Insulation Resistance Test - 104, LED, 103, 102, 101,

DC Output Voltage 250V, 500V, or 1000V Selectable

 $0.01M\Omega$ - $500M\Omega$ Display Range

Display Range / Accuracy $0.03M\Omega - 350M\Omega \pm 5\% \pm 5$

Counts

 $350M\Omega$ - $500M\Omega$ Indication Only

Display Resolution $0.01M\Omega$

Pass/Fail Level $0.00M\Omega$ -500.0M Ω

AC Flash / Hipot Test - 104, LED, 103, 102, 101,

Programmable Voltage Range 0.10kV-5.00kV

(10V/Step Resolution)

Frequency Independent of Supply 50 or 60 Hz

Voltage Display Range and Accuracy 0.10kV-5.00kV $\pm 1\% \pm 5$

Counts

Voltage Display Resolution 0.01kV

0.01mA-20.00mA ±1% ± 5 Current Display Range and Accuracy

Counts 0.01mA

Current Display Resolution

0.01mA-20.00mA Selectable Range of Pass/Fail Levels Maximum Current Output Optional Arc Detection

20.00mA @5kV 9 Levels

DC Flash / Hipot Test - 104, LED, 103, 102, 101,

0.10kV-6.00kV Programmable Voltage Range

(10V/Step Resolution)

Voltage Display Range and Accuracy $0.10 \text{ kV-}6.00 \text{kV} \pm 1\% \pm 5$

Counts

Voltage Display Resolution 0.01kV

Current Display Range and Accuracy 0.01mA-10.00mA $\pm 1\% \pm 5$

Counts

Current Display Resolution 0.01mA

Selectable Range of Pass/Fail Levels 0.01mA-10.00mA

Maximum Current Output 10.00mA Optional Arc Detection 9 Levels

Power and Leakage Test - 104 & LED

Power Output Rating

Maximum Power Output

Test Voltage 110V - 230V AC

> 20A nominal (Vin-Vout) Up to 5.0kVA (dependant

on mains supply rating)

Output Power Measurement - 104

Single Phase Power Measurement:

Display Range and Accuracy 0.02kVA-5.00kVA ±2%

+0.02kVA

Selectable Range of Pass/Fail Levels 0.001kVA-5.000kVA

Output Power Measurement - LED

Single Phase Power Measurement:

Display Range and Accuracy +/-5% +/- 2 digits

000.0 to 999.9 VA

Selectable Range of Pass/Fail Levels 000.2 -1000 VA

Single Phase Power Factor Measurement

Display Range and Accuracy Ratio $0.000 - 1.000 \pm 0.030$

Selectable Range of Pass/Fail Levels 0.000-1.000

Leakage Current Measurement

Display Range and Accuracy 0.10mA-20.00 mA ± 1% ±5

> Counts 0.01mA

Display Resolution Selectable Range of Pass/Fail Levels 0.01mA-20mA

Touch Current Measurement

Display Range and Accuracy 0.02mA - 5.00 mA $\pm 1\% \pm 5$

> Counts 0.01mA

Display Resolution Selectable Range of Pass/Fail Levels

Measuring Device

0.02mA-5.00mA IEC/EN 60990 Fig 4 (IEC/EN 60990 Fig 3 or Fig

5 Upon Request)

SEAWARD SAFETY ENCLOSURES

The safest testing environment around.

Electrical safety testing can be a hazardous process to provide maximum safeguard for an operator and comply with the recommendations of EN50191 which specifies working conditions of electrical testing. The use of safety test enclosures is a convenient, practical way of minimising the hazards.

Over the last 70 years, Seaward has produced many thousands of test enclosures for a wide range of industrial applications.

Seaward can supply and design safety test enclosures to meet the particular applications of any organisation and our skilled and experienced engineers are able to liaise with customers to identify their particular applications.

The new range of visor safety enclosures has been introduced to provide a practical and cost effective way of supplying a standard range of safety test enclosures, with a flexible pallet system to accommodate different types of fixtures.

The visor enclosure with its stylish and ergonomic design gives operators a wide, clear field of view, simple access to the equipment being tested and minimises the impact on the operator's working area. Constructed using durable non-conducting material, this new range of enclosures is available in two sizes and is simple to install and interface with electrical safety test instruments.

Sizes	Width	Height	Depth
ENC 7	600mm	475mm	560mm
ENC 6	300mm	240mm	280mm

ENC 7 Part No: 73B240 ENC 6 Part No: 73B239





CLAREHAL OPTIONS

Customising your test station's never been easier with additional peripherals.





Clare Switch Matrix

ClareHAL Scanner is designed to operate with the ClareHAL 101,103 and 104. The unit operates in parallel with the ClareHAL and provides the facility to switch the High Voltage and Ground Bond measuring terminals to multiple positions on the equipment under test. The unit incorporates eight HiPot channels and eight Ground Bond channels. A display on the front of the ClareHAL Scanner unit provides clear indication of which points are being tested at any particular time.

Part No: 485A910

ClareHAL Checkbox

It is advisable to test any electrical safety tester at regular intervals to ensure that it is performing in line with specification and expectations. The Check Box is a simple (precision load) which can be connected to the ClareHAL and quickly confirm that measurements are within the performance level expected. The Check Box provides a load for a Bond, Hipot, Installation and leakage measurements.

Part No: 481A910

Safety e-Base

A versatile software package designed to run with the ClareHAL to provide remote control and database management. Safety e-Base runs on any PC running XP or Windows 7.

Part No: 482A910





Desk Test n Tag

Any of the ClareHAL range will directly control the Desk Test and Tag printer to produce PASS or FAIL labels. The printer uses a thermal transfer process, eliminating the possibility of label fade and the material is highly durable and tear resistant.

Part No: 312A912

Labels

A variety of colours of this almost indestructible label material are available.

Part No:

312A954 - Orange Labels 312A951 - White Labels

312A954 - Printer Ribbon

312A956 - Yellow Labels

312A957 - Blue Labels

312A961 - Red Labels

312A962 - Green Labels 312A952 - Printer Ribbon

Warning Beacons

Warning Beacons can be configured to work with any of the ClareHAL range to provide clear indication of the operating condition.

Part No: DCS276

Part Number	Hardware
194A922	Barcode scanner
483A910	Power Smart Single Phase 50A
484A910	Power Smart Three Phase 63A
H-5014	Data Cable
G2/5001	H103 Class I Output Socket Box
H-5009	H101 Class I Output Socket Box
H-5022	H101 Class II Output Socket Box
H-5008	Foot Guard Switch
DCS317	Guard Switch
01521/1	Earth Clip
01520/1	Earth Probe
03919/2	HT Probe - Yellow
03918/2	HT Probe – Red
H-5017	Status Beacon
H-5003	HT – Clip
H-5030	Printer lead (Desk Test 'n' Tag)

Clare, Bracken Hill, South West Industrial Estate, Peterlee, County Durham, SR8 2SW United Kingdom

