

Spectrum Master™

Compact Handheld Spectrum Analyzer

MS2712E MS2713E
9 kHz to 4 GHz 9 kHz to 6 GHz



Anritsu Compact Spectrum Analyzer



The wireless communications market is rapidly growing as the telecommunications and defense sectors continue to evolve. Whether you are installing, troubleshooting, or solving problems for military communications facilities, public safety providers, or wireless service providers, Anritsu has a solution.

Anritsu's Spectrum Master has been designed for technicians, installers, field radio frequency (RF) engineers, and contractors who struggle with both keeping track of the growing number of interfering signals and assessing signal quality on a wide range of increasingly complex signals. Easy-to-use, integrated and high performing, the Spectrum Master helps users address those challenges and more. Its feature-rich and compact design helps users comply to regulatory requirements, manage and maximize efficiency, improve system up-time, and increase revenue – all in a rugged and field-proven device designed to withstand even the most punishing conditions.

This generation of Anritsu's best-in-class Spectrum Master series is ideal for spectrum monitoring, interference analysis, RF and microwave measurements, field strength measurements, transmitter spectrum analysis, electromagnetic field strength, signal strength mapping, and overall field analysis of cellular 2G/3G/4G, land mobile radio, Wi-Fi, and broadcast signals.

Designed For Field Use

The Spectrum Master was designed specifically for field environments. Weighing less than 3.45 kg, it is small compact and easy to carry. Its field replaceable Li-Ion battery typically lasts for more than 3 hours, and a new bright 8.4-inch color display provides visibility even in broad daylight. With an operating temperature range from -10 °C to 55 °C, a rugged case and splash proof design, the Spectrum Master works in the most extreme weather conditions with guaranteed performance anywhere and anytime.

Integrated Solution

The Spectrum Master is a multifunctional instrument that eliminates the need for you to carry and learn multiple instruments. It can be configured to include a broad range of parameters, including a 4 GHz or 6 GHz spectrum analyzer, an interference analyzer with signal mapping, coverage mapping, Tracking Generator, channel scanner, power meter, high accuracy power meter, AM/FM/PM Analyzer, and GPS receiver for time/location stamping and accuracy enhancements.

In addition, the Spectrum Master can be equipped with a GSM/EDGE Analyzer, W-CDMA/HSPA+ Analyzer, TD-SCDMA Analyzer, CDMA Analyzer, EV-DO Analyzer, Fixed and Mobile WiMAX Analyzer, LTE Analyzer, ISDB-T Analyzer, thus eliminating the need to carry multiple instruments to the field.

Easy-To-Use

The new Spectrum Master leverages the user interface from Anritsu's popular MS2721B analyzer, giving users intuitive spectrum analyzer menus. A touchscreen keypad combination provides you with an intuitive menu-driven interface designed to give a familiar menu structure with quick access to popular measurements.

Key Facts

- 9 kHz to 4 GHz (MS2712E)
- 9 kHz to 6 GHz (MS2713E)
- One-button measurements: ACPR, Channel Power, Field Strength, Occupied BW, AM/FM/SSB Demod
- Interference Analyzer: Spectrogram, Signal Strength, RSSI, Signal ID, Interference Mapping
- Indoor and Outdoor Coverage Mapping
- 3GPP Signal Analyzers: LTE, GSM/EDGE, W-CDMA/HSPA+, TD-SCDMA/HSPA+, NB-IoT
- 3GPP2 Signal Analyzers: cdmaONE/CDMA2000 1X, CDMA2000 1xEV-DO
- IEEE 802.16 Signal Analyzers: Fixed WiMAX, Mobile WiMAX
- ISDB-T Signal Analyzer
- DANL: > -162 dBm in 1 Hz RBW
- Dynamic range: > 102 dB in 1 Hz RBW
- +33 dBm TOI typical @ 6 GHz
- < Phase Noise: -100 dBc/Hz @ 10 kHz at 1 GHz
- Frequency accuracy: < ± 50 ppb with GPS on
- Detection methods: Peak, RMS, Negative, Sample, Quasi-peak
- Save-on-event: Automatically saves a sweep when crossing a limit line or at the end of the sweep.
- Gated sweep: View pulsed or burst signals only when they are on, or off.
- > Three hours of battery life
- Touch-screen display
- USB and Optional Ethernet for data transfer and instrument control
- Line Sweep Tools
- 8.4-inch daylight viewable touchscreen display
- Lightweight: < 3.45 kg


Integrated Measurement Capabilities




Configuration Overview

FUNCTION	DESCRIPTION
Spectrum Analyzer, 9 kHz to 4/6 GHz	Locates and identifies various signals over a wide frequency range. Detects signals as low as -162 dBm with phase noise better than -100 dBc/Hz.
Interference Analyzer (Option 25)	Includes everything you need to monitor, identify, and locate interference using the spectrogram display, RSSI, Signal ID, signal strength meter, and interference mapping.
Coverage Mapping (Option 431)	Provides indoor and outdoor mapping capabilities of RSSI, and ACPR measurement levels.
GPS Receiver (Option 31)	Provides location and UTC time information. Also improves the accuracy of the reference oscillator.
Tracking Generator (Option 20)	Features high dynamic range with power steps ranging from -50 dBm to 0 dBm in 0.1 dB steps.
Bias Tee (Option 10)	Provides an internally generated, variable 12V to 32V DC bias which is applied to the RF input port.
High Accuracy Power Meter (Option 19)	Connects high accuracy 4, 6, 8, 18, and 26 GHz USB power sensors with better than ± 0.16 dB accuracy.
Power Meter (Option 29)	Makes channelized transmitter power measurements.
Channel Scanner (Option 27)	Measures the power of multiple transmitted signals. Scans up to 1200 channels using Script Master.
Gated Sweep (Option 90)	Views pulsed or burst signals such as WiMAX, GSM, and TD-SCDMA only when they are on.
AM/FM/PM Analyzer (Option 509)	Analyzes AM/FM/PM signals and measures FM/PM deviation, AM depth, SINAD, Total Harmonic Distortion and much more.
20 MHz Bandwidth Demod (Option 9)	The 20 MHz BW demod option enables users to turn the Spectrum Master in to a Signal Analyzer.
GSM/EDGE Measurements (Option 880)	RF and Demod Measurements enables end users to increase data rate and capacity by ensuring good signal quality.
W-CDMA/HSPA+ Measurements (Option 881)	Uses Spectrum Master's RF, Demod, and OTA Measurements to verify frequency error, multipath signals, EVM and much more.
LTE (Option 883, 886)	Spectrum Master's LTE Measurements enables users to make RF, Demod, and OTA Measurements. Verify ACLR, Cell ID, Frequency Error, EVM, and much more.
TD-SCDMA/HSPA+ Measurements (Option 882)	The TD-SCDMA/HSPA+ analyzer includes RF, Demod, and OTA measurements and the ability to measure EVM and Peak CDE. It also includes an OTA Tau scanner.
cdmaOne/CDMA2000 1X (Option 884)	RF, Demodulation, and OTA Measurements. Measures EVM, Noise floor, ACPR and much more.
Fixed and Mobile WiMAX (Option 885)	RF Demod, and OTA Measurements verify Cell ID, Sector ID, Preamble, EVM, RCE, and much more.
NB-IoT Analyzer (Option 887)	Provides customers with the ability to verify operation and performance of their NB-IoT deployments.
ISDB-T (Option 30, 32)	Makes RF and Demod Measurements to verify Spectrum Mask and MER. Ensures digital TV transmitters are configured according to license agreements.
DVB T/H (Option 57, 64, 78)	Makes RF and Demod Measurements to verify Spectrum Mask and MER. Ensures digital TV transmitters are configured according to license agreements.
Ethernet Connectivity	Provides the ability to operate automated testing from remote PC, or conversely, to upload data from field test to the PC. Remote access control is also provided through Master Software Tools.

Designed for the Field

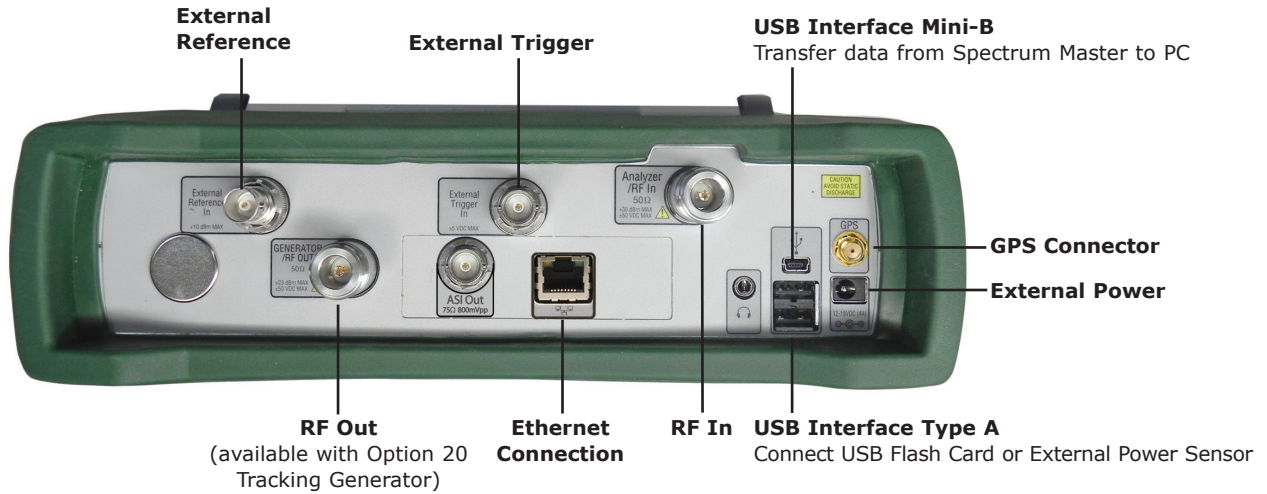

All connectors are conveniently located on the top panel, leaving the sides clear for handheld use.

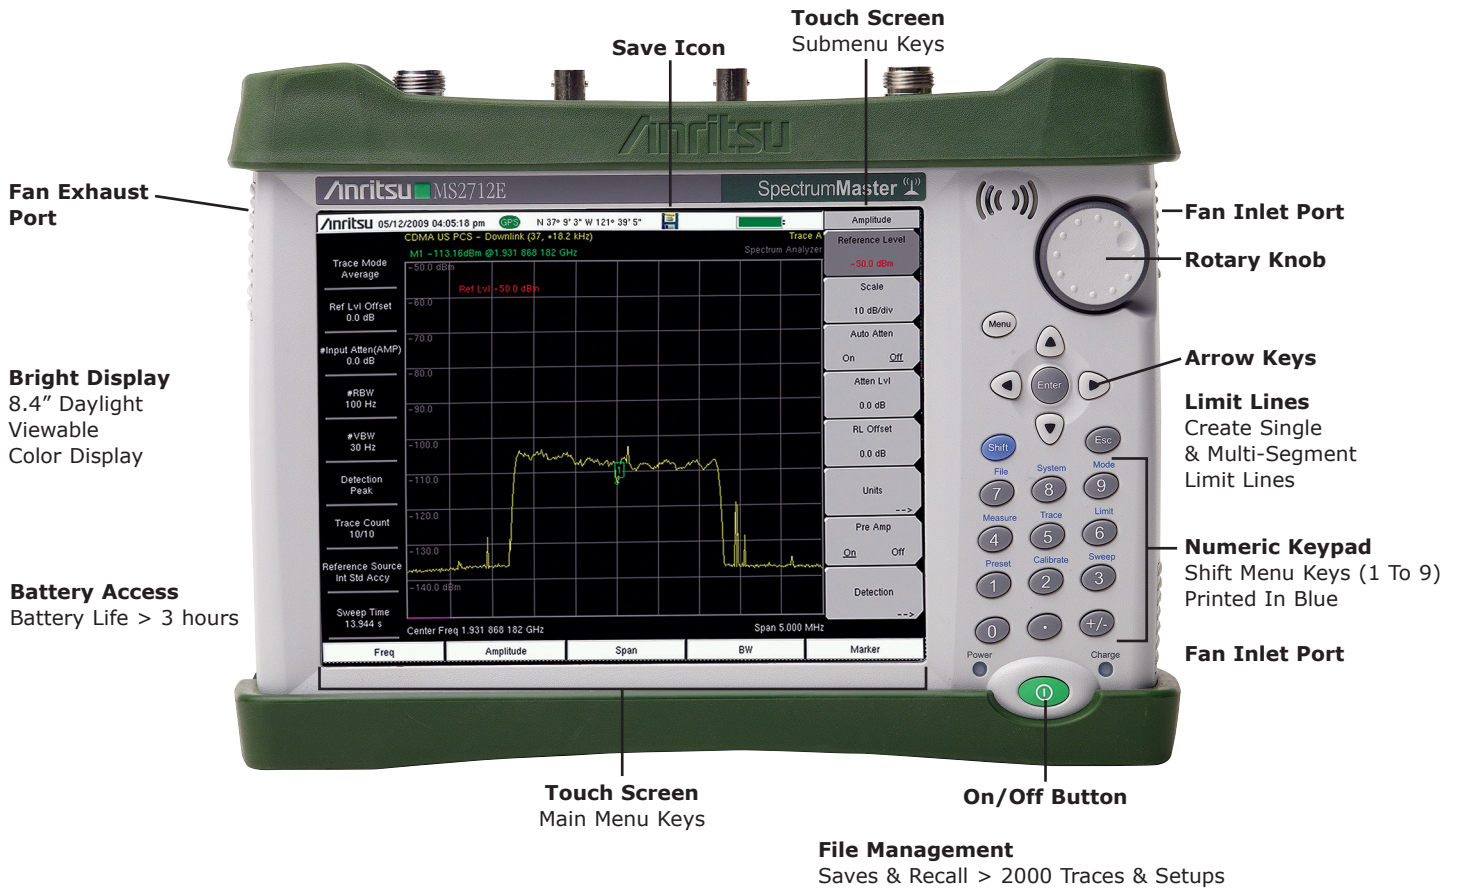

Convenient Soft Case and Tilt Bail




Tilt Bails are integrated into the case and soft case for better screen viewing.

Best Performance in its Class

Anritsu's MS2712E and MS2713E Spectrum Master spectrum analyzers provide users with high-performance for field environments and for applications requiring mobility. There is no other spectrum analyzer in this class that can deliver the same performance.

The combination of its performance and compact design makes it ideal for a broad range of activities, including spectrum monitoring, interference analysis, field strength measurements, transmitter spectrum analysis, electromagnetic field strength, signal strength mapping, and overall field analysis of cellular 2G/3G/4G, land mobile radio, Wi-Fi, and broadcast signals.

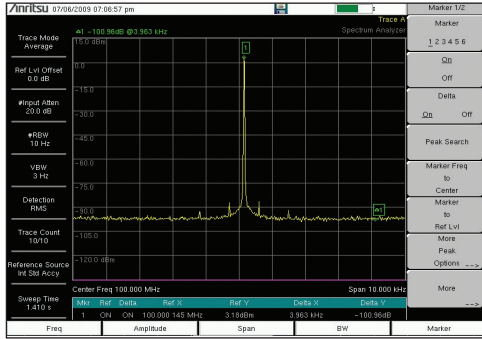

High Performance

The dynamic range is better than 102 dB in 1 Hz, enabling measurement of very small signals in the presence of much larger signals. The picture demonstrates the dynamic range in the Spectrum Master

Displayed Average Noise Level

Spectrum Master delivers impressive and best-in-class DANL performance. With the built-in pre-amp, better than 102 dBm DANL can typically be realized in 1 Hz RBW. This low-level performance capability is essential when looking for low-level interference signals.

GPS-Assisted Frequency Accuracy

With GPS Option 31 the frequency accuracy is < 50 ppb. This additional accuracy is important when characterizing 3GPP signals using counted frequency markers. Also all measurements can be GPS tagged for exporting to maps.

Simple but Powerful for Field Use

Convenience is a must in the field. This is why the Spectrum Master is equipped with features that will enhance productivity in the field.


The Spectrum Master is equipped with limit lines for all user levels. You can create single limit lines and segmented limit lines in one step using the one-button limit envelope feature.

The Spectrum Master automatically sets the fastest sweep possible while still ensuring accurate measurements. This allows users to rely on the instrument to optimize accuracy and consistency.


Auto Attenuation ties the input attenuation to the reference level eliminating the need for the user to determine how much attenuation is needed.

Six regular and six delta markers can be displayed with a marker table that can be turned on as needed. The capability to measure noise level in terms of dBm/Hz or dBµV/Hz is a standard feature of the Spectrum Master.


Dynamic Range Performance

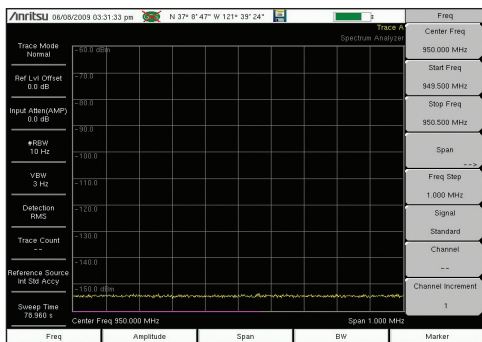

Low Level Performance

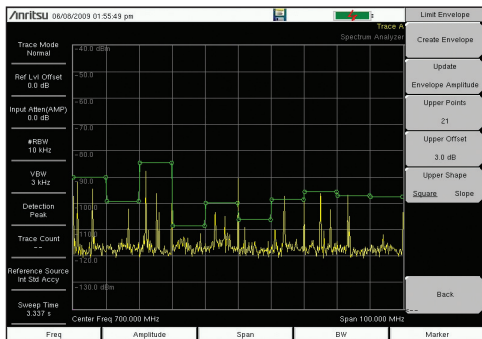

Limit Envelope

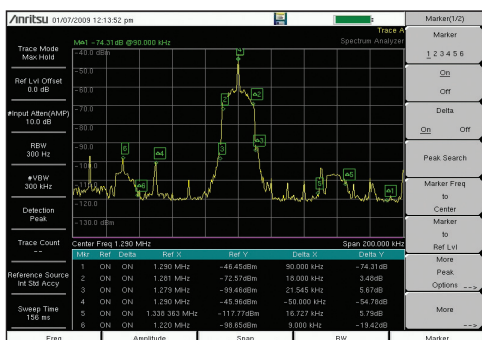


Comprehensive Marker Menu

Master Transmitter Testing

Smart Measurements for Transmitter Systems

Commonly needed transmitter measurements are built in and can be accessed easily. These include field strength, occupied bandwidth, channel power, adjacent channel power ratio (ACPR), and emission mask.

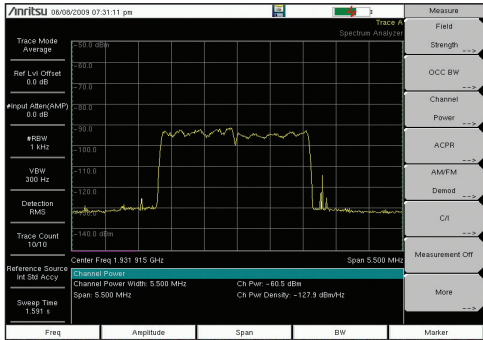


Occupied Bandwidth

Occupied Bandwidth

This measurement determines the amount of spectrum used by a modulated signal. The Spectrum Master allows you to choose between two different methods of determining bandwidth: the percent-of-power method or the "x" dB down method.

Adjacent Channel Power Ratio

Adjacent Channel Power Ratio is a common transmitter measurement. High ACPR will create interference for neighboring carriers. This measurement can be used to replace the traditional two-tone Intermodulation Distortion (IMD) test for system non-linear behavior.

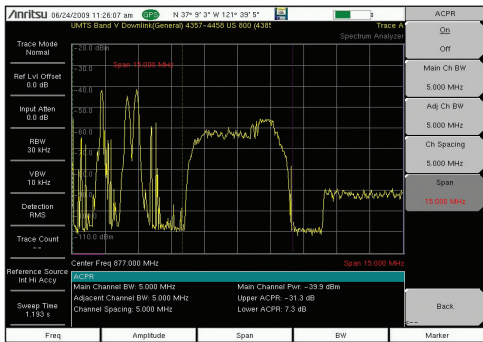


Adjacent Channel Power Ratio

Field Strength Measurements

The Spectrum Master can determine the effects of electromagnetic fields caused by transmitter systems. Specific antenna factors of the connected antenna are automatically taken into account, and field strength is displayed directly in dBμV/m. The Spectrum Master also supports a wide range of directional antennas. If you are using a different antenna, Master Software Tools can be used to edit the antenna list and upload the custom antenna list to the instrument to accurately measure the maximum field strength.

Emission Mask

The emission mask is a segmented upper limit line that will display frequency range, peak power and frequency, relative power and pass/fail status for each segment of the mask. The emission mask must have at least two segments. Emission mask adjusts to the peak power value of transmitted signal level per government emission mask requirements.

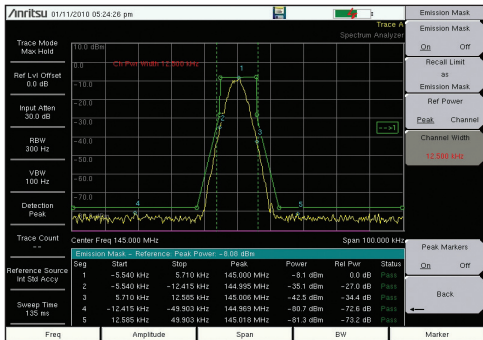


Emission Mask



Master the Location of Interference

As the wireless industry continues to expand, more diverse uses for the radio spectrum emerge, and the number of signals that may potentially cause interference is constantly increasing.

Compounding the problem are the many sources that can generate interference, including intentional radiators, unintentional radiators, and self interference. Interference causes Carrier-to-Interference degradation robbing the network of capacity. The goal of these measurements is to resolve interference issues as quickly as possible.

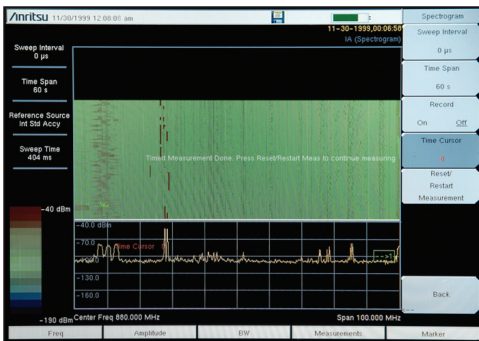


Spectrogram Display

Interference Analysis (Option 25)

The interference analyzer option provides you with a spectrogram display, RSSI, signal strength meter, signal ID, and signal mapping capabilities. Spectrum Master's integrated spectrum analyzer can detect signals as low as -152 dBm.

Spectrogram Display

This option provides you with a three-dimensional display of frequency, power, and time of the spectrum activity to identify intermittent interference and track signal levels over time. The dual display screen allows for easy viewing of both the spectrum and 3D display. The Spectrum Master allows you to save a history of data up to one week.

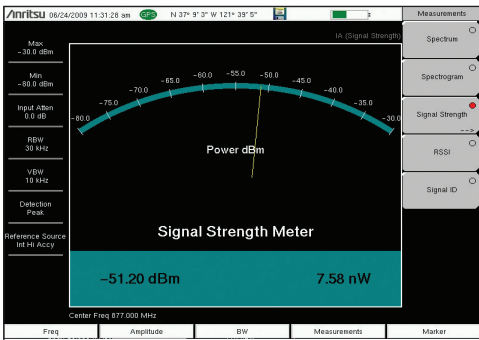


Signal Strength Meter

Received Signal Strength Indicator (RSSI)

You can use the Spectrum Master's RSSI measurement to observe the signal strength of a single frequency over time, and collect data for up to one week.

Signal Strength Meter


The Spectrum Master's signal strength meter can locate an interfering signal by using a directional antenna and measuring the signal strength. It displays power in Watts or dBm, in the graphical analog meter display and by an audible beep proportional to its strength.

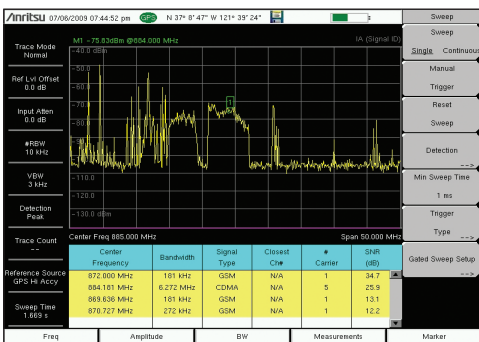

Signal ID

Signal ID

Spectrum Master's signal ID feature in the interference analyzer can help you quickly identify the type of the interfering signal. You can configure this measurement to identify all signals in the selected band or to simply monitor one single interfering frequency. The Spectrum Master then displays results that include center frequency, signal bandwidth, and signal type (FM, GSM/EDGE, W-CDMA/HSPA+, CDMA/EV-DO, Wi-Fi).

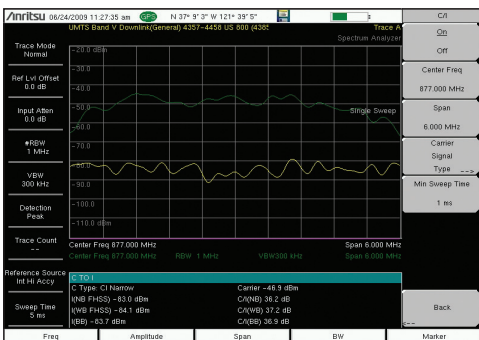

Carrier-to-Interference (C/I)


Carrier-To-Interference Measurement

Spectrum Master's carrier-to-interference measurement capability makes it simple for you to determine if the level of interference will affect users in the intended service area.

AM/FM/SSB Demodulation

A built-in demodulator for AM, narrowband FM, wideband FM and single sideband allows you to easily identify the interfering signal.

Pin Point Location of Interfering Signal with Interference Mapping

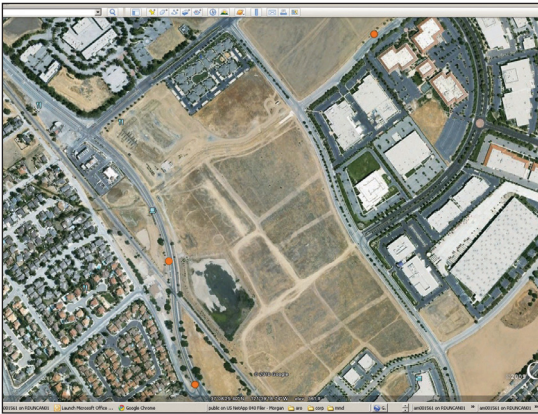

Interference Mapping with Google Earth™

Interference Mapping

The Interference Mapping measurement eliminates the need to use printed maps and draw lines to triangulate the interfering signal.

Using Map Master, it is easy to convert maps and make them compatible with the Spectrum Master. With a valid GPS signal, the instrument identifies the user location on the map. Using one of the recommended Anritsu Yagi antennas, you can identify the direction of the interfering signal and input the angle information with the rotary knob. With two or more lines from different locations, it is possible to obtain an estimate location of the interfering signal. The Interference Mapping can be done directly on the Spectrum Master. Files can also be saved as kml and opened with Google Earth™.

Directional Antennas

Anritsu offers more than eight different directional antennas covering a wide range of frequency bands including: 822 to 900 MHz, 885 to 975 MHz, 1710 to 1880 MHz, 1850 to 1990 MHz, 2400 to 2500 MHz, 1920 to 2170 MHz, 500 to 3000 MHz, and 600 to 21000 MHz.



GPS Antenna

The 2000-1528-R GPS antenna and Option 31 are required for the interference mapping and coverage mapping measurements.



The screenshot displays the Anritsu Spectrum Master interface. At the top, it shows the date and time (05/05/2010 02:34:20 pm), a GPS status icon, and coordinates (N 37° 8' 48" W 121° 39' 22"). The main display area shows a map of Morgan Hill, CA, with a red crosshair indicating the current location. A signal strength bar is visible, showing a peak of -59.47 dBm. The interface also displays the following data:

- Frequency: 2.000 GHz
- RBW: 1 MHz
- Detection: Peak
- Direction: 0 degrees
- Signal Strength: -47.78 dBm

On the right side, there is a control panel with the following buttons:


- Interference Mapping
- Save Current Point
- Location & Direction
- Save/Recall
- Points/Map
- Delete Last Saved Point
- Delete ALL Points
- Speaker On/Off
- Volume
- Reset Max/Min Hold
- Back

At the bottom, there are tabs for Freq, Amplitude, BW, Measurements, and IA Mapping.

On Screen Interference Mapping

Indoor and Outdoor Coverage Mapping Solutions (Option 431)

There is a growing demand for coverage mapping solutions. Anritsu's Coverage Mapping measurements option provides wireless service providers, public safety users, land mobile radio operators, and government officials with indoor and outdoor mapping capabilities

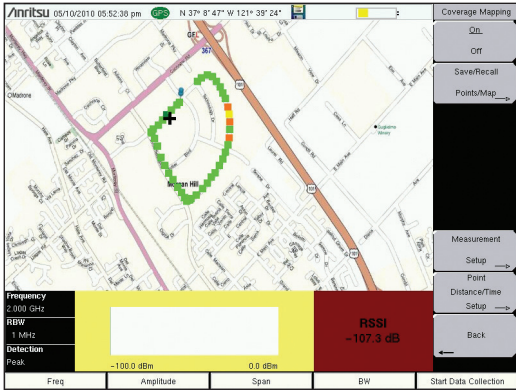


Outdoor Mapping

Outdoor Mapping

With a GPS antenna connected to the instrument and a valid GPS signal, the instrument monitors RSSI and ACPR levels automatically. Using a map created with Map Master, the instrument displays maps, the location of the measurement, and a special color code for the power level. The refresh rate can be set up in time (1 sec, minimum) or distance.

The overall amplitude accuracy coupled with the GPS update rate ensures accurate and reliable mapping results

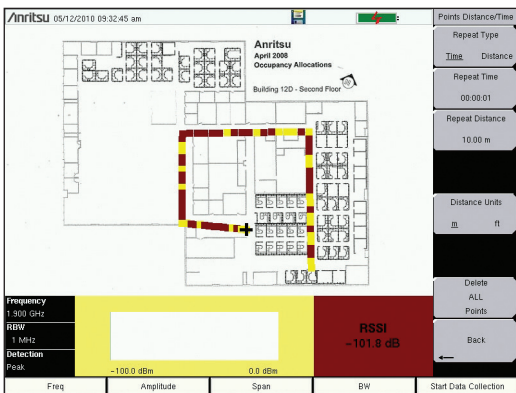

Indoor Mapping

Indoor Mapping

When there is no GPS signal valid, the Spectrum Master uses a start-walk-stop approach to record RSSI and ACPR levels. You can set the update rate, start location, and end location and the interpolated points will be displayed on the map.

Anritsu also offers an advance 3-D indoor mapping solution. Please see the TRX NEON Signal Mapper section for more details.




Saved KML File

Export KML Files

Save files as KML or JPEG. Open kml files with Google Earth™.

When opening up a pin in Google Earth, center frequency, detection method, measurement type, and RBW are shown on screen.

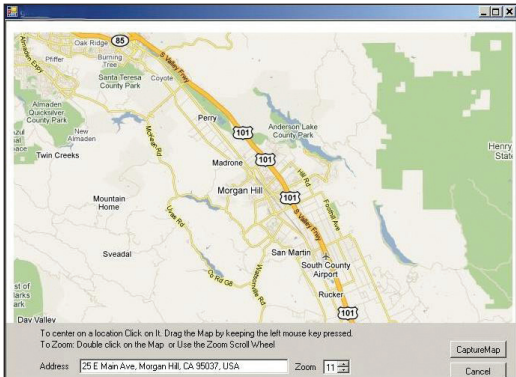

Create maps with Map Master

Map Master


The Map Master program creates maps compatible with the Spectrum Master. Maps are created by typing in the address or by converting existing JPEG, TIFF, BMP, GIF, and PNG files to MAP files. Utilizing the built-in zoom in and zoom out features, it is easy to create maps of the desired location and transfer to the instrument with a USB flash card. Map Master also includes a GPS editor for inputting latitude and longitude information of maps from different formats.

Spectrum Master™ Compact Handheld Spectrum Analyzer Features


MA8100A Series TRX NEON Signal Mapper




NEON Signal Mapper with Anritsu Handhelds

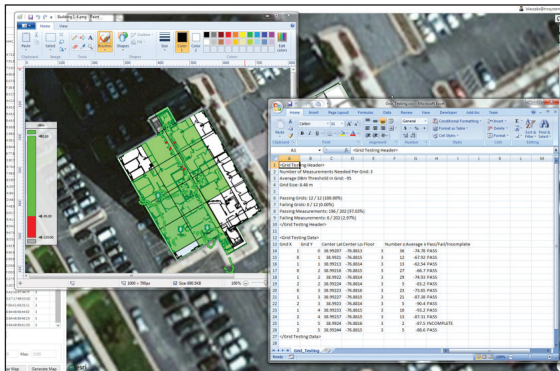

Support for NFPA Gridding Requirements

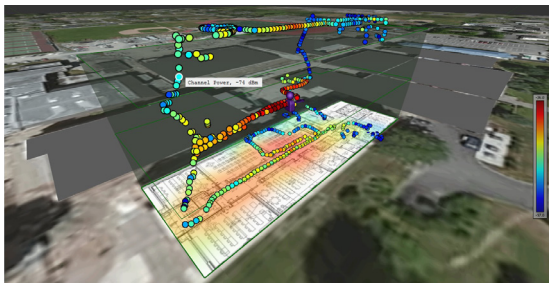

Automatically generate 3-D Heatmaps

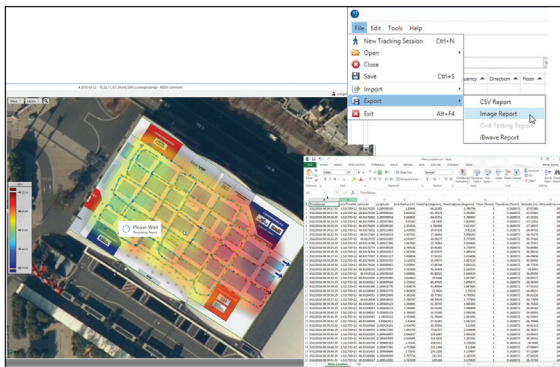

Automatic Report Generation

MA8100A Series TRX NEON® Signal Mapper*

The most powerful 3D in-building coverage mapping tool specially for Anritsu Handheld Spectrum Analyzers

Anritsu's TRX NEON Signal Mapper, a 3D in-building coverage mapping solution, is compatible with all Anritsu handheld instruments with spectrum analyzer mode. Instruments supported include Spectrum Master, LMR Master, Site Master, BTS Master, Cell Master, and VNA Master.

The MA8100A-xxx consists of both hardware and software from TRX Systems, a 3rd party partner. The MA8100A-xxx consists of a TRX Systems NEON Tracking Unit, NEON Signal Mapper Software for Android devices, and NEON Command Software for a PC.

The TRX NEON Tracking Unit supports collection and processing of sensor data that delivers 3D location information. The Tracking Unit connects to the TRX NEON Signal Mapper application which is run on an Android device via a Bluetooth connection.

The TRX NEON Signal Mapper application provides an intuitive Android user interface enabling lightly trained users to map RF signals within buildings. Users can initialize their location, start/stop mapping and save mapping data to the cloud. RF data is captured by an Anritsu Handheld spectrum analyzer product and the data is sent to the Android device via a USB connection.

The TRX NEON Command Software, run on a PC, enables creation and visualization of 3D building maps and provides centralized access to the TRX NEON Cloud Service to access stored maps and measurement data.

Key Features and Benefits


Integrating NEON's capability to automatically collect geo-referenced test data with Anritsu handheld spectrum analyzer products saves valuable time and money by:

- Eliminating the need to manually perform "check-ins" at each test point by automatically calculating indoor location
- Providing vastly more data than is possible with manual processes by recording data with every step
- Removing typical data recording errors caused by "guesstimating" locations in large buildings through automatic indoor location and path estimation
- Delivering actionable data in areas not easily analyzed such as stairways and elevators by recording and referencing measurements in 3D
- Enabling quick analysis of signal coverage and faster problem resolution by delivering the industry's only geo-referenced 3D visualization
- Provides color-graded measurement results in 2D and 3D views. Measurement values can be seen by clicking on each point. A .csv file of all measurements is also provided.


*Android device and PC are NOT included in the MA8100A-xxx. Customers must purchase their own Android device and PC.

Power Measurements for a Wide Range of Applications

The Spectrum Master supports many different power measurements, including the channel scanner, high accuracy power meter, internal power meter, and channel power measurement.

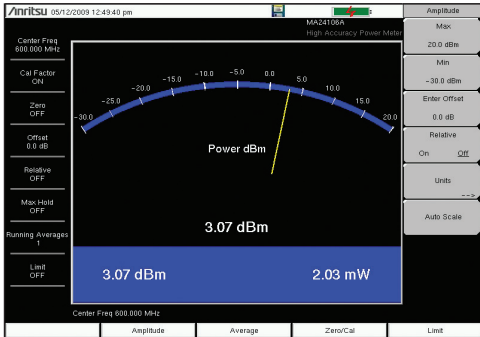


Power Meter

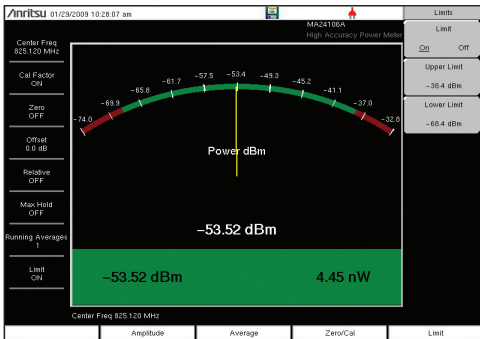

High Accuracy Power Meter



High Accuracy Power Sensors

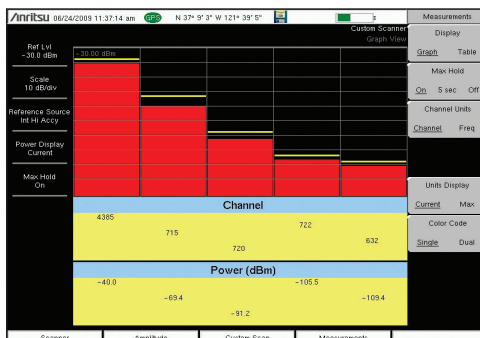

Channel Scanner

Channel Power

Use Spectrum Master's channel power measurement to determine the power and power density of a transmission channel. Using the built-in signal standard list, you can measure the channel power of a wide range of signals.

Power Meter (Option 29)

Spectrum Master's internal power meter provides power measurements without any additional tools and is ideal for making channelized power measurements. You can display the results in both dBm and Watts.

This option is easy to use and requires limited setup entries.

High Accuracy Power Meter (Option 19)

Anritsu's high accuracy power meter option enables you to make high accuracy RMS measurements. This capability is perfect for measuring both CW and digitally modulated signals such as CDMA/EV-DO, GSM/EDGE, and W-CDMA/HSPA+. You can select from a wide range of USB sensors delivering better than ± 0.16 dB accuracy. An additional benefit of using the USB connection is that a separate DC supply (or battery) is not needed because the necessary power is supplied by the USB port.

- PSN50 High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +20 dBm
- MA24105A Inline Peak Power Sensor, 350 MHz to 4 GHz, +51.76 dBm
- MA24106A High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +23 dBm
- MA24108A Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
- MA24118A, Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
- MA24126A, Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm
- MA24208A, High Accuracy RF Power Sensor, 50 MHz to 6 GHz, +20 dBm
- MA24218A, Microwave Universal USB Power Sensor, 10 MHz to 18 GHz, +20 dBm to -60 dBm
- MA24330A, Microwave CW USB Power Sensor, 10 MHz to 33 GHz, +20 dBm
- MA24340A, Microwave CW USB Power Sensor, 10 MHz to 40 GHz, +20 dBm
- MA24350A, Microwave CW USB Power Sensor, 10 MHz to 50 GHz, +20 dBm to -60 dBm
- MA25100A, RF Power Indicator


PC Power Meter

These power sensors can be used with a PC running Microsoft Windows® via USB. They come with PowerXpert™ application, a data analysis, and control software. The application has abundant features, such as data logging, power versus time graph, big numerical display, and many more, that enable quick and accurate measurements.


Channel Scanner (Option 27)

The channel scanner option measures the power of multiple transmitted signals, making it very useful for simultaneously measuring channel power of up to 20 channels in GSM, TDMA, CDMA, W-CDMA, HSDPA, and public safety networks. You can select the frequencies or the scanned data to be displayed, either by frequencies or the channel number. And in the custom setup menu, each channel can be custom built with different frequency bandwidth, or with channels from different signal standards. With the Script Master function (found in the Master Software Tools package), custom Channel Scanner scripts can be created to enable automatic measurements of up to 1200 channels.

Highly versatile Tracking Generator option

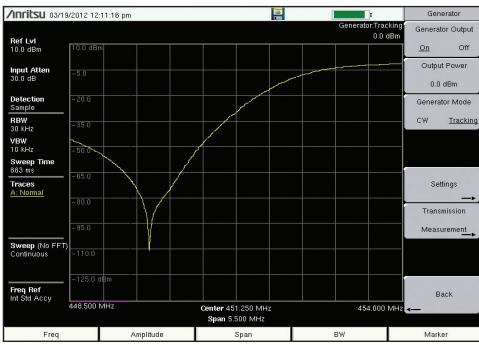

Tracking Generator Measurements

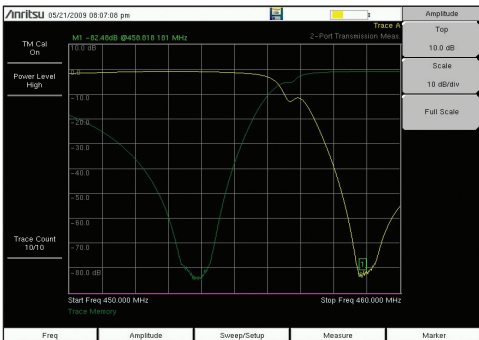

Tracking Generator (Option 20)

Spectrum Master's Tracking Generator capability allows you to make gain, isolation and insertion loss measurements of passive and active devices such as filters, cables, attenuators, duplexers, and tower mounted amplifiers. The Tracking Generator can also be used to make antenna-to-antenna isolation measurements and for repeater testing. The output power level can be varied from -50 dBm to 0 dBm in 0.1 dB steps.

Bias Tee (Option 10)


The built-in bias tee can be turned on as needed to place +12V to +32V on the center conductor of the RF In port, eliminating the need for you to carry external supplies in the field.

Filters, Duplexers, Splitters, etc...

Fast sweep speeds, high dynamic range, and easy-to-use trace math menus make the Spectrum Master well suited for multiple applications.



Valuable Options and Features

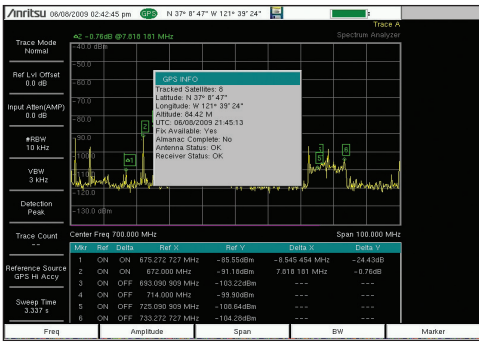

GPS Receiver

GPS Receiver (Option 31)


Spectrum Master's GPS option can be used to confirm the exact measurement location (longitude, latitude, altitude) and Universal Time (UTC) information. Each trace can be stamped with location information to ensure you are taking measurements at the right location.

In addition, the GPS option enhances the frequency accuracy of the internal reference oscillator. Within three minutes of acquiring the GPS satellite, the built-in GPS receiver provides a frequency accuracy to better than 50 ppb.

AM/FM/PM Analyzer (Option 509)

The AM/FM/PM analyzer provides analysis and display of analog modulation. Four measurement displays are provided.


The RF Spectrum display shows the spectrum with carrier power, frequency, and occupied BW. The Audio Spectrum display shows the demodulated audio spectrum along with the Rate, RMS deviation, Pk-Pk/2 deviation, SINAD, Total Harmonic Distortion (THD), and Distortion/Total. Audio Waveform display shows the time-domain demodulated waveform. Finally, there is a Summary Table Display that includes all the RF and Demod parameters.

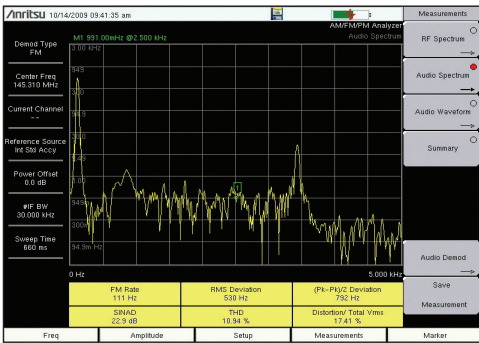

AM/FM/PM Analyzer

Built-in Keyboard

The built-in touchscreen keyboard gives you access to a fully functional keyboard, saving valuable time in the field when entering trace names. You can create shortcuts to customer-configurable user "quick names" to program frequently used words.

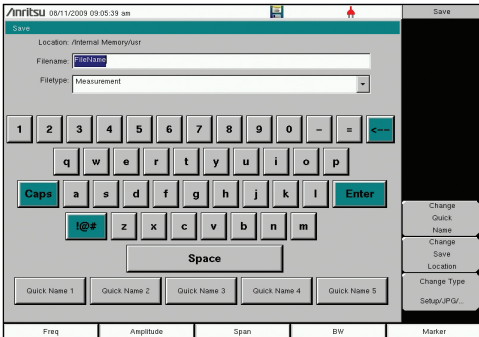

Touchscreen keyboard

Ethernet Connectivity


By enabling the MS2712E/MS2713E to communicate with PCs via Ethernet, you gain the ability to operate automated testing from your PC, or conversely, to upload data from field test to the PC. By using the Remote Access Tool (a utility provided with Anritsu's Master Software Tools), remote access control is provided.

Local Language Support

Spectrum Master features 10 user selectable languages. English, French, German (Deutsch), Spanish, Japanese, Chinese, Korean, Italian, Russian, and Portuguese.


Spectrum Master™ Compact Handheld Spectrum Analyzer Features

Introduction to Signal Analyzers

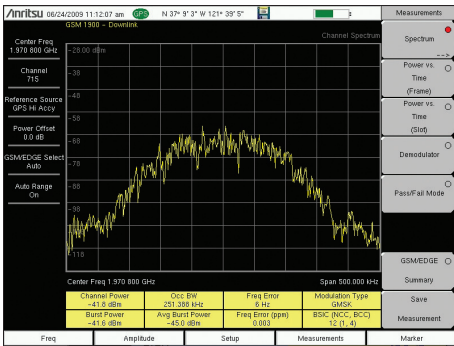


RF Measurement – GSM

High Frequency Error will cause calls to drop when mobiles travel at higher speed. In some cases, cell phones cannot hand off into, or out of the cell.

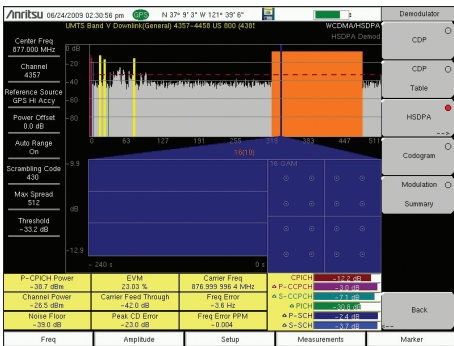


Demodulation – HSDPA

This is the single most important signal quality measurement. Poor EVM leads to dropped calls, low data rate, low sector capacity, and blocked calls.

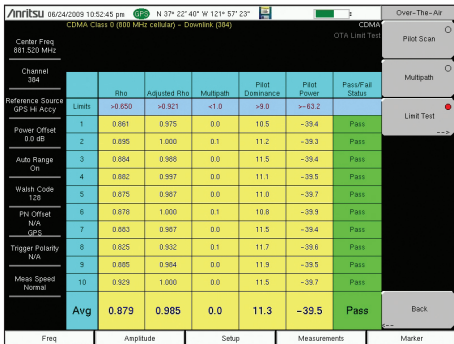

Over-the-Air Measurement – CDMA

Having low multi-path and high pilot dominance is required for quality Rho measurements OTA. Poor Rho leads to dropped and blocked calls, and low data rate.

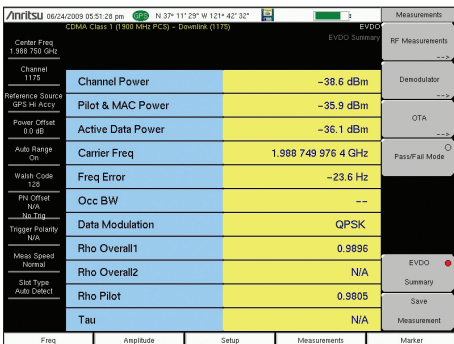

Measurement Summary – EV-DO

Having a summary of all key measurements is a quick way for a technician to see the health of the base station and record the measurements for reference.

Signal Analyzers

The Spectrum Master features Signal Analyzers for the major wireless standards around the world. The Signal Analyzers are designed to test and verify the:

- RF Quality
- Modulation Quality
- Downlink Coverage Quality

of the base stations' transmitters.

The goal of these tests are to improve the Key Performance Indicators (KPIs) associated with:

- Call Drop Rate
- Call Block Rate
- Call Denial Rate

By understanding which test to perform on the Spectrum Master when the KPIs degrade to an unacceptable level, a technician can troubleshoot down to the Field Replacement Unit (FRU) in the base station's transmitter chain. This will minimize the problem of costly no trouble founds (NTF) associated with card swapping. This will allow you to have a lower inventory of spare parts as they are used more efficiently.

Troubleshooting Guides

The screen shots on this page are all measurements made over-the-air with the MS2713E on commercial base stations carrying live traffic. To understand when, where, how, and why you make these measurements Anritsu publishes Troubleshooting Guides which explains for each measurement the:

- Guidelines for a good measurement
- Consequences of a poor measurement
- Common Faults in a base station

These *Troubleshooting Guides* are freely available for download anytime at www.anritsu.com.

Signal Analyzers

GSM/EDGE
W-CDMA/HSPA+
cdmaOne/CDMA2000 1X
CDMA2000 1xEV-DO
Fixed WiMAX
Mobile WiMAX
TD-SCDMA
ISDB-T
DVB T/H
TD & FD LTE
NB-IoT Analyzer

Typical Signal Analyzer Options

RF Measurements
Demodulation
Over-the-Air Measurements


Signal Analyzer Features

Measurement Summary Display
Pass/Fail Limit Testing

Spectrum Master™ Compact Handheld Spectrum Analyzer Features




LTE and TD-LTE Signal Analyzers (Options 883 and 886)

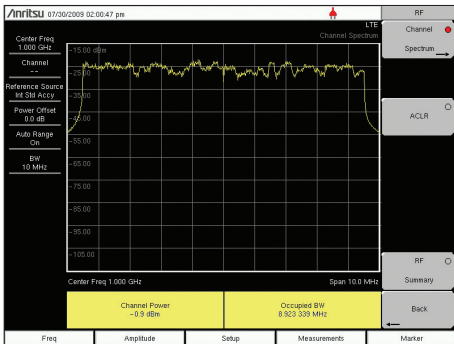

RF Measurements – Occupied Bandwidth

The bandwidth that contains 99% of the total carrier power. Excessive occupied bandwidth means excessive adjacent channel interference.

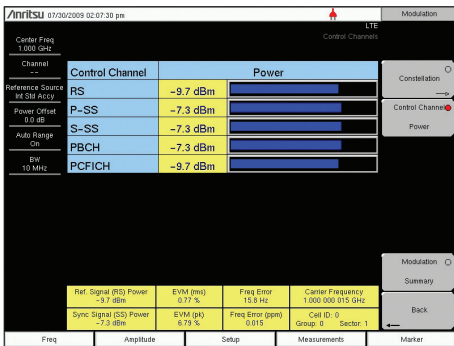


Modulation Quality – EVM

High or low values will create larger areas of cell-to-cell interference and create lower data rates near cell edges. Low values affect in-building coverage.



Over-the-Air Measurements – Sync Signal Power Check for uneven amplitude of sub-carriers. Data will be less reliable on weak sub-carriers, creating a lower over-all data rate.

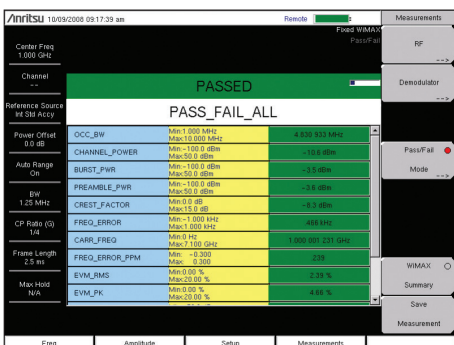

Pass/Fail Test

Set up common test limits, or sets of limits, for each instrument. Inconsistent settings between base stations, leads to inconsistent network behavior.

LTE Signal Analyzers

The Spectrum Master features three LTE measurement modes:

- RF Measurements
- Modulation Measurements
- Over-the-Air Measurements (OTA)

The goal of these measurements is to increase data rate and capacity by accurate power settings, ensuring low out-of-channel emissions, and good signal quality. These attributes help to create a low dropped call rate, a low blocked call rate, and a good customer experience.

Cell site technicians or RF engineers can make measurements Over-the-Air (OTA) to spot-check a transmitter's coverage and signal quality without taking the cell site off-line. When the OTA test results are ambiguous one can directly connect to the base station to check the signal quality and transmitter power.

Adjacent Channel Leakage Ratio (ACLR)

Adjacent Channel Leakage Ratio (ACLR) measures how much BTS signal gets into neighboring RF channels. ACLR checks the closest (adjacent) and the second closest (alternate) channels. Poor ACLR can lead to interference with adjacent carriers and legal liability. It also can indicate poor signal quality which leads to low throughput.

Cell ID (Sector ID, Group ID)

Cell ID indicates which base station is being measured OTA. The strongest base station at your current location is selected for measurement. Wrong values for Cell ID lead to inability to register. If the cause is excessive overlapping coverage, it also will lead to poor EVM and low data rates

Frequency Error

Frequency Error is a check to see that the carrier frequency is precisely correct. The Spectrum Master can accurately measure Carrier Frequency Error OTA if the instrument is GPS enabled. Calls will drop when mobiles travel at higher speed. In some cases, cell phones cannot hand off into, or out of the cell.

Sync Signal Mapping

Sync Signal Scanner can be used with the GPS to save scan results for later display on a map. The EVM of the strongest synch signal available at that spot is also recorded. The Cell, Sector, and Group ID information is also included so that it's easier to interpret the results. Once the Synch Signals are mapped, it becomes much easier to understand and troubleshoot any interference or coverage issues.

RF Measurements

- Channel Spectrum
 - Channel Power
 - Occupied Bandwidth
- Power vs. Time (TDD only)
 - Frame View
 - Sub-Frame View
 - Total Frame Power
 - DwPTS Power
 - Transmit Off Power
 - Cell ID
 - Timing Error

ACPR

- Spectral Emission Mask
 - Category A or B (Opt 1)
- RF Summary

Modulation Measurements

- Power vs. Resource Block (RB)
 - RB Power (PDSCH)
 - Active RBs, Utilization %
 - Channel Power, Cell ID
 - OSTP, Frame EVM by modulation (FDD only)
- Constellation
 - OPSK, 16 QAM, 64 QAM, 256 QAM (Opt 886)

Modulation Results

- Ref Signal Power (RS)
- Sync Signal Power (SS)
- EVM – rms, peak, max hold
- Frequency Error – Hz, ppm
- Carrier Frequency
- Cell ID

Control Channel Power

- Bar Graph or Table View
- RS, P-SS, S-SS
- PBCH, PCFICH, PHICH, PDCCH
- Total Power (Table View)
- EVM
- Modulation Results

Tx Time Alignment

- Modulation Summary
- Includes EVM by modulation (FDD only)

Antenna Icons

- Detects active antennas (1/2)

Over-the-Air (OTA)

- Scanner
 - Cell ID (Group, Sector)
 - S-SS Power, RSRP, RSRQ, SINR
 - Dominance
 - Modulation Results – On/Off
- Tx Test
 - Scanner
 - RS Power of MIMO antennas
 - Cell ID, Average Power
 - Delta Power (Max-Min)
 - Graph of Antenna Power
 - Modulation Results – On/Off


Mapping

- On-screen
 - S-SS Power, RSRP, RSRQ, or SINR
- Scanner
 - Modulation Results – Off


Spectrum Master™ Compact Handheld Spectrum Analyzer Features




GSM/EDGE Signal Analyzers (Option 880)

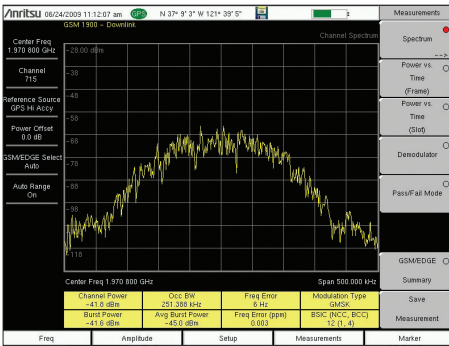


RF Measurement – Occupied Bandwidth
Excessive occupied bandwidth can create interference with adjacent channels or be a sign of poor signal quality, leading to dropped calls.

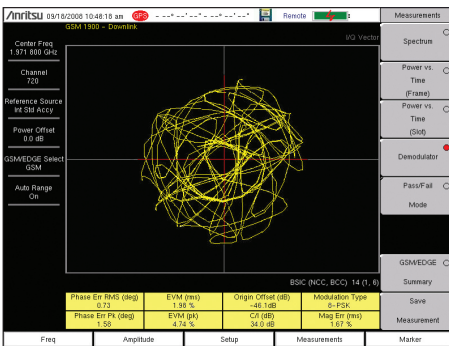

Demodulation – Error Vector Magnitude (EVM)
This is the single most important signal quality measurement. Poor EVM leads to dropped calls, low data rate, low sector capacity, and blocked calls.

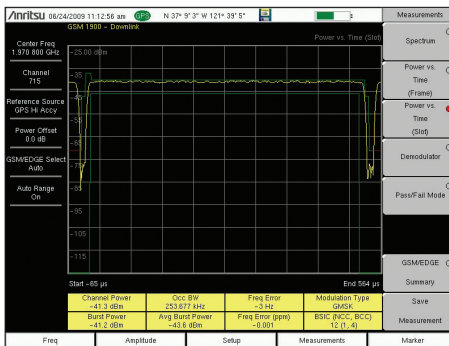

RF Measurement – Average Burst Power
High or low values will create larger areas of cell-to-cell interference and create lower data rates near cell edges. Low values create dropouts and dead zones.

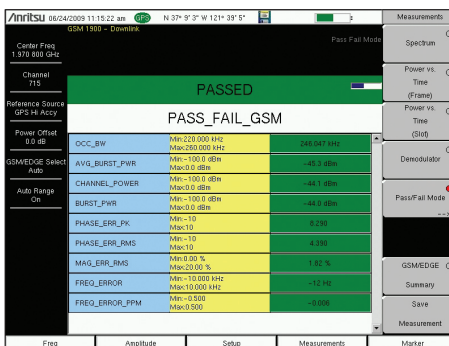

Pass/Fail Test
Set up common test limits, or sets of limits, for each instrument. Inconsistent settings between base stations, leads to inconsistent network behavior.

GSM/EDGE Analyzers

The Spectrum Master features two GSM/EDGE measurement modes.

- RF Measurements
- Demodulation

The goal of these measurements is to increase data rate and capacity by accurate power settings, ensuring low out-of-channel emissions, and good signal quality. These attributes help to create a low dropped call rate, a low blocked call rate, and a good customer experience.

Cell site technicians or RF engineers can make measurements Over-the-Air (OTA) to spot-check a transmitter's coverage and signal quality without taking the cell site off-line. When the OTA test results are ambiguous one can directly connect to the base station to check the signal quality and transmitter power.

For easy identification of which cell you are measuring the Base Station Identity Code (BSIC) gives the base station id, the Network Color Code (NCC) identifies the owner of the network, and the Base Station Color Code (BCC) provides the sector information.

Carrier-to-Interference (C/I)

C/I indicates the quality of the received signal. It also can be used to identify areas of poor signal quality. Low C/I ratios will cause coverage issues including dropped calls, blocked calls, and other handset reception problems.

Phase Error

Phase Error is a measure of the phase difference between an ideal and actual GMSK modulated voice signal. High phase error leads to dropped calls, blocked calls, and missed handoffs.

Origin Offset

Origin Offset is a measure of the DC power leaking through local oscillators and mixers. A high Origin Offset will lower EVM and Phase Error measurements and create higher dropped call rates.

Power versus Time (Slot and Frame)

Power versus Time (Slot and Frame) should be used if the GSM base station is setup to turn RF power off between timeslots. When used OTA, this measurement can also spot GSM signals from other cells. Violations of the mask create dropped calls, low capacity, and small service area issues.

RF Measurements

- Channel Spectrum
 - Channel Power
 - Occupied Bandwidth
 - Burst Power
 - Average Burst Power
 - Frequency Error
 - Modulation Type
 - BSIC (NCC, BCC)
- Multi-channel Spectrum
- Power vs. Time (Frame/Slot)
 - Channel Power
 - Occupied Bandwidth
 - Burst Power
 - Average Burst Power
 - Frequency Error
 - Modulation Type
 - BSIC (NCC, BCC)


Demodulation

- Phase Error
- EVM
- Origin Offset
- C/I
- Modulation Type
- Magnitude Error
- BSIC (NCC, BCC)


Spectrum Master™ Compact Handheld Spectrum Analyzer Features




W-CDMA/HSPA+ Signal Analyzers (Option 881)

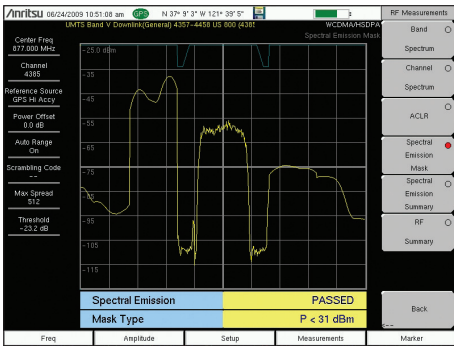


RF Measurements – Spectral Emissions Mask
The 3GPP spectral emission mask is displayed. Failing this test leads to interference with neighboring carriers, legal liability, and low signal quality.

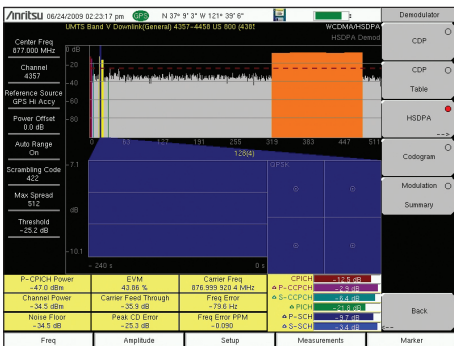

Demodulation – Error Vector Magnitude (EVM)
This is the single most important signal quality measurement. Poor EVM leads to dropped calls, low data rate, low sector capacity, and blocked calls.

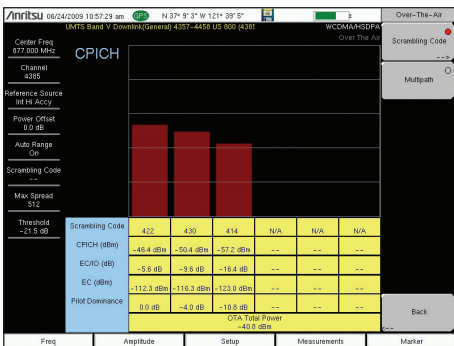

Over-the-Air Measurements – Scrambling Codes
Too many strong sectors at the same location creates pilot pollution. This leads to low data rate, low capacity, and excessive soft handoffs.

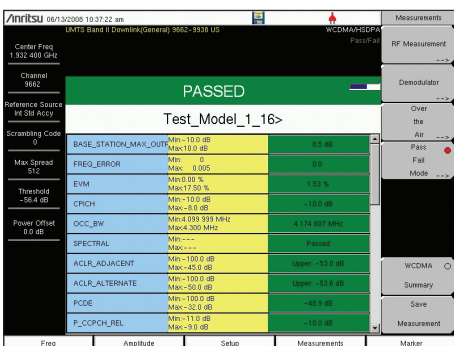

Pass/Fail Test
Set up common test limits, or sets of limits, for each instrument. Inconsistent settings between base stations leads to inconsistent network behavior.

W-CDMA/HSPA+ Signal Analyzers

The Spectrum Master features four W-CDMA/HSPA+ measurement modes:

- RF Measurements
- Demodulation (two choices)
- Over-the Air Measurements (OTA)

The goal of these measurements is to increase data rate and capacity by accurate power settings, ensuring low out-of-channel emissions, and good signal quality. These attributes help to create a low dropped call rate, a low blocked call rate, and a good customer experience.

Cell site technicians or RF engineers can make measurements Over-the-Air (OTA) to spot-check a transmitter's coverage and signal quality without taking the Node B off-line. When the OTA test results are ambiguous one can directly connect to the base station to check the signal quality and transmitter power.

Frequency Error

Frequency Error is a check to see that the carrier frequency is precisely correct. The Spectrum Master can accurately measure Carrier Frequency Error OTA if the instrument is GPS enabled. Calls will drop when mobiles travel at higher speed. In some cases, cell phones cannot hand off into, or out of the cell.

Peak Code Domain Error (PCDE)

Peak Code Domain Error is a measure of the errors between one code channel and another. High PCDE causes dropped calls, low signal quality, low data rate, low sector capacity, and blocked calls.

Multipath

Multipath measurements show how many, how long, and how strong the various radio signal paths are. Multipath signals outside tolerances set by the cell phone or other UE devices become interference. The primary issue is co-channel interference leading to dropped calls and low data rates.

Pass/Fail Mode

The Spectrum Master stores the five test models covering all eleven test scenarios specified in the 3GPP specification (TS 25.141) for testing base station performance and recalls these models for quick easy measurements.

RF Measurements

- Band Spectrum
- Channel Spectrum
- Channel Power
- Occupied Bandwidth
- Peak-to-Average Power
- Spectral Emission Mask
- Single carrier ACLR
- Multi-carrier ACLR
- RF Summary

Demodulation

- Code Domain Power Graph
- P-CPICH Power
- Channel Power
- Noise Floor
- EVM
- Carrier Feed Through
- Peak Code Domain Error
- Carrier Frequency
- Frequency Error
- Control Channel Power
- Abs/Rel/Delta Power
- CPICH, P-CCPCH
- S-CCPCH, PICH
- P-SCH, S-SCH
- HSPA+
- Power vs. Time
- Constellation

- Code Domain Power Table
- Code, Status
- EVM, Modulation Type
- Power, Code Utilization
- Power Amplifier Capacity
- Codogram
- Modulation Summary


Over-the-Air (OTA) Measurements

- Scrambling Code Scanner (Six)
- Scrambling Codes
- CPICH
- E_c/I_0
- E_c
- Pilot Dominance
- OTA Total Power
- Multipath Scanner (Six)
- Six Multipaths
- Tau
- Distance
- RSCP
- Relative Power
- Multipath Power

Spectrum Master™ Compact Handheld Spectrum Analyzer Features




CDMA Signal Analyzers (Option 884)

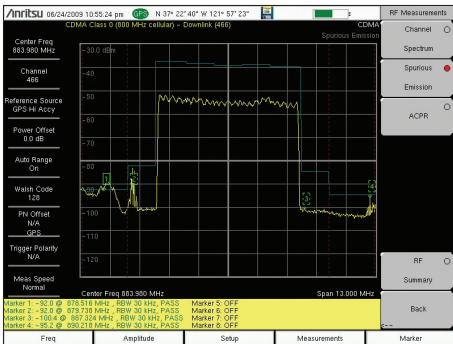


RF Measurements – Spectral Emissions Mask

The 3GPP spectral emission mask is displayed. Failing this test leads to interference with neighboring carriers, legal liability, and low signal quality.

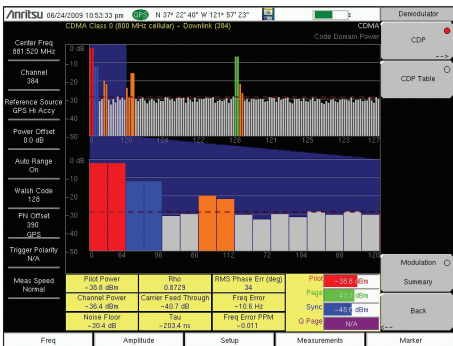


Modulation Quality – EVM

High or low values will create larger areas of cell-to-cell interference and create lower data rates near cell edges. Low values affect in-building coverage.

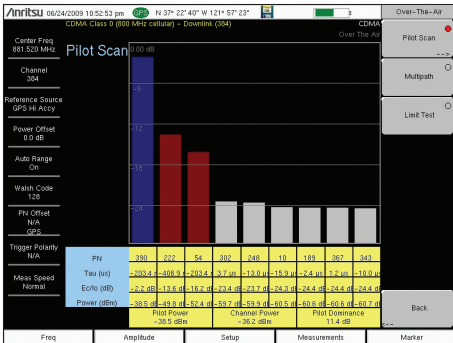

Over-the-Air Measurements – Sync Signal Power Check for uneven amplitude of sub-carriers. Data will be less reliable on weak sub-carriers, creating a lower over-all data rate.

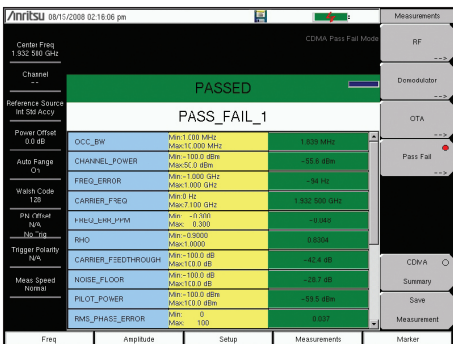

Pass/Fail Test

Set up common test limits, or sets of limits, for each instrument. Inconsistent settings between base stations leads to inconsistent network behavior.

CDMA Signal Analyzers

The Spectrum Master features three CDMA measurement modes:

- RF Measurements
- Demodulation
- Over-the Air Measurements (OTA)

The goal of these measurements is to increase data rate and capacity by accurate power settings, ensuring low out-of-channel emissions, and good signal quality. These attributes help to create a low dropped call rate, a low blocked call rate, and a good customer experience.

Cell site technicians or RF engineers can make measurements Over-the-Air (OTA) to spot-check a transmitter's code coverage and signal quality without taking the cell site off-line. When the OTA test results are ambiguous one can directly connect to the base station to check the signal quality and transmitter power.

Adjacent Channel Power Ratio (ACPR)

ACPR measures how much of the carrier gets into neighboring RF channels. ACPR, and multi-channel ACPR, check the closest (adjacent) and second closest (alternate) RF channels for single and multicarrier signals. High ACPR will create interference for neighboring carriers. This is also an indication of low signal quality and low capacity, which can lead to blocked calls.

RMS Phase Error

RMS Phase Error is a measure of signal distortion caused by frequency instability. Any changes in the reference frequency or the radio's internal local oscillators will cause problems with phase error. A high reading will cause dropped calls, low signal quality, low data rate, low sector capacity, and blocked calls.

Noise Floor

Noise Floor is the average level of the visible code domain noise floor. This will affect Rho. A high noise floor will result in dropped calls, low signal quality, low data rate, low sector capacity, and blocked calls.

E_c/I_0

E_c/I_0 indicates the quality of the signal from each PN. Low E_c/I_0 leads to low data rate and low capacity.

RF Measurements

- Channel Spectrum
- Channel Power
- Occupied Bandwidth
- Peak-to-Average Power
- Spectral Emission Mask
- Multi-carrier ACPR
- RF Summary

Demodulation

- Code Domain Power Graph
- Pilot Power
- Channel Power
- Noise Floor
- Rho
- Carrier Feed Through
- Tau
- RMS Phase Error
- Frequency Error
- Abs/Rel/ Power
- Pilot
- Page
- Sync
- Q Page

Code Domain Power Table

- Code
- Status
- Power
- Multiple Codes
- Code Utilization
- Modulation Summary


Over-the-Air (OTA) Measurements

- Pilot Scanner (Nine)
- PN
- E_c/I_0
- Tau
- Pilot Power
- Channel Power
- Pilot Dominance
- Multipath Scanner (Six)
- E_c/I_0
- Tau
- Channel Power
- Multipath Power
- Limit Test – 10 Tests Averaged
- Rho
- Adjusted Rho
- Multipath
- Pilot Dominance
- Pilot Power
- Pass/Fail Status

Spectrum Master™ Compact Handheld Spectrum Analyzer Features




EV-DO Signal Analyzers (Option 884)

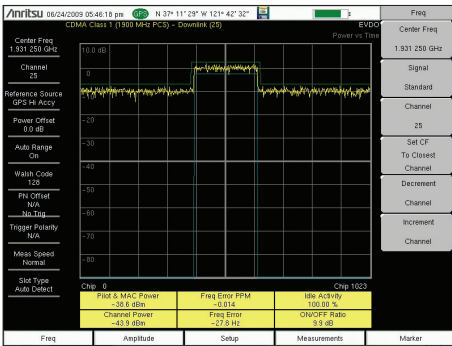


RF Measurements – Pilot and MAC Power

High values will create pilot pollution. High or low values will cause dead spots/dropped calls and cell loading imbalances/blocked calls.

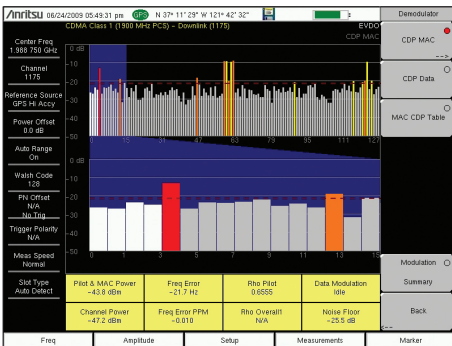


Demodulation – Frequency Error

Calls will drop when mobiles travel at higher speed. In some cases, cell phones cannot hand off into, or out of the cell, creating island cells.

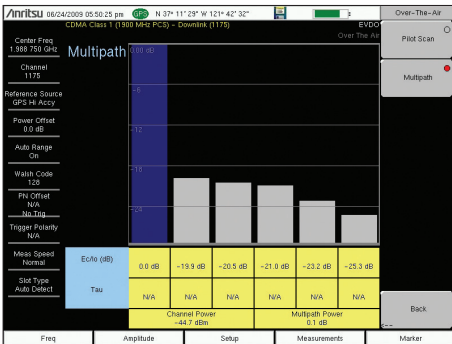

Over-the-Air Measurements – Multipath

Too much Multipath from the selected PN Code is the primary issue of co-channel interference leading to dropped calls and low data rates.

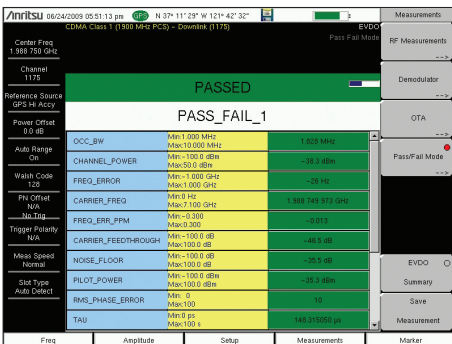

Pass/Fail Test

Set up common test limits, or sets of limits, for each instrument. Inconsistent settings between base stations leads to inconsistent network behavior.

EV-DO Signal Analyzers

The Spectrum Master features three EV-DO measurement modes.

- RF Measurements
- Demodulation
- Over-the Air Measurements (OTA)

The goal of these measurements is to increase data rate and capacity by accurate power settings, ensuring low out-of-channel emissions, and good signal quality. These attributes help to create a low dropped call rate, a low blocked call rate, and a good customer experience.

Cell site technicians or RF engineers can make measurements Over-the-Air (OTA) to spot-check a transmitter's coverage and signal quality without taking the cell site off-line. When the OTA test results are ambiguous one can directly connect to the base station to check the signal quality and transmitter power.

Spectral Emission Mask (SEM)

SEM is a way to check out-of-channel spurious emissions near the carrier. These spurious emissions both indicate distortion in the signal and can create interference with carriers in the adjacent channels. Faults lead to interference and thus, lower data rates, for adjacent carriers. Faults also may lead to legal liability and low in-channel signal quality.

Rho

Rho is a measure of modulation quality. Rho Pilot, Rho Mac, and Rho Data are the primary signal quality tests for EV-DO base stations. Low Rho results in dropped calls, low signal quality, low data rate, low sector capacity, and blocked calls. This is the single most important signal quality measurement.

PN Codes

PN Code overlap is checked by the pilot scanner. Too many strong pilots create pilot pollution which results in low data rate, low capacity, and excessive soft handoffs.

Over-the-Air (OTA) Pilot Power

OTA Pilot Power indicates signal strength. Low OTA Pilot Power causes dropped calls, low data rate, and low capacity.

RF Measurements

- Channel Spectrum
 - Channel Power
 - Occupied Bandwidth
 - Peak-to-Average Power
- Power vs. Time
 - Pilot & MAC Power
 - Channel Power
 - Frequency Error
 - Idle Activity
 - On/Off Ratio
- Spectral Emission Mask
- Multi-carrier ACPR
- RF Summary

Demodulation

- MAC Code Domain Power Graph
 - Pilot & MAC Power
 - Channel Power
 - Frequency Error
 - Rho Pilot
 - Rho Overall
 - Data Modulation
 - Noise Floor
- MAC Code Domain Power Table
 - Code
 - Status
 - Power
 - Code Utilization
- Data Code Domain Power
 - Active Data Power
 - Data Modulation
 - Rho Pilot
 - Rho Overall
 - Maximum Data CDP
 - Minimum Data CDP
- Modulation Summary


Over-the-Air (OTA) Measurements

- Pilot Scanner (Nine)
 - PN
 - E/I₀
 - Tau
 - Pilot Power
 - Channel Power
 - Pilot Dominance
- Multipath Scanner (Six)
 - E/I₀
 - Tau
 - Channel Power
 - Multipath Power

Spectrum Master™ Compact Handheld Spectrum Analyzer Features




Fixed WiMAX Signal Analyzers (Option 885)

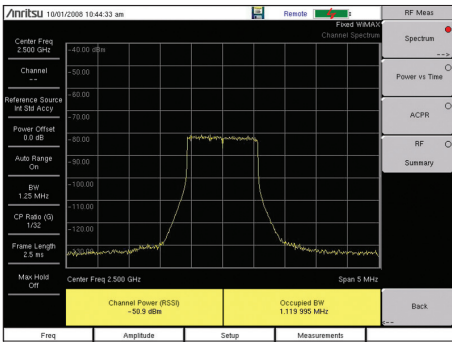


RF Measurements – Occupied Bandwidth

The bandwidth that contains 99% of the total carrier power. Excessive occupied bandwidth means excessive adjacent channel interference.

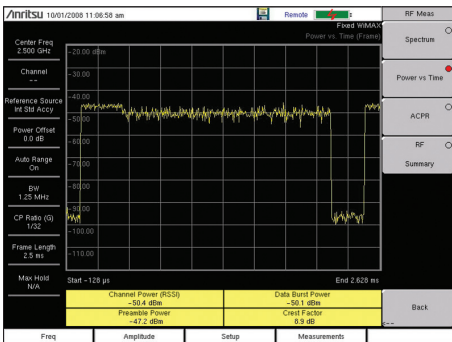


RF Measurement – Preamble Power

High or low values will create larger areas of cell-to-cell interferences and create lower data rates near cell edges. Low values affect in-building coverage.

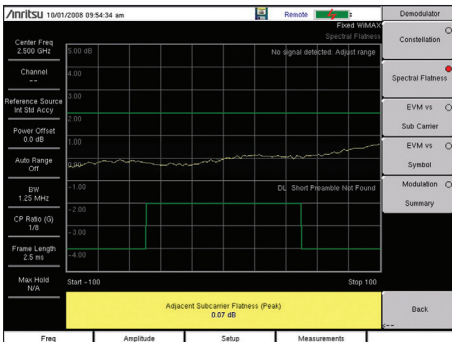

Demodulation – Spectral Flatness

Check for uneven amplitude of sub-carriers. Data will be less reliable on weak sub-carriers, creating a lower over-all data rate.

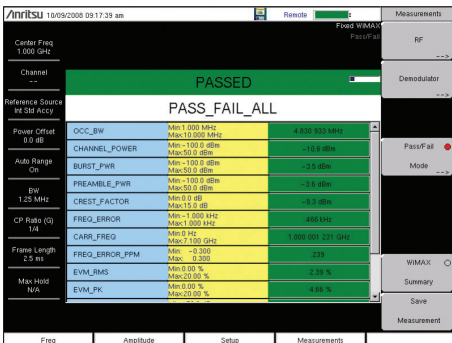

Pass/Fail Test

Set up common test limits, or sets of limits, for each instrument. Inconsistent settings between base stations leads to inconsistent network behavior.

Fixed WiMAX Signal Analyzers

The Spectrum Master features two Fixed WiMAX measurement modes:

- RF Measurements
- Demodulation

The goal of these measurements is to increase data rate and capacity by accurate power settings, ensuring low out-of-channel emissions, and good signal quality. These attributes help to create a low dropped call rate, a low blocked call rate, and a good customer experience.

Cell site technicians or RF engineers can make measurements Over-the-Air (OTA) to spot-check a transmitter's coverage and signal quality without taking the cell site off-line. When the OTA test results are ambiguous one can directly connect to the base station to check the signal quality and transmitter power.

Adjacent Channel Power Ratio (ACPR)

Adjacent Channel Power Ratio (ACPR) measures how much BTS signal gets into neighboring RF channels. ACPR checks the closest (adjacent) and the second closest (alternate) channels. Poor ACPR can lead to interference with adjacent carriers and legal liability. It also can indicate poor signal quality which leads to low throughput.

Base Station ID

Base Station ID indicates which base station is being measured OTA. The strongest base station at your current location is selected for measurement. Wrong values for base station ID lead to inability to register. If the cause is excessive overlapping coverage, it also will lead to poor RCE and low data rates.

Relative Constellation Error (RCE)

RCE, when used Over-the-Air (OTA), is a test that is ideal for checking received signal quality. High RCE leads directly to low data rate, which creates dissatisfied customers and lowers the data capacity of the sector. Very high RCE results in dropped calls, timeouts, and inability to register.

Adjacent Subcarrier Flatness (Peak)

Adjacent Subcarrier Flatness (Peak) is measured between one sub-carrier and the next. Poor flatness will give the weaker sub-carriers a high bit error rate and lower capacity. Data will be less reliable on weak sub-carriers, creating a lower over-all data rate.

RF Measurements

Channel Spectrum
Channel Power
Occupied Bandwidth

Power vs. Time
Channel Power
Preamble Power
Data Burst Power
Crest Factor

ACLR
RF Summary


Demodulation

Constellation
RCE (RMS/Peak)
EVM (RMS/Peak)
Frequency Error
Carrier Frequency
Base Station ID
Spectral Flatness
Adjacent Subcarrier Flatness
EVM vs. Subcarrier/Symbol
RCE
EVM
Frequency Error
Carrier Frequency
Base Station ID
Modulation Summary

Spectrum Master™ Compact Handheld Spectrum Analyzer Features




Mobile WiMAX* Signal Analyzers (Option 885)

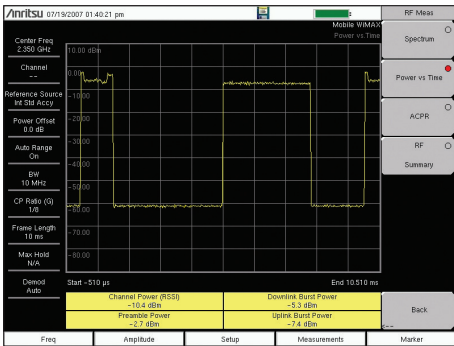


RF Measurement – Preamble Power

High or low values will create larger areas of cell-to-cell interference and create lower data rates near cell edges. Low values affect in-building coverage.

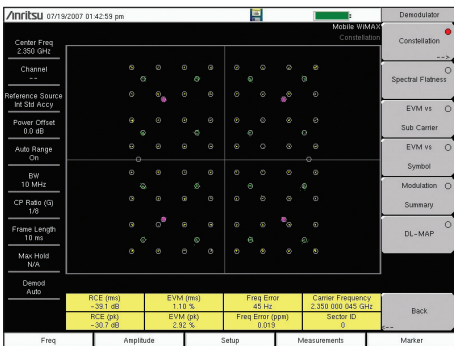


Demodulation – Frequency Error

Calls will drop when user's equipment travels at high speed. In severe cases, handoffs will not be possible at any speed, creating island cells.

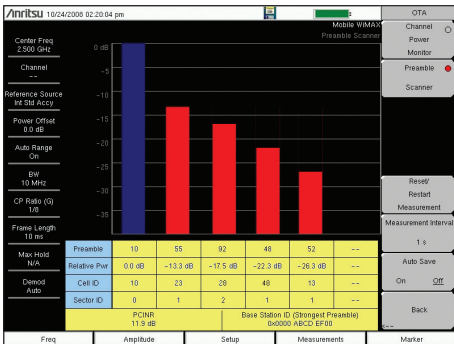

Over-the-Air Measurements – PCINR

A low Physical Carrier to Interference plus Noise Ratio (PCINR) indicates poor signal quality, low data rate and reduced sector capacity.

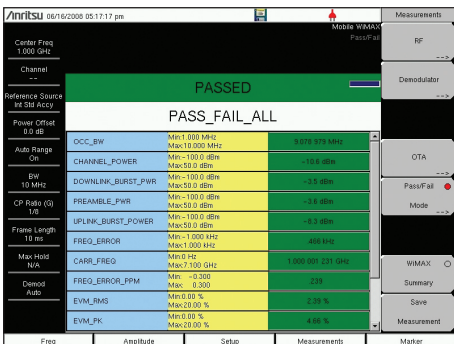

Pass/Fail Test

Set up common test limits, or sets of limits, for each instrument. Inconsistent settings between base stations leads to inconsistent network behavior.

Mobile WiMAX Signal Analyzers

The Spectrum Master features three Mobile WiMAX measurement modes:

- RF Measurements
- Demodulation
- Over-the Air Measurements (OTA)

The goal of these measurements is to increase data rate and capacity by accurate power settings, ensuring low out-of-channel emissions, and good signal quality. These attributes help to create a low dropped call rate, a low blocked call rate, and a good customer experience.

Cell site technicians or RF engineers can make measurements Over-the-Air (OTA) to spot-check a transmitter's coverage and signal quality without taking the cell site off-line. When the OTA test results are ambiguous one can directly connect to the base station to check the signal quality and transmitter power.

Cell ID, Sector ID, and Preamble

Cell ID, Sector ID, and Preamble show which cell, sector, and segment are being measured OTA. The strongest signal is selected automatically for the additional PCINR and Base Station ID measurement. Wrong values for cell, sector and segment ID lead to dropped handoffs and island cells. If the cause is excessive coverage, it also will lead to large areas of low data rates.

Error Vector Magnitude (EVM) Relative Constellation Error (RCE)

RCE and EVM measure the difference between the actual and ideal signal. RCE is measured in dB and EVM in percent. A known modulation is required to make these measurements. High RCE and EVM causes low signal quality, low data rate, and low sector capacity. This is the single most important signal quality measurement.

Preamble Mapping (Mobile WiMAX)

Preamble Scanner can be used with the GPS to save scan results for later display on a map. PCINR ratio for the strongest WiMAX preamble available at that spot. The Base Station ID and Sector ID information are also included so that it's easier to interpret the results. Once PCINR data is mapped, it becomes much easier to understand and troubleshoot any interference or coverage issues.

RF Measurements

- Channel Spectrum
- Channel Power
- Occupied Bandwidth
- Power vs. Time
- Channel Power
- Preamble Power
- Downlink Burst Power
- Uplink Burst Power


- ACPR
- RF Summary

Demodulation

- Constellation
 - RCE (RMS/Peak)
 - EVM (RMS/Peak)
- Frequency Error
- CINR
- Base Station ID
- Sector ID
- Spectral Flatness
 - Adjacent Subcarrier Flatness
- EVM vs. Subcarrier/Symbol
 - RCE (RMS/Peak)
 - EVM (RMS/Peak)
- Frequency Error
- CINR
- Base Station ID
- Sector ID
- DL-MAP (Tree View)
- Modulation Summary

Over-the-Air (OTA)

- Channel Power Monitor
- Preamble Scanner (Six)
 - Preamble
 - Relative Power
 - Cell ID
 - Sector ID
 - PCINR
 - Dominant Preamble
 - Base Station ID

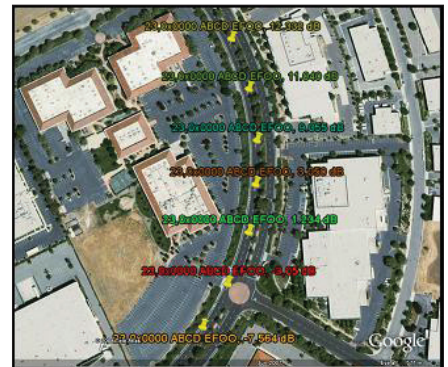


* Conforms to IEEE Std. 802.16e-2005, WiMAX Forum® Air Interface - Mobile System Profile - Release 1.0 Certified, System Profiles according to WMF-T24-001-R010v07.

Spectrum Master™ Compact Handheld Spectrum Analyzer Features




TD-SCDMA/HSPA+ Signal Analyzers (Option 882)

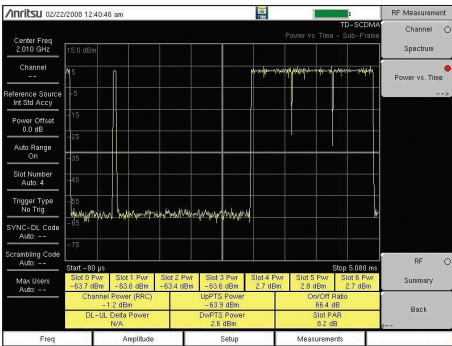


RF Measurement – Time Slot Power

Empty downlink slots with access power will reduce the sensitivity of the receiver and the size of the sector. This will cause dropped and blocked calls.

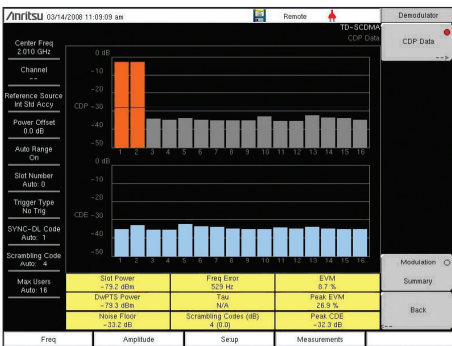


Demodulation – Scrambling Code

Scrambling Code measurements provide a check for the BTS settings. Scrambling Code errors can cause a very high dropped call rate on hand off.

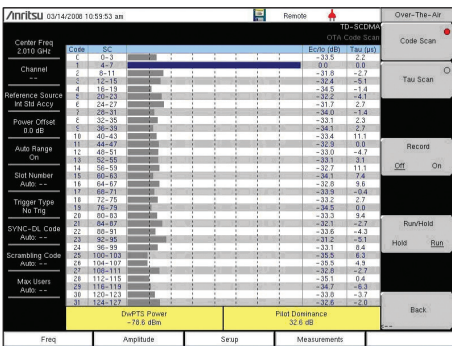

Over-the-Air Measurements – Code Scanner

Excessive sync codes produce too much co-channel interference, which leads to lower capacity, low data rate and excessive handoffs.

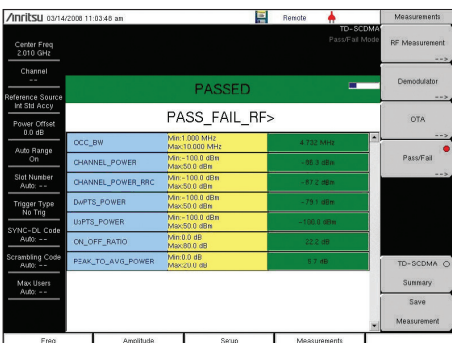

Pass/Fail Test

Set up common test limits, or sets of limits, for each instrument. Inconsistent settings between base stations leads to inconsistent network behavior.

TD-SCDMA/HSPA+ Signal Analyzers

The Spectrum Master features three TD-SCDMA/HSPA+ measurement modes:

- RF Measurements
- Demodulation
- Over-the Air Measurements (OTA)

The goal of these measurements is to increase data rate and capacity by accurate power settings, ensuring low out-of-channel emissions, and good signal quality. These attributes help to create a low dropped call rate, a low blocked call rate, and a good customer experience.

Cell site technicians or RF engineers can make measurements Over-the-Air (OTA) to spot-check a transmitter's coverage and signal quality without taking the cell site off-line. When the OTA test results are ambiguous one can directly connect to the base station to check the signal quality and transmitter power.

Error Vector Magnitude (EVM) EVM is the ratio of errors, or distortions, in the actual signal, compared to a perfect signal. EVM faults will result in poor signal quality to all user equipment. In turn, this will result in extended hand off time, lower sector capacity, and lower data rates, increasing dropped and blocked calls.

Peak Code Domain Error (Peak CDE)

Peak CDE is the EVM of the worst code. Code Domain displays show the traffic in a specific time slot. Peak CDE faults will result in poor signal quality to all user equipment. In turn, this will result in extended hand off time, lower sector capacity, and lower data rates.

OTA Tau Scanner E_c/I_o

E_c/I_o faults indicate excessive or inadequate coverage and lead to low capacity, low data rates, extended handoffs, and excessive call drops.

DwPTS OTA Power Mapping

DwPTS OTA Power when added to E_c/I_o gives the absolute sync code power which is often proportional to PCCPCH (pilot) power. Use this to check and plot coverage with GPS. Coverage plots can be downloaded to PC based mapping programs for later analysis. Poor readings will lead to low capacity, low data rates, excessive call drops and call blocking.

RF Measurements

- Channel Spectrum
- Channel Power
- Occupied Bandwidth
- Left Channel Power
- Left Channel Occ B/W
- Right Channel Power
- Right Channel Occ B/W

Power vs. Time

- Six Slot Powers
- Channel Power (RRC)
- DL-UL Delta Power
- UpPTS Power
- DwPTS Power
- On/Off Ratio
- Slot Peak-to-Average Power

Spectral Emission

RF Summary


Demodulation

- Code Domain Power/Error (QPSK/8 PSK/16 QAM)
- Slot Power
- DwPTS Power
- Noise Floor
- Frequency Error
- Tau
- Scrambling Code
- EVM
- Peak EVM
- Peak Code Domain Error

Modulation Summary

Over-the-Air (OTA) Measurements


- Code Scan (32)
- Scrambling Code Group
- Tau
- E_c/I_o
- DwPTS Power
- Pilot Dominance
- Tau Scan (Six)
- Sync-DL#
- Tau
- E_c/I_o
- DwPTS Power
- Pilot Dominance

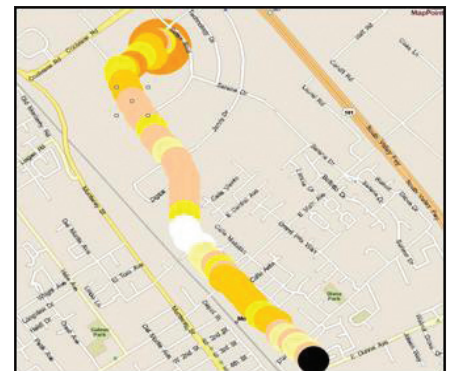


Spectrum Master™ Compact Handheld Spectrum Analyzer Features




NB-IoT Analyzer (Option 887)

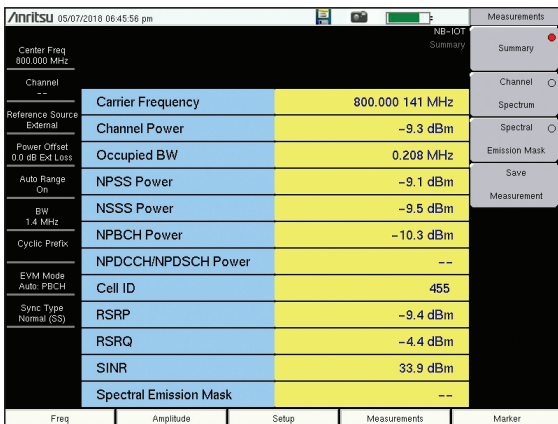

NB-IoT Analyzer Summary Screen

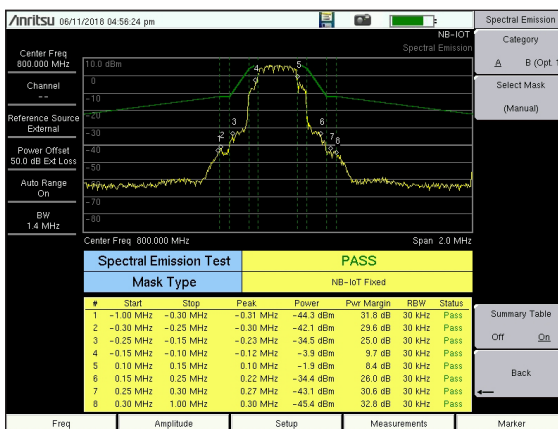

NB-IoT Analyzer Spectral Emission Mask

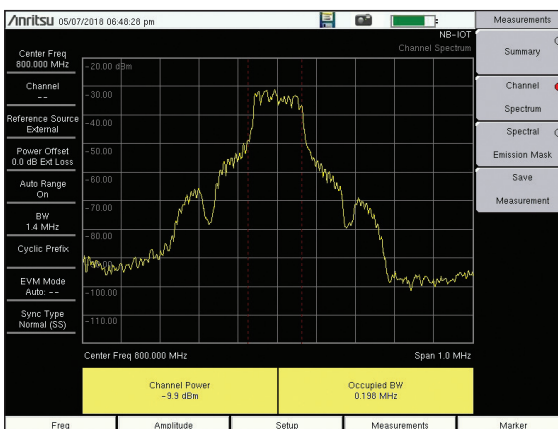

NB-IoT Analyzer Channel Spectrum

NB-IoT Analyzer (Option 887)

Narrowband Internet of Things (NB-IoT), also known as LTE Cat-NB1, is a cellular technology introduced in 3GPP Release 13 for providing wide-area coverage for the Internet of Things (IoT).

The NB-IoT Analyzer is ideal for network operator installation and maintenance teams, along with their contractors that are deploying or have already deployed NB-IoT services. This feature allows field installation and maintenance teams to verify that NB-IoT services are deployed and are working as intended.

Key Features and Benefits


The NB-IoT analyzer, Option 887 has the following features:

- Summary screen showing the following RF measurements:
 - Carrier Frequency
 - Channel Power
 - Occupied BW
 - NPSS Power
 - NSSS Power
 - NPBCH Power
 - NPDCCH/NPDSCH Power
 - Cell ID
 - RSRP
 - RSRQ
 - SINR
 - Spectral Emission Mask (Pass/Fail)
- Channel Spectrum
- Spectral Emission Mask

Spectrum Master™ Compact Handheld Spectrum Analyzer Features




ISDB-T Signal Analyzers (Options 30, 79, 32)

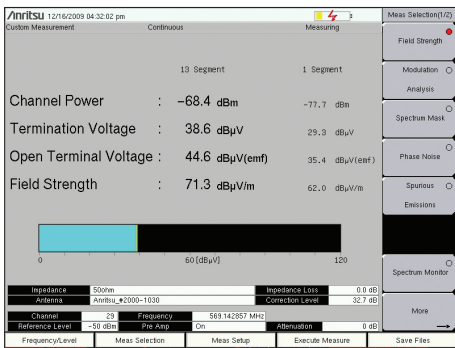


RF Measurements – Signal Power

The Signal Power screen showing the transmission channel power and signal field strength used to assess suitable reception coverage area.

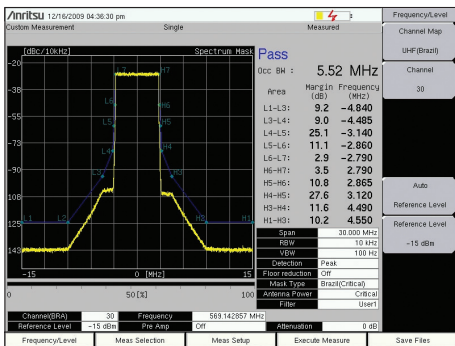


RF Measurements – Spectrum Mask

The Spectrum Mask measurement is shown. ISDB-T systems in Japan and South America call for different spectrum mask specifications. Both are catered for.

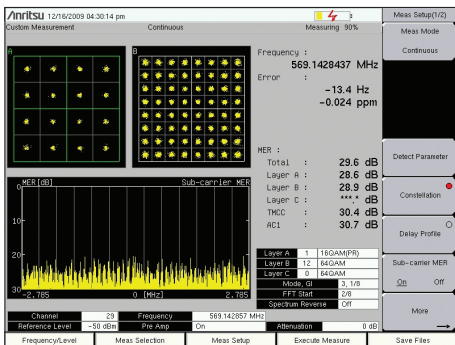

Signal Analysis – Constellation and MER

This is the single most important signal quality measurement. Poor MER leads to higher received errors which can cause serious picture degradation.

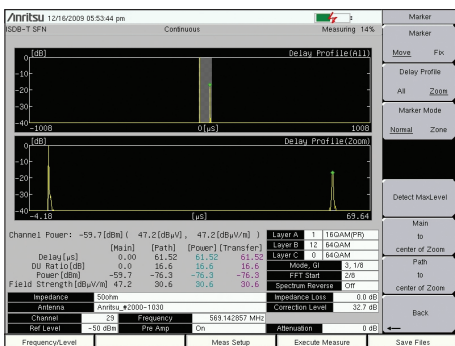

SFN Analysis – Delay Profile

This measurement indicates whether signals from different transmitters in an SFN are received correctly to prevent interference and high received errors.

ISDB-T Signal Analyzer

The Spectrum Master features options that enable area survey measurements and the installation and field maintenance of ISDB-T digital broadcasting equipment in accordance with ARIB (Japan) and ABNT (Brazil) standards.

The user has three measurement modes to choose from depending on the his skill level and test environment: Custom, where specific measurements and setups are chosen; Easy, where some setup parameters are automatically set or detected; Batch, where the user can specify all relevant measurements, setups and channels for automatic measurement and results' display for fast and efficient field testing.

The goal of all measurements is to ensure digital TV transmitters are configured according to license agreements and optimized for error-free reception over the entire coverage area helping to create an excellent televisual experience.

Field Strength

Field Strength (dBuV/m) measurement enables a technician to assess whether signals will be detected at a location with sufficient power for good TV reception. The antenna factors of the antenna used for measurement can be compensated for to facilitate easy measurement comparison.

Modulation Error Ratio (MER)

MER is the fundamental measurement in digital TV broadcast systems. It quantifies the modulation signal quality directly. It is essential for managing signal margin and the deterioration of equipment with time, as well as for maintaining stable broadcast services. MER is independent of modulation type so MER measurements can be easily compared.

Delay Profile

This function measures the difference in time and frequency of multi-path signals caused by reflections from obstacles or from other transmitters. By measuring the channel frequency response, the multi-path effect or frequency selective fading can be observed. It is important that all signals from reflections or other transmitters are received within the guard interval to prevent inter-symbol interference which will cause reception degradation. Delay Profile measurement is useful for adjusting the timing of SFN repeaters to achieve this.

RF Measurements (Option 30)

- Signal Power
 - Channel Power
 - Termination Voltage
 - Open Terminal Voltage
 - Field Strength
- Spectrum Monitor
 - Channel Power
 - Zone Center Channel
 - Zone Center Frequency
- Spectrum Mask
 - Mask (Standard A) Japan
 - Mask (Standard B) Japan
 - Mask (Critical) Brazil
 - Mask (Sub-critical) Brazil
 - Mask (Non-critical) Brazil
- Phase Noise
- Spurious Emissions

Signal Analysis (Option 30)

- Constellation (w/zoom)
 - Layer A, B, C, TMCC
- Sub-carrier MER
- Delay Profile (w/zoom)
- Frequency Response
- Measured Data
 - Frequency
 - Frequency Offset
 - MER (Total, Layer A/B/C, TMCC, AC1)
 - Modulation (Layer A/B/C)
 - Mode, GI
 - Sub-carrier MER w/marker
 - Delay w/marker
 - Frequency Response w/marker

BER Analysis (Option 79)

- Layer A, Layer B, Layer C
- BER and Error Count per Layer
 - Before RS
 - Before Viterbi
- PER and Error Count per Layer
- MPEG Bit Rate per Layer
- TMCC Information per Layer

- Modulation
- Code Rate
- Interleave
- Segments

















- Channel Power
- Mode, GI
- Signal Sync Status
- ASI Out

SFN Analysis (Option 32)

- Impulse Response (w/zoom)
- In-band Spectrum
- Measured Data
 - Channel Power
 - Delay
 - DU Ratio
 - Power
 - Field Strength

Spectrum Master™ Ordering Information

Ordering Information – Instrument Options

	MS2712E	MS2713E	Description
	9 kHz to 4 GHz	9 kHz to 6 GHz	Spectrum Analyzer
	Options	Options	
	MS2712E-0010	MS2713E-0010	Bias-Tee
	MS2712E-0009	MS2713E-0009	20 MHz Bandwidth Demod
	MS2712E-0031	MS2713E-0031	GPS Receiver
	MS2712E-0019	MS2713E-0019	High-Accuracy Power Meter (Requires External Power Sensor)
	MS2712E-0029	MS2713E-0029	Power Meter
	MS2712E-0025	MS2713E-0025	Interference Analyzer (Option 31 recommended)
	MS2712E-0027	MS2713E-0027	Channel Scanner
	MS2712E-0431	MS2713E-0431	Coverage Mapping (Requires Option 31)
	MS2712E-0444	MS2713E-0444	EMF Measurements (Requires Anritsu Isotropic Antenna)
	MS2712E-0090	MS2713E-0090	Gated Sweep
	MS2712E-0020	MS2713E-0020	Tracking Generator
	MS2712E-0509	MS2713E-0509	AM/FM/PM Analyzer
	MS2712E-0880	MS2713E-0880	GSM/GPRS/EDGE Measurements (Requires Option 9)
	MS2712E-0881	MS2713E-0881	W-CDMA/HSPA+ Measurements (Requires Option 9; Option 31 recommended)
	MS2712E-0882	MS2713E-0882	TD-SCDMA/HSPA+ Measurements (Requires Option 9; requires Option 31 for full functionality)
	MS2712E-0883	MS2713E-0883	LTE/LTE-A FDD/TDD Measurements (Requires Option 9; requires Option 31 for full functionality)
	MS2712E-0886	MS2713E-0886	LTE 256 QAM Demodulation (Requires Option 883)
	MS2712E-0884	MS2713E-0884	CDMA/EV-DO Measurements (Requires Option 9; requires Option 31 for full functionality)
	MS2712E-0885	MS2713E-0885	WiMAX Fixed/Mobile Measurements (Requires Option 9; requires Option 31 for full functionality)
	MS2712E-0886	MS2713E-0886	LTE 256 QAM Demodulation (Requires Option 883)
	MS2712E-0887	MS2713E-0887	NB-IoT Analyzer (Requires Option 9)
	MS2712E-0030	MS2713E-0030	ISDN-T Digital Video Measurements (Requires Option 9)
	MS2712E-0032	MS2713E-0032	ISDB-T SFN Measurements (Requires Option 9)
	MS2712E-0079	MS2713E-0079	ISDB-T BER Measurements (Requires Option 9 and 30. Cannot be ordered with Option 759)
	MS2712E-0064	MS2713E-0064	DVB-T/H Digital Video Measurements (Requires Option 9)
	MS2712E-0078	MS2713E-0078	SDVB-T/H SFN Measurements (Requires Option 9)
	MS2712E-0057	MS2713E-0057	DVB-T/H BER Measurements (Requires Option 64. Cannot be ordered with Option 759)
	MS2712E-0098	MS2713E-0098	Standard Calibration (ANSI Z540-1-1994)
	MS2712E-0099	MS2713E-0099	Premium Calibration (ANSI Z540-1-1994) plus printed test data

Spectrum Master™ Ordering Information

Standard Accessories (included with instrument)




Part Number	Description
2000-1371-R	Ethernet Cable, 7 ft/213 cm
2000-1685-R	Soft Carrying Case
2000-1691-R	Stylus with Coiled Tether
2000-1797-R	Touchscreen Protective Film, 8.4 in (one factory-installed, one spare)
633-75	High Capacity Li-Ion Battery
40-187-R	AC/DC Power Supply
806-141-R	Automotive Power Adapter, 12 VDC, 60 W
3-2000-1498	USB A-mini B Cable, 10 ft/305 cm
	Certificate of Calibration and Conformance
	Three-year warranty (battery one-year warranty)

Power Sensors (for complete ordering information see the respective data sheets of each sensor)



Model Number	Description
MA24105A	Inline Peak Power Sensor, 350 MHz to 4 GHz, +3 dBm to +51.76 dBm
MA24106A	RF USB Power Sensor, 50 MHz to 6 GHz, +23 dBm
MA24108A	Microwave USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24118A	Microwave USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24126A	Microwave USB Power Sensor, 10 MHz to 26 GHz, +20 dBm
MA24208A	Microwave Universal USB Power Sensor, 10 MHz to 8 GHz, +20 dBm
MA24218A	Microwave Universal USB Power Sensor, 10 MHz to 18 GHz, +20 dBm
MA24330A	Microwave CW USB Power Sensor, 10 MHz to 33 GHz, +20 dBm
MA24340A	Microwave CW USB Power Sensor, 10 MHz to 40 GHz, +20 dBm
MA24350A	Microwave CW USB Power Sensor, 10 MHz to 50 GHz, +20 dBm
MA25100A	RF Power Indicator

Manuals (soft copy included at www.anritsu.com)

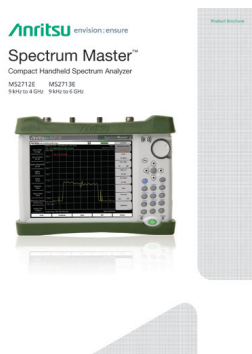

Part Number	Description
10580-00340	Spectrum Master User Guide
10580-00349	Spectrum Analyzer Measurement Guide
10580-00339	Tracking Generator Measurement Guide
10580-00240	Power Meter Measurement Guide
10580-00234	3GPP Signal Analyzer Measurement Guide - GSM/EDGE, W-CDMA/HSPA+, TD-SCDMA/HSPA+, LTE, TD-LTE
10580-00235	3GPP2 Signal Analyzer Measurement Guide - CDMA, EV-DO
10580-00236	WiMAX Signal Analyzer Measurement Guide - Fixed WiMAX, Mobile WiMAX
10580-00341	Spectrum Master Programming Manual
10580-00342	Spectrum Master Maintenance Manual

• United States**Anritsu Americas Sales Company**

450 Century Parkway, Suite 190,
Allen, TX 75013 U.S.A.
Phone: +1-800-Anritsu (1/800-267-4878)

• Canada**Anritsu Electronics Ltd.**

700 Silver Seven Road, Suite 120,
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil**Anritsu Eletrônica Ltda.**

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - Sao Paulo - SP - Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico**Anritsu Company, S.A. de C.V.**

Blvd Miguel de Cervantes Saavedra #169 Piso 1, Col. Granada
Mexico, Ciudad de Mexico, 11520, MEXICO
Phone: +52-55-4169-7104

• United Kingdom**Anritsu EMEA Ltd.**

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

• France**Anritsu S.A.**

12 avenue du Québec, Batiment Iris 1-Silic 612,
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany**Anritsu GmbH**

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy**Anritsu S.r.l.**

Via Elio Vittorini 129, 00144 Roma Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden**Anritsu AB**

Isafjordsgatan 32C, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00

• Finland**Anritsu AB**

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark**Anritsu A/S**

c/o Regus Winghouse, Ørestads Boulevard 73, 4th floor,
2300 Copenhagen S, Denmark
Phone: +45-7211-2200

• Russia**Anritsu EMEA Ltd.****Representation Office in Russia**

Tverskaya str. 16/2, bld. 1, 7th floor.
Moscow, 125009, Russia
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• Spain**Anritsu EMEA Ltd.****Representation Office in Spain**

Edificio Cuzco IV, Po. de la Castellana, 141, Pta. 5
28046, Madrid, Spain
Phone: +34-915-726-761
Fax: +34-915-726-621

• United Arab Emirates**Anritsu EMEA Ltd.****Dubai Liaison Office**

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• India**Anritsu India Pvt Ltd.**

6th Floor, Indiqube ETA, No.38/4, Adjacent to EMC2,
Doddanekundi, Outer Ring Road, Bengaluru - 560048, India
Phone: +91-80-6728-1300
Fax: +91-80-6728-1301

• Singapore**Anritsu Pte. Ltd.**

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• Vietnam**Anritsu Company Limited**

Room No. 1635, 16th Floor, ICON 4 Tower, 243A De La
Thanh Street,
Lang Thuong Ward, Dong Da District, Hanoi, Vietnam
Phone: +84-24-3760-6216
Fax: +84-24-6266-2608

• P. R. China (Shanghai)**Anritsu (China) Co., Ltd.**

27th Floor, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, Xu Hui Di District,
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P. R. China (Hong Kong)**Anritsu Company Ltd.**

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P. R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan**Anritsu Corporation**

8-5, Tamura-cho, Atsugi-shi,
Kanagawa, 243-0016 Japan
Phone: +81-46-296-6509
Fax: +81-46-225-8352

• Korea**Anritsu Corporation, Ltd.**

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 13494 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia**Anritsu Pty Ltd.**

Unit 20, 21-35 Ricketts Road,
Mount Waverley, Victoria 3149, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan**Anritsu Company Inc.**

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817