


FTB-7500E—Metro/Long-Haul OTDR

LONG-DISTANCE FIBER CHARACTERIZATION AND FIBER UPGRADES

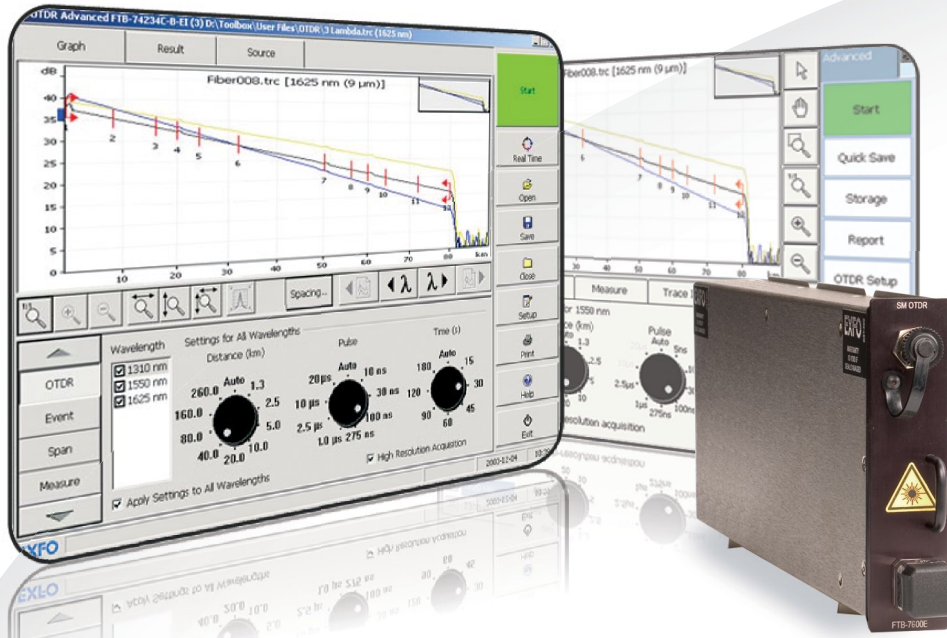

40G

EXFO Connect
Compatible



High dynamic range combined with high resolution for truly accurate fiber characterization

KEY FEATURES

Dynamic range of up to 45 dB

Up to 256 000 sampling points

Event dead zone of 0.8 m and attenuation dead zone of 4 m

Industry-leading linearity of ± 0.03 dB/dB

EXFO Connect-compatible: automated asset management; data goes through the cloud and into a dynamic database

APPLICATIONS

Metro network testing

Long-haul network testing

PLATFORM COMPATIBILITY



Platform
FTB-2/FTB-2 Pro



Platform
FTB-200



Platform
FTB-500

EXFO

EXFO Connect



AUTOMATE ASSET MANAGEMENT. PUSH TEST DATA IN THE CLOUD. GET CONNECTED.

EXFO Connect pushes and stores test equipment and test data content automatically in the cloud, allowing you to streamline test operation from build-out to maintenance.

EXPERT TEST TOOLS ON THE FTB-200 PLATFORM

Expert Test Tools is a series of platform-based software testing tools that enhance the value of the FTB-200 platform, providing additional testing capabilities without the need for additional modules or units.

EXPERT TEST TOOLS

Expert VoIP TEST TOOLS

EXpert VoIP generates a voice-over-IP call directly from the test platform to validate performance during service turn-up and troubleshooting.

- › Supports a wide range of signaling protocols, including SIP, SCCP, H.248/Megaco and H.323
- › Supports MOS and R-factor quality metrics
- › Simplifies testing with configurable pass/fail thresholds and RTP metrics

Expert IP TEST TOOLS

EXpert IP integrates six commonly used datacom test tools into one platform-based application to ensure that field technicians are prepared for a wide range of testing needs.

- › Rapidly performs debugging sequences with VLAN scan and LAN discovery
- › Validates end-to-end ping and traceroute
- › Verifies FTP performance and HTTP availability

Expert IPTV TEST TOOLS

This powerful IPTV quality assessment solution enables set-top-box emulation and passive monitoring of IPTV streams, allowing quick and easy pass/fail verification of IPTV installations.


- › Real-time video preview
- › Analyzes up to 10 video streams
- › Comprehensive QoS and QoE metrics including MOS score

All specifications valid at 23 °C ± 2 °C with an FC/APC connector, unless otherwise specified.

| TECHNICAL SPECIFICATIONS | |
|---|--|
| Model ^a | FTB-7500E |
| Wavelengths (nm) ^b | 1310 ± 20/1550 ± 20/1625 ± 10 |
| Dynamic range at 20 μs (dB) ^c | 45/45/45 |
| Event dead zone (m) ^d | 0.8 |
| Attenuation dead zone (m) ^d | 4/4.5/4.5 |
| Distance range (km) | 1.25, 2.5, 5, 10, 20, 40, 80, 160, 260, 400 |
| Pulse width (ns) | 5, 10, 30, 100, 275, 1000, 2500, 10 000, 20 000 |
| Linearity (dB/dB) ^b | ±0.03 |
| Loss threshold (dB) | 0.01 |
| Loss resolution (dB) | 0.001 |
| Sampling resolution (m) | 0.04 to 5 |
| Sampling points | Up to 256 000 |
| Distance uncertainty (m) ^e | ±(0.75 + 0.001 % x distance + sampling resolution) |
| Measurement time | User-defined (5 sec. minimum to 60 min. maximum) |
| Typical real-time refresh (Hz) | 4 |
| Stable source output power (dBm) ^f | -1 (7500E-0023B) |

Notes

- For complete details on all available configurations, refer to the Ordering Information section.
- Typical.
- Typical dynamic range with a three-minute averaging at SNR = 1. Typical dynamic range at 1550 nm for the FTB-7500E-0023B configuration is 2 dB lower.
- Typical dead zone of singlemode modules for reflectance below -45 dB, using a 5 ns pulse.
- Does not include uncertainty due to fiber index.
- Typical output power value at 1550 nm.

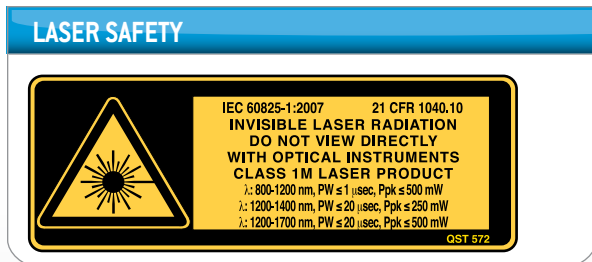

ORDERING INFORMATION

Singlemode (METRO/LONG-HAUL)

FTB-7500E-XX-XX-XX

Model

Dual-wavelength

FTB-7500E-0023B = SM OTDR module, 1310/1550 nm (9/125 μ m)

FTB-7500E-0034B = SM OTDR module, 1550/1625 nm (9/125 μ m)

OTDR Software Option

00 = Without software option ^a

AD = Macroband finder and linear view ^b

Connector

EA-EUI-28 = APC/DIN 47256

EA-EUI-89 = APC/FC narrow key

EA-EUI-91 = APC/SC

EA-EUI-95 = APC/E-2000

EA-EUI-98 = APC/LC

EI-EUI-28 = UPC/DIN 47256

EI-EUI-76 = UPC/HMS-10/AG

EI-EUI-89 = UPC/FC narrow key

EI-EUI-90 = UPC/ST

EI-EUI-91 = UPC/SC

EI-EUI-95 = UPC/E-2000

Example: FTB-7500E-0023B-EI-EUI-89-AD

Notes

a. Includes macroband finder in FTB-2/FTB-2 Pro.

b. Included in FTB-200v2. Not available in FTB-2/FTB-2 Pro.

EI CONNECTORS



To maximize the performance of your OTDR, EXFO recommends using APC connectors. These connectors generate lower reflectance, which is a critical parameter that affects performance, particularly dead zones. APC connectors provide better performances than UPC connectors, thereby improving testing efficiency.

Note: UPC connectors are also available, simply replace EA-XX by EI-XX in the ordering part number. Additional connectors available are the EI-EUI-76 (UPC/HMS-10/AG) and EI-EUI-90 (UPC/ST).

EXFO Headquarters > Tel.: +1 418 683-0211 | Toll-free: +1 800 663-3936 (USA and Canada) | Fax: +1 418 683-2170 | info@EXFO.com | www.EXFO.com

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.

For the most recent version of this spec sheet, please go to the EXFO website at www.EXFO.com/specs.

In case of discrepancy, the Web version takes precedence over any printed literature.