

Wasp WDT950 Quick Start Guide

WDT950 Android Handheld Terminal (38 Keys)



What's in the package?

Please make sure the following items are in the WDT950 box. If something is missing or damaged, please contact your sales representative.

The package items include:

- WDT950 Terminal with bumper
- Battery
- Hand Strap
- Quick Start Guide
- Regulatory Compliance Statements


Optional accessories

- USB Type C Cable
- Terminal Power Adapter
- Glass Screen Protector
- 1-slot Terminal & Battery Charging Cradle + Adapter
- 1-slot Ethernet & Battery Cradle + Adapter
- 1-slot USB & Battery Cradle + Adapter

Product View



Keypad View

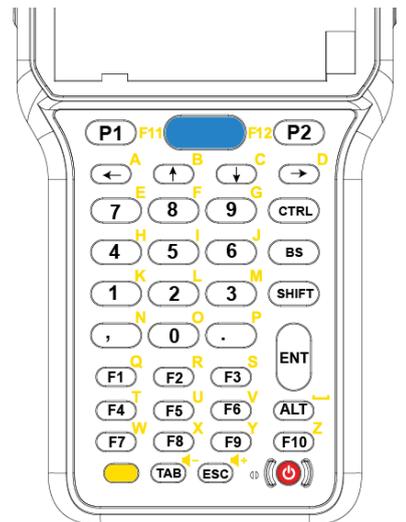

1	Scanner Window	6	Receiver
2	13m Camera & LED Flashlight	7	Pogo pin
3	LED Indicator	8	USB Type C Port
4	Scanner Trigger Key	9	Battery Release Latch
5	Keypad	10	Battery Cover

Install the Battery and the Battery Cover

1. Slide and position the battery pack, making sure the battery contacts are aligned with the contacts in the battery compartment. Make sure the battery release latch is in the unlocked position. 
2. Insert the battery cover up to 45 degrees (45°), from bottom to top. Press the battery cover down to secure in place and then slide the battery release latch to the locked position. 

Remove the Battery Cover and the Battery

1. Make sure the battery release latch is in the unlocked position.



2. Grab the battery cover from the two recesses and gently lift upward, stop when you feel a resistive force. Press the battery cover against the battery and lift the battery upwards until you remove the battery. (The process follows the principle of lever).



WARNING! There is a risk of fire and burns if the battery is handled improperly. DO NOT disassemble, crush, puncture, short external contacts, or dispose the battery pack in fire or water. DO NOT attempt to open or service the battery. Dispose of used batteries according to local recycling guidelines in your area.

CAUTION!

- To ensure the unit works properly, please keep all connectors away from contaminants such as dust, grease, mud, and water. Negligence may cause the unit to lose communication, short circuit, overheat, and so on.
- If the connector is damaged, please ensure the connector is fully repaired before using the unit to avoid causing a short circuit.

Charging the battery

Using the terminal for the first time, you need to charge it for about 24 hours. For the regular use, you can charge the terminal with the USB type-C cable. Connect the type C USB cable to the USB port on WDT950 and connect the other end of the USB cable to AC power adapter. Then plug into the electrical outlet. It is highly recommended that using the USB type-C cable and AC power adapter to charge the

Inserting Micro SD/ Nano SIM Card



SIM 1 & 2 Card Slot

Push down SIM card holder to unlock and lift the card holder to insert SIM card. Close the card holder and slide up to lock position. Ensure that it is installed properly.



MicroSD Card Slot

Push up MicroSD card holder to unlock and lift the card holder to insert MicroSD card. Close the card holder and slide down to lock position. Ensure that it is installed properly.



Checking LED Status

LED	Description
Red Light	<ul style="list-style-type: none"> ■ Battery Charging ■ Twinkling together to indicate battery low status (less than 15%) when power on. ■ Twinkling alternate to indicate battery is not installed or not installed well when battery charger was plugged-in.
Green Light	<ul style="list-style-type: none"> ■ Battery Fully charged ■ Barcode scan good read
Blue Light	Message
No LED (Red and Green) display when battery is out.	